

Artemide[®]

ARCHITECTURAL



↳ THE HUMAN AND RESPONSIBLE LIGHT

Indoor



182	37 Cube	186	PAD
298	A.24	256	PAD 80
368	A.39	516	PAD System
408	Algoritmo	280	Parabola
580	Alphabet of Light	82	Picto
638	Ameluna	278	Picto Recessed
158	Caelum	286	Rastaf
486	Calipso	464	Series Y
112	Cata	202	Sharp
530	Chocolate	566	Silent Field 2.0
524	Chocolate Floor	458	Smart Office
618	Discovery	532	Surf System
634	Discovery Space	538	Surf Wall
540	Eggboard	650	Tagora
226	Everything	194	Track
504	Grafa System	522	Uglare19
136	Hoy	170	Una Pro
96	LoT	240	Una Pro 75
264	Luceri LED	250	Una Pro 150
668	Mouette	44	Vector
572	Nur 1618 Acoustic	290	Zeno UP
128	Olmo	294	Zeno Up Frosted

Outdoor



844	Aria	724	Ippolito
708	Antartikòs	884	LineaLed - drive over
734	Basolo	888	LineaLed - wallwasher
772	Calumet	834	Megara
934	Cariddi	842	Microled
938	Cariddi palo	858	Minispot
924	Cefiso	776	Molla
930	Cefiso palo	740	Niki
760	Chilone	746	Nuda
754	Ciclope	678	"O"
736	Cuneo	874	Obice
892	Dedalo	730	Oblique
744	Dioscuri	726	Piroscafo
778	Effetto	916	Poto
798	Ego downlight	712	Reeds
816	Ego walk/drive over	906	Solar Tree 2.0
862	Ego spot	896	Solar Tree 2 nd Generation
866	Epulo	920	Sostituto palo
848	Faci	918	Sostituto spot
852	Faci Vetro	880	Spike
870	Falange	720	Tetragono
768	Granito	788	Tolomeo Outdoor
914	Indicta	784	Tolomeo XXL
		690	Walking

Indoor



projector _____ 40

downlighting _____ 200

professional lighting _____ 296

Outdoor



general lighting _____ 578

general lighting path _____ 676

downlighting walk/drive over lighting _____ 796

projector _____ 856

scenographic lighting _____ 878

Technical



places and street lighting _____ 894

940









CEILING

	
298 A.24	96 LoT
	
368 A.39	106 LoT Reflector
	
408 Algoritmo	186 PAD
	
444 A.Sharping	256 PAD 80
	
486 Calipso	82 Picto
	
112 Cata	650 Tagora
	
112 Cata	170 Una Pro
	
560 Eggboard Baffle	240 Una Pro 75
	
136 Hoy	250 Una Pro 150

CEILING RECESSED - SEMI RECESSED

		
182 37 Cube	96 LoT	652 Tagora
		
298 A.24	96 LoT Reflector	522 Uglare19
		
368 A.39	264 Luceri LED	170 Una Pro
		
408 Algoritmo	186 PAD	240 Una Pro 75
		
444 A.Sharping	256 PAD 80	290 Zeno Up
		
158 Caelum	280 Parabola	294 Zeno Up Frosted
		
226 Everything	278 Picto Recessed	
		
136 Hoy	286 Rastaf	
		
136 Hoy	202 Sharp	










TRACK


298 A.24

112 Cata

136 Hoy

96 LoT

128 Olmo

82 Picto

170 Una Pro

44 Vector

SUSPENSION

		
298 A.24	634 Discovery Space	128 Olmo
		
368 A.39	540 Eggboard	516 PAD System
		
408 Algoritmo	560 Eggboard Baffle	464 Series Y
		
580 Alphabet of Light	504 Grafa	566 Silent Field 2.0
		
638 Ameluna	136 Hoy	458 Smart Office
		
434 A.Sharping	96 LoT	532 Surf System
		
486 Calipso	96 LoT Reflector	650 Tagora
		
112 Cata	668 Mouette	
		
618 Discovery	572 Nur Acoustic	


WALL


298 A.24

408 Algoritmo

580 Alphabet of Light

486 Calipso

530 Chocolate Wall

618 Discovery

560 Eggboard Wall

538 Surf Wall

170 Una Pro

FLOOR


524 Chocolate Floor

SUSPENSION



678

"O"



788

Tolomeo Lampione



788


Tolomeo Paralume



788


Tolomeo Paralume

LINEAR PROFILE




892

Dedalo



888

LineaLed Wallwasher



880


Spike

WALL - CEILING



708

Antarktikòs




778

Effetto



730

Oblique



734

Basolo



862

Ego Spot



918

Sostituto Spot




772

Calumet



866

Epulo



720

Tetragono




934

Cariddi




870

Falange



690

Walking




924

Cefiso



858

Minispot




760

Chilone



776

Molla




754

Ciclope



740

Niki




736

Cuneo




678

"O"



744

Dioscuri



874

Obice

WALL RECESSED



844

Aria



754

Ciclope



848

Faci



852

Faci Vetro



746


Nuda

CEILING RECESSED




844

Aria



798


Ego downlight



812


Ego Vetro downlight

GROUND RECESSED



816

Ego drive/walk over




830

Ego Vetro walk over




884

LineaLed drive over



834


Megara



842

Microled

FLOOR - BOLLARD




708

Antarktikòs




870

Falange




918

Sostituto spot




734

Basolo



768

Granito




720

Tetragono




934

Cariddi




724

Ippolito



788

Tolomeo Lampione




930

Cefiso



858

Minispot



788

Tolomeo Paralume



760

Chilone



746

Nuda



784

Tolomeo XXL




754

Ciclope




678

"O"




690

Walking



736

Cuneo



730

Oblique



862

Ego Spot




726

Piroscrafo



866

Epulo



712

Reeds

POLE



938

Cariddi pole



930

Cefiso pole



760

Chilone pole



914

Indicta




916

Poto



906

Solar Tree 2.0




896

Solar Tree 2nd Gen.



920

Sostituto pole



690

Walking

PROJECTOR



182
37 Cube



82
Picto



158
Caelum



170
Una Pro




112
Cata



240
Una Pro 75



136
Hoy




250
Una Pro 150




96
LoT



44
Vector



96
LoT Reflector



128
Olmo




186
PAD



256
PAD 80

DOWNLIGHTING



226
Everything



264
Luceri LED



280
Parabola




278
Picto Recessed



286
Rastaf



202
Sharp



240
Una Pro 75



290
Zeno Up




294
Zeno Up Frosted


PROFESSIONAL LIGHTING



298
A.24




516
PAD System




368
A.39



464
Series Y




408
Algoritmo




202
Sharp



444
A.Sharping




458
Smart Office



486
Calipso




532
Surf System



486
Calipso Linear



522
Uglare19




530
Chocolate



170
Una Pro




524
Chocolate floor



504
Grafa System

ACOUSTIC LIGHTING



540
Eggboard



560
Eggboard Baffle



572
Nur 1618 Acoustic




566
Silent Field 2.0


GENERAL LIGHTING



580
Alphabet of Light




638
Ameluna




530
Chocolate Wall




618
Discovery




634
Discovery Space



668
Mouette




538
Surf Wall




650
Tagora


SCENOGRAPHIC LIGHTING



892
Dedalo



888
LineaLed Wallwasher




880
Spike

ACCENT LIGHTING




934
Cariddi



924
Cefiso



862
Ego spot



866
Epulo



870
Falange



858
Minispot




874
Obice



918
Sostituto Spot


GRAPHIC LIGHTING




734
Basolo



772
Calumet




736
Cuneo



778
Effetto




768
Granito



812
Molla

INDICATOR LIGHTING




708
Antarktikòs




844
Aria




754
Ciclope



848
Faci



852
Faci Vetro



746
Nuda




690
Walking


DOWNLIGHTING



844
Aria




798
Ego downlight




812
Ego Vetro downlight

WALK / DRIVE OVER LIGHTING




816
Ego drive over




830
Ego Vetro walk over



884
LineaLed drive over




834
Megara




842
Microled

GENERAL LIGHTING



734
Basolo




760
Chilone



754
Ciclope




774
Dioscuri




740
Niki




730
Oblique



720
Tetragono



788
Tolomeo Lampione



788
Tolomeo Paralume


PATH LIGHTING




760
Chilone



754
Ciclope



724
Ippolito



746
Nuda




678
"O"




730
Oblique




726
Piroscrafo




916
Poto



712
Reeds



720
Tetragono



690
Walking


PLACES AND STREET LIGHTING



938
Cariddi pole



930
Cefiso pole



760
Chilone



914
Indicta



906
Solar Tree 2.0




896
Solar Tree 2nd Gen.



920
Sostituto pole



784
Tolomeo XXL




690
Walking


The Human and Responsible Light

The relationship between humans, light and environment has always been central to Artemide's vision. Over the years, this principle has aimed not only at the well-being of the individual and his/her perception of spaces, but also it has confronted the environmental sustainability and it has focused on understanding the attention to nature and to all living beings.

Light is the source of life. It feeds man, space, and the whole Planet. It marks the rhythms of our lives. It is an element that can sustain and improve environmental, perceptive and social quality.

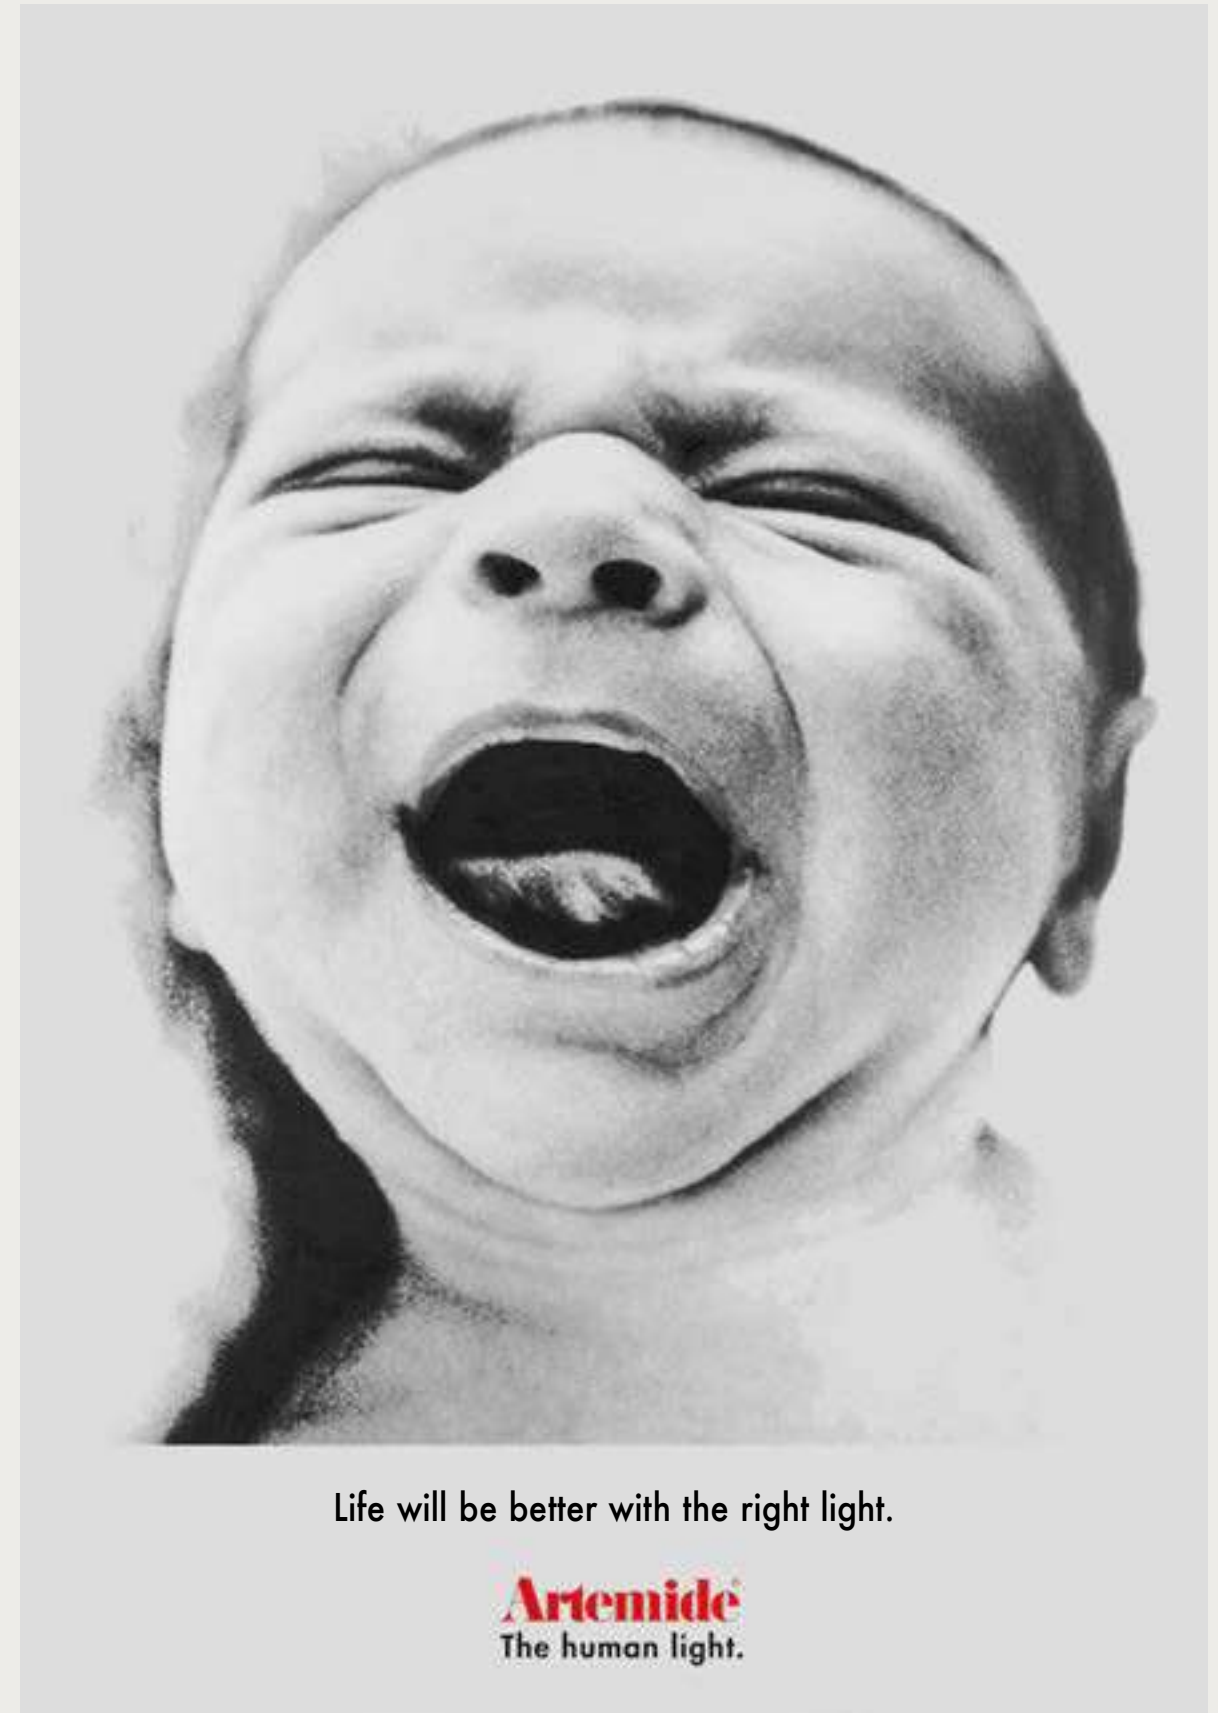

ADV Campaign, 1998

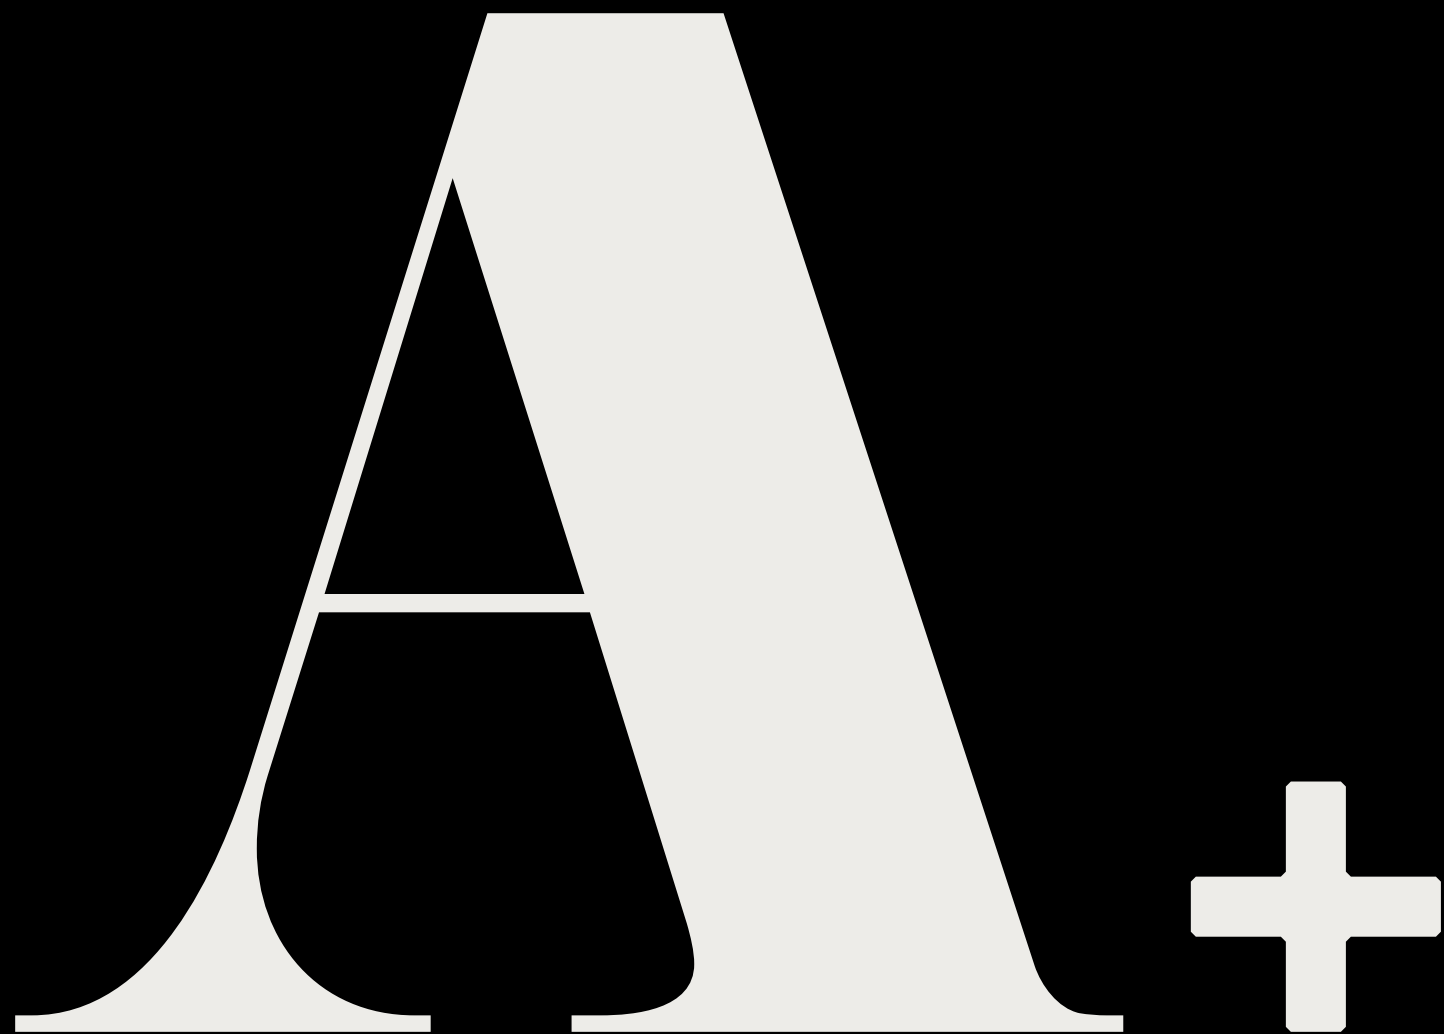

**Innovation adds up
values to the present
in order to shape the
future we want to
inhabit.**

Designing innovation means to offer a better alternative to what we already have, creating an interactive and responsive design that connects technology and science with humanistic contemporary culture.

Good design combines innovation, aesthetics, know-how, high quality of manufacturing and the greatest attention to the human and emotional relation with the object and the light effect. Design means project, not simply shape or style.

Sustainability

↳ Sustainable light design means to be responsible for our common future

Responsible design

Reduce to innovate: more with less. New project values become acts of responsibility towards the Planet and translate into a creative evolution: less material, no waste and less energy, without giving up performance, quality and beauty. A more efficient and critical approach that gets to the core of the project.

Enduring projects


Enduring Project: the emancipation from the logics of consumption, through a lasting partnership with matter. A careful selection of innovative materials and an intelligent project help create a dynamic emotional bond with the product. Enduring project means quality.

Incremental system

Incremental System: the project as an open platform. We intend the product as something that is never finished, an open positive system that can constantly grow through physical maintenance and the upgrading of parameters.

Re-connecting to nature

From energy to nature: re-connecting to nature. Light is indispensable energy for the life of humanity and all organisms. It has significant repercussions on nature by helping its growth and all the photo-biological processes. By studying light and its relation to humankind, space and environment, we can get towards the definition of a light that takes care of all living organisms.

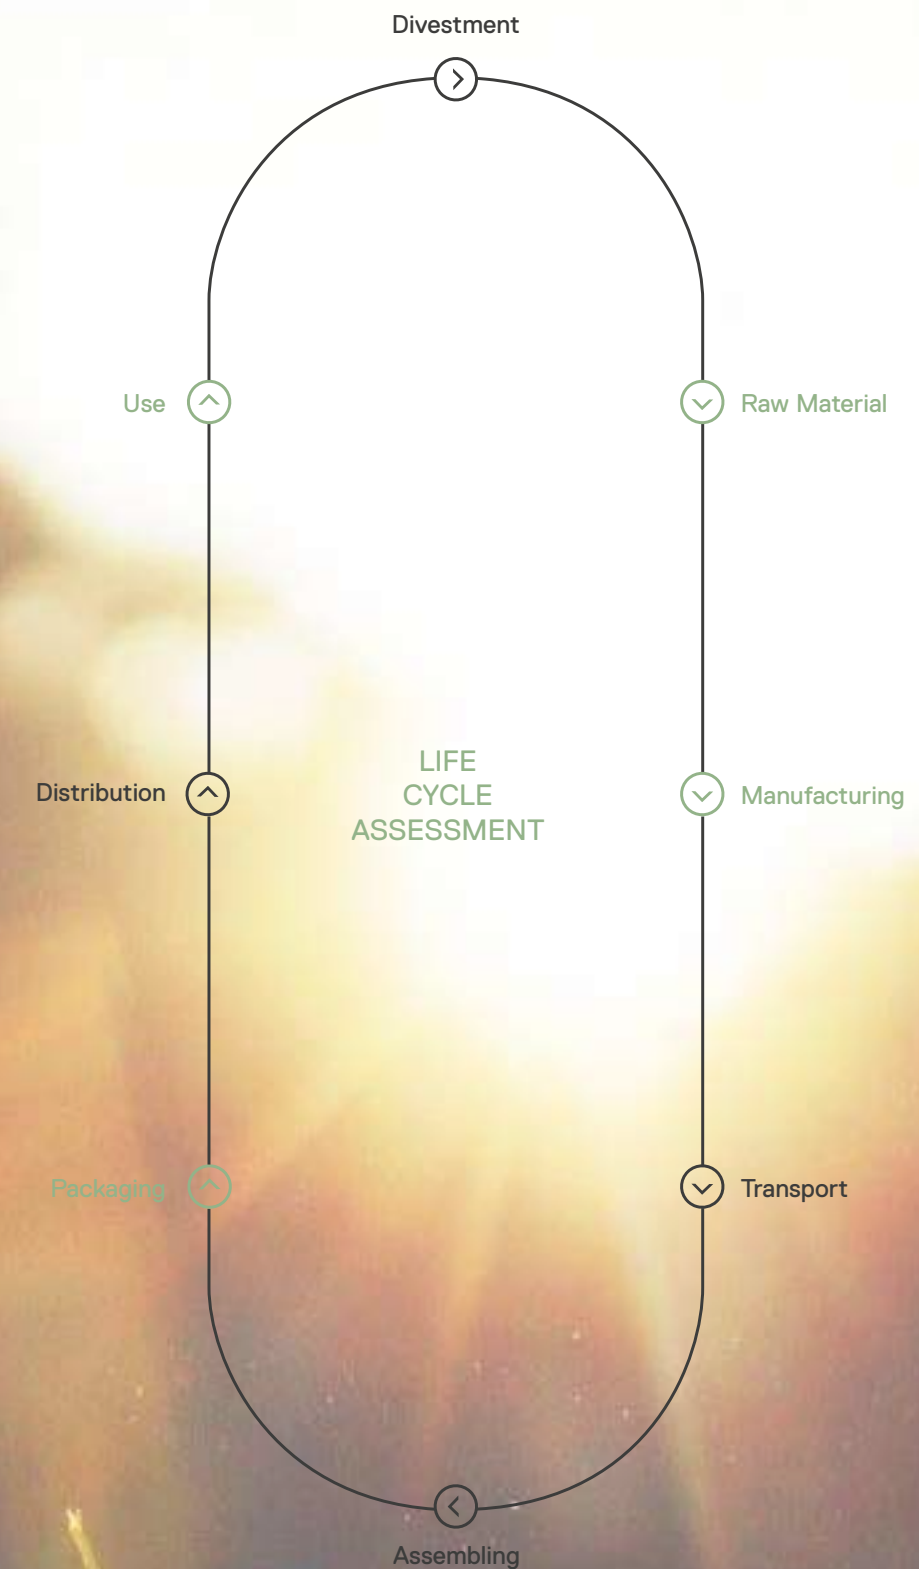

→ Light is energy as well as matter. The attention to the sources, materials, optical solutions and efficient management choice is the key to have a correct energy balance.

Beyond spaces


↪ Transversal light solutions

Let's go beyond the classic separation between technical products and design products; let's open a new transversal point of view on the light project and its applications. We can offer all-purpose and surprising solutions, translating innovation and high-tech performance into emotional perception. And create products that are perfect for both outdoor and indoor, or products for the office space that have an exciting, fascinating design.



Knowledge and manufacturing

The Artemide collections are a unique blend of values and competences: the company's approach to human and responsible light is combined with design and material savoir faire to create a mix of next-generation technology, industry 4.0 and ancient wisdoms – a perfect expression of sustainable design. Every Artemide product is completely developed in our Pregnana Milanese headquarter and made in Europe, to guarantee the best results of quality and conformity to international standards. Certified laboratories support research and every stage of the product development, from the preliminary study until the final release. The culture of the project, the true value of Italian design, is the unique coincidence of scientific, technical and humanistic heritage knowledge. Innovation, born from an interdisciplinary culture, is nourished by research and scientific thought, that is the ability to see things differently than before.

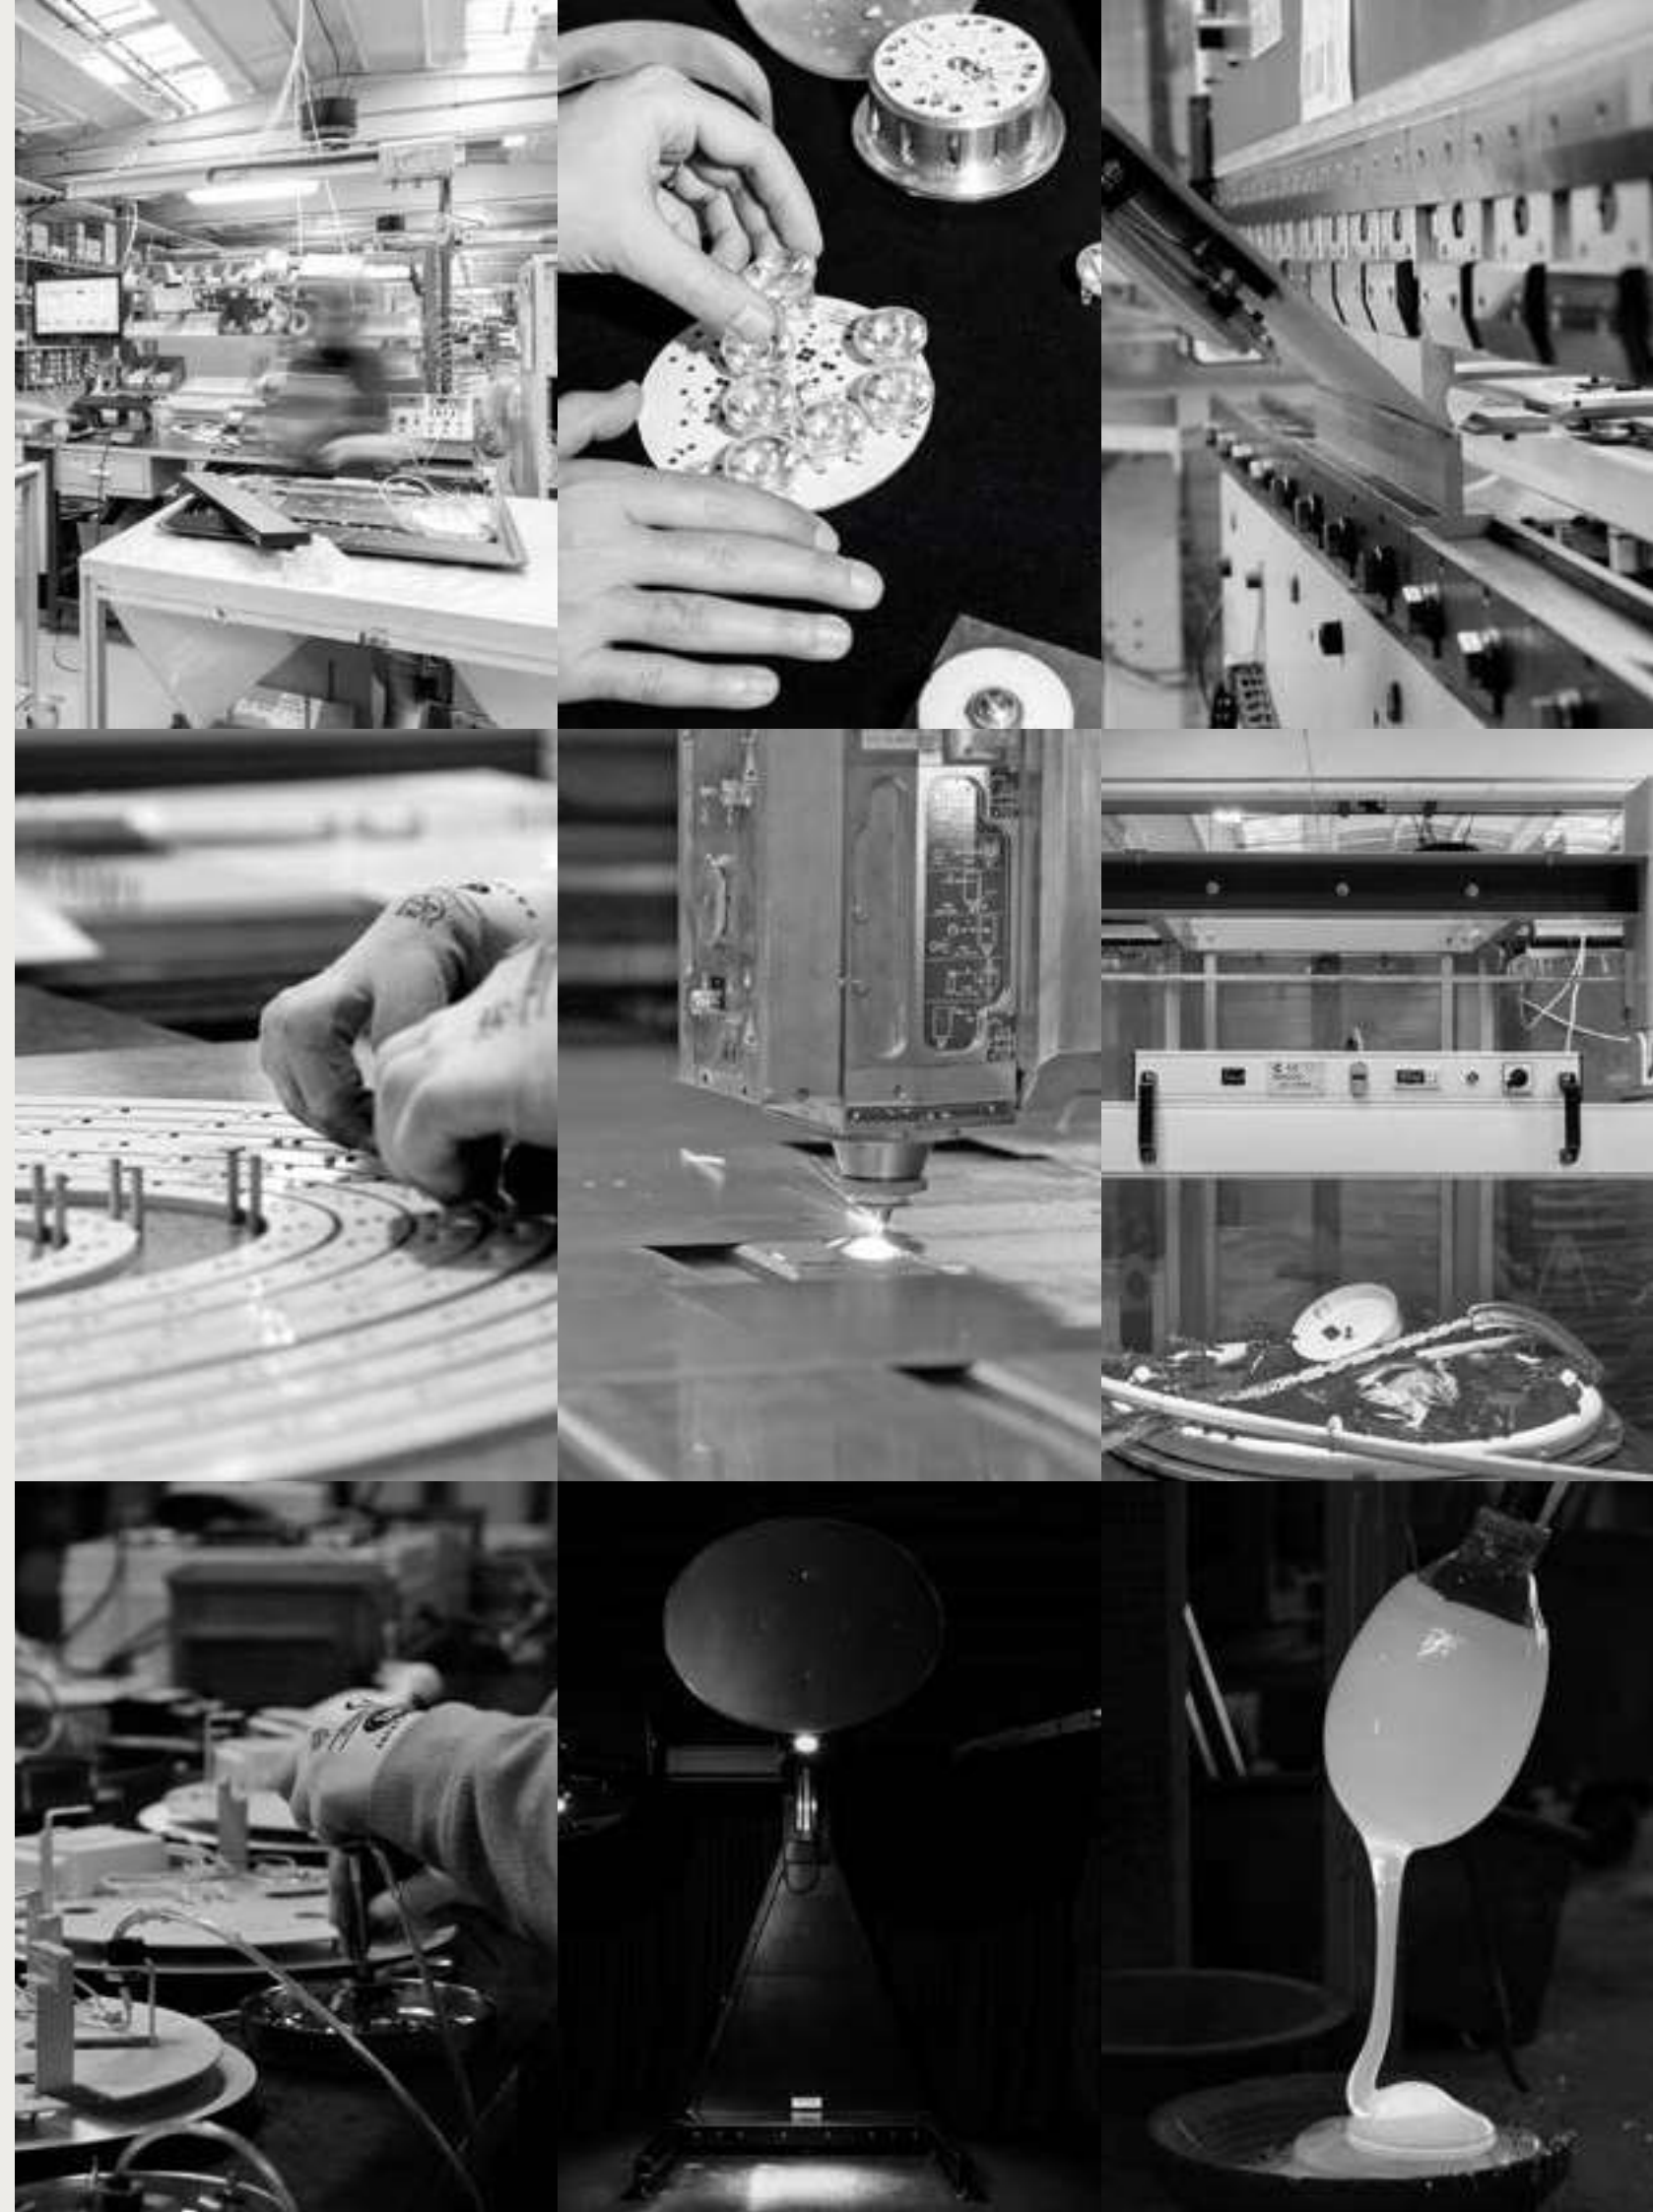

↑ Audi City Lab., Milan

↑ BIG Offices, New York

Bespoke products

↑ Atirni by Heinz Beck



The world of project is our world. Project is our strong skill and we are always eager to work with new partners that can give us the opportunity to create special products. We can develop custom product solutions, both starting from existing versions and by designing and producing bespoke items. We have a dedicated custom department working together with the Research, Development and Innovation staff, to create new and different solutions and support them with services and intelligence.

↑ National Bank of Kuwait, Kuwait City



↑ Office, Milan



↑ La Porta, Malpensa



↑ San Siro, Milan



↑ Pietà Rondanini Museum, Milan



↑ Louvre, Abu Dhabi



Smart environment

↳ We turn spaces into places

Light is a key medium in the relation between people and their space. It can provide new experiences and emotions requalifying our spaces and making us authors and protagonists of a social landscape. Light reinforces our sense of belonging by turning every space in the place we want it to be.



Light has two identities

↳ Light is wavelength

Light is wavelength. It is an invisible physical phenomenon that makes the world visible. Good light can follow and sustain the rhythmic flow of the lives, behavior and emotions of individuals by introducing them to a broader dimension for a new perceptive experience. In its continuous relation between humanity and the environment, light is a material for the construction of space, delimiting territoriality and influencing our state of mind. Light has significant repercussions on the feeding of nature by helping its growth and favouring the photobiological processes that guarantee its survival.

↳ Light is quanta

Light is energy and it can also transmit data, information and intelligence sustaining man to interpret the space he lives in. Photonics is the science of the new millennium and it's remodeling the world as we know it. New technologies are developing at a tremendous speed, revolutionizing the design limits of light.

We design interactivity to generate interactions

Freedom

People are different, and so is their approach with light. That's why we offer different solutions to manage this relationship: from the physical analogic interaction to the digital one made of sensors and apps, ours is a very simple principle: everyone must be free to determine his/her approach with light. We are constantly developing new generations of products that express a parametric human-centered vision, in order to achieve a dynamic and positive experience.

→ **Artemide App**

→ **Geo LI-FI**



Artemide APP

Artemide designs products and services to allow a more advanced and flexible use thereof.

The Artemide App is a user-friendly and intuitive interface that can be used as a daily tool for private use and as well as a project variable for workplace and retail, public and urban spaces. Man is the centre of the project, the orchestra director of his light concerto.


All Artemide products can be Artemide App compatible.

- Managing up to 500 lighting fixtures, single or in groups
- Connecting with Bluetooth Low Energy
- Distance: bluetooth Android 25-30 m, Apple 15 m
- Cloud backup
- Secured personal access
- Multi-user: 1 administrator, more guests
- Multidevices control for the same network
- For tablet and smartphone
- Bluetooth interface for DALI products - 40 addresses
- 10 Static scenarios
- 15 Dynamic scenarios
- Scheduling
- News channel



→ Interactive Experience

Emissions

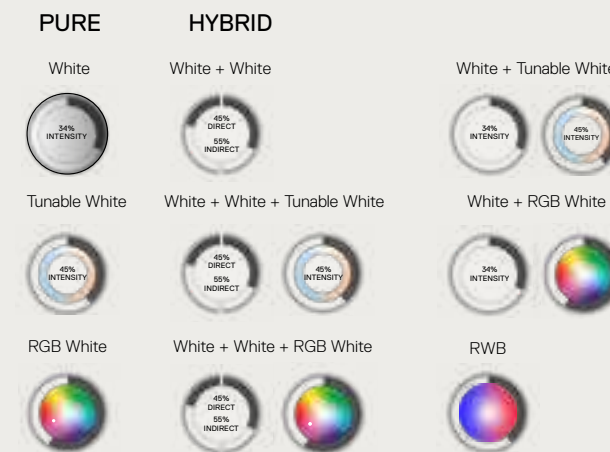

Dynamic Scenes




Motion Sensor


Vocal Control
Amazon Alexa
Google Home

→ Parametric Experience

Environmental Quality

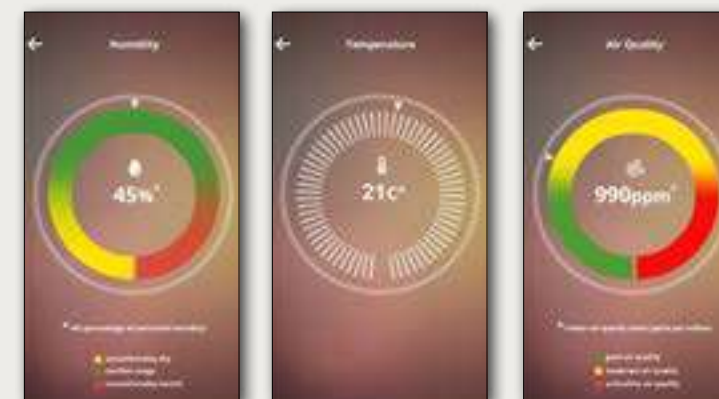

Heat map

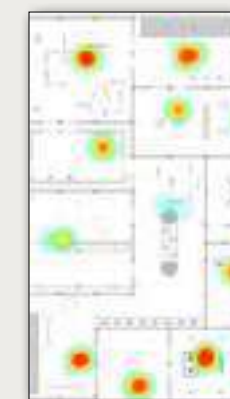

Daylight Sensor

Target Point

Circadian Rythm

Geo Li-Fi


Artemide is able not only to design the right light for every space but also to propose innovative applications of the Geo Li-Fi technology introducing specific multi-level solutions for any application fields, generating unexpected experiences for engagement, interaction and inspiration.

Geo Li-Fi technology is not a product-specific standard solution but an open platform for the creation of new services. It's capable to be integrated into multiple products and systems within Artemide collections to combine the perfect lighting solution with an innovative interpretation of interaction.

The Geo Li-Fi App, especially designed by Artemide, processes and transforms the contents received through light into useful information, services, or interactions. It can also refer to external links, thus acting as a bridge towards more in-depth analyses that help us to interpret and understand spaces we live in. It is able to support a contextualized, real-time and tailored experience for the single user giving the possibility to select specific information, marketing and communication contents.

They can be related for example to what we are lighting or directions to drive visitors through spaces. Geo Li-Fi ensures much greater precision in tracking the position – within a few centimetres, rather than one metre. This allows very accurate and punctual localization of the position of the signal receiver.

The Geo Li-Fi technology can be used to provide information, as well as to collect data: it allows to create heat maps that recognize people in space, track their positions, record motion times and generate useful information on space use. It therefore works as a service for space users and as a tool for space operators.

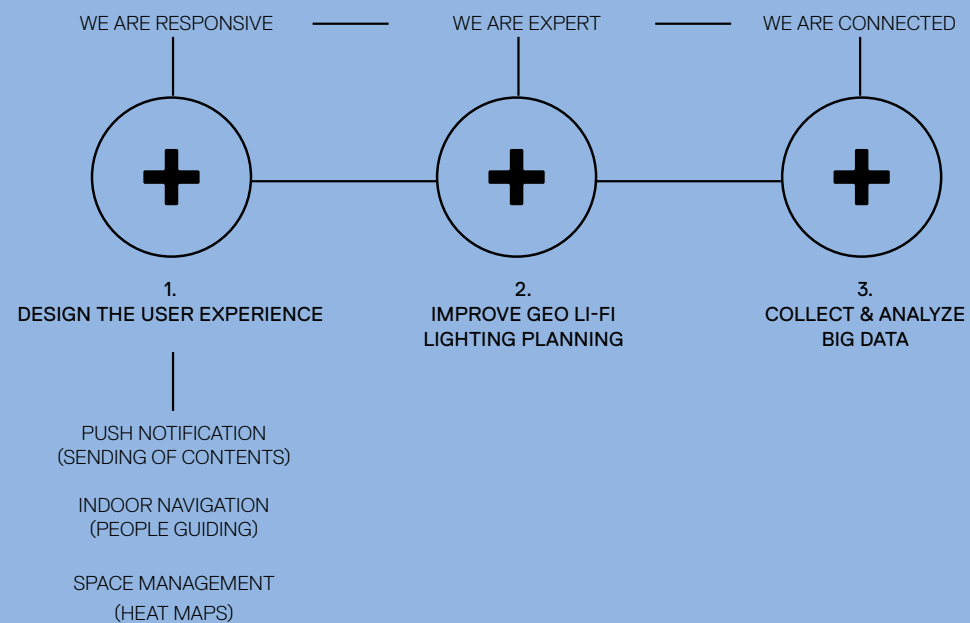

With Geo Li-Fi data is transmitted by the lamp through visible light, which is modulated according to the 0-1 binary signal, at the basis of all digital electronic communication. While the frequency of these light impulses cannot be perceived by the human eye, it generates a signal that the camera of any smart device can receive. Communication travels one way (from the lighting appliance to the device) and the bit rate is limited. The transmitted information should be quite “light” and therefore simple. It can be a static content, such as a message or an image, as well dynamic one, such as a video.

Two configurators A.24 Alphabet of Light





Artemide provides tools to support the end customer and especially the lighting professionals in choosing the best lighting solution.

For an intuitive composition of the most complex systems, Artemide offers innovative and complete configurators on its website.

A24 and Alphabet of Light System Configurator are useful tools to simplify the design of your composition.

After defining the layout of the space, the desired system can be created by reconstructing it with a practical drag and drop of the various modules available.

Once the project is completed, the system returns a complete datasheet with all the details to proceed with the order.

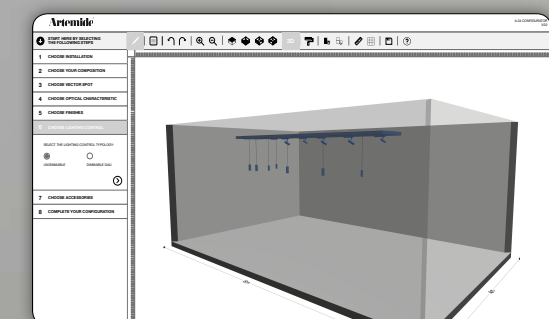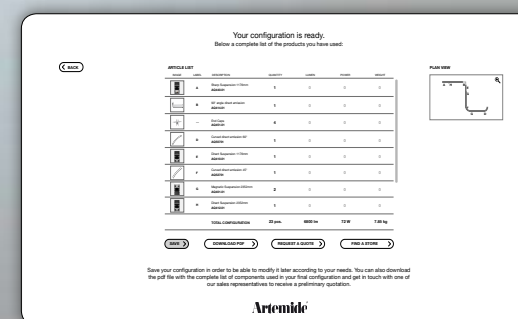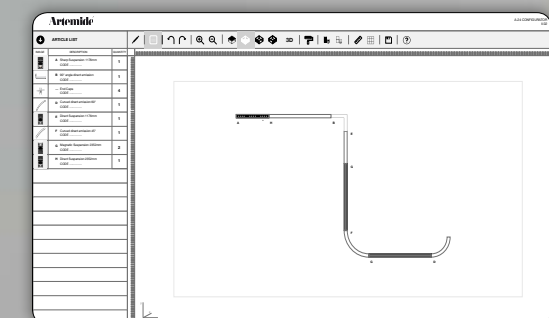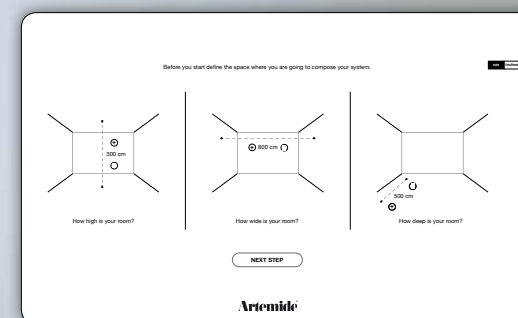



↪ Indoor

Projector



Vector	_____	44
Picto	_____	82
LoT	_____	96
Cata	_____	112
Olmo	_____	128
Hoy	_____	136
Caelum	_____	158
Una Pro	_____	170
37 Cube	_____	182
Pad	_____	186
Track	_____	194





For further information on Vector
↳ visit artemide.com

Vector

Carlotta de Bevilacqua
↳ 2017





Vector colors



→ Fast delivery



→ Delivery time on demand



Vector color temperatures



→ Fast delivery




→ Delivery time on demand






Artemide
App
↪ on request

Magnetic track

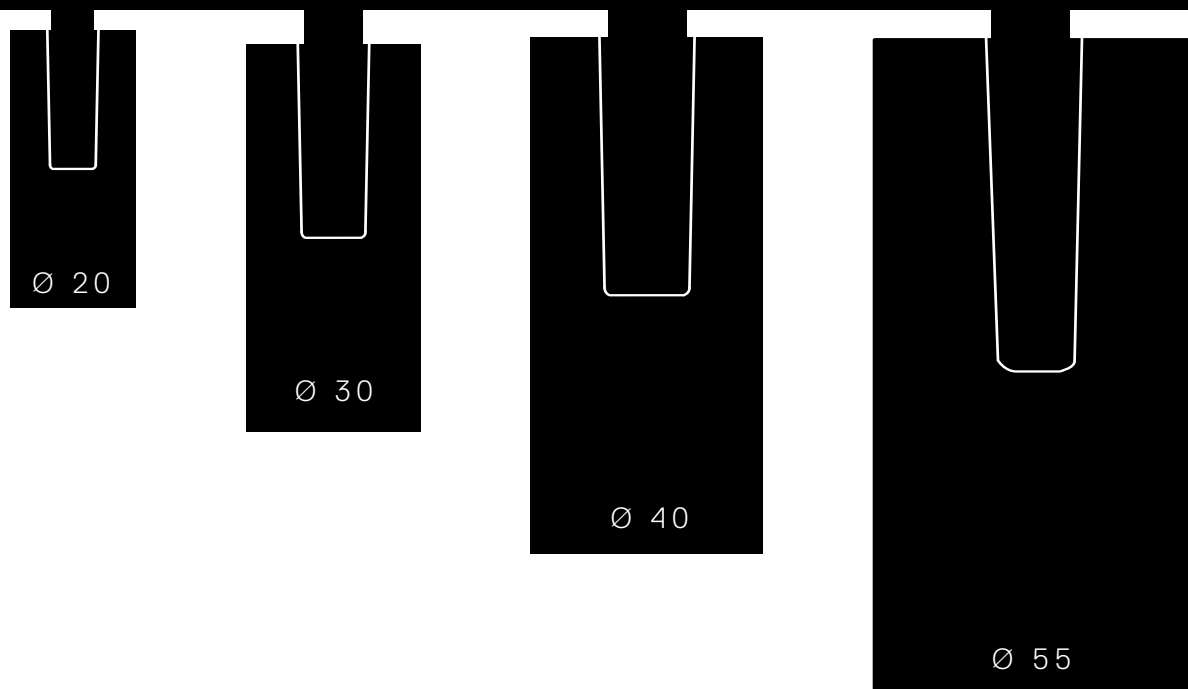


3-phaseTrack

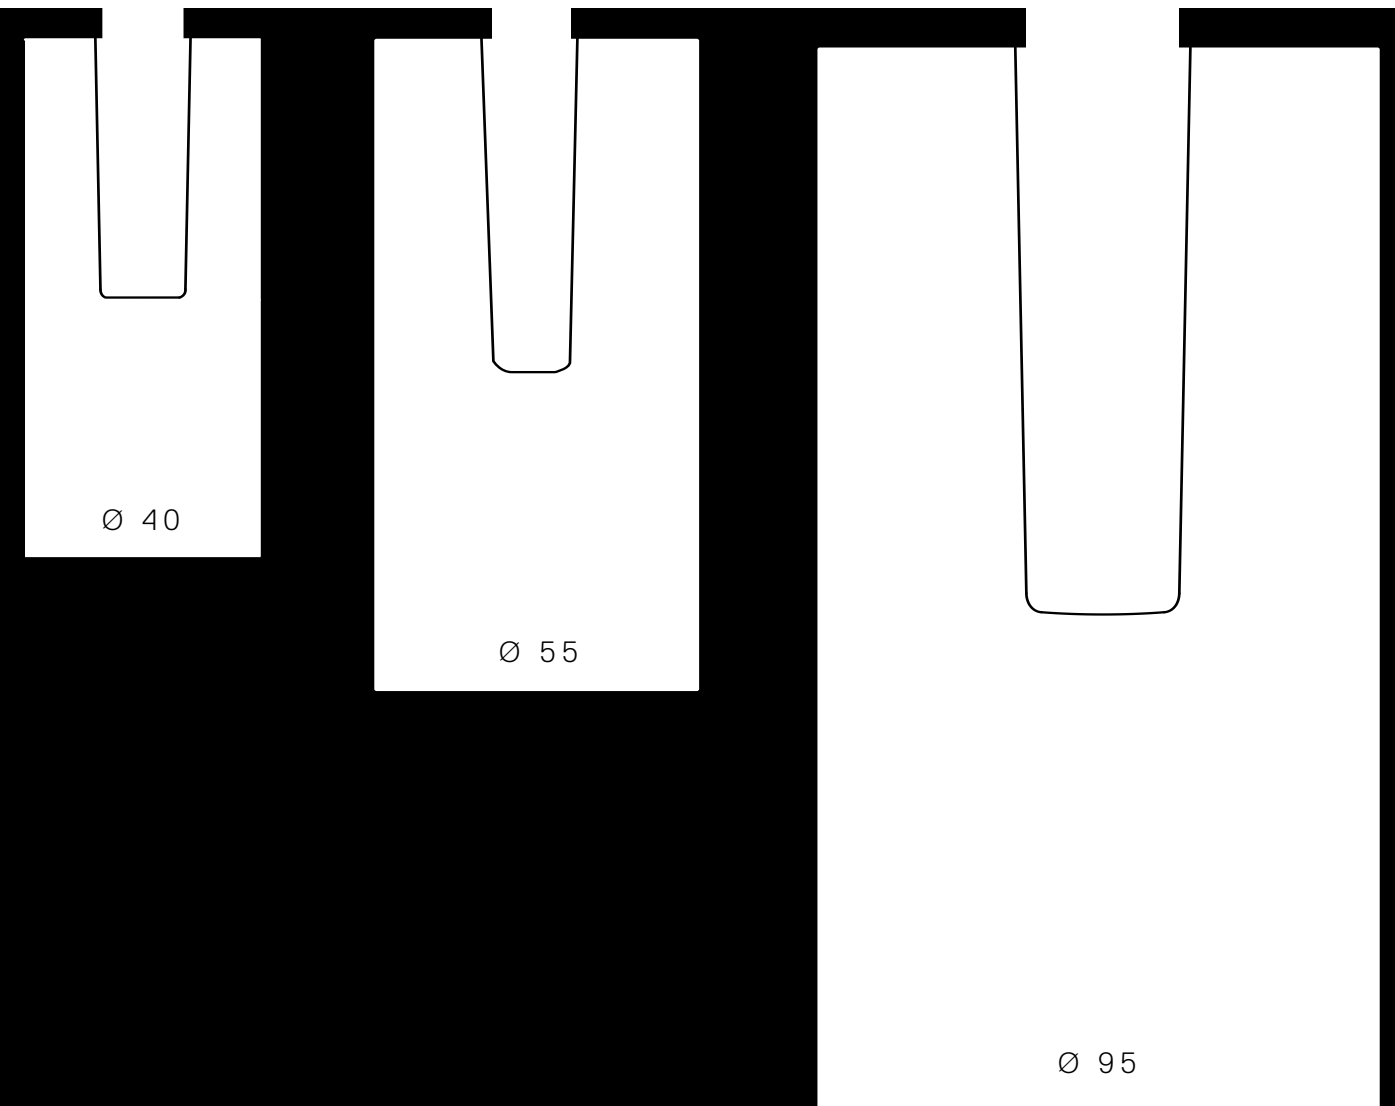


Vector dimensions

Vector is balanced

THE JUNCTION ARM IS INTEGRATED WITH THE SPOTLIGHT BODY.
THE CENTER OF BALANCE IS PERFECTLY ALIGNED WITH THE TRACK.
THE PIVOTING OF THE BODY AND THE ARM ORIENTATION ARE LOCKABLE.

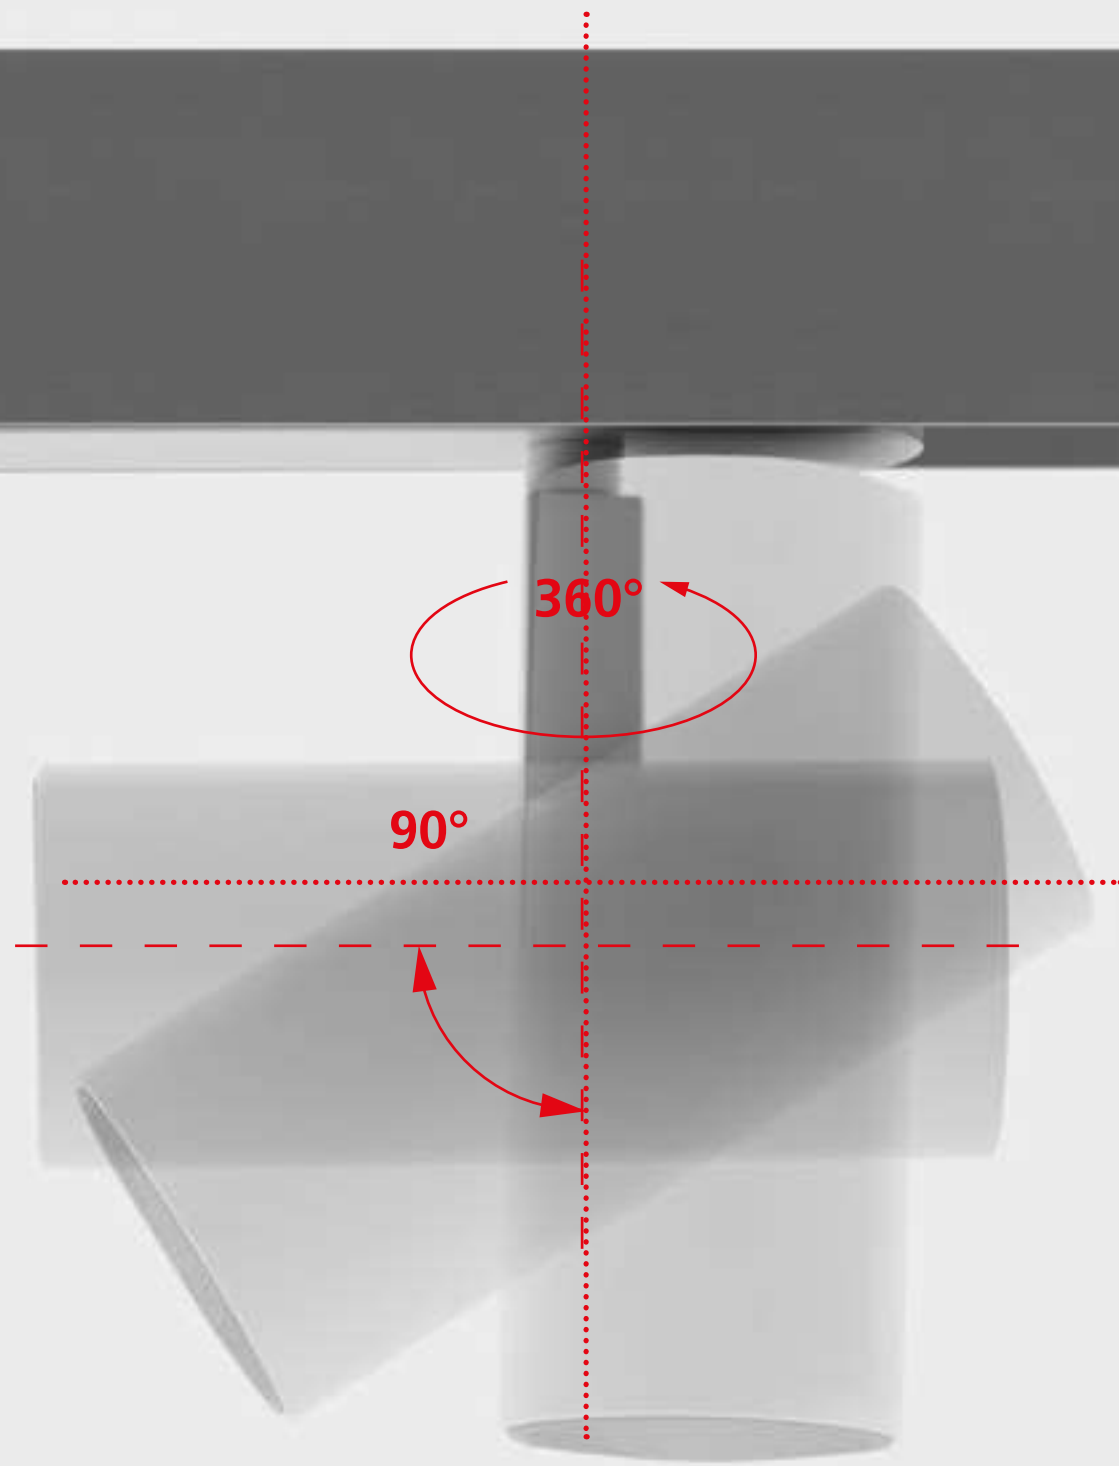

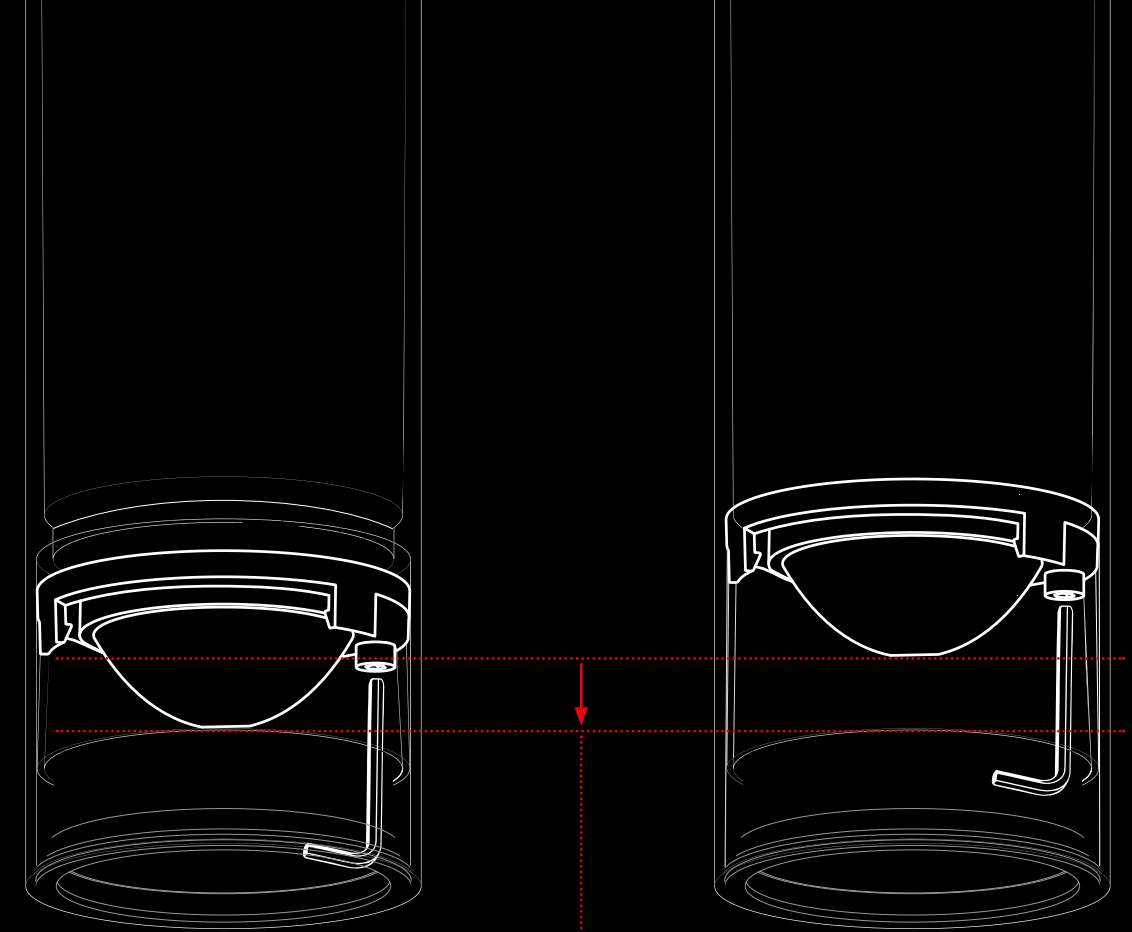

Flood
22°
660 lm

Wide Flood
32°
1137 lm

Vector 55 zoom



ANTI-DAZZLE LOUVRE



ACCESSORIES HOLDER



LENS FOR ELLIPTICAL EMISSION
SOFT FILTER



ADJUSTABLE DOWSERS

Vector 40 / 55 multiple accessories


POSSIBILITY TO INSTALL UP TO 3 ACCESSORIES

Vector typologies

3-PHASE TRACK




VECTOR 40



S 13° F 20° WF 28°
10W 10W 10W
540 lm 584 lm 528 lm



VECTOR 55



S 16° F 22° WF 32°
25W 25W 25W
1492 lm 1465 lm 1596 lm




VECTOR 55 ZOOM



F 22°- WF 32°
23W
660 - 1137 lm



VECTOR 95




S 16° F 24° WF 60°
31W 31W 31W
2870 lm 2880 lm 2870 lm

SEMI-RECESSED




VECTOR 40



S 13° F 20° WF 28°
8W 8W 8W
540 lm 584 lm 528 lm



VECTOR 55




S 16° F 22° WF 32°
21W 21W 21W
1492 lm 1465 lm 1596 lm

RECESSED




VECTOR 40



S 13° F 20° WF 28°
8W 8W 8W
540 lm 584 lm 528 lm



VECTOR 55




S 16° F 22° WF 32°
17,5W 17,5W 17,5W
1248 lm 1225 lm 1356 lm

MAGNETIC TRACK




VECTOR 20



S 10° F 24° WF 32°
2W 2W 2W
175 lm 160 lm 140 lm




VECTOR 30



S 6° F 24° WF 40°
6W 6W 6W
475 lm 450 lm 425 lm




VECTOR 40



S 13° F 20° WF 28°
10W 10W 10W
540 lm 584 lm 528 lm



VECTOR 55




S 16° F 22° WF 32°
26W 26W 26W
1492 lm 1465 lm 1596 lm

MAGNETIC TRACK PENDANT




VECTOR 40 PENDANT



S 13° F 20° WF 28°
10W 10W 10W
540 lm 584 lm 528 lm



VECTOR 55 PENDANT



S 16° F 22° WF 32°
26W 26W 26W
1492 lm 1465 lm 1596 lm



VECTOR 55 ZOOM



F 22°- WF 32°
23W
660 - 1137 lm

Vector

↪ 3-phase track



VECTOR 40



VECTOR 55



VECTOR 95

↳ VECTOR 3-PHASE TRACK

White Black
 01 04
 Fast delivery

Brushed Silver Brushed Copper Brushed Bronze
 15 18 20
 Delivery time on demand

S F WF


Delivery time on demand
 2700K / 4000K

MacAdam 3SDCM
 *MacAdam 2SDCM
 CRI = 90

IP20
 90°
 360°


VECTOR 40 3-PHASE TRACK

Track slim adapter				Undimmable		Dimmable DALI		
W	Beam	Flux	CCT	Code	Code	Code	Code	
10 W	S 13°	540 lm	2700K	AN011. 01/04	AN016. 01/04			
			3000K	15/18/20	15/18/20			
			4000K	15/18/20	15/18/20			
		*F 20°	584 lm	2700K	AN012. 01/04	AN017. 01/04		
				3000K	15/18/20	15/18/20		
				4000K	15/18/20	15/18/20		
	*WF 28°	528 lm	2700K	AN013. 01/04	AN018. 01/04			
			3000K	15/18/20	15/18/20			
			4000K	15/18/20	15/18/20			

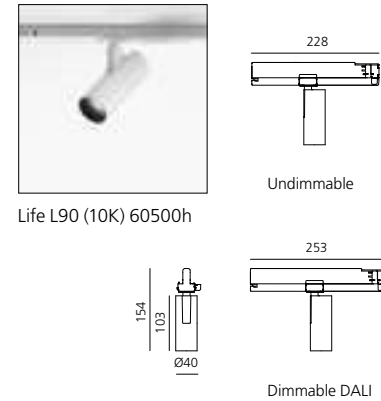

VECTOR 55 TRACK 230V

Track slim adapter				Undimmable		Dimmable DALI		
W	Beam	Flux	CCT	Code	Code	Code	Code	
25 W	S 16°	1492 lm	2700K	AN111. 01/04	AN116. 01/04			
			3000K	15/18/20	15/18/20			
			4000K	15/18/20	15/18/20			
		F 22°	1465 lm	2700K	AN112. 01/04	AN117. 01/04		
				3000K	15/18/20	15/18/20		
				4000K	15/18/20	15/18/20		
	WF 32°	1596 lm	2700K	AN113. 01/04	AN118. 01/04			
			3000K	15/18/20	15/18/20			
			4000K	15/18/20	15/18/20			

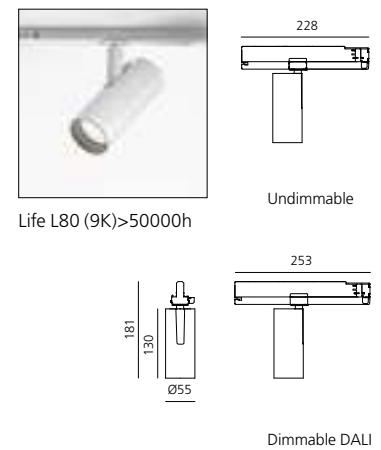

↳ VECTOR 3-PHASE TRACK

White Black
 01 04
 Fast delivery

Brushed Silver Brushed Copper Brushed Bronze
 15 18 20
 Delivery time on demand

S F WF


Delivery time on demand
 2700K / 4000K

MacAdam 3SDCM
 CRI = 90

IP20
 90°
 360°


VECTOR 55 ZOOM TRACK 230V

Track slim adapter				Dimmable DALI	
W	Beam	Flux	CCT	Code	Code
23 W	F 22°-WF 32°	660 - 1137 lm	2700K	AN119. 01/04	
			3000K	15/18/20	AN109. 01/04
			4000K	15/18/20	AN159. 01/04
				15/18/20	

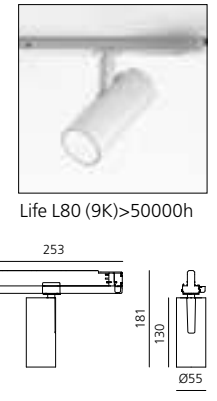

VECTOR 95 TRACK 230V

Track slim adapter				Undimmable		Dimmable DALI		Dimmable DALI Eutrac	
W	Beam	Flux	CCT	Code	Code	Code	Code	Code	Code
31 W	S 16°	2870 lm	2700K	AN211. 01/04	AN216. 01/04	AN316. 01/04			
			3000K	15/18/20	15/18/20	15/18/20			
			4000K	15/18/20	15/18/20	15/18/20			
		F 24°	2880 lm	2700K	AN201. 01/04	AN206. 01/04	AN306. 01/04		
				3000K	15/18/20	15/18/20	15/18/20		
				4000K	15/18/20	15/18/20	15/18/20		
	WF 60°	2870 lm	2700K	AN212. 01/04	AN217. 01/04	AN317. 01/04			
			3000K	15/18/20	15/18/20	15/18/20			
			4000K	15/18/20	15/18/20	15/18/20			

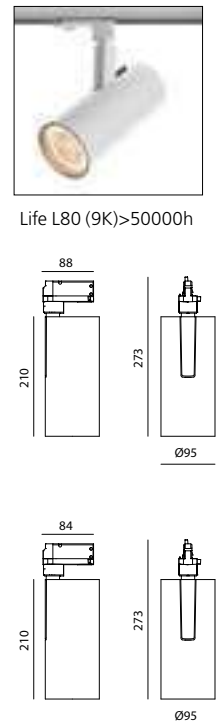

Accessories	Color	Vector 40 Code	Vector 55 Code	Vector 95 Code
Accessories holder		AP90100	AP91100	AP92100
Lens for elliptical emission		AP90200	AP91200	M282007
Soft filter		AP90300	AP91300	M056807
Anti-dazzle louvre		AP90400	AP91400	M282100
Adjustable dowsers	●		AP91500	M059910

Eutrac version

Vector

↳ Recessed






↳ VECTOR RECESSED

White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	S	F	WF	Driver 700/500mA SELV supplied separately. Fitting to be completed with trimless recessed structure.	MacAdam 3SDCM *MacAdam 2SDCM CRI = 90	IP20 90° 360°
------------------------------	-------------	---	----------------------	----------------------	---	---	----	--	---	---------------------

VECTOR 40 RECESSED




W	Beam	Flux	CCT	Code	
8 W	S 13°	540 lm	2700K	AP521. 01/04 15/18/20	
			3000K	AP501. 01/04 15/18/20	
			4000K	AP551. 01/04 15/18/20	
		*F 20°	584 lm	2700K	AP522. 01/04 15/18/20
				3000K	AP502. 01/04 15/18/20
				4000K	AP552. 01/04 15/18/20
	*WF 28°	528 lm	2700K	AP523. 01/04 15/18/20	
			3000K	AP503. 01/04 15/18/20	
			4000K	AP553. 01/04 15/18/20	



Life L90 (10K) 60500h

VECTOR 55 RECESSED

W	Beam	Flux	CCT	Code	
17,5 W	S 16°	1248 lm	2700K	AP531. 01/04 15/18/20	
			3000K	AP511. 01/04 15/18/20	
			4000K	AP561. 01/04 15/18/20	
		F 22°	1225 lm	2700K	AP532. 01/04 15/18/20
				3000K	AP512. 01/04 15/18/20
				4000K	AP562. 01/04 15/18/20
	WF 32°	1356 lm	2700K	AP533. 01/04 15/18/20	
			3000K	AP513. 01/04 15/18/20	
			4000K	AP563. 01/04 15/18/20	



Life L80 (9K)>50000h

	Vector 40	Vector 55
Code	AP50000	AP50000
Trimless recessed structure		
Optional trim frame Ø 108	AP590. 01/04	AP591. 01/04

	Driver	Vac	L _{mm}	W _{mm}	H _{mm}		Code
Vector 40	15-32W 700mA*	220-240	146,5	43,5	22	☐	Undimmable DV1030
Vector 55	15-32W 500mA	220-240	146,5	43,5	22	☐	Undimmable DV1030
Vector 40	11-25W 700mA	220-240	164	38	24,5	☐	Dimmable DALI DV1031
Vector 55	11-25 W 500mA	220-240	164	38	24,5	☐	Dimmable DALI DV1031

* 1 Driver for Max 3 Spots

Vector

↪ Semi-recessed



↪ VECTOR SEMI-RECESSED


White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	S	F	WF	Driver supplied separately. Vector 40: 700mA Vector 55: 600mA	MacAdam 3SDCM *MacAdam 2SDCM CRI = 90	IP20 90° 360°
------------------------------	-------------	---	----------------------	----------------------	---	---	----	---	---	---------------------

VECTOR 40 SEMI-RECESSED

W	CRI	Beam	Flux	CCT	Code		
8 W	90	S 13°	540 lm	2700K	AP621. 01/04 15/18/20		
				3000K	AP601. 01/04 15/18/20		
				4000K	AP651. 01/04 15/18/20		
				*F 20°	584 lm	2700K	AP622. 01/04 15/18/20
				3000K	AP602. 01/04 15/18/20		
				4000K	AP652. 01/04 15/18/20		
		*WF 28°	528 lm	2700K	AP623. 01/04 15/18/20		
					3000K	AP603. 01/04 15/18/20	
					4000K	AP653. 01/04 15/18/20	



Life L90 (10K) 60500h




VECTOR 55 SEMI-RECESSED

W	CRI	Beam	Flux	CCT	Code		
21W	90	S 16°	1492 lm	2700K	AP631. 01/04 15/18/20		
				3000K	AP611. 01/04 15/18/20		
				4000K	AP661. 01/04 15/18/20		
				F 22°	1465 lm	2700K	AP632. 01/04 15/18/20
				3000K	AP612. 01/04 15/18/20		
				4000K	AP662. 01/04 15/18/20		
		WF 32°	1596 lm	2700K	AP633. 01/04 15/18/20		
					3000K	AP613. 01/04 15/18/20	
					4000K	AP663. 01/04 15/18/20	



Life L80 (9K)>50000h



	Driver	Vac	L _{mm}	W _{mm}	H _{mm}		Code
Vector 40	15-32W 700mA*	220-240	146,5	43,5	22	☐	Undimmable DV1030
Vector 55	15-32W 600mA	220-240	146,5	43,5	22	☐	Undimmable DV1030
Vector 40	11-25 W 700mA	220-240	164	38	24,5	☐	Dimmable DALI DV1031
Vector 55	11-25 W 600mA	220-240	164	38	24,5	☐	Dimmable DALI DV1031

* 1 Driver for Max 3 Spots



Vector
↪ Magnetic track

↪ VECTOR MAGNETIC TRACK

White Black
 01 04
 Fast delivery

Brushed Silver Brushed Copper Brushed Bronze
 15 18 20
 Delivery time on demand


S F WF
 Delivery time on demand
 2700K / 4000K

MacAdam 3SDCM
 CRI = 80

IP20
 90°
 360°

VECTOR 20 MAGNETIC


W	Beam	Flux	CCT	Dimmable DALI Code
2 W	S 10°	175 lm	2700K	AP711. 01/04 15/18/20
			3000K	AP701. 01/04 15/18/20
			4000K	AP751. 01/04 15/18/20
F 24°	160 lm	2700K	AP712. 01/04 15/18/20	
		3000K	AP702. 01/04 15/18/20	
		4000K	AP752. 01/04 15/18/20	
WF 32°	140 lm	2700K	AP713. 01/04 15/18/20	
		3000K	AP703. 01/04 15/18/20	
		4000K	AP753. 01/04 15/18/20	

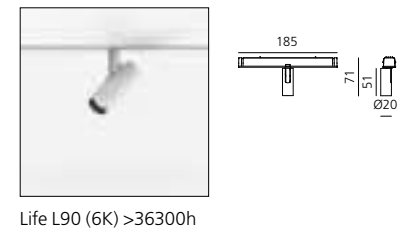

Life L90 (6K) >36300h

VECTOR 30 MAGNETIC

W	Beam	Flux	CCT	Dimmable DALI Code
6 W	XS 6°	475 lm	2700K	AP811. 01/04 15/18/20
			3000K	AP801. 01/04 15/18/20
			4000K	AP851. 01/04 15/18/20
F 24°	450 lm	2700K	AP812. 01/04 15/18/20	
		3000K	AP802. 01/04 15/18/20	
		4000K	AP852. 01/04 15/18/20	
WF 40°	425 lm	2700K	AP813. 01/04 15/18/20	
		3000K	AP803. 01/04 15/18/20	
		4000K	AP853. 01/04 15/18/20	

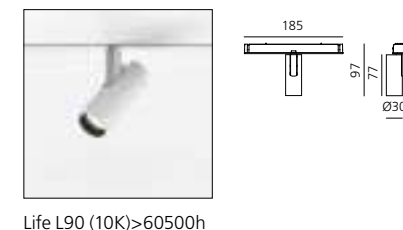

Life L90 (10K) >60500h

↪ VECTOR MAGNETIC TRACK

White Black
 01 04
 Fast delivery

Brushed Silver Brushed Copper Brushed Bronze
 15 18 20
 Delivery time on demand


S F WF
 Delivery time on demand
 2700K / 4000K

MacAdam 3SDCM
 *MacAdam 2SDCM
 CRI = 90

IP20
 90°
 360°

VECTOR 40 MAGNETIC


W	Beam	Flux	CCT	Dimmable DALI Code
10 W	S 13°	540 lm	2700K	AP011. 01/04 15/18/20
			3000K	AP001. 01/04 15/18/20
			4000K	AP051. 01/04 15/18/20
*F 20°	584 lm	2700K	AP012. 01/04 15/18/20	
		3000K	AP002. 01/04 15/18/20	
		4000K	AP052. 01/04 15/18/20	
*WF 28°	528 lm	2700K	AP013. 01/04 15/18/20	
		3000K	AP003. 01/04 15/18/20	
		4000K	AP053. 01/04 15/18/20	

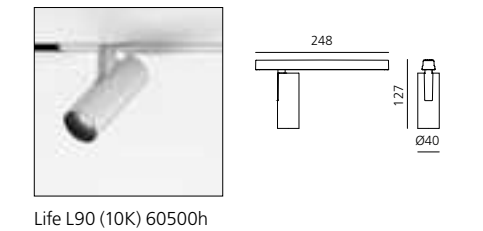






Life L90 (10K) 60500h

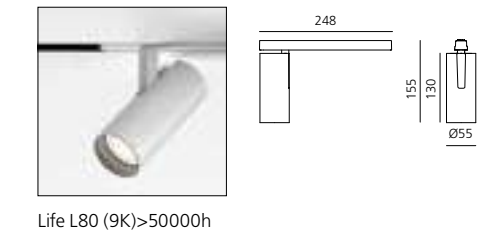VECTOR 55 MAGNETIC

W	Beam	Flux	CCT	Dimmable DALI Code
26 W	S 16°	1492 lm	2700K	AP111. 01/04 15/18/20
			3000K	AP101. 01/04 15/18/20
			4000K	AP151. 01/04 15/18/20
F 22°	1465 lm	2700K	AP112. 01/04 15/18/20	
		3000K	AP102. 01/04 15/18/20	
		4000K	AP152. 01/04 15/18/20	
WF 32°	1596 lm	2700K	AP113. 01/04 15/18/20	
		3000K	AP103. 01/04 15/18/20	
		4000K	AP153. 01/04 15/18/20	



Life L80 (9K) >50000h


Accessoires	Color	Vector 40 Code	Vector 55 Code
 Accessories holder		AP90100	AP91100
 Lens for elliptical emission		AP90200	AP91200
 Soft filter		AP90300	AP91300
 Anti-dazzle louvre		AP90400	AP91400
 Adjustable dowsers	●		AP91500

↳ VECTOR MAGNETIC TRACK

White	Black	Brushed Silver	Brushed Copper	Brushed Bronze	S	F	WF	Delivery time on demand 2700K / 4000K	MacAdam 3SDCM CRI = 90	IP20 90° 360°
01	04	15	18	20						
Fast delivery		Delivery time on demand								

VECTOR 55 ZOOM MAGNETIC


W	Beam	Flux	CCT	Dimmable DALI Code
23 W	F 22°-WF 32°	660 - 1137 lm	2700K	AP114. 01/04 15/18/20
			3000K	AP104. 01/04 15/18/20
			4000K	AP154. 01/04 15/18/20

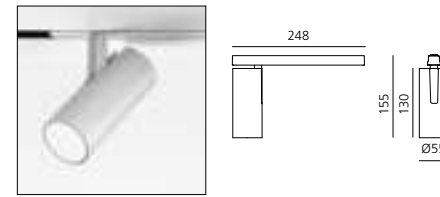

Life L80 (9K)>50000h

VECTOR 40 PENDANT MAGNETIC


W	Beam	Flux	CCT	Dimmable DALI Code
10 W	S 13°	540 lm	2700K	AP211. 01/04 15/18/20
			3000K	AP201. 01/04 15/18/20
			4000K	AP251. 01/04 15/18/20
	F 20°	584 lm	2700K	AP212. 01/04 15/18/20
			3000K	AP202. 01/04 15/18/20
			4000K	AP252. 01/04 15/18/20
WF 28°	528 lm	2700K	AP213. 01/04 15/18/20	
		3000K	AP203. 01/04 15/18/20	
		4000K	AP253. 01/04 15/18/20	

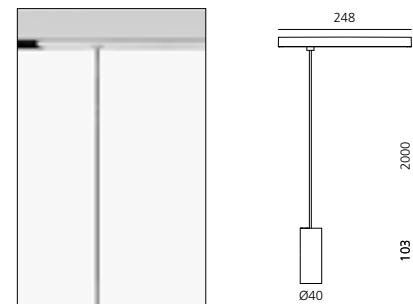

Life L90 (10K) 60500h


VECTOR 55 PENDANT MAGNETIC

W	Beam	Flux	CCT	Dimmable DALI Code
26 W	S 16°	1492 lm	2700K	AP311. 01/04 15/18/20
			3000K	AP301. 01/04 15/18/20
			4000K	AP351. 01/04 15/18/20
	F 22°	1465 lm	2700K	AP312. 01/04 15/18/20
			3000K	AP302. 01/04 15/18/20
			4000K	AP352. 01/04 15/18/20
WF 32°	1596 lm	2700K	AP313. 01/04 15/18/20	
		3000K	AP303. 01/04 15/18/20	
		4000K	AP353. 01/04 15/18/20	

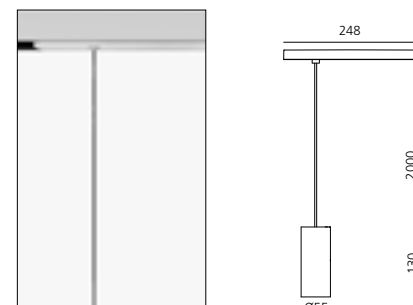

Life L80 (9K)>50000h



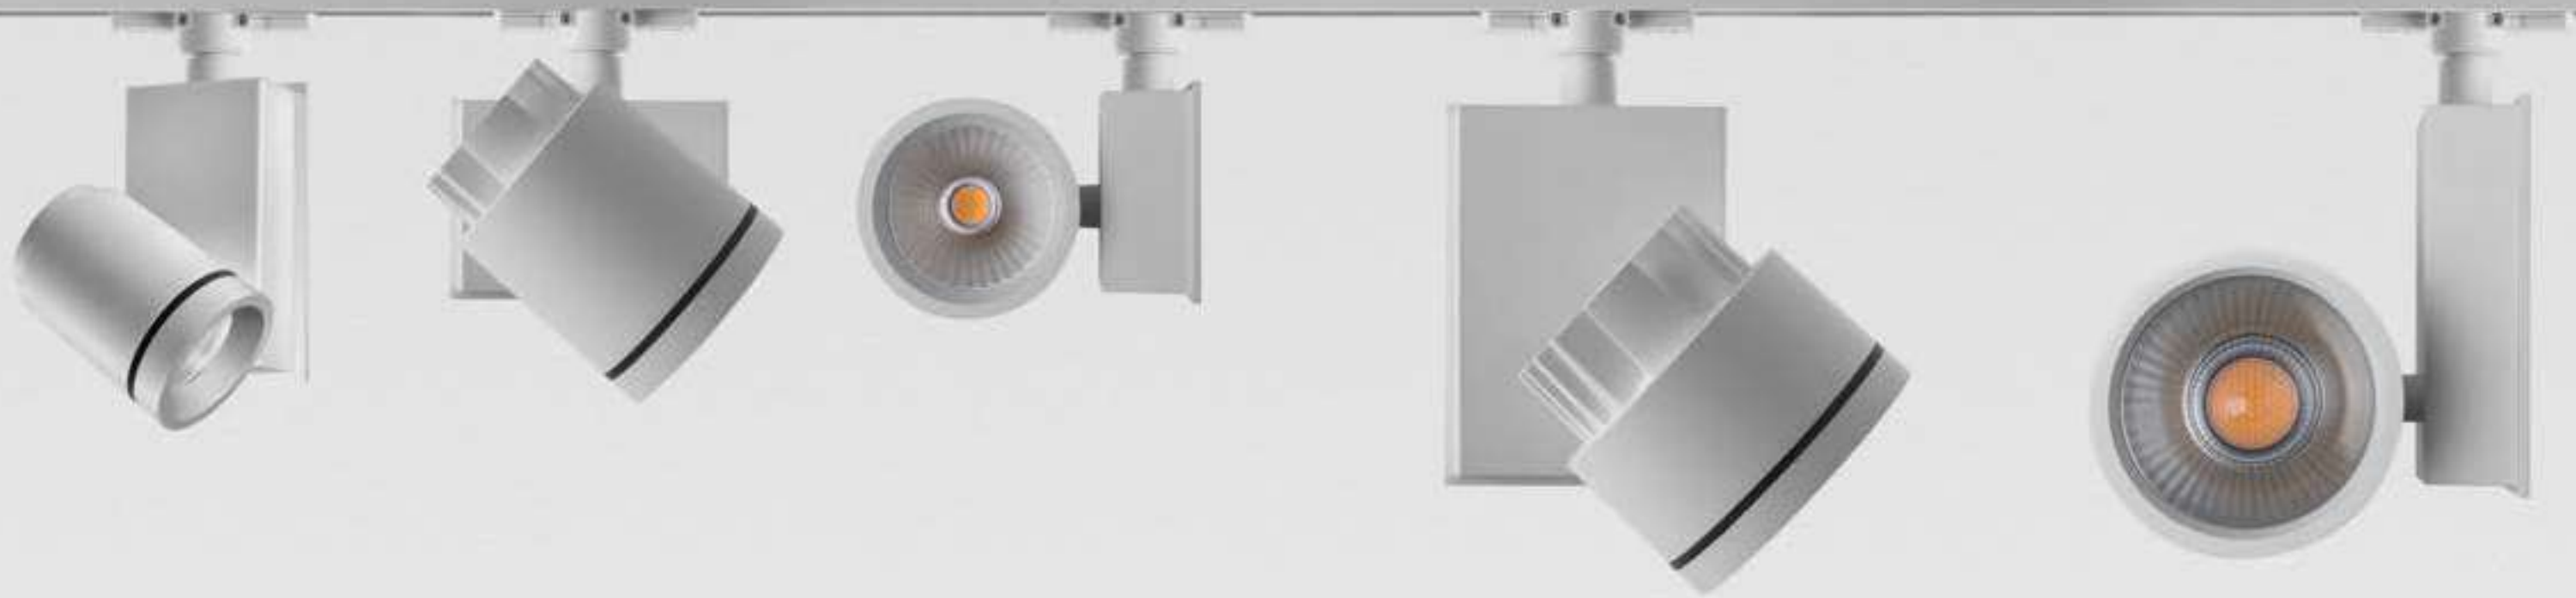

Picto

Studio Artemide
↔ 2013



Series of high-output LED adjustable projectors.
2 colours available.

Optical units available in 3 sizes, depending on the
light source: 70 mm, 100 mm, 125 mm.

Defined narrow beams in the LED version, thanks to
the hybrid optical system (Picto 125).

Picto 125 High Flux uses a high-yield reflective optical
unit.

The new Picto High Flux improves the performance
thanks to the high installed power and its high
efficiency.

Picto 125 Tuneable White (LED): colour temperature
can be adjusted from 2,900K to 5,500K – CRI>91
(min).

Adjustability: -90°/+90°, rotation up to 355°.

Precise aiming of the projectors, thanks to advanced
locking system.

Wide range of accessories: UV filters, chromatic
filters, louvres, asymmetric diffuser, adjustable
dowsers, Gobo to project images or control shape of
beam.

2 installation options: with 3-circuit track adapter
(available for ceiling mounted option), or base plate
for ceiling mounting.

Electronic power supply: with DALI dimmable, or non-
dimmable options.


Materials: injection-moulded aluminium head,
aluminium or polymer body, pure aluminium reflectors.

Compliant to EN60598-1 standard and other specific
regulations.



For further information on Picto
↪ visit artemide.com

Picto colors

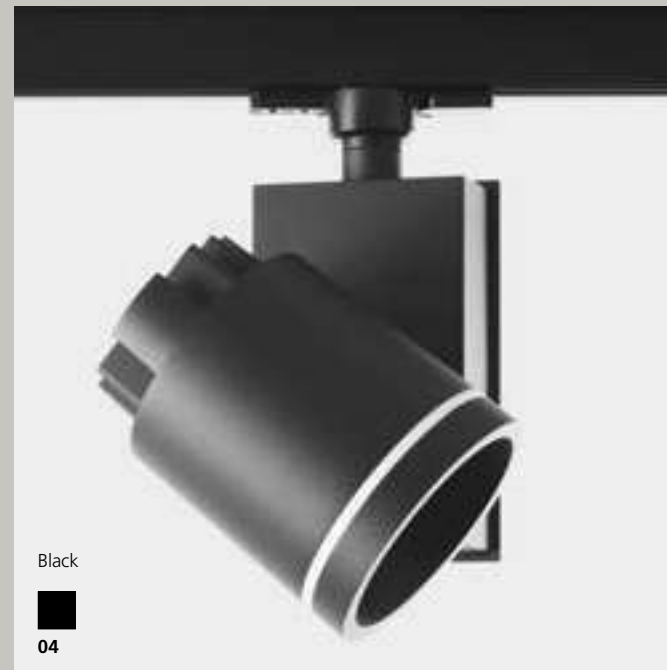

Picto accessory





↳ PICTO 70

White Black S F WF XF 220/240Vac 50/60Hz MacAdam 2SDCM IP20
 electronic ballast included. Life L80 (9K)>50000h CRI=90
 850°
 -90° 90° 355°

Vertical				
W	Weight	Beam	Flux	CCT
20 W	1,20 kg	S 14°	1095 lm	3000K
			1349 lm	4000K
		F 35°	1753 lm	3000K
			1806 lm	4000K
		WF 43°	1780 lm	3000K
			1834 lm	4000K
		XF 50°	1822 lm	3000K
			1877 lm	4000K

Undimmable	
Code	
AD017. 01/04	
AD018. 01/04	
AD011. 01/04	
AD014. 01/04	
AD012. 01/04	
AD015. 01/04	
AD013. 01/04	
AD016. 01/04	


DALI dimmable	
Code	
AD037. 01/04	
AD038. 01/04	
AD031. 01/04	
AD034. 01/04	
AD032. 01/04	
AD035. 01/04	
AD033. 01/04	
AD036. 01/04	



Vertical Eutrac				
W	Weight	Beam	Flux	CCT
20 W	1,20 kg	S 14°	1095 lm	3000K
			1349 lm	4000K
		F 35°	1753 lm	3000K
			1806 lm	4000K
		WF 43°	1780 lm	3000K
			1834 lm	4000K
		XF 50°	1822 lm	3000K
			1877 lm	4000K

Undimmable Eutrac	
Code	
AD007. 01/04	
AD008. 01/04	
AD001. 01/04	
AD004. 01/04	
AD002. 01/04	
AD005. 01/04	
AD003. 01/04	
AD006. 01/04	

DALI dimmable Eutrac	
Code	
AD027. 01/04	
AD028. 01/04	
AD021. 01/04	
AD024. 01/04	
AD022. 01/04	
AD025. 01/04	
AD023. 01/04	
AD026. 01/04	



Horizontal				
W	Weight	Beam	Flux	CCT
20 W	1,20 kg	S 14°	1095 lm	3000K
			1349 lm	4000K
		F 35°	1753 lm	3000K
			1806 lm	4000K
		WF 43°	1780 lm	3000K
			1834 lm	4000K
		XF 50°	1822 lm	3000K
			1877 lm	4000K

Undimmable	
Code	
AD057. 01/04	
AD058. 01/04	
AD051. 01/04	
AD054. 01/04	
AD052. 01/04	
AD055. 01/04	
AD053. 01/04	
AD056. 01/04	


DALI dimmable	
Code	
AD077. 01/04	
AD078. 01/04	
AD071. 01/04	
AD074. 01/04	
AD072. 01/04	
AD075. 01/04	
AD073. 01/04	
AD076. 01/04	



Horizontal Eutrac				
W	Weight	Beam	Flux	CCT
20 W	1,20 kg	S 14°	1095 lm	3000K
			1349 lm	4000K
		F 35°	1753 lm	3000K
			1806 lm	4000K
		WF 43°	1780 lm	3000K
			1834 lm	4000K
		XF 50°	1822 lm	3000K
			1877 lm	4000K

Undimmable Eutrac	
Code	
AD047. 01/04	
AD048. 01/04	
AD041. 01/04	
AD044. 01/04	
AD042. 01/04	
AD045. 01/04	
AD043. 01/04	
AD046. 01/04	

DALI dimmable Eutrac	
Code	
AD067. 01/04	
AD068. 01/04	
AD061. 01/04	
AD064. 01/04	
AD062. 01/04	
AD065. 01/04	
AD063. 01/04	
AD066. 01/04	



Accessories Picto 70

	Projector	Color	Code
	<input type="radio"/>	<input checked="" type="radio"/>	M083037
	<input checked="" type="radio"/>	<input type="radio"/>	M083017
	<input type="radio"/>	<input checked="" type="radio"/>	M082837
	<input checked="" type="radio"/>	<input type="radio"/>	M082817
	<input type="radio"/>	<input checked="" type="radio"/>	M083937
	<input checked="" type="radio"/>	<input type="radio"/>	M083917
	<input type="radio"/>	<input checked="" type="radio"/>	M083837
	<input checked="" type="radio"/>	<input type="radio"/>	M083817
	<input type="radio"/>	<input checked="" type="radio"/>	L176320
	<input checked="" type="radio"/>	<input type="radio"/>	L176330

↳ PICTO 100

White Black F WF XF 220/240Vac 50/60Hz MacAdam 2SDCM IP20
 electronic ballast included. Life L80 (9K)>50000h CRI=90
 850°
 -90° 90° 355°

Vertical				
W	Weight	Beam	Flux	CCT
35 W	2,60 kg	F 28°	2843 lm	3000K
			2928 lm	4000K
		WF 42°	2808 lm	3000K
			2892 lm	4000K
		XF 63°	2836 lm	3000K
			2921 lm	4000K

Undimmable	
Code	
AD111. 01/04	
AD114. 01/04	
AD112. 01/04	
AD115. 01/04	
AD113. 01/04	
AD116. 01/04	


DALI dimmable	
Code	
AD131. 01/04	
AD134. 01/04	
AD132. 01/04	
AD135. 01/04	
AD133. 01/04	
AD136. 01/04	



Vertical Eutrac				
W	Weight	Beam	Flux	CCT
35 W	2,60 kg	F 28°	2843 lm	3000K
			2928 lm	4000K
		WF 42°	2808 lm	3000K
			2892 lm	4000K
		XF 63°	2836 lm	3000K
			2921 lm	4000K

Undimmable Eutrac	
Code	
AD101. 01/04	
AD104. 01/04	
AD102. 01/04	
AD105. 01/04	
AD103. 01/04	
AD106. 01/04	

DALI dimmable Eutrac	
Code	
AD121. 01/04	
AD124. 01/04	
AD122. 01/04	
AD125. 01/04	
AD123. 01/04	
AD126. 01/04	



Horizontal				
W	Weight	Beam	Flux	CCT
35 W	2,60 kg	F 28°	2843 lm	3000K
			2928 lm	4000K
		WF 42°	2808 lm	3000K
			2892 lm	4000K
		XF 63°	2836 lm	3000K
			2921 lm	4000K

Undimmable	
Code	
AD151. 01/04	
AD154. 01/04	
AD152. 01/04	
AD155. 01/04	
AD153. 01/04	
AD156. 01/04	


DALI dimmable	
Code	
AD171. 01/04	
AD174. 01/04	
AD172. 01/04	
AD175. 01/04	
AD173. 01/04	
AD176. 01/04	



Horizontal Eutrac				
W	Weight	Beam	Flux	CCT
35 W	2,60 kg	F 28°	2843 lm	3000K
			2928 lm	4000K
		WF 42°	2808 lm	3000K
			2892 lm	4000K
		XF 63°	2836 lm	3000K
			2921 lm	4000K

Undimmable Eutrac	
Code	
AD141. 01/04	
AD144. 01/04	
AD142. 01/04	
AD145. 01/04	
AD143. 01/04	
AD146. 01/04	

DALI dimmable Eutrac	
Code	
AD161. 01/04	
AD164. 01/04	
AD162. 01/04	
AD165. 01/04	
AD163. 01/04	
AD166. 01/04	

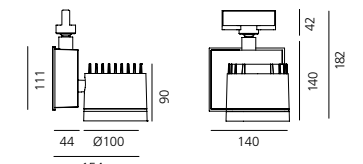

Accessories Picto 100

	Projector	Color	Code
	<input type="radio"/>	<input checked="" type="radio"/>	M082737
	<input checked="" type="radio"/>	<input type="radio"/>	M082717
	<input type="radio"/>	<input checked="" type="radio"/>	M082637
	<input checked="" type="radio"/>	<input type="radio"/>	M082617
	<input type="radio"/>	<input checked="" type="radio"/>	M081737
	<input checked="" type="radio"/>	<input type="radio"/>	M081717
			M080545
	<input type="radio"/>	<input checked="" type="radio"/>	L176320
	<input checked="" type="radio"/>	<input type="radio"/>	L176330


↳ PICTO 125

White Black S F WF 220/240Vac 50/60Hz MacAdam 2SDCM IP20
 electronic ballast included. Life L80 (9K)>50000h CRI=90
 850°
 -90° 90° 355°

Picto 125 High Flux					Undimmable		DALI dimmable	
W	Weight	Beam	Flux	CCT	Code	Code	Code	Code
68 W	2,60 kg	F 17°	5371 lm	3000K	AD211. 01/04	AD231. 01/04	AD231. 01/04	AD231. 01/04
			5532 lm	4000K	AD213. 01/04	AD233. 01/04	AD233. 01/04	AD233. 01/04
		WF 41°	5253 lm	3000K	AD212. 01/04	AD232. 01/04	AD232. 01/04	AD232. 01/04
			5411 lm	4000K	AD214. 01/04	AD234. 01/04	AD234. 01/04	AD234. 01/04



Picto 125 High Flux Eutrac					Undimmable Eutrac		DALI dimmable Eutrac	
W	Weight	Beam	Flux	CCT	Code	Code	Code	Code
68 W	2,60 kg	F 17°	5371 lm	3000K	AD201. 01/04	AD221. 01/04	AD221. 01/04	AD221. 01/04
			5532 lm	4000K	AD203. 01/04	AD223. 01/04	AD223. 01/04	AD223. 01/04
		WF 41°	5253 lm	3000K	AD202. 01/04	AD222. 01/04	AD222. 01/04	AD222. 01/04
			5411 lm	4000K	AD204. 01/04	AD224. 01/04	AD224. 01/04	AD224. 01/04



Picto 125					Undimmable		DALI dimmable	
W	Weight	Beam	Flux	CCT	Code	Code	Code	Code
46 W	2,60 kg	F 17°	3972 lm	3000K	AD311. 01/04	AD331. 01/04	AD331. 01/04	AD331. 01/04
			4091 lm	4000K	AD313. 01/04	AD333. 01/04	AD333. 01/04	AD333. 01/04
		WF 41°	3976 lm	3000K	AD312. 01/04	AD332. 01/04	AD332. 01/04	AD332. 01/04
			4095 lm	4000K	AD314. 01/04	AD334. 01/04	AD334. 01/04	AD334. 01/04

Picto 125 Eutrac					Undimmable Eutrac		DALI dimmable Eutrac	
W	Weight	Beam	Flux	CCT	Code	Code	Code	Code
46 W	2,60 kg	F 17°	3972 lm	3000K	AD301. 01/04	AD321. 01/04	AD321. 01/04	AD321. 01/04
			4091 lm	4000K	AD303. 01/04	AD323. 01/04	AD323. 01/04	AD323. 01/04
		WF 41°	3976 lm	3000K	AD302. 01/04	AD322. 01/04	AD322. 01/04	AD322. 01/04
			4095 lm	4000K	AD304. 01/04	AD324. 01/04	AD324. 01/04	AD324. 01/04

Accessories			
	Projector	Color	Code
	<input type="radio"/>	<input checked="" type="radio"/>	M083137
	<input type="radio"/>	<input checked="" type="radio"/>	M082937
	<input type="radio"/>	<input checked="" type="radio"/>	M083337
	<input type="radio"/>	<input checked="" type="radio"/>	M083537
	<input type="radio"/>	<input checked="" type="radio"/>	M083437
	<input type="radio"/>	<input checked="" type="radio"/>	M083637
	<input type="radio"/>	<input checked="" type="radio"/>	M083737
	<input type="radio"/>	<input checked="" type="radio"/>	M080535
	<input type="radio"/>	<input checked="" type="radio"/>	L176320
	<input checked="" type="radio"/>	<input type="radio"/>	L176330


↳ PICTO 125 TUNABLE WHITE

White Black S WF 220/240Vac 50/60Hz MacAdam 2SDCM IP20
 electronic ballast included. Life L80 (9K)>50000h CRI=93
 850°
 -90° 90° 355°


Picto 125 TW					Manual adjustment		DALI 8 dimmable	
W	Weight	Beam	Flux	CCT	Code	Code	Code	Code
32 W	2,60 kg	S 18°	1233 lm	2900K-5500K	AD411. 01/04	AD431. 01/04	AD431. 01/04	AD431. 01/04
		WF 37°	1157 lm	2900K-5500K	AD412. 01/04	AD432. 01/04	AD432. 01/04	AD432. 01/04




Picto 125 TW Eutrac					*Manual adjustment		DALI 8 dimmable	
W	Weight	Beam	Flux	CCT	Code	Code	Code	Code
32 W	2,60 kg	S 18°	1233 lm	2900K-5500K	AD401. 01/04	AD421. 01/04	AD421. 01/04	AD421. 01/04
		WF 37°	1157 lm	2900K-5500K	AD402. 01/04	AD422. 01/04	AD422. 01/04	AD422. 01/04

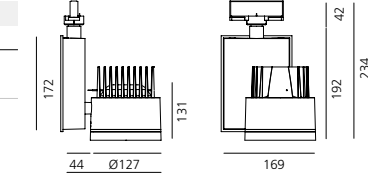

TW[®]
Artemide Tunable White

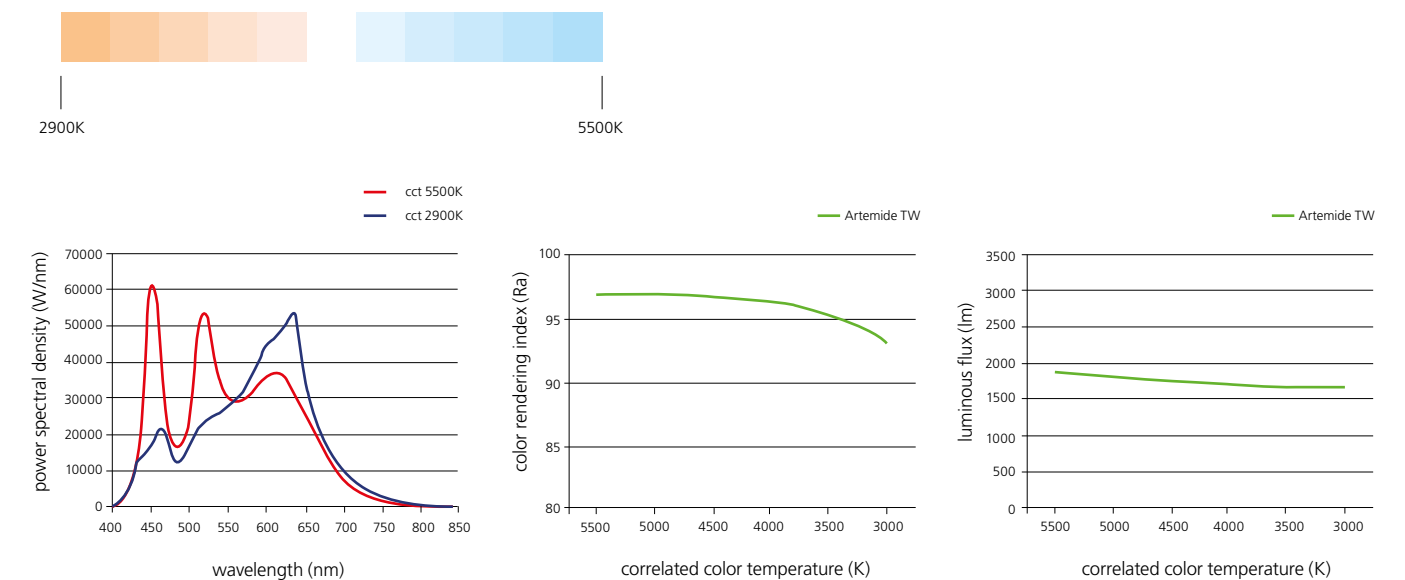


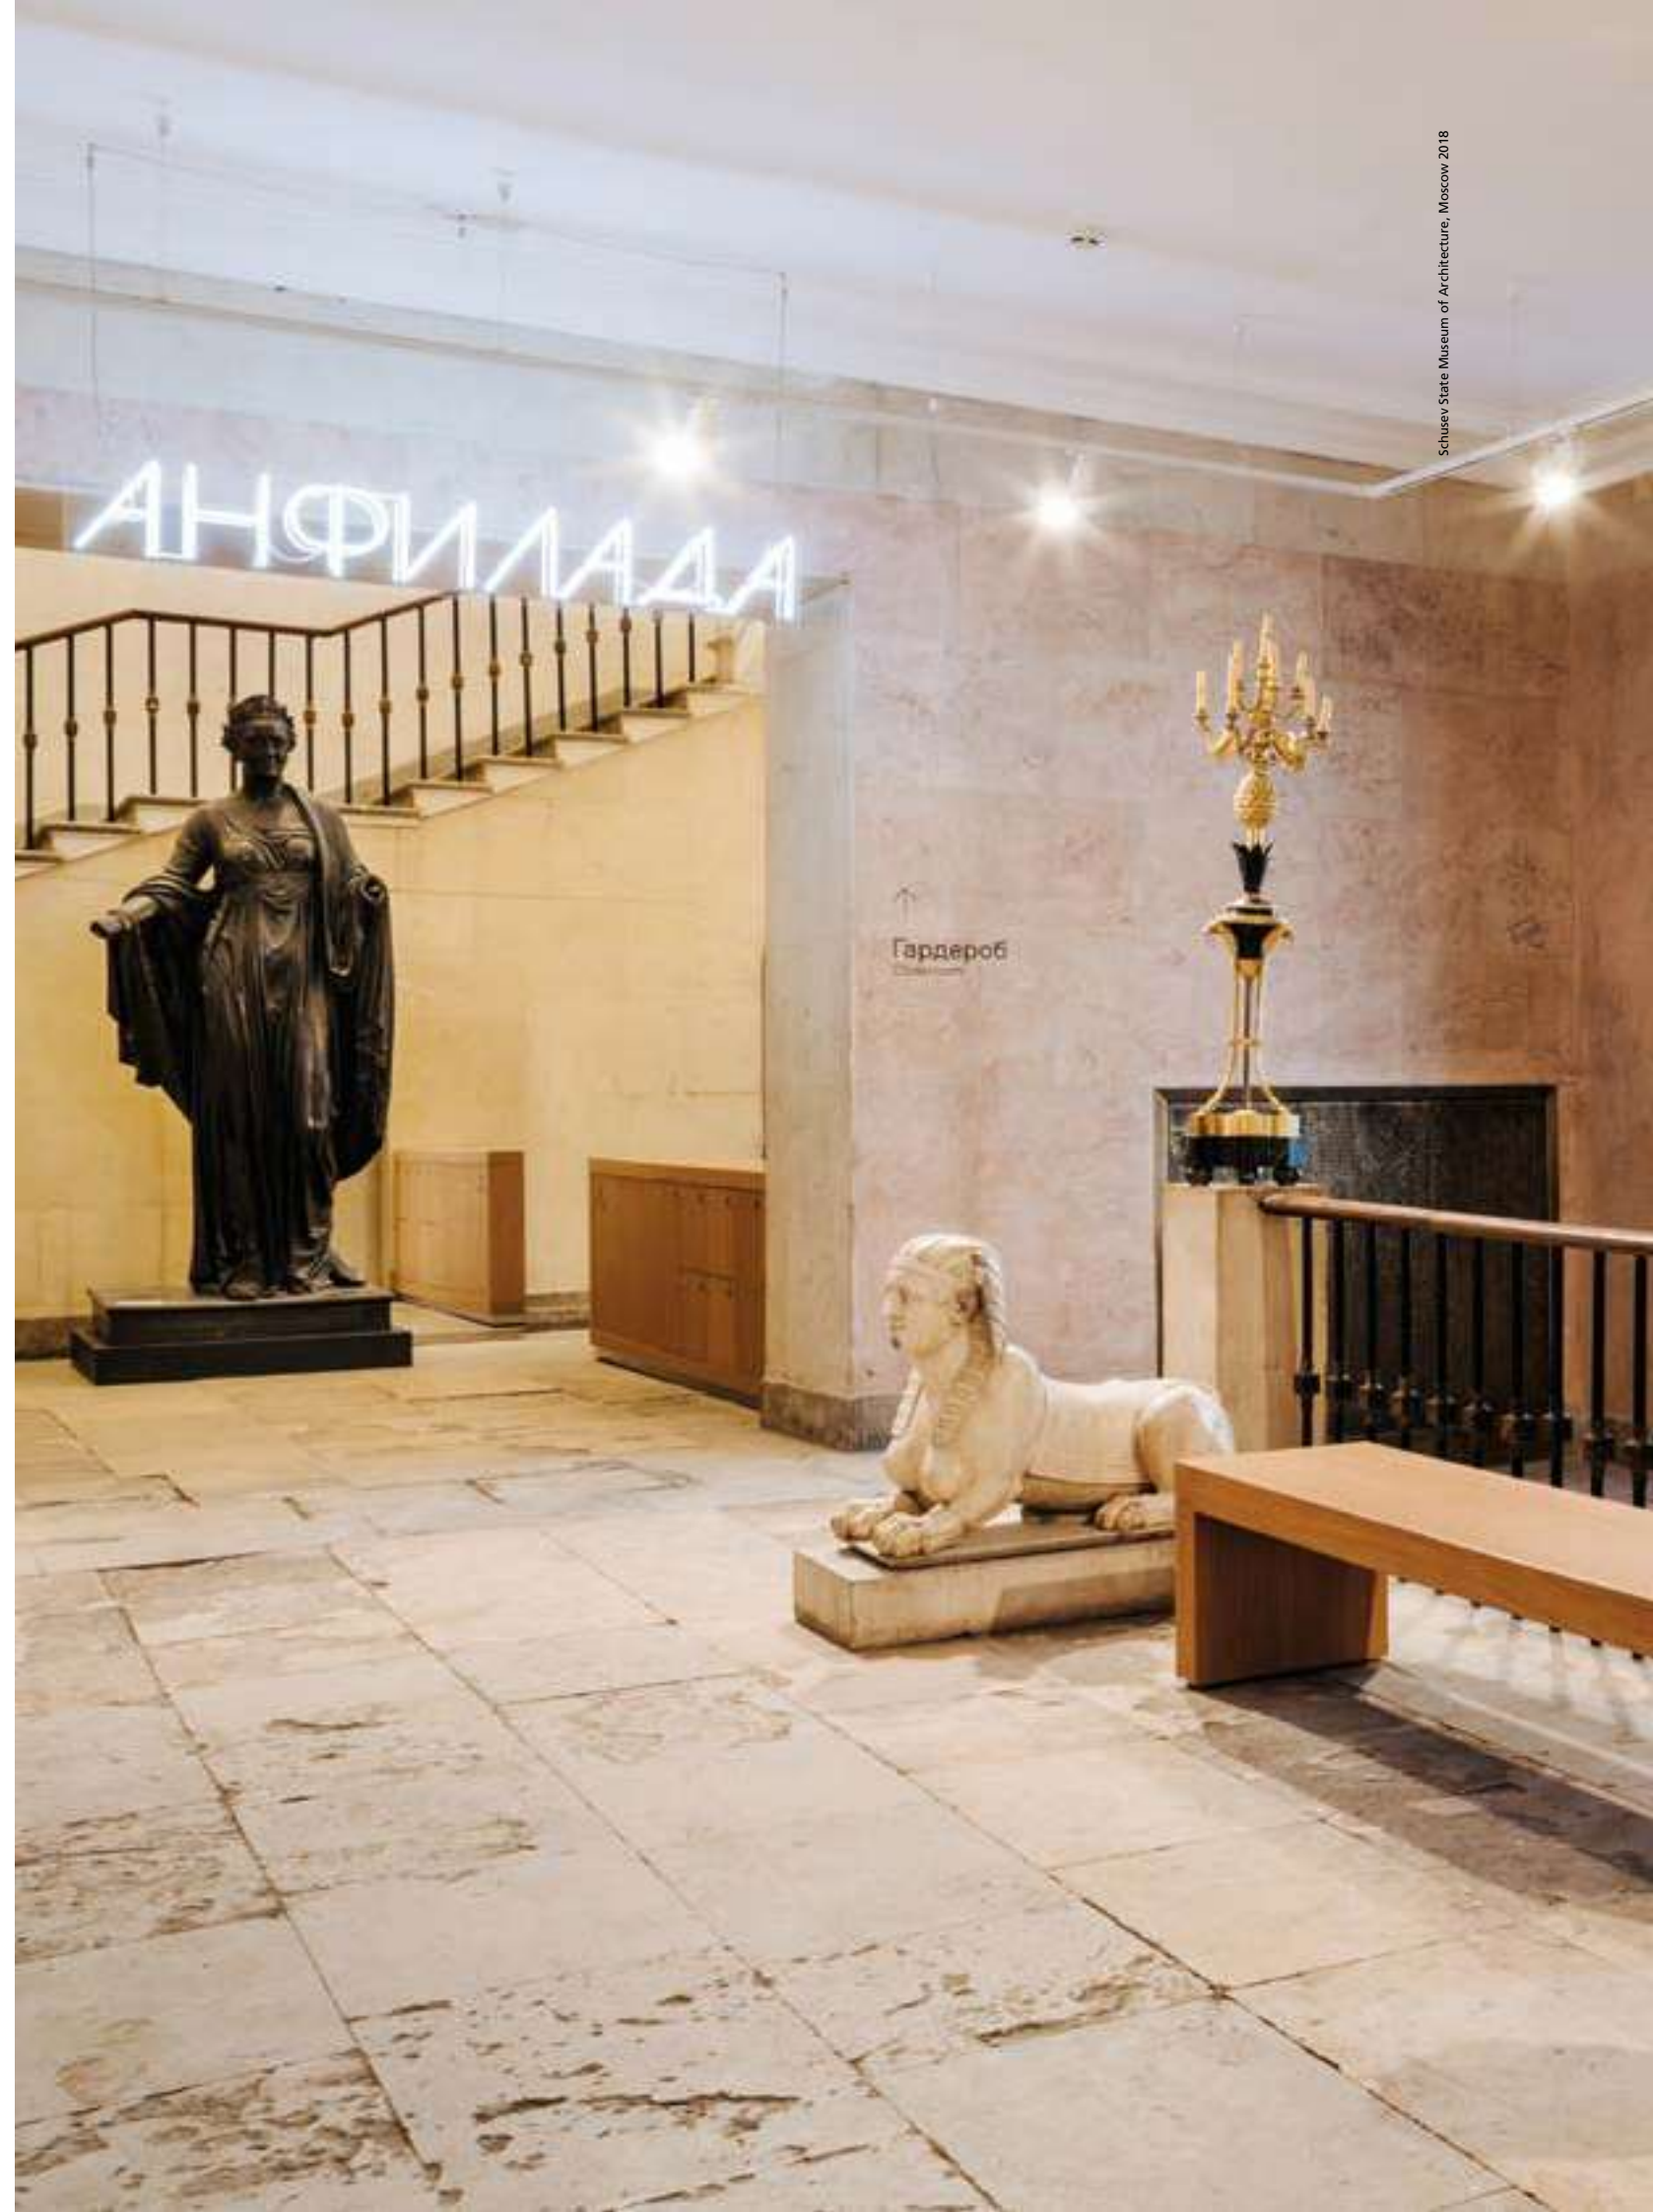

LoT

Tapio Rosenius

↪ 2016

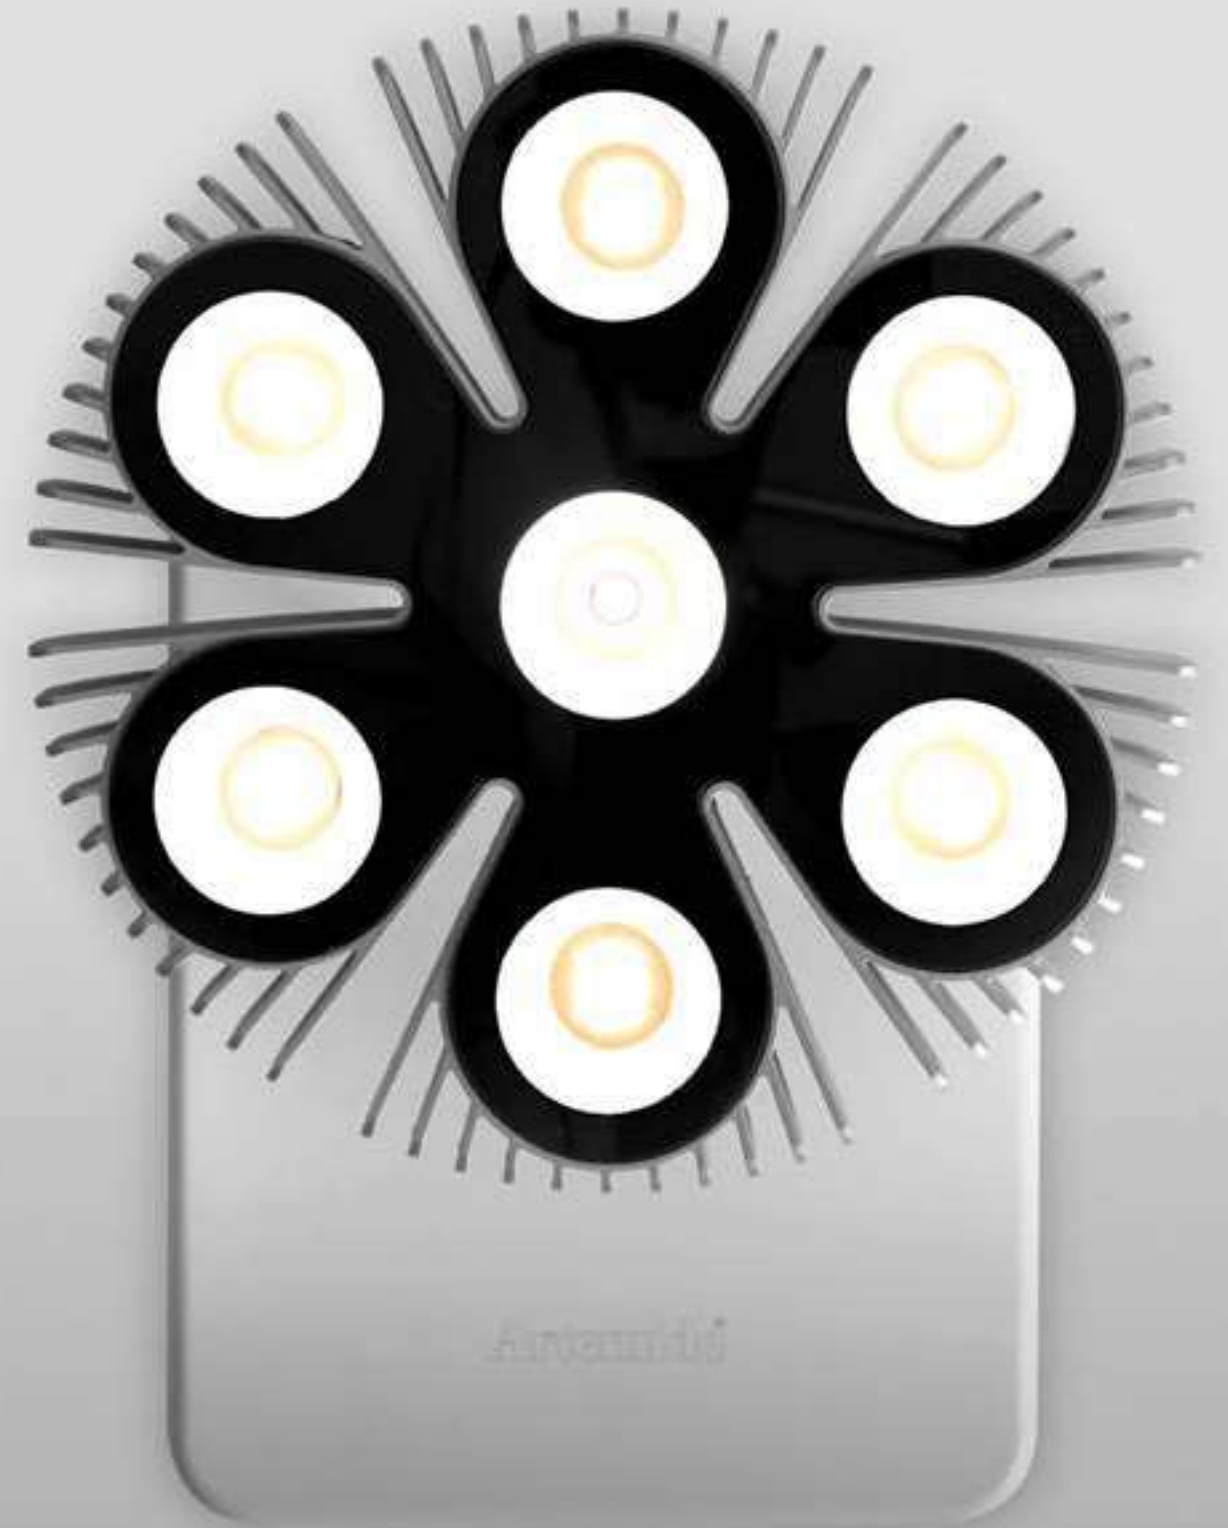

→ Patent of invention



LoT

↪ RGB white

LoT is a universal projector that changes the beam angles of emissions and flows dynamically, and produces coloured ambient light.

It is a multi-focal projector that ensures utmost flexibility with minimal dimensions.

Its dynamic luminous beam does not imply any mechanical movements, but is rather the result of innovative optoelectronic design. Seven lenses define four base beam angles and, when combined, can modulate countless beam angles and intensities through current change.

A well-calibrated mix of currents allows to adjust the beam angles of the emissions and to manage all intermediate angles with a very high resolution. Fluid and gradual changes are thus perceived through the management of a single DMX channel. 1 DMX channel is dedicated to adjusting the light intensity.

In addition to the white light projector function, LoT can produce coloured ambient light in the RGBW mode through 4 additional dedicated channels.


Uses TIR lenses.

The special heat sink allows to adjust the lighting power to ensure excellent illumination up to a 5 m distance.

Specifications and details can be obtained from the Artemide sales office.



For further information on LoT
↪ visit artemide.com

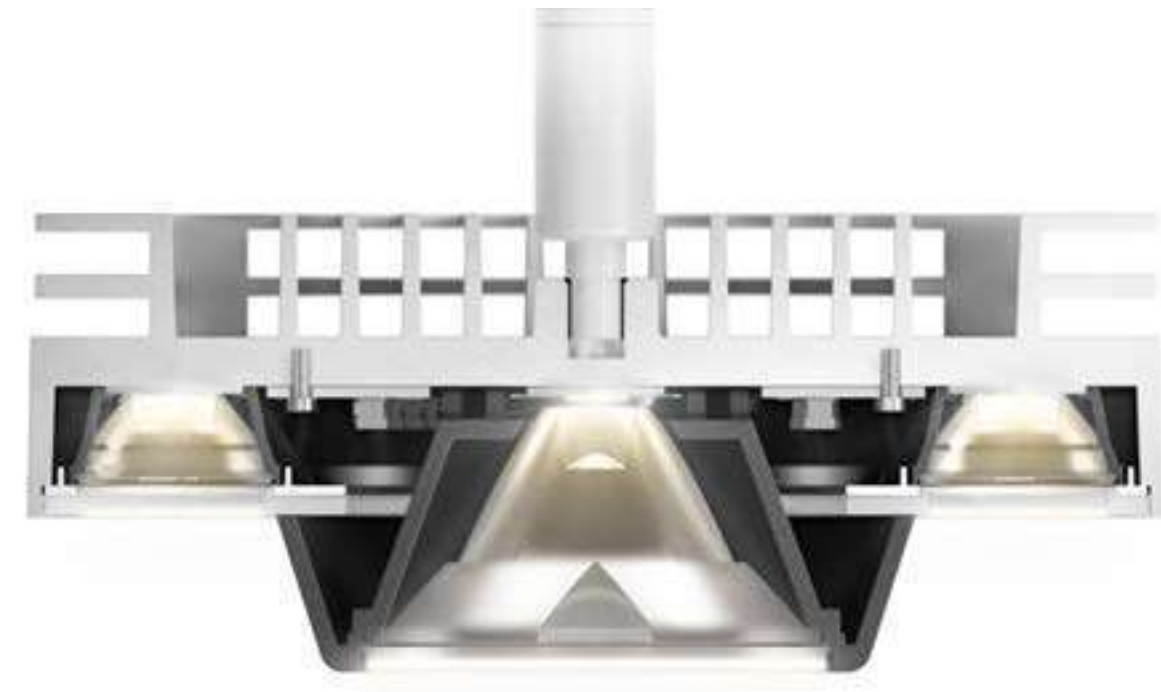

LoT DMX

The LoT is an DMX RDM enabled device. DMX stands for Digital Multiplex. It is simply a standard system of controlling lighting equipment and accessories.

The Remote Device Management or RDM is a protocol enhancement to USITT DMX512 and enables the bi-directional communication between a lighting controller and the connected RDM devices over a standard DMX line, for simple, convenient commissioning. The protocol allows the configuration (setting of the start address, patching, load personalities), status monitoring, firmware update and management of these devices.

The wiring infrastructure for DMX has been precisely defined and all installers must follow these rules. Pls refer to the Artemide DMX Brochure for detailed information.

The LoT fixtures can be controlled with Standard DMX controllers (not RDM enabled) as the DSC30 NL19030 or the DSC60 NL19081. The setup of the parameters has to be carried out with a RDM controller during or before the installation.

For smaller installations with small quantities, Artemide offers the possibility for a pre-setup (addressing,...) of the DMX RDM fixtures.

Artemide offers the on-site support for the RDM setup and the programming of the system. Refer to the technical department of Artemide SpA for further information or assistance.

CONFIGURATION FOR UP TO 32 LoT

At the beginning of every DMX line there must be a single DMX controller / transmitter.

This can have a max. of 32 standard devices connected over a max. cable length of 300m in a multi-drop bus topology commonly called a "daisy chain".

The last DMX512 Output needs to be terminated with a 120 ohms resistor joining pins + and -.



CONFIGURATION FOR HANDLING MORE THAN 32 LoT


If more devices are required then a DMX splitter should be used.

The output of a DMX splitter is considered a new DMX line, with the same rules applying.

At the end of each DMX line a terminator should be fitted.

DMX fixtures are linked by 'daisy-chaining' cables; Y-Splitters are not possible.


Pls. use RDM enabled DMX splitter for RDM light fixtures.

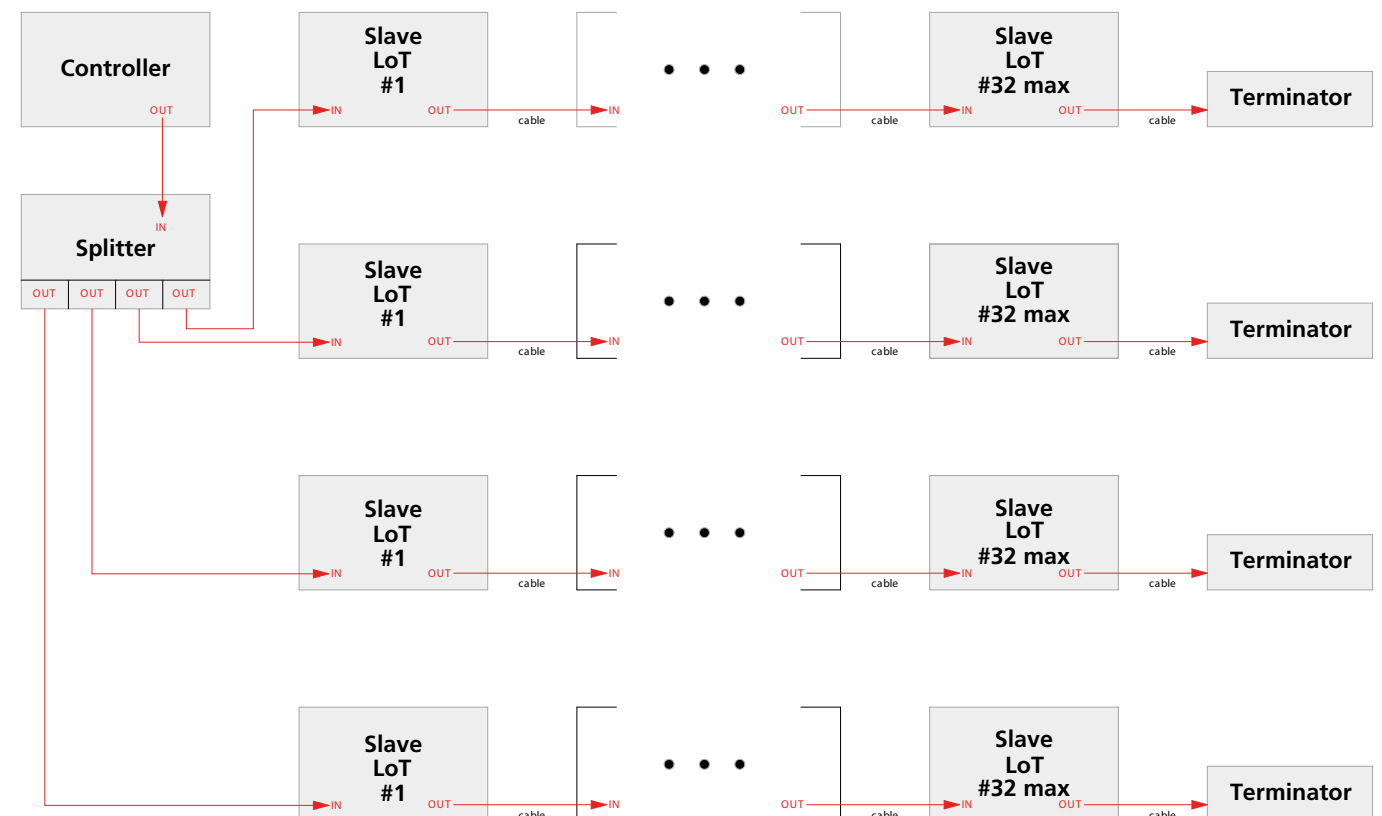


DMX Channels

	CH 1 Beam	CH 2 Intensity	CH 3 Red	CH 4 Green	CH 5 Blue	CH 6 White	Flux	W	Beam
	0	255	0	0	0	0	1166 lm	22 W	5°
	50	255	0	0	0	0	2090 lm	36 W	11°
	100	255	0	0	0	0	2240 lm	37 W	28°
	150	255	0	0	0	0	3750 lm	57 W	34°
	175	255	0	0	0	0	3788 lm	55 W	38°
	200	255	0	0	0	0	3821 lm	56 W	42°
	225	255	0	0	0	0	3874 lm	58 W	43°
	255	255	0	0	0	0	1986 lm	33 W	50°
	0	0	255	0	0	0	225 lm	9 W	
	0	0	0	255	0	0	389 lm	11 W	
	0	0	0	0	255	0	64 lm	11 W	
	0	0	0	0	0	255	267 lm	11 W	

↪ LOT RGB WHITE




MacAdam 25DCM
Life L70 (9K) 50000h
CRI=90
Control DMX/RDM
DMX 6 footprint



TRACK

W	Weight	Flux	CCT	Code
max peak power 80 W	6,0 kg	1100 lm/	2700 K	AA400.01/04
max continuous power 60 W		3800 lm		

To be used in combination with three-phase DALI tracks for DMX use.




RECESSED TRIM

W	Weight	Flux	CCT	Code
max peak power 80 W	6,0 kg	1100 lm/	2700 K	AA200.01/04/54
max continuous power 55 W		3800 lm		



∅ 292




RECESSED TRIMLESS

W	Weight	Flux	CCT	Code
max peak power 80 W	6,0 kg	1100 lm/	2700 K	AA100.01/04/54
max continuous power 55 W		3800 lm		




∅ 292




CEILING

W	Weight	Flux	CCT	Code
max peak power 80 W	6,0 kg	1100 lm/	2700 K	AA000.01/04
max continuous power 60 W		3800 lm		



SUSPENSION


W	Weight	Flux	CCT	Code
max peak power 80 W	6,0 kg	1100 lm/	2700 K	AA300.01/04
max continuous power 60 W		3800 lm		




SUSPENSION TRACK

W	Weight	Flux	CCT	Code
max peak power 80 W	6,0 kg	1100 lm/	2700 K	AA500.01/04
max continuous power 60 W		3800 lm		

To be used in combination with three-phase DALI tracks for DMX use.



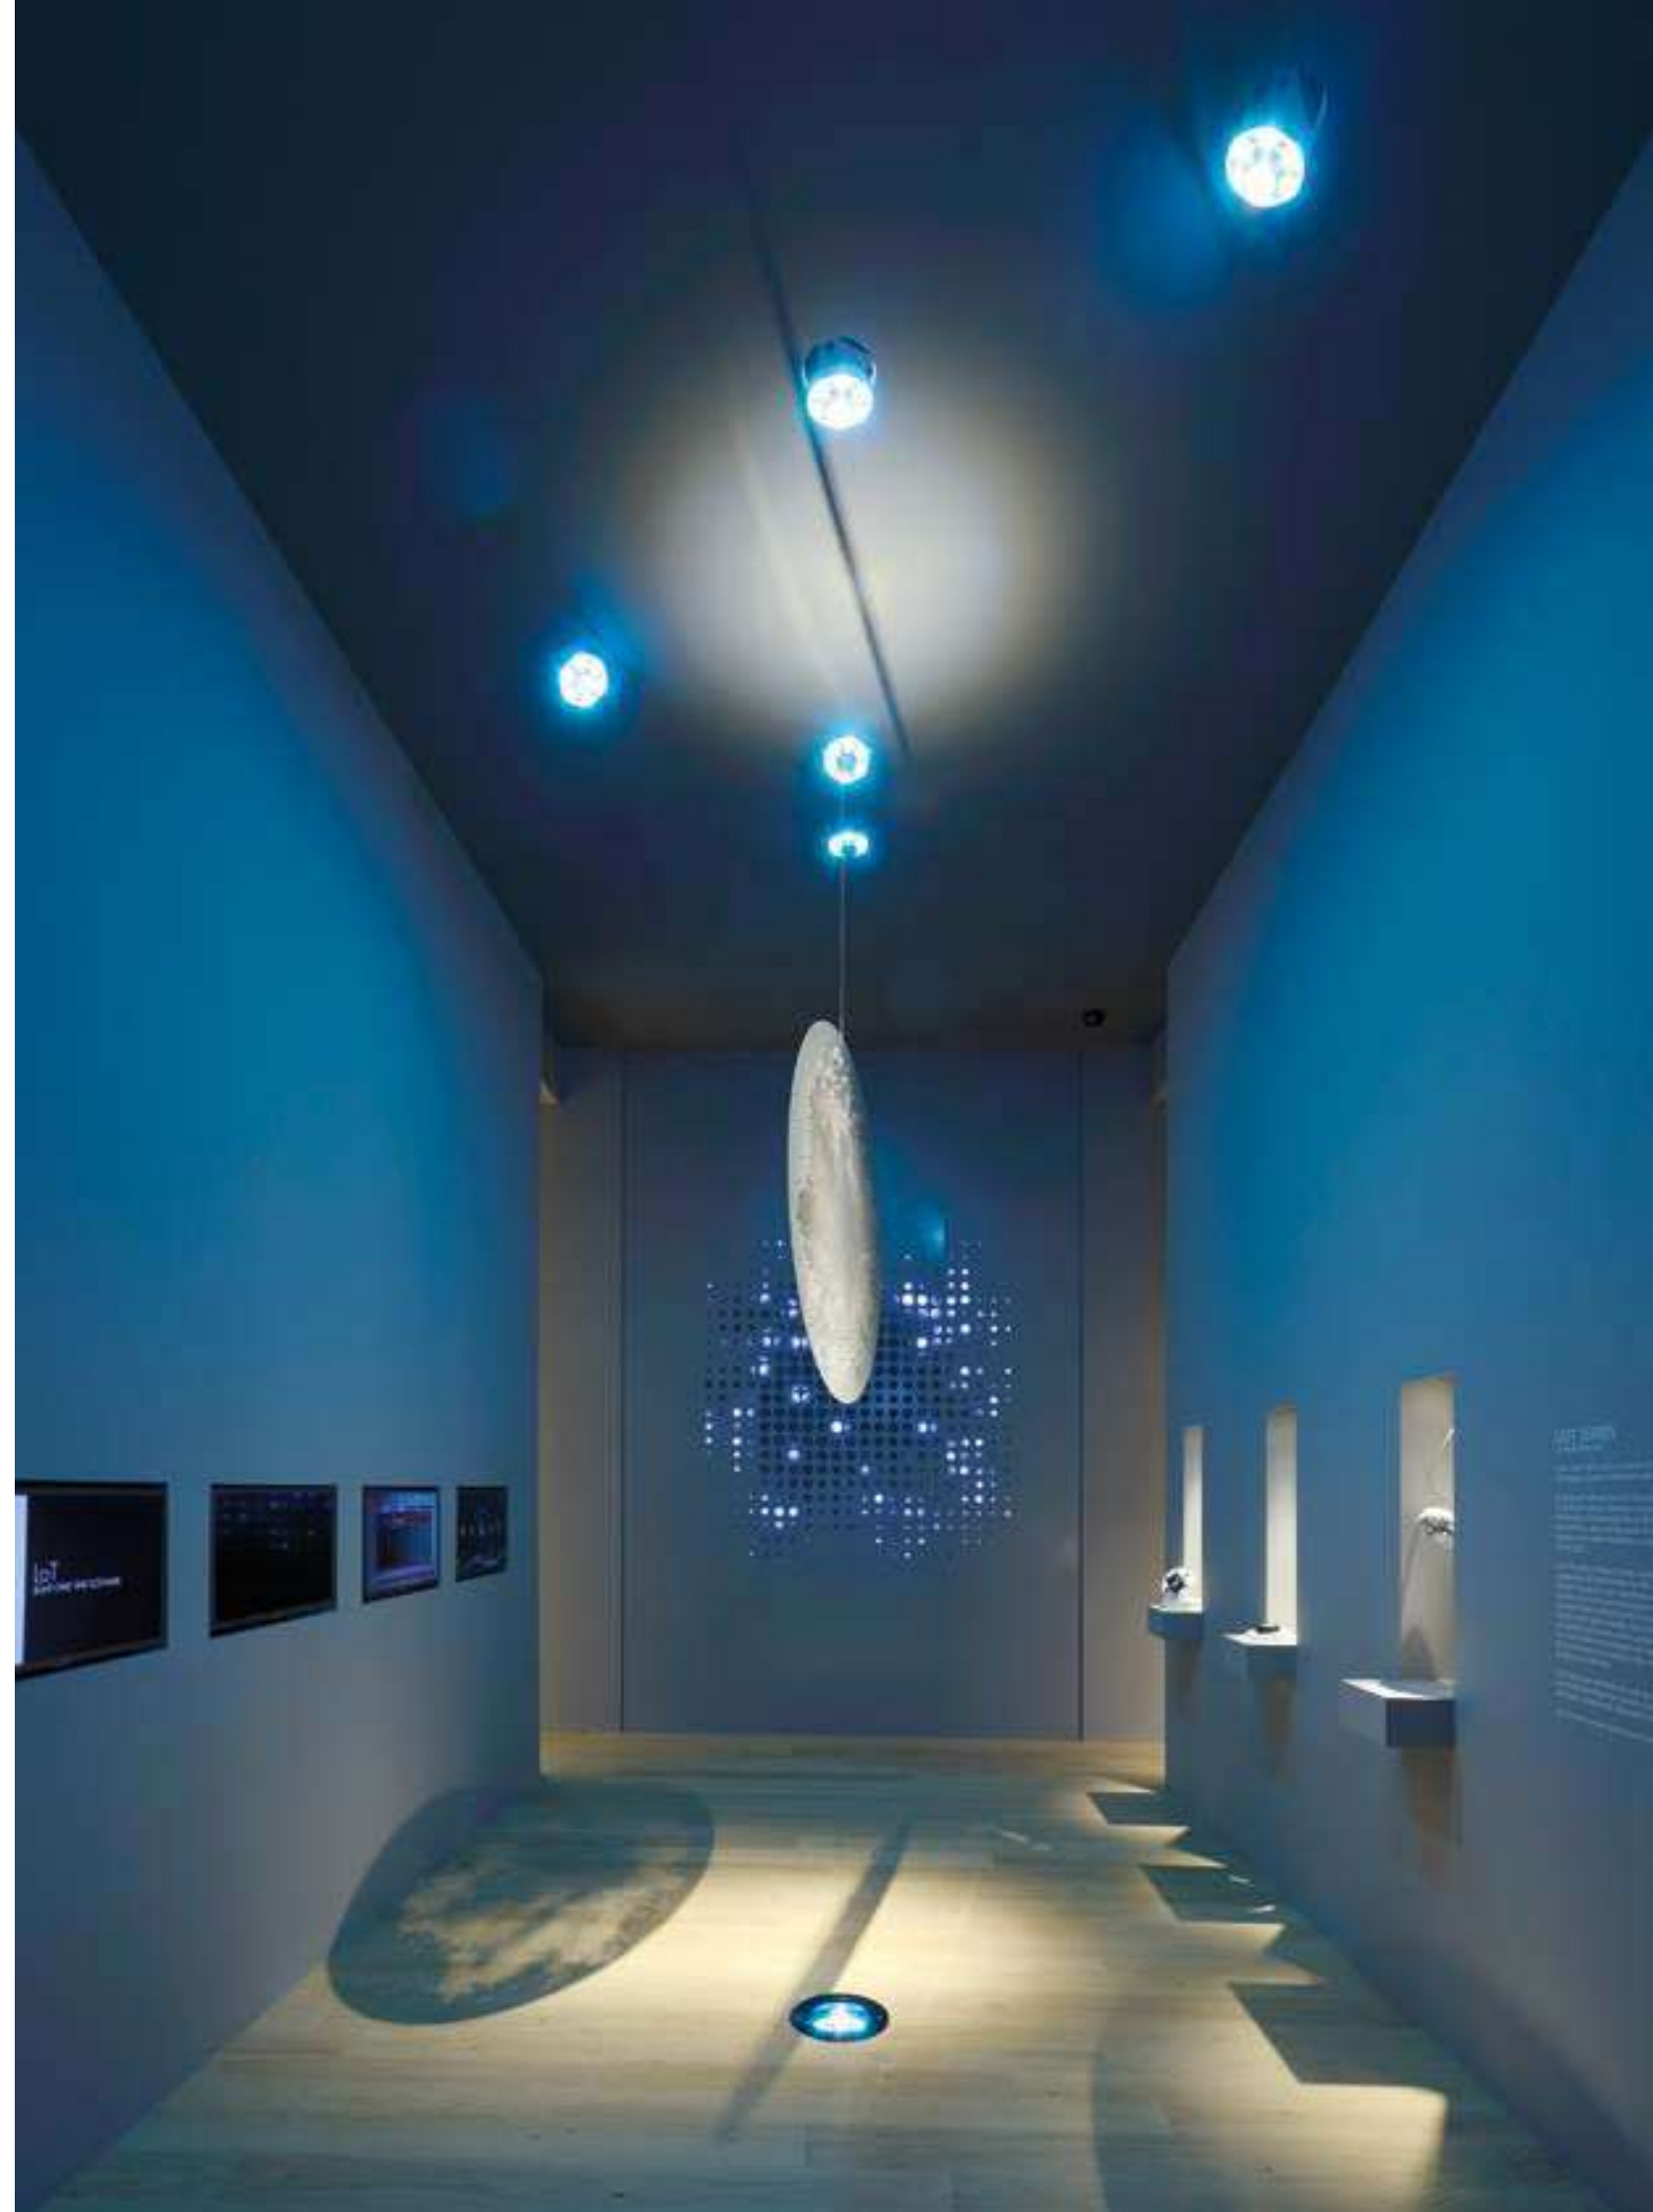



LoT ↪ Reflector

LoT Reflector is a universal projector that changes the beam angles of emissions and flows dynamically. It is a multi-focal projector that ensures utmost flexibility with minimal dimensions.

Its dynamic luminous beam does not imply any mechanical movements, but is rather the result of innovative optoelectronic design. Seven lenses define 3 base beam angles and, when combined, can modulate countless beam angles and intensities through current change.

Each base beam angle has 3 different optical unit types: 3 for the narrow beam, 2 for the flood beam, and 2 for the extra flood beam.

A well-calibrated mix of currents on the 3 different channels allows to adjust the beam angles of the emissions and to manage all intermediate angles with a very high resolution. Fluid and gradual changes are thus perceived.

Footprint 1: white emission beam angle
Footprint 2: white emission intensity

Uses reflective optical units.

The special heat sink allows to adjust the lighting power to ensure excellent illumination up to a 12 m installation height.

Specifications and details can be obtained from the Artemide sales office.



For further information on LoT
↪ visit artemide.com



LoT Reflector beam

S = Spot
15°






F = Flood
30°



WF = Wide flood
45°



Max Power Spot
20°

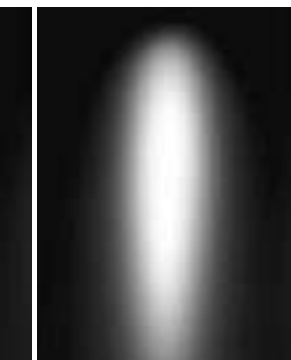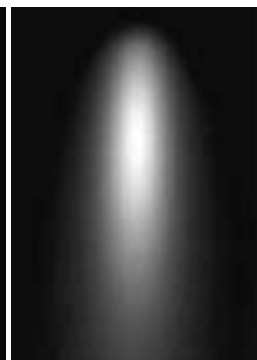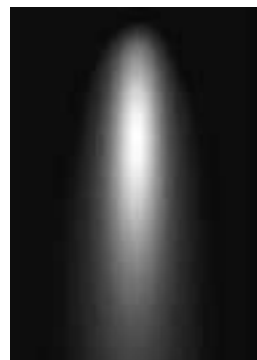

↪ LOT REFLECTOR

Silver
05


MacAdam 2SDCM
Life L70 (9K) 50000h
CRI=90
Control DMX/RDM
DMX 2 footprint

IP20
-90° 90° 360°

TRACK


W	Weight	Flux tot	CCT	Code
max 70 W	6,0 kg	5600 lm	3000 K	AM04005

To be used in combination with three-phase DALI tracks for DMX use.




RECESSED TRIM

W	Weight	Flux tot	CCT	Code
max 70 W	6,0 kg	5600 lm	3000 K	AM02005



∅ 292




RECESSED TRIMLESS

W	Weight	Flux tot	CCT	Code
max 70 W	6,0 kg	5600 lm	3000 K	AM01005





∅ 292




CEILING

W	Weight	Flux tot	CCT	Code
max 70 W	6,0 kg	5600 lm	3000 K	AM00005



SUSPENSION


W	Weight	Flux tot	CCT	Code
max 70 W	6,0 kg	5600 lm	3000 K	AM03005



SUSPENSION TRACK

W	Weight	Flux tot	CCT	Code
max 70 W	6,0 kg	5600 lm	3000 K	AM05005

To be used in combination with three-phase DALI tracks for DMX use.





BACKSTAGE

BACKSTAGE

BACKSTAGE



Cata

Carlotta de Bevilacqua

↪ 2012

→ Patent pending



For further information on Cata
→ visit artemide.com

Cata optical system



CATA

CATADIOPTRIC

High axial intensities with considerable beam collimation.
High-precision accent lighting.
Well defined narrow beams.
Excellent light blending.



CATA TIR

TOTAL INTERNAL REFLECTION




Extremely compact dimensions.
High efficiency.
Wide availability of beam angles.
Maximum control of light emission.
Wide range of optical accessories.



CATA WIDE

REFLECTIVE & REFRACTIVE

Soft, homogenous light.
High efficiency.
Diffused light effect produced by transparent material.

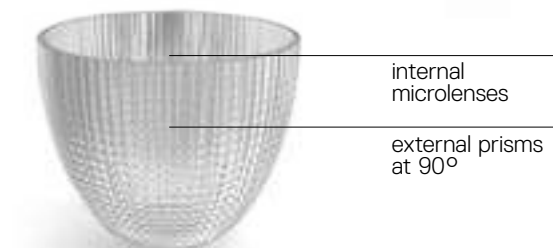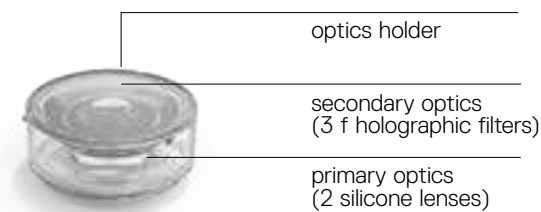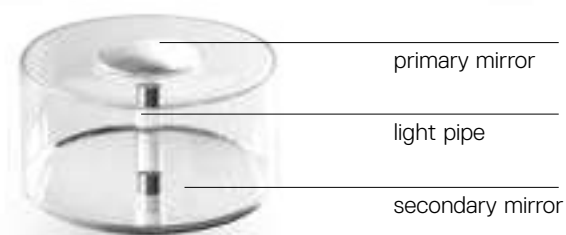

Interchangeable optical unit a 'twist & lock' mechanism.
Defined, concentrated light beams thanks to an innovative collimation system.

3 beam angles: S (9°), S (14°), XF (66°).

Excellent quality of light.

Cata Tuneable White: adjustable colour temperature from 2700K to 5700K CRI >93 (min.).

Cata Stable White: available as warm white (3000K) and neutral white (4000K) – CRI=80 (min.).

Rotation of 360°, tilt angle of +90°/-90°.

4 installation options: with adaptor for 3-circuit track (ceiling only as envisaged by legislation), with power unit for ceiling installation in the adjustable and fixed version, with power unit for suspension installation in the adjustable version.

Ultra-flat power source (8mm height): DALI dimmable as standard, DALI8 interface hub for Tunable White version.

If mounting on a track, it can be used with button on board unit with memory function.

In all the other mounting modes, optional SwitchDimm operation and resident button with memory function.

Materials: optic in transparent and metallic polycarbonate, heat sink in die-cast polished aluminium, feeder/power supply in transparent polycarbonate, arm in die-cast polished aluminium.

Complies with EN60598-1 standard and other specific standards.



OPTICAL UNIT

Cata is equipped with a system of interchangeable optics via a 'twist and lock' mechanism.

S 9°



S 14°



XF 66°



Cata

↪ Catadioptric


↪ CATA CATADIOPTRIC



Polished Aluminium


In absence of DALI-SwitchDim bus, CATA can be dimmed using the button on the light fitting.

MacAdam 3SDCM
Life L80 (10K) 55000h
CRI=80



TRACK


W	Weight	CCT	DALI Code
30 W	0,70 kg	3000 K	M057383
		4000 K	M057483



To be used in conjunction with DALI 3-circuit tracks.


CEILING

W	Weight	CCT	DALI-SwitchDim Code
30 W	0,70 kg	3000 K	M057381
		4000 K	M057481




SUSPENSION

W	Weight	CCT	DALI-SwitchDim Code
30 W	0,70 kg	3000 K	M0672W81
		4000 K	M0672N81




CEILING FIX

W	Weight	CCT	DALI Code
30 W	0,70 kg	3000 K	M0677W81
		4000 K	M0677N81





↪ OPTIC




Optical unit 9°

Weight	Beam	Code
0,25 kg	S 9°	M057500
CCT	Flux	
3000 K	1125 lm	
4000 K	1194 lm	




Optical unit 14°

Weight	Beam	Code
0,20 kg	S 14°	M057600
CCT	Flux	
3000 K	946 lm	
4000 K	1004 lm	



Optical unit 66°

Weight	Beam	Code
0,30 kg	XF 66°	M057810
CCT	Flux	
3000 K	2123 lm	
4000 K	2254 lm	




Interchangeable optical unit a 'twist & lock' mechanism.
 5 available beams: XS (4°), S (16°), WF (28°), XF (56°), WW.
 2 color temperatures: warm white (3000K) CRI=93 (min.), neutral white (4000K) CRI=90 (min.)
 Rotation of 360°, tilt angle of +90°/-90°.
 4 installation options: with adaptor for 3-circuit track (ceiling only as envisaged by legislation), with power unit for ceiling installation in the adjustable and fixed version, with power unit for suspension installation in the adjustable version.
 Ultra-flat power source (8mm height): DALI dimmable as standard.
 If mounting on a track, it can be used with button on board unit with memory function.

If using a ceiling and suspension mount, it can be used in SwitchDimm option and with button on board unit with memory function.
 Materials: optic in transparent polycarbonate and silicone, heat sink in die-cast polished aluminium, feeder/power supply body in transparent polycarbonate, arm in die-cast polished aluminium.
 Complies with EN60598-1 standard and other specific standards.



OPTICAL UNIT

Cata Lens is equipped with a system of interchangeable optics via a 'twist and lock' mechanism.

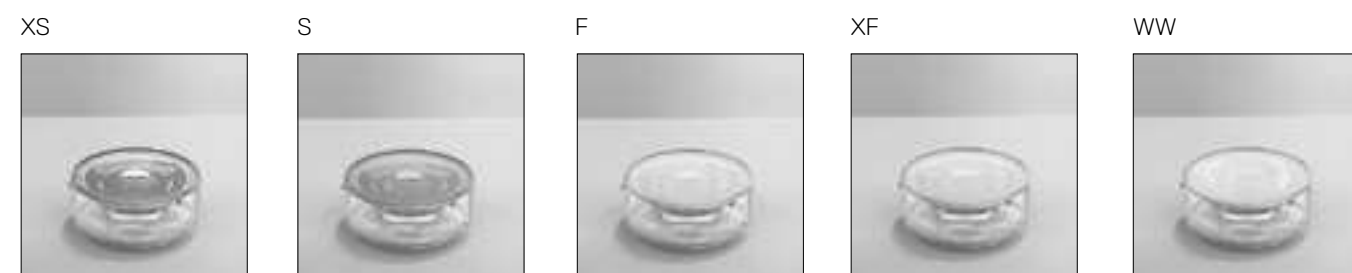


Cata
 ↪ **TIR**



Polished Aluminium


In absence of DALI-SwitchDim bus, CATA can be dimmed using the button on the light fitting.

MacAdam 2SDCM
Life L90 (10K)>55400h
CRI=90



TRACK


W	Weight	CCT	DALI Code
22W	0,70 kg	3000 K	M0569W83
		4000 K	M0569N83



To be used in conjunction with DALI 3-circuit tracks.


CEILING

W	Weight	CCT	DALI-SwitchDim Code
22W	0,70 kg	3000 K	M0569W81
		4000 K	M0569N81




SUSPENSION

W	Weight	CCT	DALI-SwitchDim Code
22W	0,70 kg	3000 K	M0671W81
		4000 K	M0671N81




CEILING FIX

W	Weight	CCT	DALI Code
22W	0,70 kg	3000 K	M0676W81
		4000 K	M0676N81




Optical unit XS

Weight	Beam	Code
0,15 kg	XF 4°	M109500
<hr/>		
CCT	Flux	
3000 K	1446 lm	
4000 K	1551 lm	




Optical unit S

Weight	Beam	Code
0,15 kg	S 16°	M109600
<hr/>		
CCT	Flux	
3000 K	1638 lm	
4000 K	1758 lm	




Optical unit F

Weight	Beam	Code
0,15 kg	WF 28°	M109700
<hr/>		
CCT	Flux	
3000 K	1561 lm	
4000 K	1674 lm	




Optical unit XF

Weight	Beam	Code
0,15 kg	XF 56°	M109800
<hr/>		
CCT	Flux	
3000 K	1663 lm	
4000 K	1784 lm	



Optical unit WW

Weight	Beam	Code
0,15 kg	WW	M109900
<hr/>		
CCT	Flux	
3000 K	1616 lm	
4000 K	1734 lm	



Accessories configuration		narrow	spot	flood	wide flood
	1 Glass filter Lens for elliptical emission Soft filter Chromatic filter	●	●	●	●
	Anti-dazzle louvre	●	●	●	●
	Adjustable dowsers	●	●	●	●
	Anti-dazzle louvre + Adjustable dowsers	●	●	●	●
	Anti-dazzle louvre + 1 Glass filter Lens for elliptical emission Soft filter Chromatic filter	●	●	●	●
	Adjustable dowsers + 1 Glass filter Lens for elliptical emission Soft filter Chromatic filter	●	●	●	●
	2 Glass filters Lens for elliptical emission Soft filter Chromatic filter	●	●	●	●

Accessories		Color	Code
	Accessories holder	①	M057080
	Lens for elliptical emission		M282007
	Soft filter		M056807
	Chromatic filter	● ● ●	M281745 M281755 M281735
	Anti-dazzle louvre	●	M282100
	Adjustable dowsers	●	M059910





Museum Louvre Abu Dhabi, 2017, Jean Nouvel, ph. Michèle Anastasi



Olmo

Giulio Iacchetti
↔ 2015



Olmo is magnetic

48V magnetic track, max. 5 modules with 12 spots and one power unit.
The junction allows to join the parts at 360° horizontally or vertically.
Adjustable magnetic LED projectors.
DALI dimmerable and non-dimmerable version.




Artemide
App
↪ on request

Olmo is a system based on a combination of plain optical and mechanical elements: a magnetic adapter and three luminous heads that offer different light beams. The track's structure has a C-section to ensure appropriate structural properties and accommodate an innovative printed circuit board within for power supply. Underneath is a thin iron edge that supports the luminous bodies with a magnetic joint. The suspension tracks ensure maximum mounting flexibility, in that they can be either connected with each other or installed vertically or horizontally, as are connected via an element that ensures power and mechanical connection. Olmo is therefore a system that grows freely and unpredictably to adjust its geometry, look, and lighting performance to space.



For further information on Olmo
↪ visit artemide.com




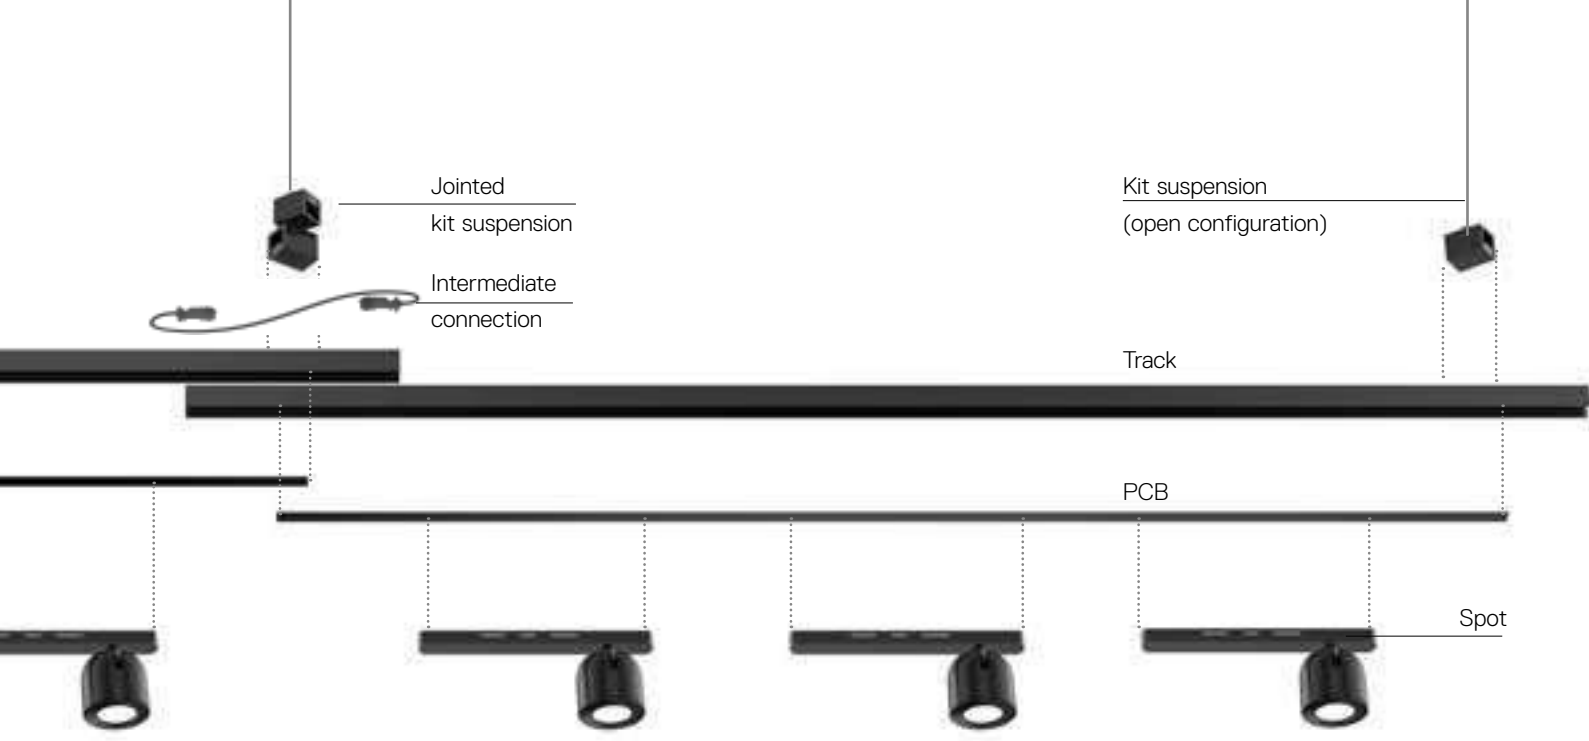


↪ OLMO

White	Black	F	WF	MacAdam 2SDCM	IP20
□	■	◐	◑	Life L80 (9K)>50000h	⊕
10	09			CRI=90	



MAGNETIC TRACK

Length	Weight	Code
1300 mm	2,30 kg	DGI2700A. 10/09



SPOT


W	Beam	Flux	CCT	DALI dimmable
16 W	F 22°	1233 lm	2700 K	DGI2700B. 10/09 1Y
		1319 lm	3000 K	DGI2700B. 10/09 1W
	F 29°	1237 lm	2700 K	DGI2700B. 10/09 2Y
		1324 lm	3000 K	DGI2700B. 10/09 2W
	WF 42°	1236 lm	2700 K	DGI2700B. 10/09 3Y
		1322 lm	3000 K	DGI2700B. 10/09 3W




Accessories	Code
Suspension kit	DGI2700H. 10/09




Suspension junction	DGI2700F. 10/09
---------------------	-----------------



Electrical connection kit	DGI2700G. 10/09
---------------------------	-----------------



Driver	Undimmable	DALI dimmable
	Code	Code
	DGI2700E. 10/09	DGI2700E. 10/09



Olmo components



Hoy

Foster+Partners
↪ 2017



For further information on Hoy
↪ visit artemide.com

Hoy typologies

RECESSED - SEMI RECESSED



TRIM



XF 55°




TRIMLESS



XF 55°




SEMI-RECESSED TRIM



SP 13° FL 30° WF 44°



SEMI-RECESSED TRIMLESS



SP 13° FL 30° WF 44°

LINEAR STAND ALONE - SYSTEM



SUSPENSION




CEILING

SPOT



SMD



SP 13° FL 30° WF 44°




SMD FIXED



XF 55°

SPOT MODULE




S 13° F 20° WF 28°

TRACK



TRACK



S 16° F 22° WF 32°



TRACK FIXED




XF 55°

Hoy colors



Hoy Spot rotation

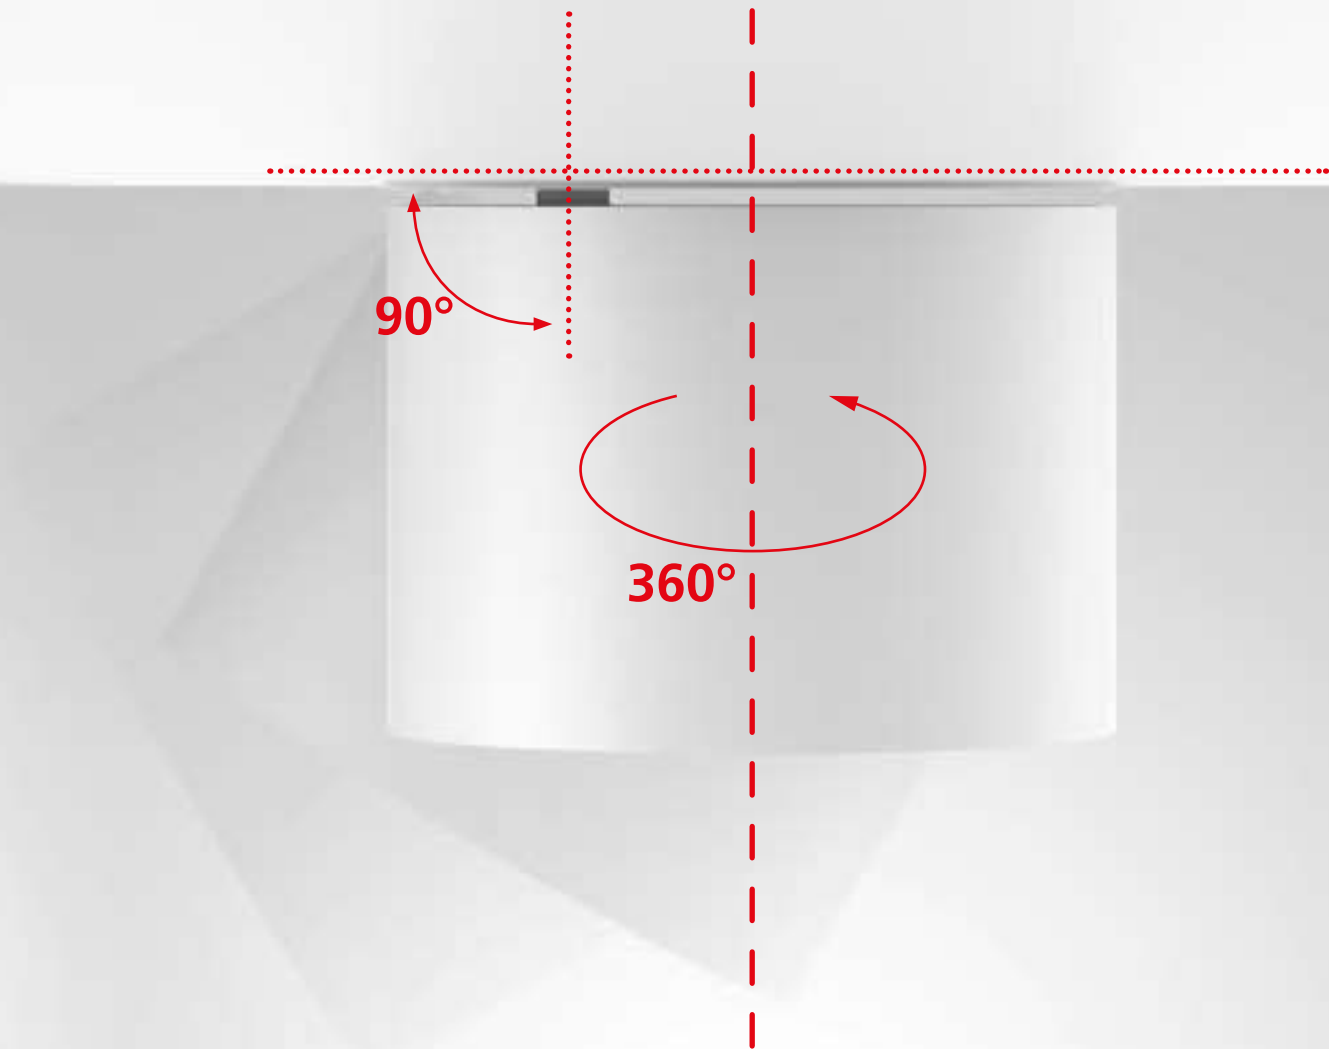


Hoy ↪ System




Hoy System linear configuration

→ SUSPENSION FRONT VIEW

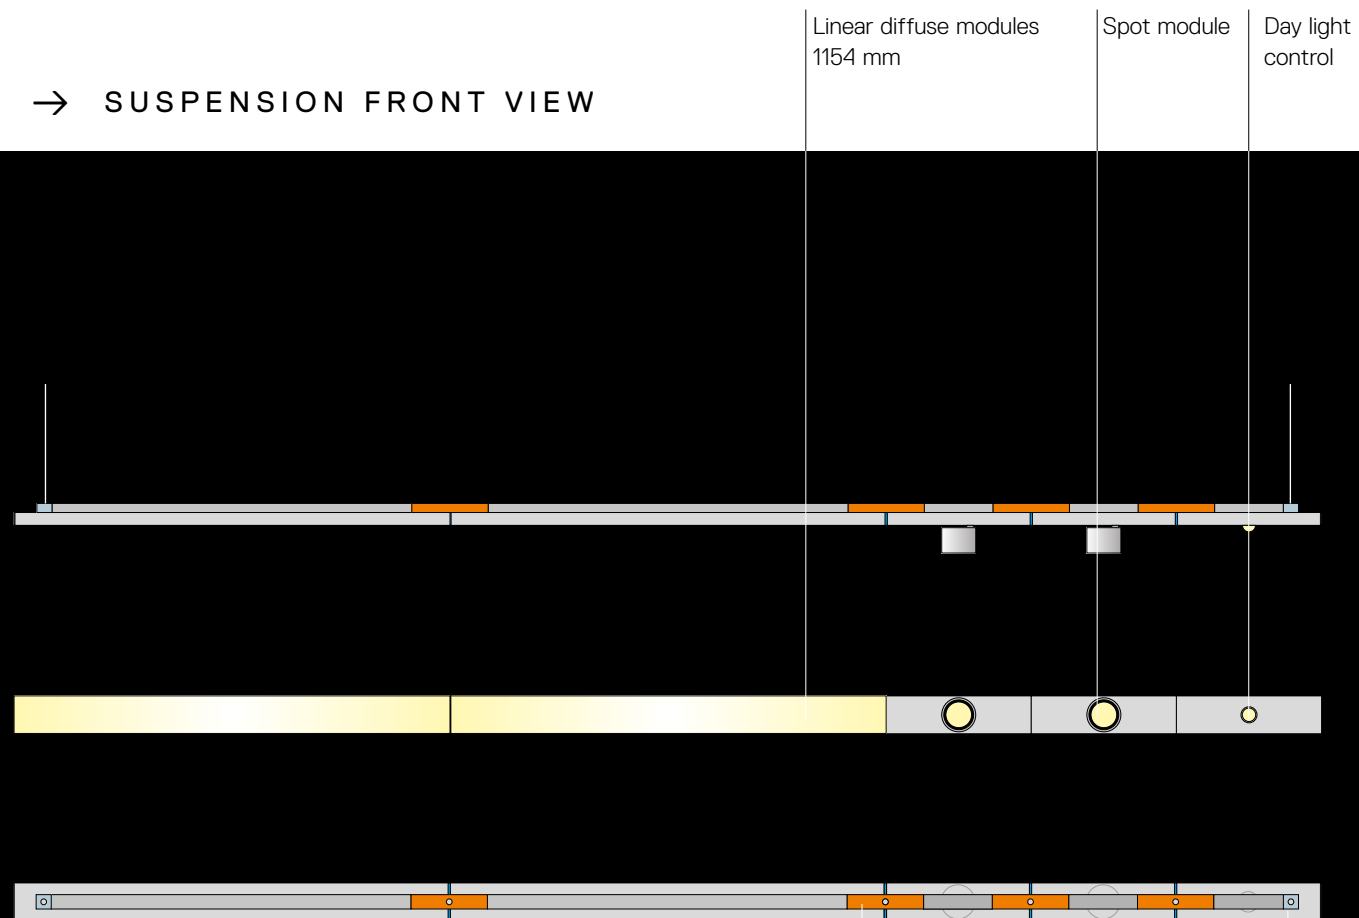

→ CEILING FRONT VIEW

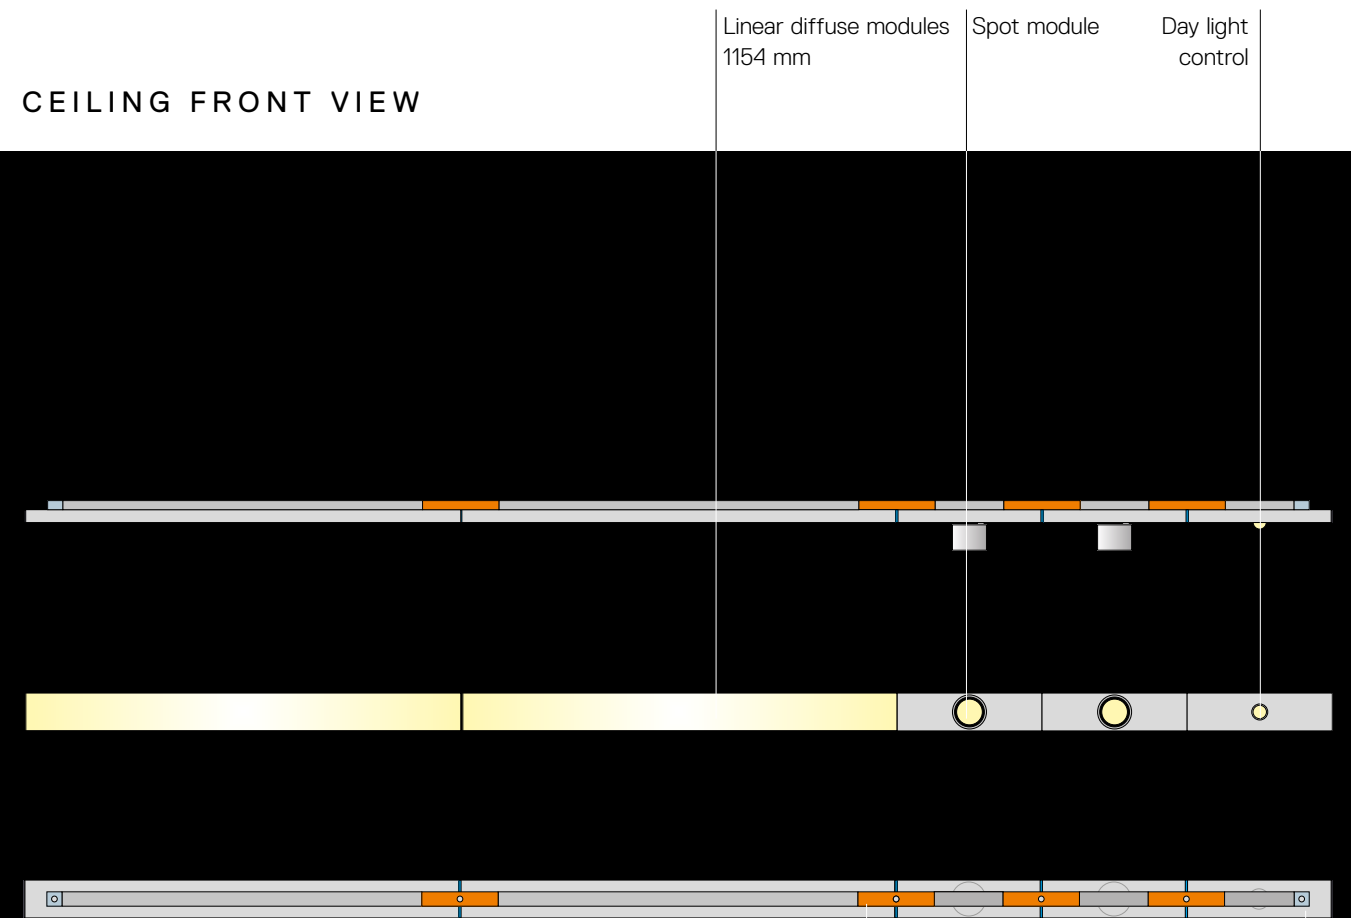

→ SUSPENSION BOTTOM VIEW

Linear feedable
suspension intermediate joint

Suspension
feedable end caps kit

The diagram shows a bottom view of the linear light fixture. It is a long, thin white housing with several orange-colored modules inside. The modules are arranged in a sequence: a long linear diffuse module, followed by a smaller spot module, and a day light control module. The fixture is shown in a perspective view, with the top and bottom surfaces visible.

→ CEILING BOTTOM VIEW


Linear feedable
ceiling intermediate joint

Ceiling
feedable end caps kit


The diagram shows a bottom view of the linear light fixture. It is a long, thin white housing with several orange-colored modules inside. The modules are arranged in a sequence: a long linear diffuse module, followed by a smaller spot module, and a day light control module. The fixture is shown in a perspective view, with the top and bottom surfaces visible.

Hoy System configuration

→ SUSPENSION FRONT VIEW

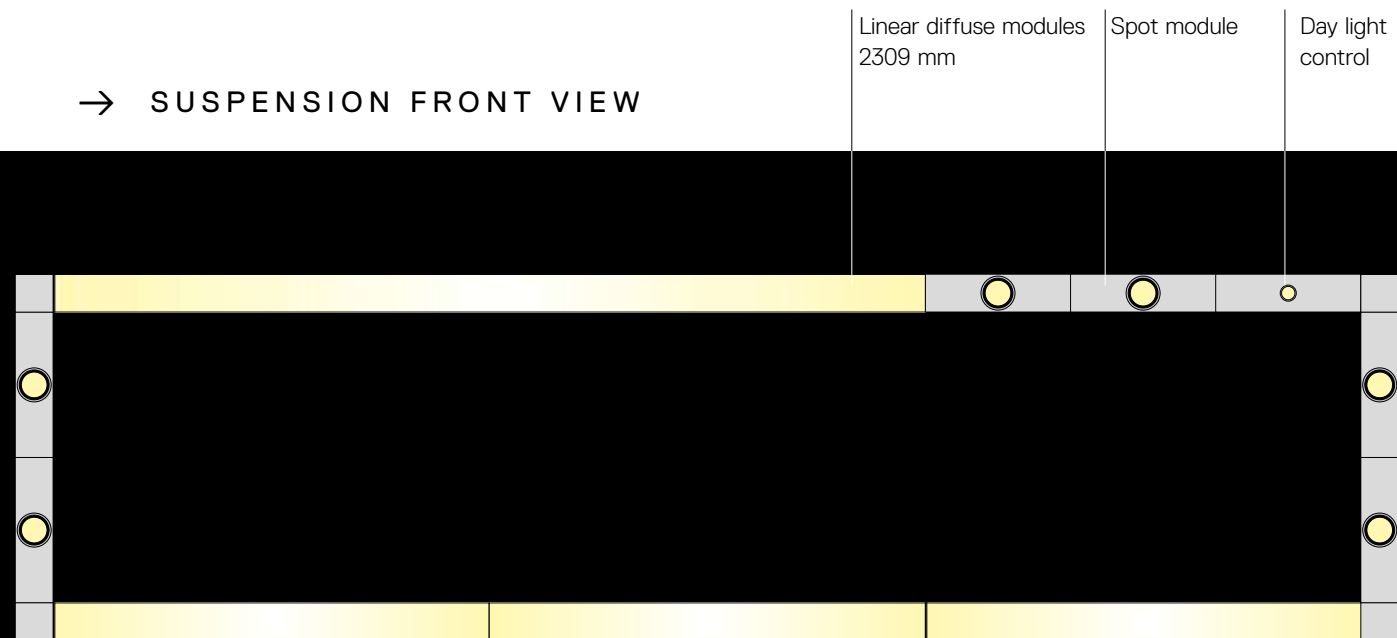


→ CEILING FRONT VIEW

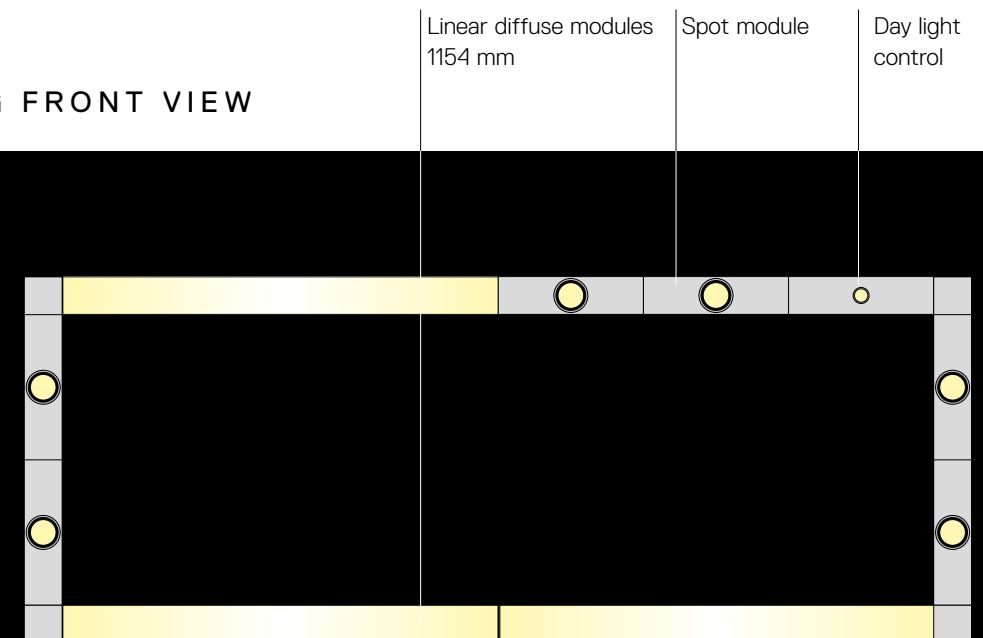

→ SUSPENSION BOTTOM VIEW



→ CEILING BOTTOM VIEW

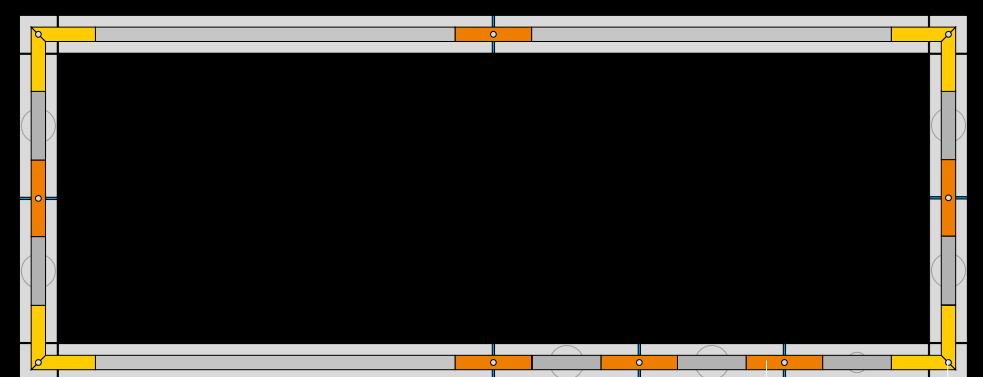

White 01	Black 04	S	F	WF	220/240Vac 50/60Hz electronic ballast included * Driver uses 1 DALI address ** Drivers use 2 DALI addresses	MacAdam 3SDCM Life L70 (6K) 50000h CRI =80 UGR 19	IP20 90° 360°
-------------	-------------	---	---	----	---	--	---------------------


White 01	Black 04
-------------	-------------

LINEAR ELEMENTS

Direct emission				
Length	W	Beam	Flux	CCT
1154 mm	20,5 W	XF	2200 lm	3000K 4000K
2309 mm	41 W	XF	4400 lm	3000K 4000K

Undimmable	
Code	
BL001.	01/04
BL002.	01/04
BL101.	01/04
BL102.	01/04


Dimmable DALI*	
Code	
BL004.	01/04
BL005.	01/04
BL104.	01/04
BL105.	01/04



Direct emission + indirect				
Length	W	Beam	Flux	CCT
1154 mm	20,5 W direct 10 W indirect	XF	2200 lm 1100 lm	3000K 4000K
2309 mm	41 W direct 10 W indirect	XF	4400 lm 2200 lm	3000K 4000K

Undimmable	
Code	
BL007.	01/04
BL008.	01/04
BL107.	01/04
BL108.	01/04


Dimmable DALI**	
Code	
BL010.	01/04
BL011.	01/04
BL110.	01/04
BL111.	01/04



NO LIGHT MODULES

Length
1154 mm
2309 mm


Code
BL012.
BL112.









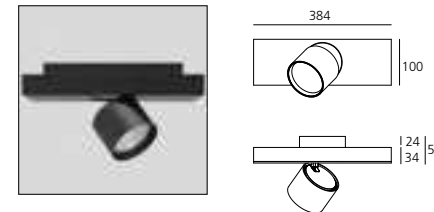



SPOT MODULES

Direct emission			
W	Beam	Flux	CCT
27 W	SP 13°	1900 lm	2700K
			3000K
			4000K
	FL 30°	1912 lm	2700K
			3000K
			4000K
	WF 44°	1891 lm	2700K
			3000K
			4000K

Dimmable DALI	
Code	
BL300.	01/04
BL301.	01/04
BL302.	01/04
BL303.	01/04
BL304.	01/04
BL305.	01/04
BL306.	01/04
BL307.	01/04
BL308.	01/04



	Code
 Suspension feedable end caps kit. including 2 suspension cable (pair)	BL200. 01/04
 Ceiling feedable end caps kit. (pair)	BL206. 01/04
 Suspension intermediate feedable joint including 1 suspension cable and 1 transition joint	BL202. 01/04
 Ceiling intermediate feedable joint including 1 transition joint	BL203. 01/04
 Suspension intermediate feedable joint 2x90° including 1 suspension cable and 2 transition joints	BL212. 01/04
 Ceiling intermediate feedable joint 2x90° including 2 transition joints	BL213. 01/04
 Day Light control module and presence sensor	BL311. 01/04
 Power kit for suspension modules. (3 poles cable L. 2.00m)	BL20401
 Power kit for suspension modules. (5 poles cable L. 2.00m)	BL20501
 Power kit for ceiling modules. (3/5 poles)	BL21400




↪ HOY SPOT

White 01	Black 04	S	F	WF	Driver supplied separately. Fitting to be completed with installation frame.	MacAdam 3SDCM Life L70 (6K) 50000h CRI = 80	IP20
-------------	-------------	---	---	----	---	---	------

HOY SEMI-RECESSED


W	Beam	Flux	CCT	Code
25 W	SP 13°	1900 lm	2700K	BM000. 01/04
			3000K	BM001. 01/04
			4000K	BM002. 01/04
	FL 30°	1912 lm	2700K	BM003. 01/04
			3000K	BM004. 01/04
			4000K	BM005. 01/04
	WF 44°	1891 lm	2700K	BM006. 01/04
			3000K	BM007. 01/04
		4000K	BM008. 01/04	



∅ 86 mm



HOY RECESSED

W	Beam	Flux	CCT	Code
25 W	XF 55°	1605 lm	2700K	BM00900
			3000K	BM01000
			4000K	BM01100



∅ 86 mm

Accessories

	Code
 Trimless frame	BM05000
 Trim frame Ø 108	BM051. 01/04

Driver	Vac	L _{mm}	W _{mm}	H _{mm}		Code	
36W 700mA	☑	220-240	147	44	22	Undimmable	DV1030
36W 700mA	☑	220-240	103	67	21	Dimmable DALI	M079200
36W 700mA	☑	220-240	103	67	21	Push/1-10V Dimmable	M079300



Hoy ↪ Spot




Hoy ↪ SMD

↪ HOY SMD

White 01	Black 04	S	F	WF	220/240Vac 50/60Hz electronic ballast included	MacAdam 3SDCM Life L70 (6K) 50000h CRI=80	IP20
-------------	-------------	---	---	----	--	---	------


HOY SMD ADJUSTABLE


W	Beam	Flux	CCT	Undimmable Code	Dimmable DALI Code
27 W	SP 13°	1900 lm	2700K	BM100. 01/04	BM103. 01/04
			3000K	BM101. 01/04	BM104. 01/04
			4000K	BM102. 01/04	BM105. 01/04
			2700K	BM106. 01/04	BM109. 01/04
	FL 30°	1912 lm	2700K	BM107. 01/04	BM110. 01/04
			3000K	BM108. 01/04	BM111. 01/04
			4000K	BM112. 01/04	BM115. 01/04
			2700K	BM113. 01/04	BM116. 01/04
	WF 44°	1891 lm	2700K	BM114. 01/04	BM117. 01/04
			3000K		
			4000K		

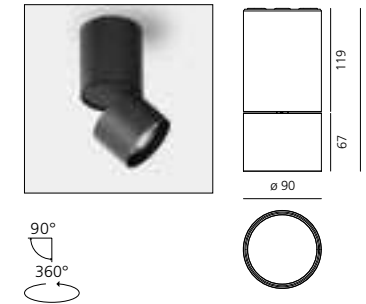

HOY SMD FIX

W	Beam	Flux	CCT	Undimmable Code	Dimmable DALI Code
27 W	XF 55°	1605 lm	2700K	BM118. 01/04	BM121. 01/04
			3000K	BM119. 01/04	BM122. 01/04
			4000K	BM120. 01/04	BM123. 01/04

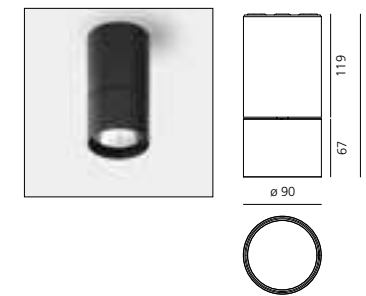

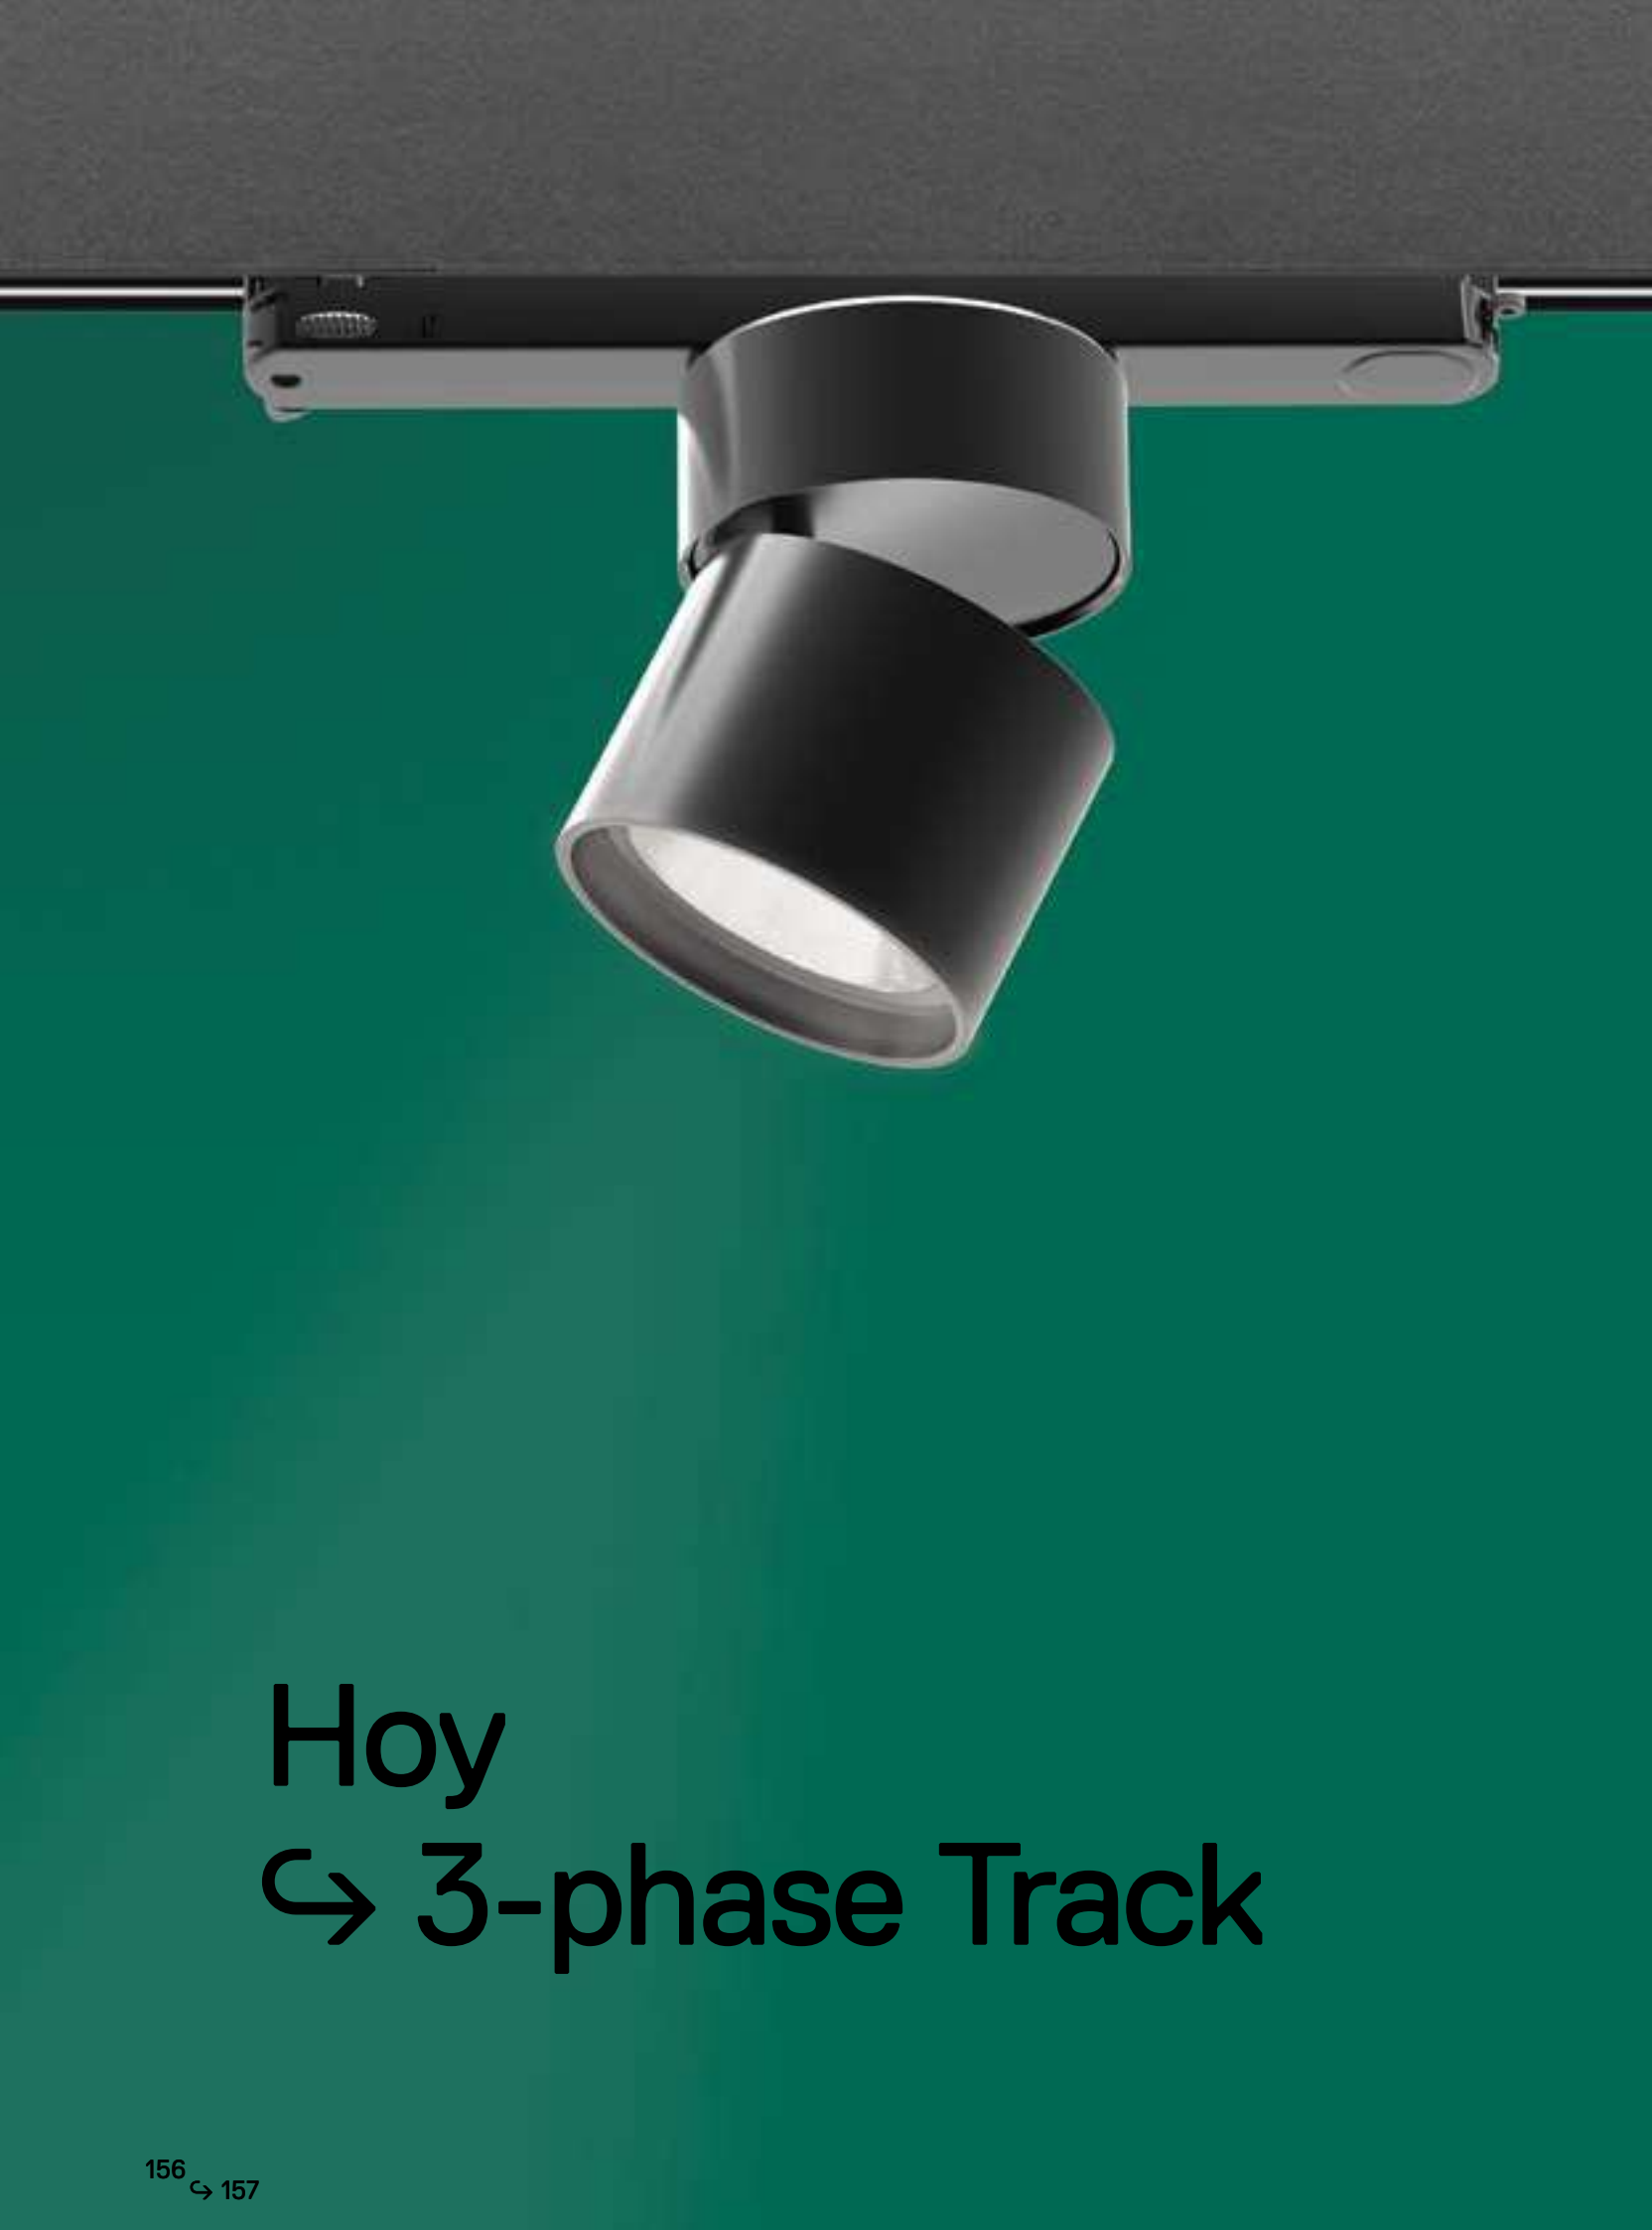


↪ HOY 3-PHASE TRACK


White 01	Black 04	S	F	WF	220/240Vac 50/60Hz electronic ballast included	MacAdam 3SDCM Life L70 (6K) 50000h CRI =80	IP20
-------------	-------------	---	---	----	--	--	------

HOY 3-PHASE TRACK

W	Beam	Flux	CCT	Undimmable Code	Dimmable DALI Code	
26 W	SP 13°	1900 lm	2700K	BM200. 01/04	BM203. 01/04	
			3000K	BM201. 01/04	BM204. 01/04	
			4000K	BM202. 01/04	BM205. 01/04	
		FL 30°	1912 lm	2700K	BM209. 01/04	BM212. 01/04
				3000K	BM210. 01/04	BM213. 01/04
				4000K	BM211. 01/04	BM214. 01/04
	WF 44°	1891 lm	2700K	BM218. 01/04	BM221. 01/04	
			3000K	BM219. 01/04	BM222. 01/04	
			4000K	BM220. 01/04	BM223. 01/04	




dimmable dali version




undimmable version

HOY FIX 3-PHASE TRACK

W	Beam	Flux	CCT	Undimmable Code	Dimmable DALI Code
26 W	XF 55°	1605 lm	2700K	BM227. 01/04	BM230. 01/04
			3000K	BM228. 01/04	BM231. 01/04
			4000K	BM229. 01/04	BM232. 01/04



dimmable dali version




undimmable version

Hoy

↪ 3-phase Track



For further information on Caelum
↪ visit artemide.com

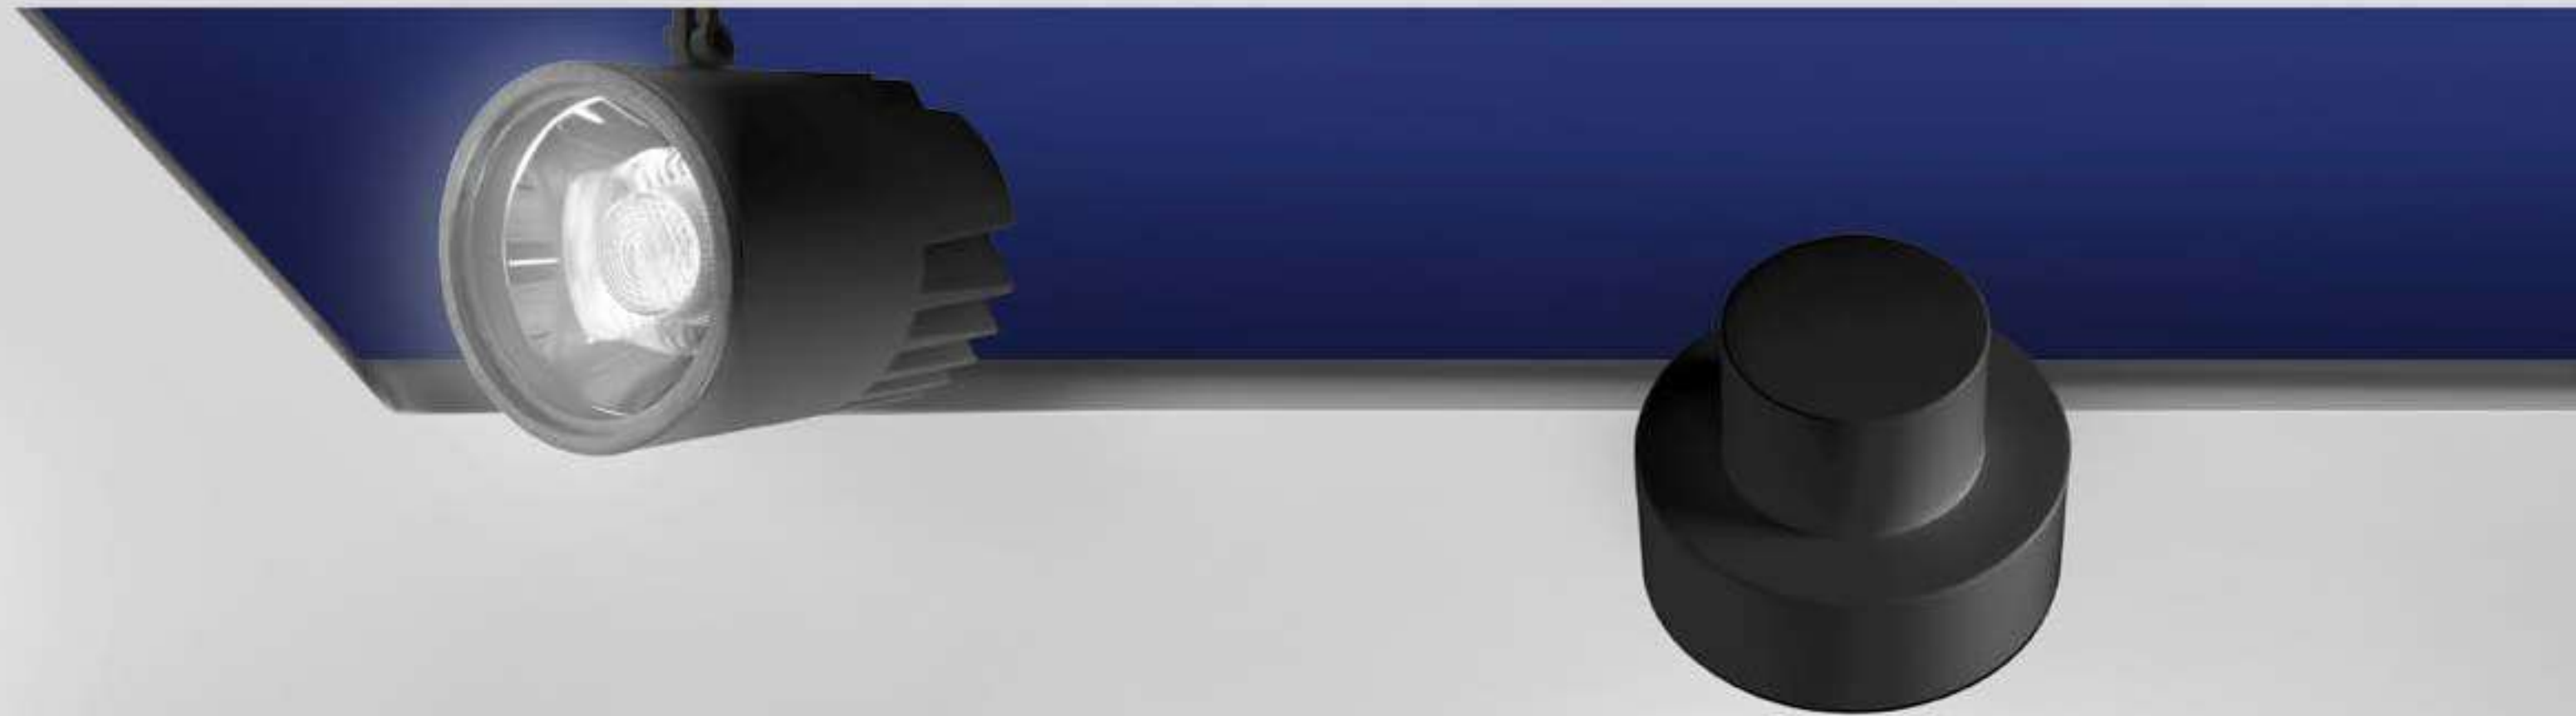

Caelum

Ernesto Gismondi
↪ 2013

Caelum is designed to provide a versatile lighting solution for the retail sector. It is a highly flexible, multi-functional system, with a high aesthetic and exceptionally high performance.

Caelum is a modular lighting system with an open recessed profile channel, which integrates perfectly with the architectural design.

Optional covers to delineate the channel.

The spotlight kits are available in 2 sizes: Ø 90 mm and Ø 120 mm (diameter of the optical assembly) and are provided with a swivel arm which allows total concealment of the spotlight or, if open, allows the partial or total extraction of the spotlight from the channel.

A double hinge system provides a high degree of regulation of the beam direction.

The spotlights are provided with an electronic power supply.

The extruded elements are installed along both edges of the ceiling cut, creating a channel that can be finished with an optional top cover.



↳ CARTER FOR FALSE CEILING



Linear profiles
500 mm long
600 mm long
700 mm long




Left inner profile
For joining two linear profiles on the same level.




Right inner profile
For joining two linear profiles on the same level.



End cap



H. 220 MIN



H. 270 MIN

Special application without Carter against the wall.

↳ ALUMINIUM TRIM PROFILES



Linear aluminium trim profiles
500 mm long
1000 mm long
2000 mm long
3000 mm long



90° inner coupling
For joining two trim profiles on the same level.





90° outer coupling
For joining two trim profiles on the same level.



Closing end caps

Caelum structural components

Caelum configuration

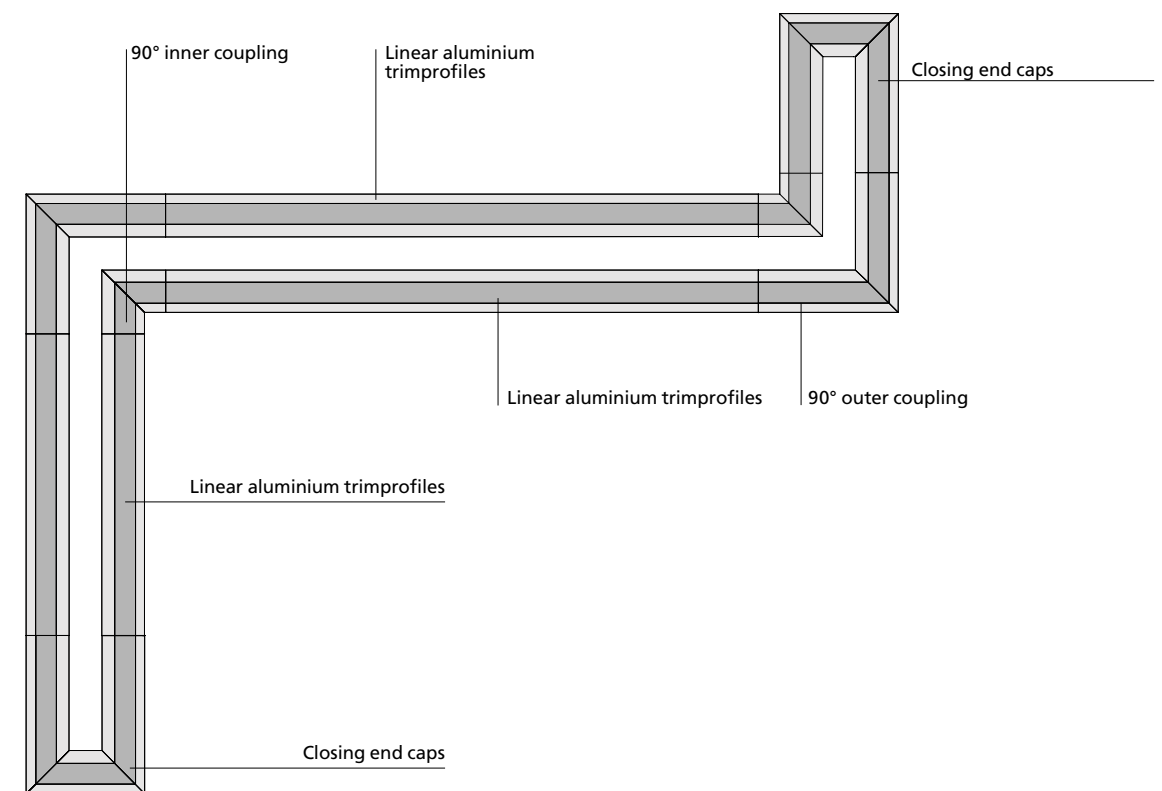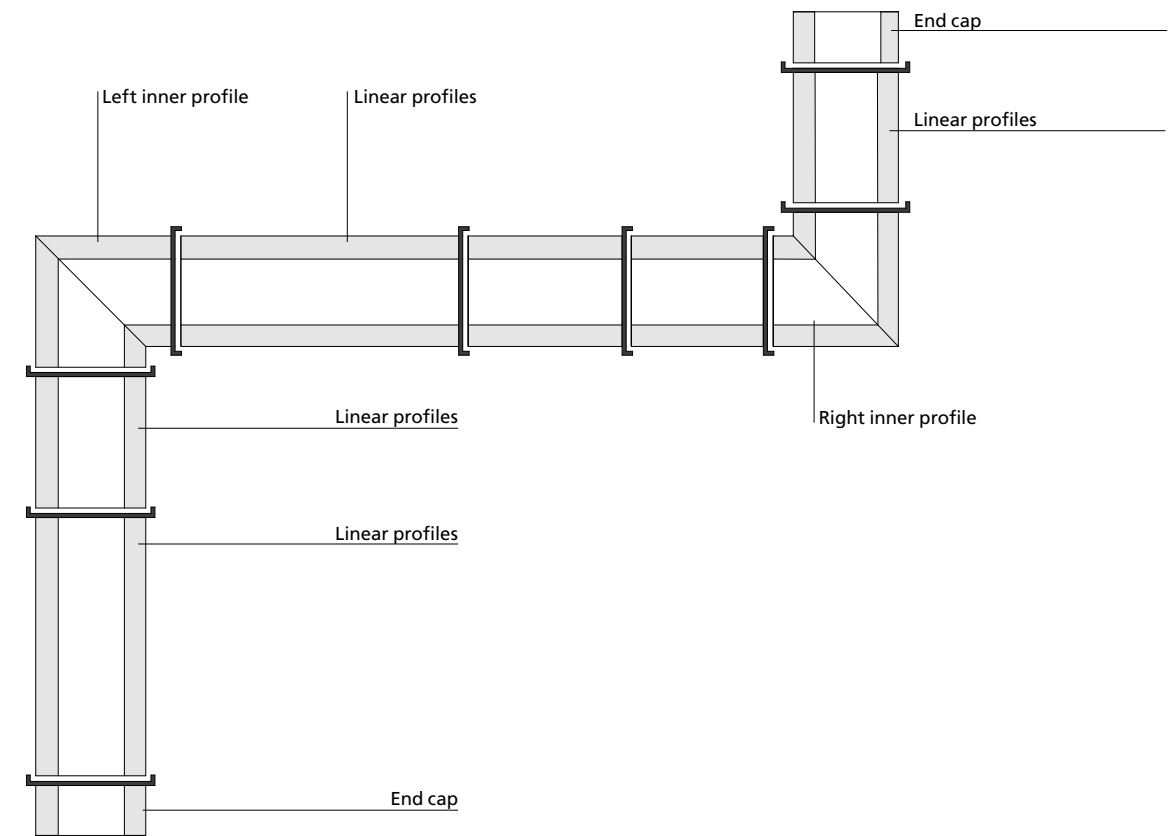


↪ CAELUM PROFILE



White Black Blue Bronze




Profile		Code
Length	Weight	
500 mm	3,30 kg	M2827. 20/10/30/50
600 mm	3,90 kg	M2828. 20/10/30/50
700 mm	4,60 kg	M2829. 20/10/30/50

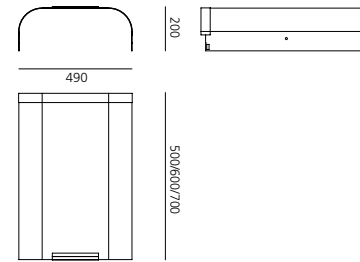

90° profile		Code
Angle	Weight	
left	4,80 kg	M2832. 20/10/30/50
right	4,80 kg	M2833. 20/10/30/50

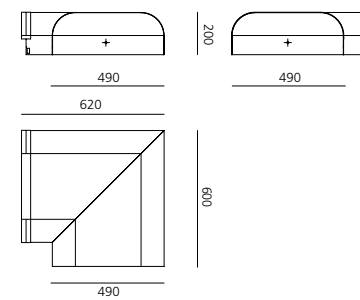

End cap		Code
Weight		
1,60 kg		M2831. 20/10/30/50




↪ CAELUM STRUCTURAL MODULES



White Black




Linear structural module (set of 2)		Code
Length	Weight	
500 mm	1,10 kg	M2841. 20/10
1000 mm	2,20 kg	M2842. 20/10
2000 mm	4,40 kg	M2843. 20/10
3000 mm	6,60 kg	M2844. 20/10

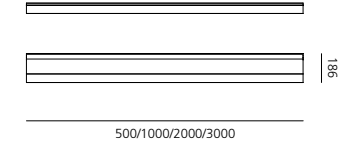

90° structural module		Code
Angle	Weight	
inner	0,30 kg	M2845. 20/10
outer	2,30 kg	M2847. 20/10




End caps structural module (set of 2)		Code
Weight		
3,30 kg		M2846. 20/10



Connectors		Code
Kit power connectors (2pz)		M280900
Kit spacers connector (5pz)		M281000

↪ CAELUM 90 LED




220/240Vac 50/60Hz electronic ballast included.

MacAdam 3SDCM
Life L80 (9K)>50000h
CRI<90 (typ.)


IP20
850°
-35° 35° 50° 30°
60°

W	Weight	Beam	Flux	CCT	Code
28W	1,20 kg	F 20°	1873 lm	3000 K	M2756. 25/15
			1930 lm	4000 K	M2757. 25/15
		XF 50°	1758 lm	3000 K	M2760. 25/15
			1811 lm	4000 K	M2761. 25/15



Accessoires		Color	Code
	Lens for elliptical emission		M282007
	Chromatic filter		M281745
			M281755
		M281735	
	Anti-dazzle louvre		M282100
	IR filter		M281807
	UV filter		M281907
	Adapter ring		M285007
	Spacing ring		M285107

↪ CAELUM 120 LED




220/240Vac 50/60Hz electronic ballast included.

MacAdam 3SDCM
Life L80 (9K)>50000h
CRI<90 (typ.)

IP20
850°
-35° 35° 50° 30°
60°

W	Weight	Beam	Flux	CCT	Code
35 W	1,70 kg	F 16°	2301 lm	3000 K	M2762. 25/15
			2448 lm	4000 K	M2763. 25/15
		WF 36°	2233 lm	3000 K	M2764. 25/15
			2376 lm	4000 K	M2765. 25/15

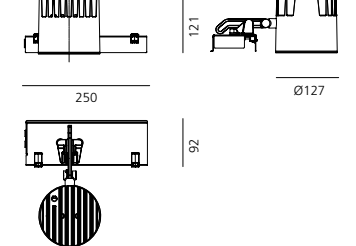

Accessoires		Color	Code
	Lens for elliptical emission		M078700
	Chromatic filter		M078900
			M079000
		M282235	
	Anti-dazzle louvre		M078400
	Soft filter		M078800
	UV filter		M282407
	IR filter		M282307
	Spacing ring		M285307

Una Pro

Carlotta de Bevilacqua
↪ 2010





High-power LED lighting appliance mounted on a thin (3 mm) flat aluminium sheet with improved heat dissipation.

The patented dissipation system allows to touch the lighting body at all times for adjusting in space, thus establishing a new relation with light.

The heads can accommodate 9, 12, or 16-LED circuits. Available with three different emissions: 6°, 20°, 38°.

The junction allows 358° rotation on two axes and 180° rotation on the third one.






For further information on Una Pro
→ visit artemide.com

→ Patent of invention






Una Pro beam angles

↪ 6° - EXTRA SPOT

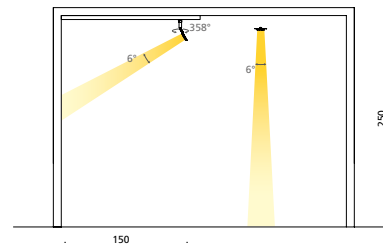



XS = extra spot (<math><8^\circ</math>)

↪ 20° - FLOOD

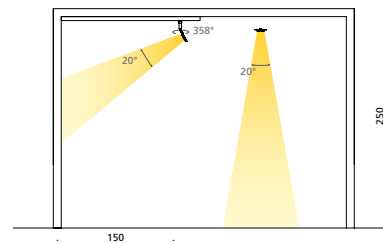

F = flood (15°-30°)

↪ 38° - WIDE FLOOD

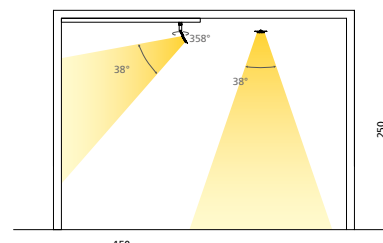

WF = wide flood (30°-45°)

Una Pro colors



White
White
10



Aluminium
Black
00.




White
□



Black
■



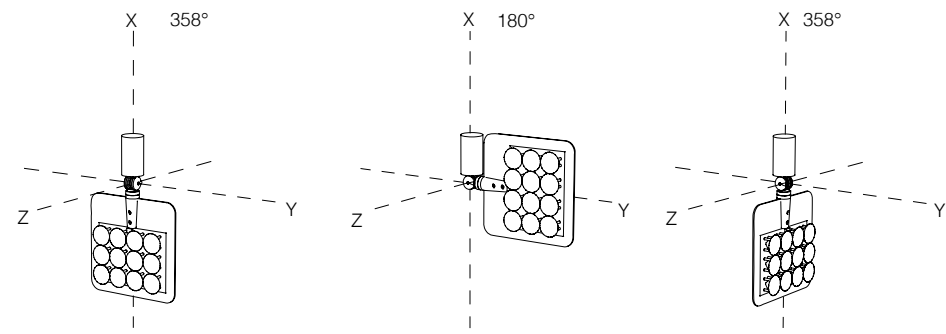


Una Pro joints

The utmost flexibility of UNA PRO is ensured by a small junction that allows 358° rotation on two axes and 180° rotation on the third one, thus providing full freedom of movement of the three heads in space. Adjustment is easy; based on the study of heat dissipation, the sheet constituting the lamp's body can be freely touched for easy and intuitive adjustment of the light beam.

Flexibility also helps ensure perfect integration with any space and architectural approach. Una Pro can be an unobtrusive entity that stresses the importance of the emitted light, rather than of the appliance.



UNA PRO




MacAdam 4SDCM
Life L90 (9K)>54400h
CRI = 80/85

IP20

UNA PRO WALL-CEILING

W	Weight	Beam	CRI	Flux	CCT
9 LED 10,5 W	0,70 kg	XS 6°	=85	536 lm	3000K
			=80	570 lm	3700K
		F 20°	=85	529 lm	3000K
			=80	563 lm	3700K
		WF 38°	=85	517 lm	3000K
			=80	550 lm	3700K
12 LED 13 W	0,70 kg	XS 6°	=85	726 lm	3000K
			=80	772 lm	3700K
		F 20°	=85	719 lm	3000K
			=80	765 lm	3700K
		WF 38°	=85	689 lm	3000K
			=80	733 lm	3700K
16 LED 20 W	0,70 kg	XS 6°	=85	982 lm	3000K
			=80	1045 lm	3700K
		F 20°	=85	929 lm	3000K
			=80	988 lm	3700K
		WF 38°	=85	915 lm	3000K
			=80	973 lm	3700K


Code
DD0014B. 00/10 A1W
DD0014B. 00/10 A1
DD0014B. 00/10 A2W
DD0014B. 00/10 A2
DD0014B. 00/10 A3W
DD0014B. 00/10 A3
DD0014B. 00/10 B1W
DD0014B. 00/10 B1
DD0014B. 00/10 B2W
DD0014B. 00/10 B2
DD0014B. 00/10 B3W
DD0014B. 00/10 B3
DD0014B. 00/10 C1W
DD0014B. 00/10 C1
DD0014B. 00/10 C2W
DD0014B. 00/10 C2
DD0014B. 00/10 C3W
DD0014B. 00/10 C3

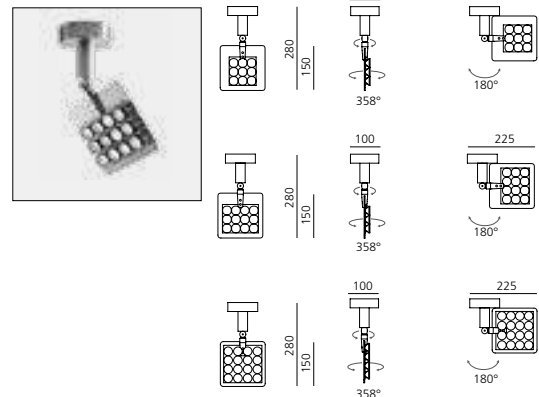

UNA PRO SEMI-RECESSED

W	Weight	Beam	CRI	Flux	CCT
9 LED 10,5 W	0,70 kg	XS 6°	=85	536 lm	3000K
			=80	570 lm	3700K
		F 20°	=85	529 lm	3000K
			=80	563 lm	3700K
		WF 38°	=85	517 lm	3000K
			=80	550 lm	3700K
12 LED 13 W	0,70 kg	XS 6°	=85	726 lm	3000K
			=80	772 lm	3700K
		F 20°	=85	719 lm	3000K
			=80	765 lm	3700K
		WF 38°	=85	689 lm	3000K
			=80	733 lm	3700K
16 LED 20 W	0,70 kg	XS 6°	=85	982 lm	3000K
			=80	1045 lm	3700K
		F 20°	=85	929 lm	3000K
			=80	988 lm	3700K
		WF 38°	=85	915 lm	3000K
			=80	973 lm	3700K


Code
DD0014G. 00/10 A1W
DD0014G. 00/10 A1
DD0014G. 00/10 A2W
DD0014G. 00/10 A2
DD0014G. 00/10 A3W
DD0014G. 00/10 A3
DD0014G. 00/10 B1W
DD0014G. 00/10 B1
DD0014G. 00/10 B2W
DD0014G. 00/10 B2
DD0014G. 00/10 B3W
DD0014G. 00/10 B3
DD0014G. 00/10 C1W
DD0014G. 00/10 C1
DD0014G. 00/10 C2W
DD0014G. 00/10 C2
DD0014G. 00/10 C3W
DD0014G. 00/10 C3

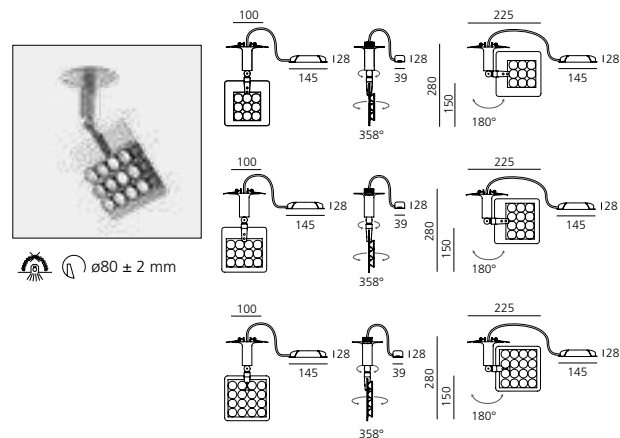

UNA PRO TRACK

W	Weight	Beam	CRI	Flux	CCT
9 LED 10,5 W	0,70 kg	XS 6°	=85	536 lm	3000K
			=80	570 lm	3700K
		F 20°	=85	529 lm	3000K
			=80	563 lm	3700K
		WF 38°	=85	517 lm	3000K
			=80	550 lm	3700K
12 LED 13 W	0,70 kg	XS 6°	=85	726 lm	3000K
			=80	772 lm	3700K
		F 20°	=85	719 lm	3000K
			=80	765 lm	3700K
		WF 38°	=85	689 lm	3000K
			=80	733 lm	3700K
16 LED 20 W	0,70 kg	XS 6°	=85	982 lm	3000K
			=80	1045 lm	3700K
		F 20°	=85	929 lm	3000K
			=80	988 lm	3700K
		WF 38°	=85	915 lm	3000K
			=80	973 lm	3700K

Code
DD0014R. 00/10 A1W
DD0014R. 00/10 A1
DD0014R. 00/10 A2W
DD0014R. 00/10 A2
DD0014R. 00/10 A3W
DD0014R. 00/10 A3
DD0014R. 00/10 B1W
DD0014R. 00/10 B1
DD0014R. 00/10 B2W
DD0014R. 00/10 B2
DD0014R. 00/10 B3W
DD0014R. 00/10 B3
DD0014R. 00/10 C1W
DD0014R. 00/10 C1
DD0014R. 00/10 C2W
DD0014R. 00/10 C2
DD0014R. 00/10 C3W
DD0014R. 00/10 C3

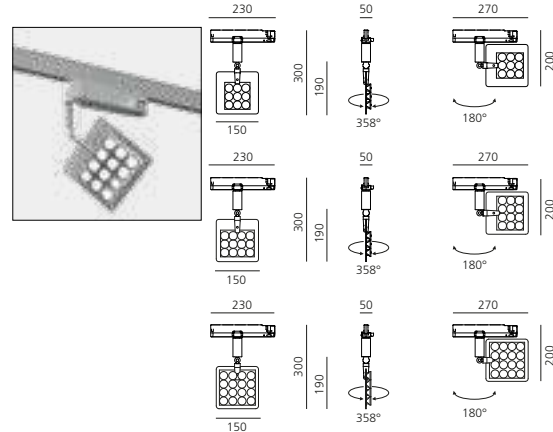


Florim Showroom, NY | 2017

Florm Showroom, Milan | 2015



Larve, Milan | 2013



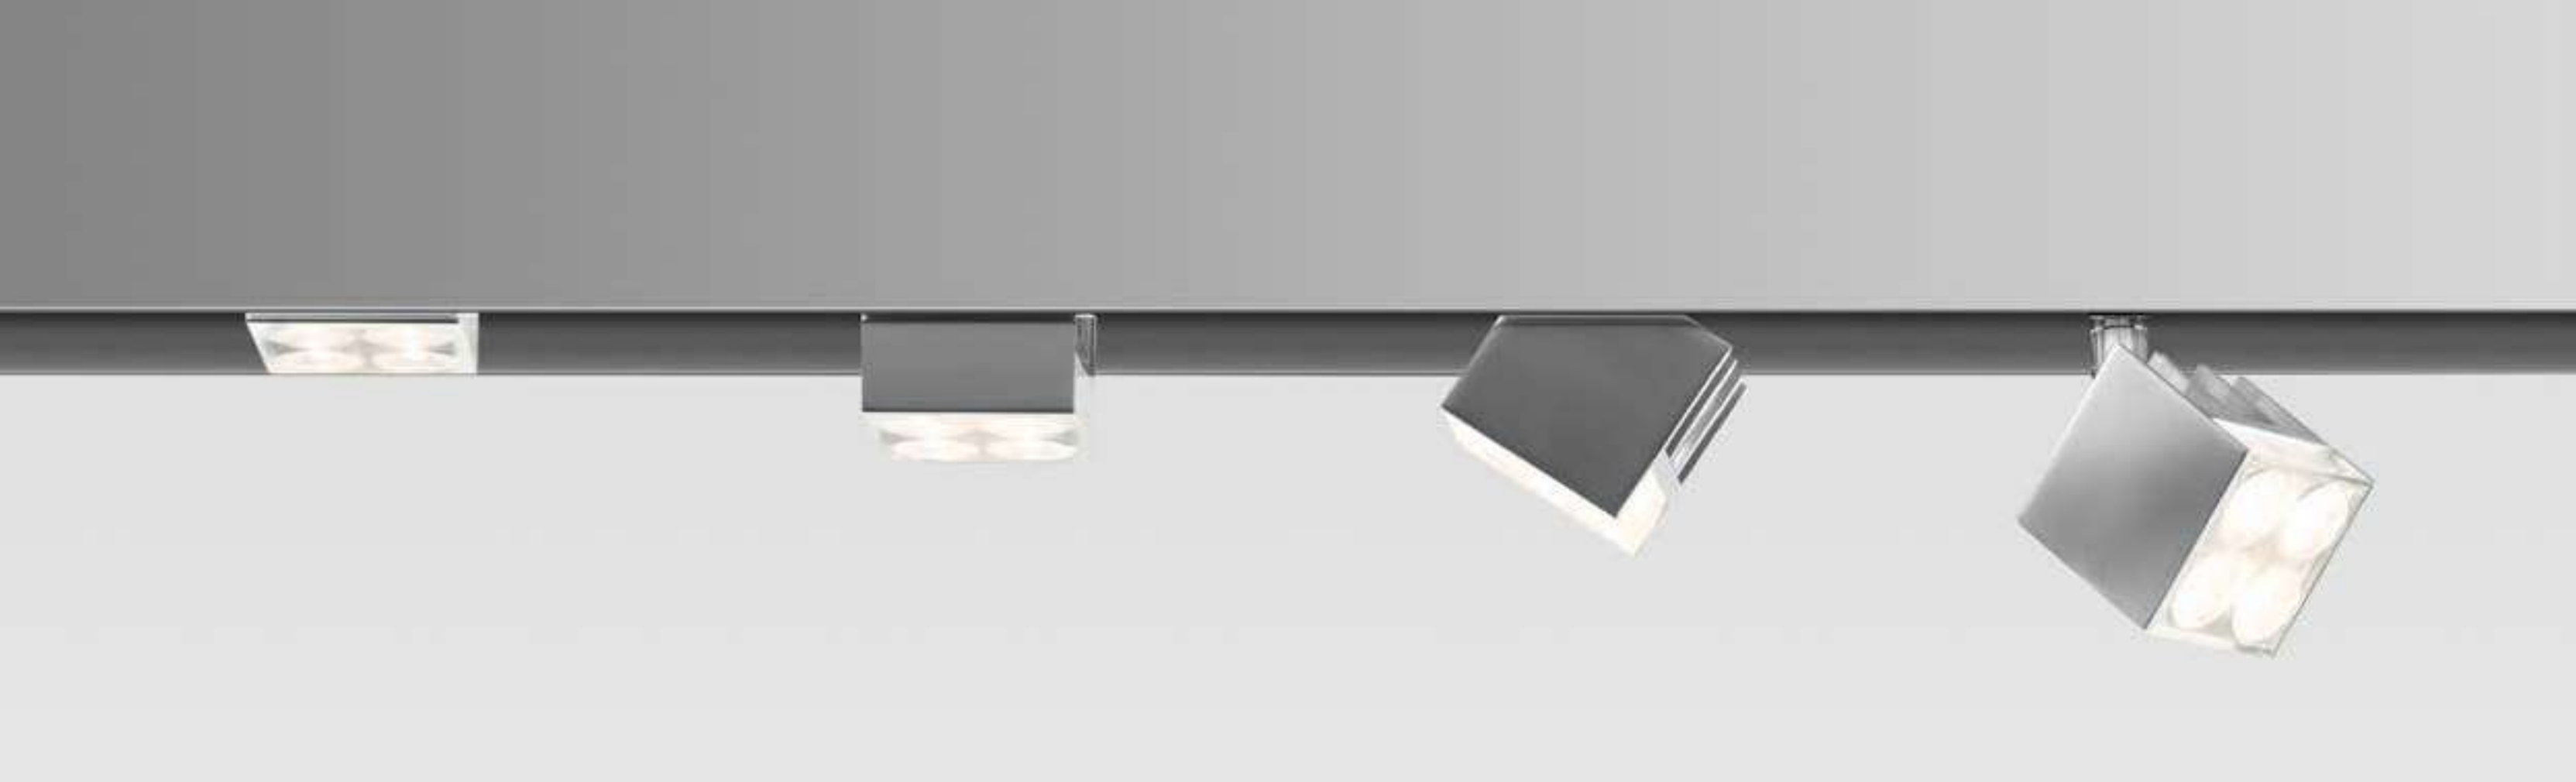

37 Cube

Carlotta de Bevilacqua
Paola di Arianello
↪ 2011

Minimal dimensions, material and energy consumption:
37mmx37mmx37mm.

Effective and precise accent lighting with only 8W of total
power consumption.


Maximum flexibility: rotation 360°,
tilt angle +90°/-90°.

2 installation options available: with control gear for mounting
within Algoritmo product range or base plate for semi-recessed
installation.

Option of installation inside Algoritmo modules.

Materials: body in anodised aluminium, translucent cover in
polycarbonate.

Complies with EN60598-1 standard and other specific standards.

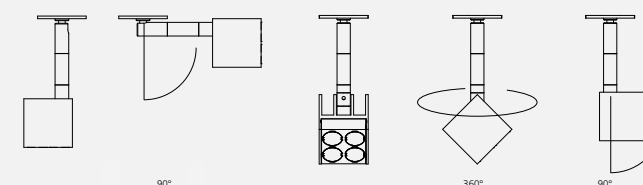

For further information on 37 Cube
↪ visit artemide.com

↪ 37 CUBE


Anodised aluminium S F WF 220/240Vac 50/60Hz
 electronic ballast included. MacAdam 4SDCM IP20
 Life L70 (6K) > 50000h 650°
 CRI= 80 (min.)

04

90° 360°

37 CUBE SEMI-RECESSED


W	Weight	Beam	Flux	CCT	Undimmable Code
8 W	0,21 kg	S 14°	483 lm	3000 K	M028504
			517 lm	4000 K	M028604
		F 18°	463 lm	3000 K	M028704
			495 lm	4000 K	M028804
		WF 30°	468 lm	3000 K	M028904
			501 lm	4000 K	M029004

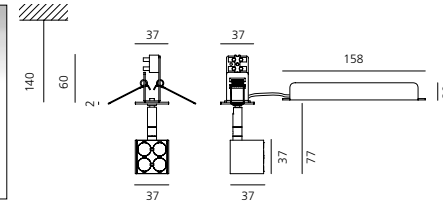

ø30


KIT CONTAINING 3 PROJECTORS FOR ALGORITHM SYSTEM

W	Weight	Beam	Flux	CCT	Undimmable Code
3x8 W	0,47 kg	S 14°	3x483 lm	3000 K	M029100
			3x517 lm	4000 K	M029400
		F 18°	3x463 lm	3000 K	M029200
			3x495 lm	4000 K	M029500
		WF 30°	3x468 lm	3000 K	M029300
			3x501 lm	4000 K	M029600



⊕

For Algoritmo, please see page 408

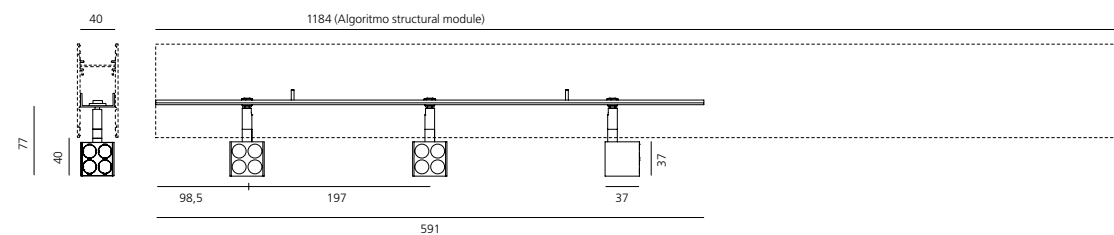

Art&Foods, Triennale di Milano, Milano (It), 2015, Studio Italo Rota, ph. Federico Villa



For further information on Pad
↳ visit artemide.com



Pad / Pad Square

Carlotta de Bevilacqua

↳ 2010

Compact dimensions:

PAD, 85mm x 170mm x 16mm

PAD Square, 168mm x 170mm x 16mm

Ultra-flat power source (8mm height): high efficiency and extraordinary versatile power input from 100 to 240v, 50 and 60 Hz.

Optimized thermal management: passive cooling system based on the extension of aluminium surface and partition of the LED sources (PAD 12 LED-12W PAD SQUARE 24 LED-24W).

2 sizes and power:

PAD (12LED-14,5W total load, 85mm x 170mm x 16mm)

PAD Square (24LED-29W total load, 168mm x 170mm x 16mm).

4 installation options: with adaptor for 3-circuit track, with gear plate for mounting within Algoritmo product range, wall/ceiling mounted version, or base plate for semi-recessed mounting.

Wall/ceiling and semi-recessed versions available with SwitchDim.

Materials: body in extruded aluminium, transparent cover in polycarbonate, translucent cover in polycarbonate, joint in die-cast aluminium.


Complies with EN60598-1 standard and other specific standards.



Pad / Pad Square thermal management

Pad / Pad Square joints

Thermal management
The uniform fragmentation of LED sources provides optimized heat dissipation.

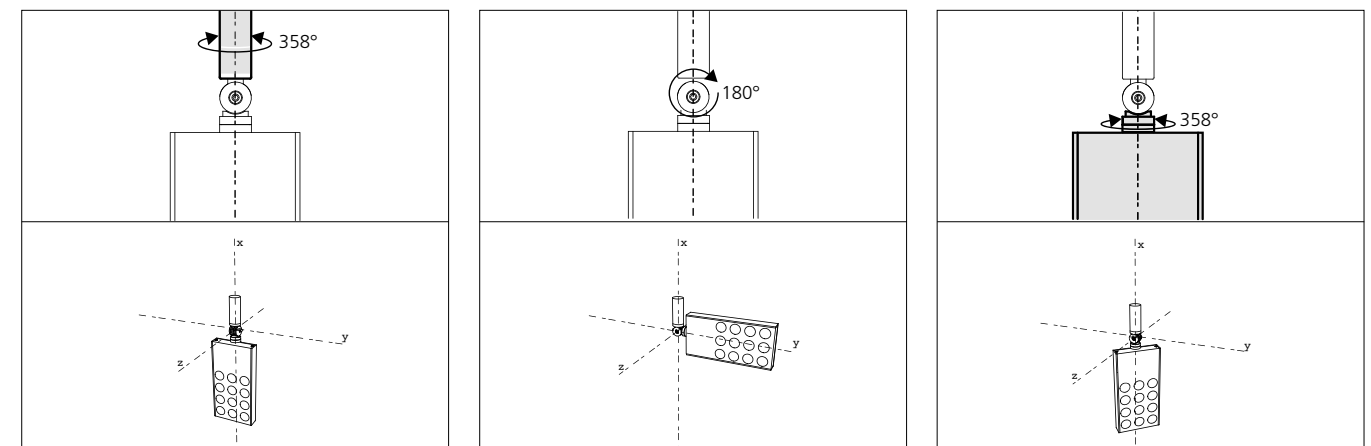


↪ PAD

Gloss anodised S F WF 220/240Vac 50/60Hz electronic ballast included. MacAdam 4SDCM Life L70 (14K) > 81600h CRI=80 (typ.) IP40 650° -90° 90° 358°


PAD TRACK

W	Weight	Beam	Flux	CCT	Undimmable Code
14,5 W	0,42 kg	S 12°	825 lm	3000 K	M200003
			880 lm	4000 K	M200103
	F 24°	825 lm	3000 K	M200203	
		880 lm	4000 K	M200303	
	WF 36°	805 lm	3000 K	M200403	
		855 lm	4000 K	M200503	



PAD KIT FOR ALGORITMO SYSTEM


W	Weight	Beam	Flux	CCT	Undimmable Code
14,5 W	0,42 kg	S 12°	825 lm	3000 K	M200002
			880 lm	4000 K	M200102
	F 24°	825 lm	3000 K	M200202	
		880 lm	4000 K	M200302	
	WF 36°	805 lm	3000 K	M200402	
		855 lm	4000 K	M200502	



For Algoritmo, please see page 408


PAD CEILING

W	Weight	Beam	Flux	CCT	SwitchDim Code
14,5 W	0,74 kg	S 12°	825 lm	3000 K	M200001
			880 lm	4000 K	M200101
	F 24°	825 lm	3000 K	M200201	
		880 lm	4000 K	M200301	
	WF 36°	805 lm	3000 K	M200401	
		855 lm	4000 K	M200501	



PAD SEMI-RECESSED

W	Weight	Beam	Flux	CCT	SwitchDim Code
14,5 W	0,73 kg	S 12°	825 lm	3000 K	M200004
			880 lm	4000 K	M200104
	F 24°	825 lm	3000 K	M200204	
		880 lm	4000 K	M200304	
	WF 36°	805 lm	3000 K	M200404	
		855 lm	4000 K	M200504	




↪ PAD SQUARE

Gloss anodised S F WF 220/240Vac 50/60Hz electronic ballast included. MacAdam 4SDCM Life L70 (14K) > 81600h CRI=80 (typ.) IP40 650° -90° 90° 358°

PAD SQUARE TRACK

W	Weight	Beam	Flux	CCT	Undimmable Code
29 W	0,65 kg	S 12°	1650 lm	3000 K	M201503
			1760 lm	4000 K	M201603
	F 24°	1650 lm	3000 K	M201703	
		1760 lm	4000 K	M201803	
	WF 36°	1610 lm	3000 K	M201903	
		1710 lm	4000 K	M202003	



PAD SQUARE KIT FOR ALGORITMO SYSTEM


W	Weight	Beam	Flux	CCT	Undimmable Code
29 W	0,76 kg	S 12°	1650 lm	3000 K	M201502
			1760 lm	4000 K	M201602
	F 24°	1650 lm	3000 K	M201702	
		1760 lm	4000 K	M201802	
	WF 36°	1610 lm	3000 K	M201902	
		1710 lm	4000 K	M202002	



For Algoritmo, please see page 408


PAD SQUARE CEILING

W	Weight	Beam	Flux	CCT	Undimmable Code
29 W	0,98 kg	S 12°	1650 lm	3000 K	M201501
			1760 lm	4000 K	M201601
	F 24°	1650 lm	3000 K	M201701	
		1760 lm	4000 K	M201801	
	WF 36°	1610 lm	3000 K	M201901	
		1710 lm	4000 K	M202001	



PAD SQUARE SEMI-RECESSED

W	Weight	Beam	Flux	CCT	Undimmable Code
29 W	0,97 kg	S 12°	1650 lm	3000 K	M201504
			1760 lm	4000 K	M201604
	F 24°	1650 lm	3000 K	M201704	
		1760 lm	4000 K	M201804	
	WF 36°	1610 lm	3000 K	M201904	
		1710 lm	4000 K	M202004	





↪ EXTERNAL 3-PHASE TRACK 230V

White Black




TRACK

Length

1000 mm
2000 mm
3000 mm
4000 mm

Code

TK001. 01/04
TK002. 01/04
TK003. 01/04
TK004. 01/04

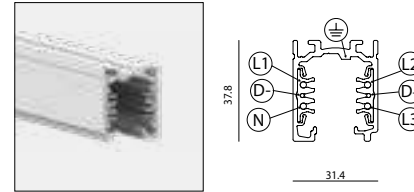

Accessories

Image	Description	Code
	End cap	TK005. 01/04
	Power supply end cap Earth conductor on the left.	TK006. 01/04
	Power supply end cap Earth conductor on the right.	TK007. 01/04
	Universal hook Maximum load 10 kg	TK200. 01/04
	Kit suspension cables L. 1500 mm L. 3000 mm L. 5000 mm	TK20100 TK20200 TK20300
	Stem kit L. 1000 mm	TK204. 01/04
	Plastic cup for steel cable Ø 1,5 mm	TK20501
	T bracket for suspension	TK20600
	Universal adapter 6 conductors 4 conductors	TK207. 01/04 TK208. 01/04
	Accessory for ceiling installation	TK209. 01/04

Joint

Image	Description	Code
	Recessed joint	TK008. 01/04
	Linear joint	TK009. 01/04
	90° joint Internal earth conductor.	TK011. 01/04
	90° joint External earth conductor.	TK010. 01/04
	3-way joint Earth conductor on right.	TK012. 01/04
	3-way joint Earth conductor on left.	TK013. 01/04
	4-way joint	TK014. 01/04
	Flexible joint	TK015. 01/04

↪ RECESSED 3-PHASE TRACK 230V

White Black




TRACK

Length

2000 mm
3000 mm
4000 mm

Code

TK102 01/04
TK103 01/04
TK104 01/04

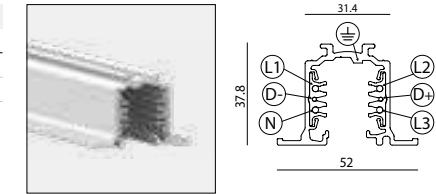

Accessories

Image	Description	Code
	End cap	TK105. 01/04
	Power supply end cap Earth conductor on the left.	TK108. 01/04
	Power supply end cap Earth conductor on the right.	TK107. 01/04
	Universal adapter 6 conductors 4 conductors	TK207. 01/04 TK208. 01/04

Joint

Image	Description	Code
	Recessed joint	TK106. 01/04

The system is a 3 phase mixed system with two additional conductors intended to manage a general data signal (for example DALI, DMX, lon, eib, etc.).

The system is EN 60570 certified and its installation must be accomplished by highly qualified person.

There are four possible installation systems: directly on ceiling or on wall, using the needlepoints on the track, on ceiling or on wall using a metal clip, hanging by the suspension or recessed without exceeding the maximum loads.

EXTERNAL 3-PHASE TRACK 230V - EUTRAC

White Black Aluminium



Three-circuit track for surface mounting.

Extruded aluminium profile in white, black or aluminium finish.

Supplied in lengths of up to 4m, cut to measure.












2 versions: standard version with 5 conductors (1 earth, 1 neutral, 3 phases) each with a 2.5mm² section, or DALI version with 2 additional conductors allowing dimming of lights fitted with DALI dimmable control gear.

Maximum intensity: 16a across the 3 circuits.


Track is pre-cut every 33cm for fixing.

Wide range of accessories, power supply components and electrical and mechanical connectors.













EXTERNAL 3-PHASE TRACK 230V

	Standard	DALI
 1000 mm 1,00 kg	Code L1700. 2/3/7 .0	Code L1700. 2/3/7 .1
 2000 mm 2,00 kg	L1701. 2/3/7 .0	L1701. 2/3/7 .1
 3000 mm 3,00 kg	L1702. 2/3/7 .0	L1702. 2/3/7 .1
 4000 mm 4,00 kg	L1703. 2/3/7 .0	L1703. 2/3/7 .1
 Power supply end cap Earth conductor on the left.	L1706. 2/3 .0 7 .0	L1706. 2/3 .1 7 .1
 Power supply end cap Earth conductor on the right.	L1707. 2/3 .0 7 .0	L1707. 2/3 .1 7 .1
 Closure end cap	L1716. 2/3 .0 7 .0	
 Clip for steel cables or pendant coupler	L1717. 2/3 .0 7 .0	
 Stem Ø13 mm / L=600mm	L1704. 2/3 .0	
 Stem Ø13 mm / L=1200mm	L1705. 2/3 .0	
 Can be cut to measure. For use with pendant clip or pendant coupler (on request).		
Suspension cables L. 1.500 mm Eutrac L. 3.000 mm Eutrac L. 6.200 mm Eutrac	L176000 L176100 L176200	

White Black Aluminium











JOINTS

	Standard	DALI
 Recessed joint	Code L1709. 2/3 .0 7 .0	Code L1709. 2/3 .1 7 .1
 Linear joint	L1710. 2/3 .0 7 .0	L1710. 2/3 .1 7 .1
 90° joint Internal earth conductor.	L1711. 2/3 .0 7 .0	L1711. 2/3 .1 7 .1
 90° joint External earth conductor.	L1712. 2/3 .0 7 .0	L1712. 2/3 .1 7 .1
 Flexible joint	L1715. 2/3 .0	L1715. 2/3 .1
 3-way joint Earth conductor on left.	L1718. 2/3 .0 7 .0	L1718. 2/3 .1 7 .1
 3-way joint Earth conductor on right.	L1713. 2/3 .0 7 .0	L1713. 2/3 .1 7 .1
 4-way joint	L1714. 2/3 .0 7 .0	L1714. 2/3 .1 7 .1
Accessories	Standard	DALI
 Universal adapter 230/240V - 16A	Code L1720. 2/3 .0	Code L1720. 2/3 .1
 Adapter with terminal resistance for DMX signal	L1722. 2/3 .1	
 Universal hook Maximum load 10 kg	L1734. 2/3 .0	
 Accessory for ceiling installation	L1763. 2/3 .0 7 .0	




3-phase track for recess mounting.
 Extruded aluminium profile in white, black or aluminium finish.
 Supplied in lengths of up to 4m, cut to measure.
 2 versions: standard version with 5 conductors (1 earth, 1 neutral, 3 phases) each with a 2.5mm² section, or DALI version with 2 additional conductors allowing dimming of lights fitted with DALI dimmable control gear.
 Maximum intensity: 16a across the 3 circuits.
 Track is pre-cut every 33cm for fixing.
 Wide range of accessories, power supply components and electrical and mechanical connectors.


RECESSED 3-PHASE TRACK

	Standard	DALI
 2000 mm 2,30 kg 3000 mm 3,50 kg 4000 mm 4,60 kg	Code L1726. 2.0 L1727. 2.0 L1728. 2.0	Code L1726. 2.1 L1727. 2.1 L1728. 2.1
 Power supply end cap Earth conductor on left. Power supply end cap Earth conductor on right.	L1764. 2.0 L1765. 2.0	L1764. 2.1 L1765. 2.1
 Recessed joint	L1732. 2.0	L1732. 2.1
 Closure end cap	L1733. 2.0	
 Clip for suspension cable (6 pieces)	L173400	
Accessories	Standard	DALI
 Universal adapter 230/240V - 16A	Code L1720. 2/3 .0	Code L1720. 2/3 .1
 MultiAdapter DMX Terminator	L1722. 2/3 .1	
 Universal hook Maximum load 10 kg	L1734. 2/3 .0	


LOAD OF TRACKS WITH SPOTLIGHTS IN RELATION TO FIXING POINTS (INCLUDES THE WEIGHT OF THE TRACK)



Three-circuit track for pendant mounting with fixing points every 0.5m.
 (Can also be used for recessed installation).




Three-circuit track for ceiling mounting with fixing points every 0.33m.




Three-circuit track for recessed installation with fixing points every metre.
 (Can also be used for pendant mounting).

EARTH CONDUCTOR DIAGRAMS

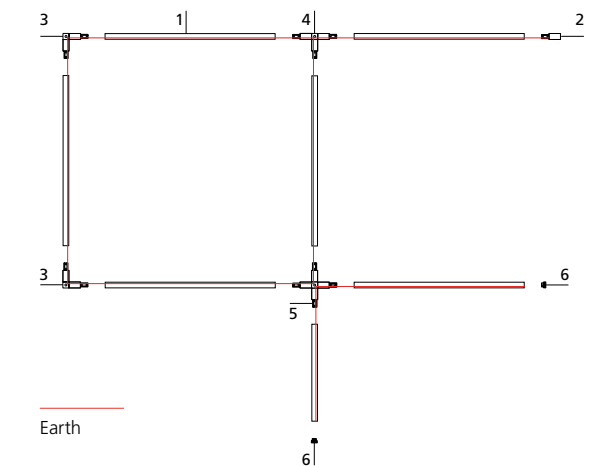

- 1 Standard three-circuit track.
- 2 Power supply end cap, earth conductor on left.
- 3 90° joint, internal earth conductor.
- 4 3-way joint, earth conductor on left.
- 5 4-way joint.
- 6 Closure end cap.

ELECTRICAL DIAGRAM FOR ALTERNATING CURRENT 230V (220-240V)

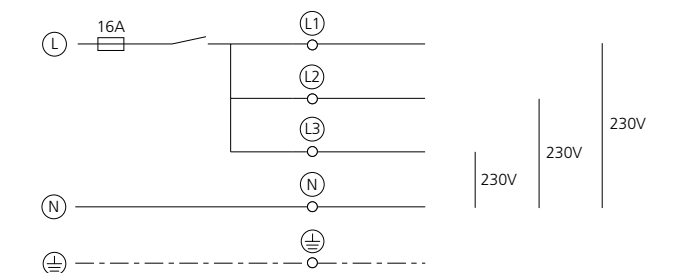

Maximum W allowed: 3600W (max 16A total).
 The load can be distributed over the 3 circuits as required.
 Protection fuse: 1x16A.
 Power supply cable section: min 3x1.5mm² - max 3x2.5mm².

Downlighting



Sharp	202
Everything	226
Una Pro 75	240
Una Pro 150	250
PAD 80	256
Luceri	264
Picto Recessed	278
Parabola	280
Rastaf	286
Zeno Up	290
Zeno Up Frosted	294



Sharp

Carlotta de Bevilacqua

↪ 2016



A patented high-efficiency optical system combining a polynomial optical unit with geometric screening of the beam's viewing angle.

Highly uniform lighting and full emission control.

Total absence of any lighting defects, such as spots or multiple shadows.

Recess depth 60 mm.

Suited for 1 to 25 mm ceilings.

Available in the trim, trimless and SMD versions.

→ PATENT PENDING



For further information on Sharp
↪ visit artemide.com



**Artemide
App**


↪ on request

Only for recessed version
(4x, 6x, 12X, 16x)




Sharp

↳ trim - trimless

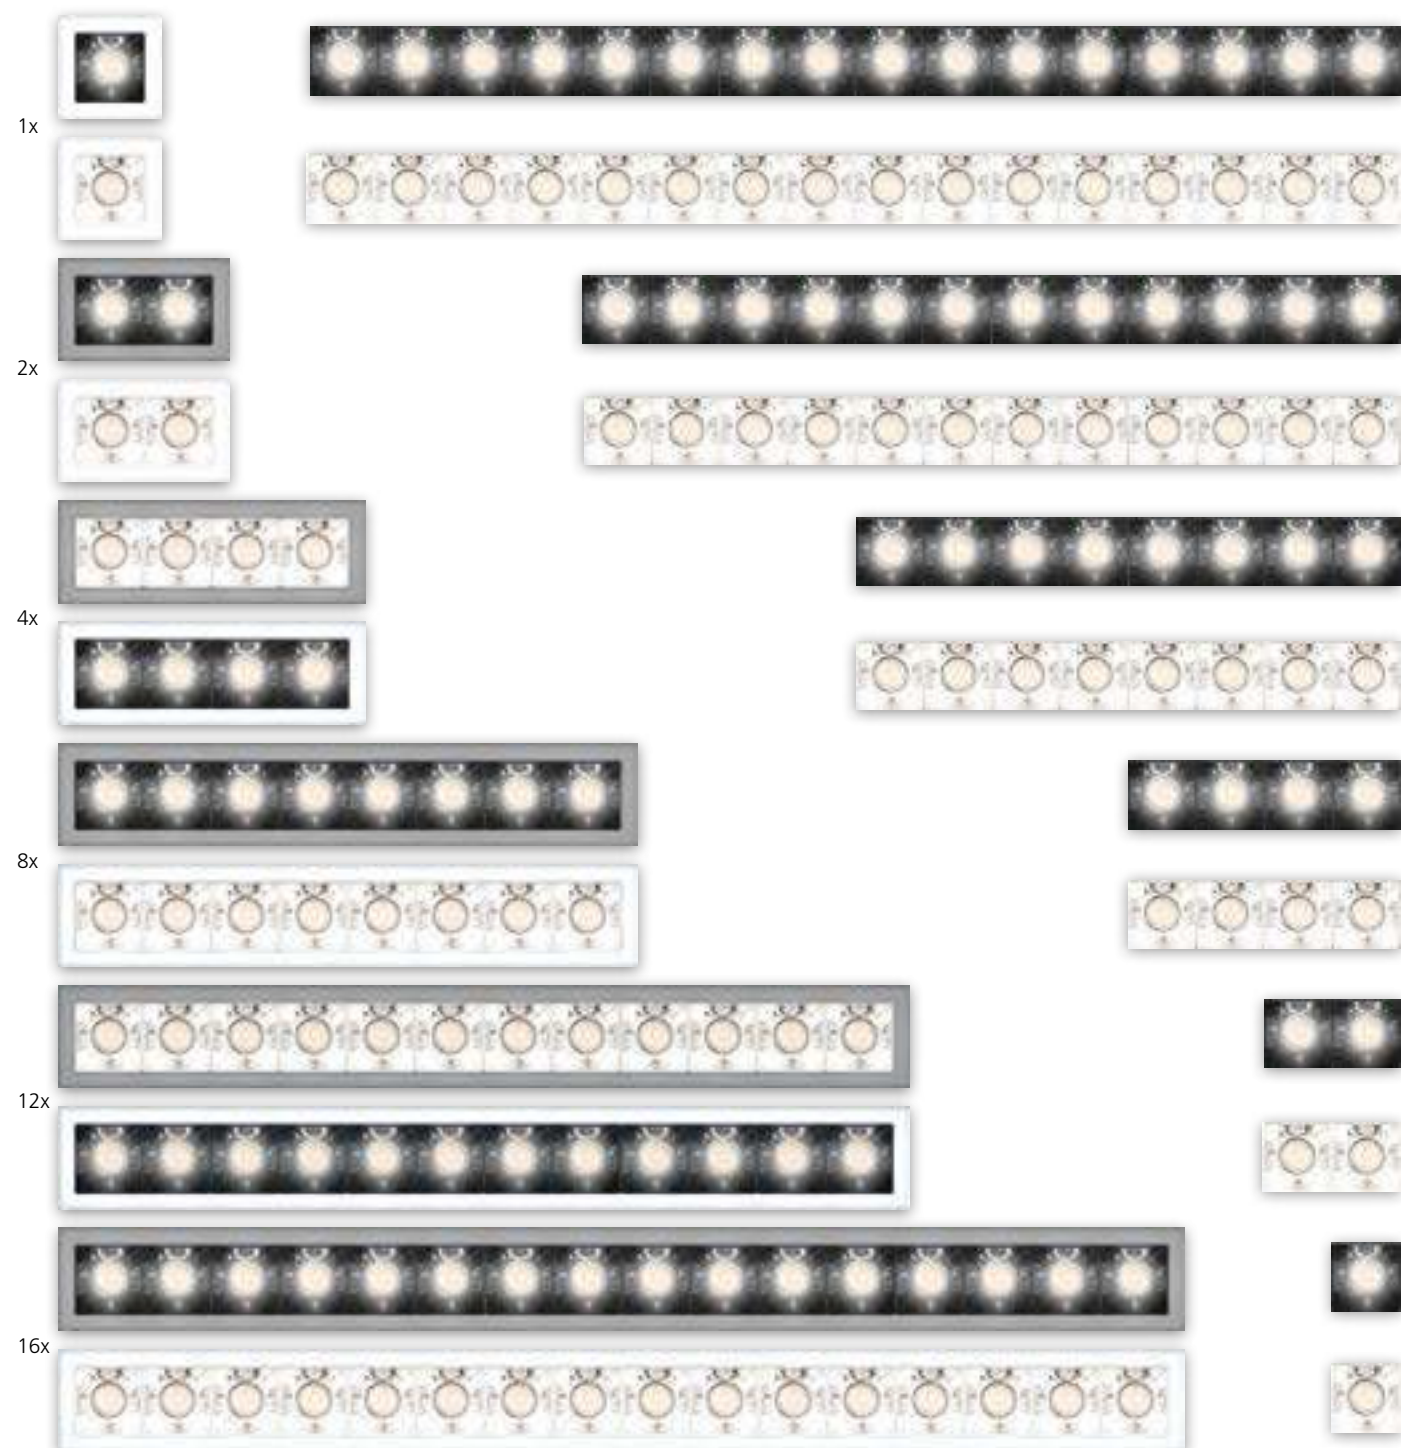


Sharp trim - trimless typologies

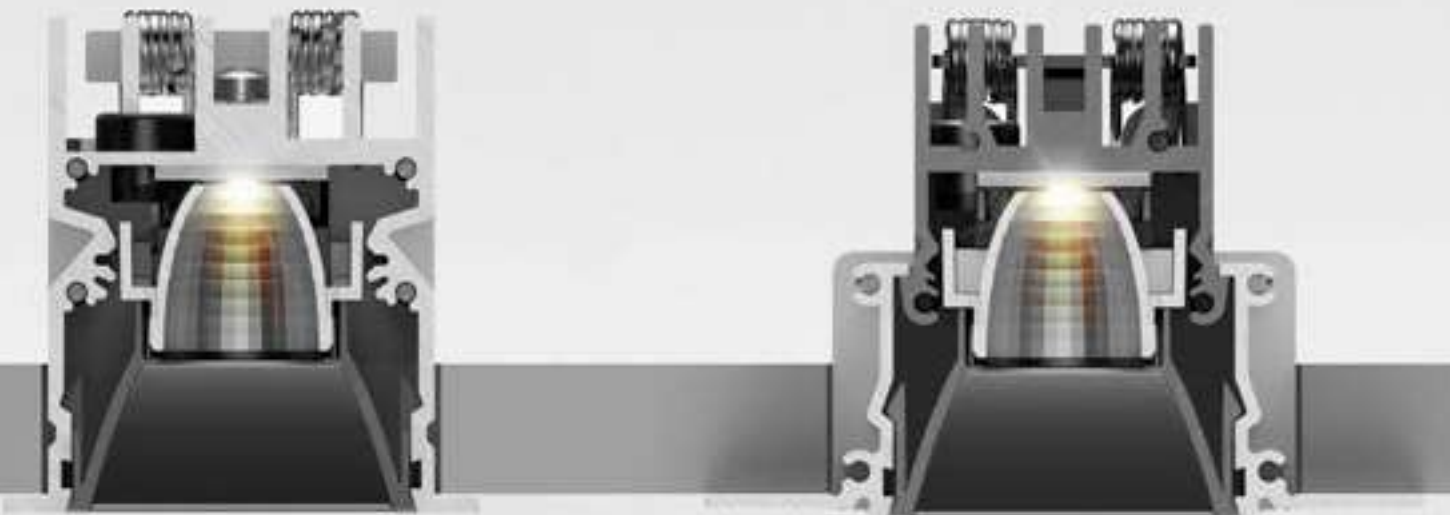


→ Sharp trim

→ Sharp trimless

Minimum distance from
the wall



Minimum distance between the devices

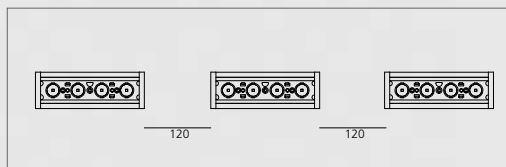

Sharp trim

Optic unit



Louvres



Driver							
	Vac	L _{mm}	W _{mm}	H _{mm}	Optic units	Min. ceiling depth (mm)	
7,2 W 900mA	220-240	76	32	22	1x / 2x	80 / 60	Undimmable
19,8 W 900mA	220-240	125	38	23	4x	60	Undimmable
20 W 900mA	220-240	180	32	32	4x	80	DALI
32 W 1000mA	220-240	129,5	42	30	8x	80	Undimmable
50 W 1050mA	220-240	124	79	22	12x / 16x	80	Undimmable
40 W 900mA	220-240	97	43	30	8x / 16x	80	Undimmable
25 W 900mA	220-240	164	38	24,5	1x / 2x / 4x / 8x	150 / 130 / 80 / 60	DALI
48 W 900mA	220-240	110	75	25,7	12x / 16x	80 / 80	DALI

Code
DV1001
DV1002
DV1008
DV1004
DV1005
DV1006
DV1003
DV1007

SHARP TRIM

White 01 Black 04 Silver 05 S F WF Driver 900mA SELV and louvres supplied separately. MacAdam 2SDCM Life L90 (17K) 103000h CRI >90 IP20

	Watt	Beam	Flux	CCT	Code	
1 optic unit	3 W	S 20°	189 lm	2700 K	AF000. 01/05/04	
			201 lm	3000 K	AF003. 01/05/04	
			215 lm	4000 K	AF006. 01/05/04	
		F 36°	177 lm	2700 K	AF001. 01/05/04	
			188 lm	3000 K	AF004. 01/05/04	
			201 lm	4000 K	AF007. 01/05/04	
			WF 52°	183 lm	2700 K	AF002. 01/05/04
				195 lm	3000 K	AF005. 01/05/04
				208 lm	4000 K	AF008. 01/05/04
2 optic units	5,5 W	S 20°	377 lm	2700 K	AF050. 01/05/04	
			402 lm	3000 K	AF053. 01/05/04	
			430 lm	4000 K	AF056. 01/05/04	
		F 36°	353 lm	2700 K	AF051. 01/05/04	
			376 lm	3000 K	AF054. 01/05/04	
			403 lm	4000 K	AF057. 01/05/04	
			WF 52°	366 lm	2700 K	AF052. 01/05/04
				389 lm	3000 K	AF055. 01/05/04
				417 lm	4000 K	AF058. 01/05/04
4 optic units	11 W	S 20°	755 lm	2700 K	AF100. 01/05/04	
			804 lm	3000 K	AF103. 01/05/04	
			860 lm	4000 K	AF106. 01/05/04	
		F 36°	706 lm	2700 K	AF101. 01/05/04	
			752 lm	3000 K	AF104. 01/05/04	
			805 lm	4000 K	AF107. 01/05/04	
			WF 52°	731 lm	2700 K	AF102. 01/05/04
				779 lm	3000 K	AF105. 01/05/04
				834 lm	4000 K	AF108. 01/05/04
8 optic units	22 W	S 20°	1509 lm	2700 K	AF147. 01/05/04	
			1608 lm	3000 K	AF150. 01/05/04	
			1721 lm	4000 K	AF153. 01/05/04	
		F 36°	1412 lm	2700 K	AF148. 01/05/04	
			1504 lm	3000 K	AF151. 01/05/04	
			1610 lm	4000 K	AF154. 01/05/04	
			WF 52°	1462 lm	2700 K	AF149. 01/05/04
				1558 lm	3000 K	AF152. 01/05/04
				1667 lm	4000 K	AF155. 01/05/04
12 optic units	33 W	S 20°	2263 lm	2700 K	AF197. 01/05/04	
			2412 lm	3000 K	AF200. 01/05/04	
			2581 lm	4000 K	AF203. 01/05/04	
		F 36°	2118 lm	2700 K	AF198. 01/05/04	
			2256 lm	3000 K	AF201. 01/05/04	
			2415 lm	4000 K	AF204. 01/05/04	
			WF 52°	2193 lm	2700 K	AF199. 01/05/04
				2337 lm	3000 K	AF202. 01/05/04
				2501 lm	4000 K	AF205. 01/05/04
16 optic units	44 W	S 20°	3019 lm	2700 K	AF247. 01/05/04	
			3215 lm	3000 K	AF250. 01/05/04	
			3442 lm	4000 K	AF253. 01/05/04	
		F 36°	2824 lm	2700 K	AF248. 01/05/04	
			3009 lm	3000 K	AF251. 01/05/04	
			3220 lm	4000 K	AF254. 01/05/04	
			WF 52°	2924 lm	2700 K	AF249. 01/05/04
				3316 lm	3000 K	AF252. 01/05/04
				3335 lm	4000 K	AF255. 01/05/04


Louvres		
		1X
		2X
		4X

Code
AF950. 01/04
AF951. 01/04
AF952. 01/04

Accessories


Sharpening wall grazer lens Kit (4pcs)
26°x70° elliptical lenses kit. It has to be used on top of S 20° reflectors to get an elliptical beam (greater axis along the module length). It contains 4 lenses.

Code
AF06000

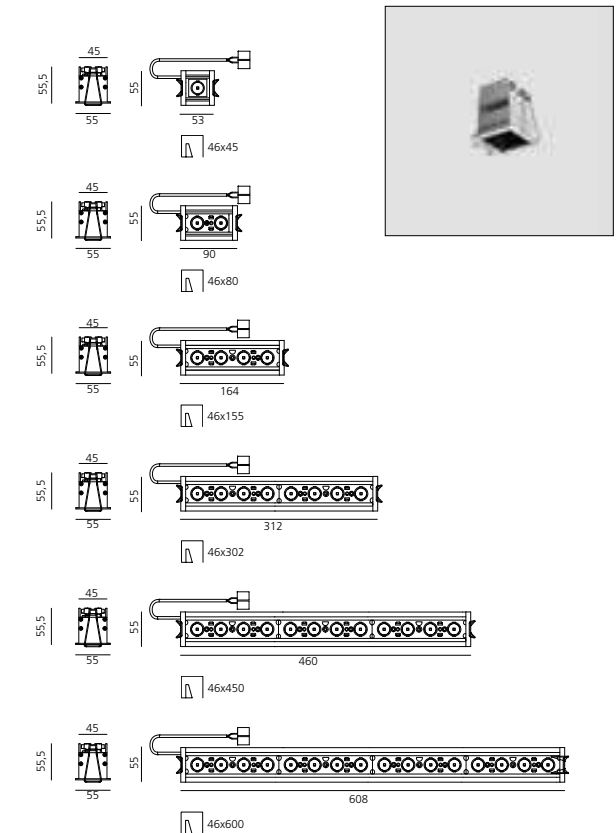

Sharp trimless


↳ SHARP TRIMLESS

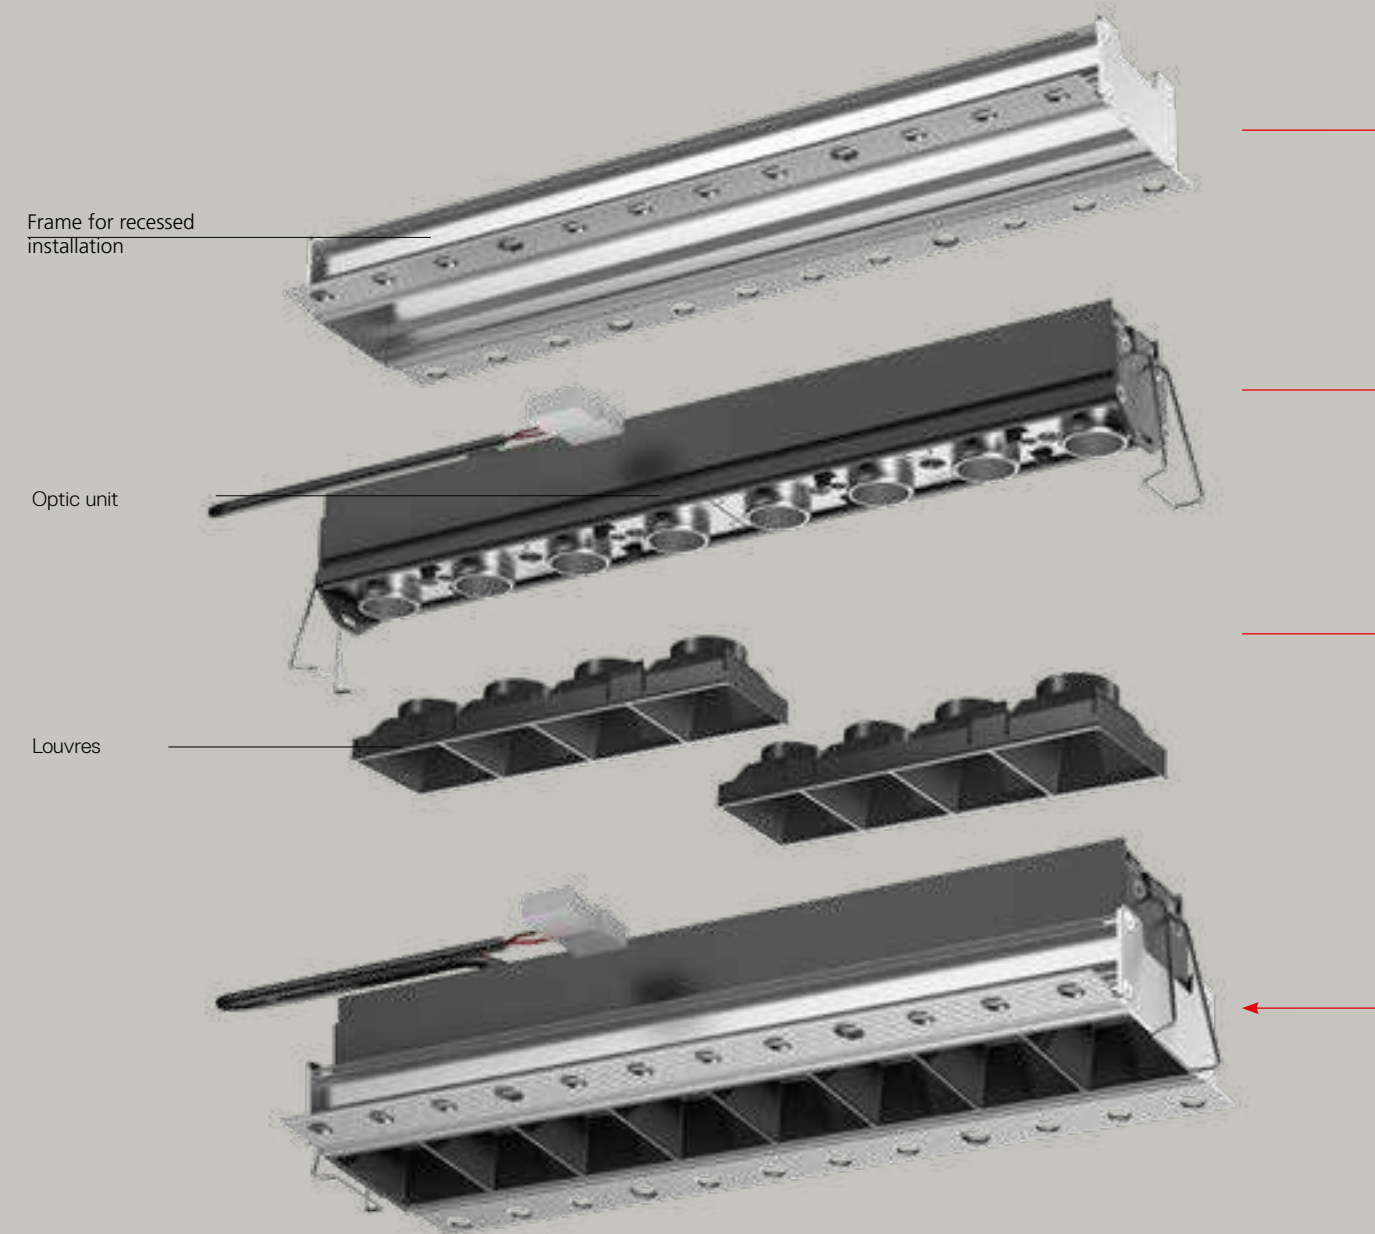

Driver 900mA SELV and louvres supplied separately.

MacAdam 2SDCM
Life L90 (17K) 103000h
CRI >90

	Watt	Beam	Flux	CCT	Code			
1 optic unit	3 W	S 20°	189 lm	2700 K	AF50000			
			201 lm	3000 K	AF50300			
			215 lm	4000 K	AF50600			
		F 36°	177 lm	2700 K	AF50100			
			188 lm	3000 K	AF50400			
			201 lm	4000 K	AF50700			
		WF 52°	183 lm	2700 K	AF50200			
			195 lm	3000 K	AF50500			
			208 lm	4000 K	AF50800			
2 optic units	5,5 W	S 20°	371 lm	2700 K	AF55000			
			402 lm	3000 K	AF55300			
			430 lm	4000 K	AF55600			
		F 36°	353 lm	2700 K	AF55100			
			376 lm	3000 K	AF55400			
			403 lm	4000 K	AF55700			
		WF 52°	366 lm	2700 K	AF55200			
			389 lm	3000 K	AF55500			
			417 lm	4000 K	AF55800			
			4 optic units	11 W	S 20°	755 lm	2700 K	AF60000
						804 lm	3000 K	AF60300
				F 36°	706 lm	2700 K	AF60100	
752 lm	3000 K	AF60400						
	WF 52°	805 lm	4000 K	AF60700				
		731 lm	2700 K	AF60200				
		779 lm	3000 K	AF60500				
		834 lm	4000 K	AF60800				
8 optic units	22 W	S 20°	1509 lm	2700 K	AF64700			
			1608 lm	3000 K	AF65000			
			1721 lm	4000 K	AF65300			
		F 36°	11412 lm	2700 K	AF64800			
			1504 lm	3000 K	AF65100			
			1610 lm	4000 K	AF65400			
		WF 52°	1462 lm	2700 K	AF64900			
			1558 lm	3000 K	AF65200			
			1667 lm	4000 K	AF65500			
			12 optic units	33 W	S 20°	2263 lm	2700 K	AF69700
						2412 lm	3000 K	AF70000
				F 36°	2581 lm	4000 K	AF70300	
2118 lm	2700 K	AF69800						
	WF 52°	2256 lm	3000 K	AF70100				
		2415 lm	4000 K	AF70400				
		2193 lm	2700 K	AF69900				
		2337 lm	3000 K	AF70200				
16 optic units	44 W	S 20°	3019 lm	2700 K	AF74700			
			3215 lm	3000 K	AF75000			
			3442 lm	4000 K	AF75300			
		F 36°	2824 lm	2700 K	AF74800			
			3009 lm	3000 K	AF75100			
			3220 lm	4000 K	AF75400			
		WF 52°	2924 lm	2700 K	AF74900			
			3316 lm	3000 K	AF75200			
			3335 lm	4000 K	AF75500			

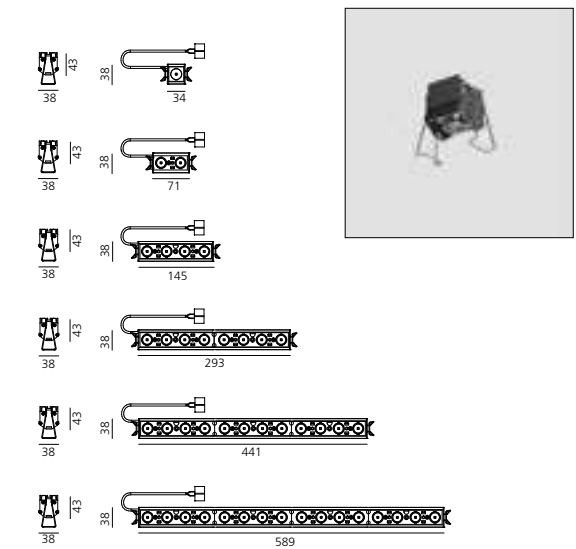

↳ SHARP TRIMLESS

White Black



Driver 900mA SELV and louvres supplied separately.


Frame for recessed installation



1X
2X
4X
8X
12X
16X

Code

AF90000
AF90100
AF90200
AF90300
AF90400
AF90500

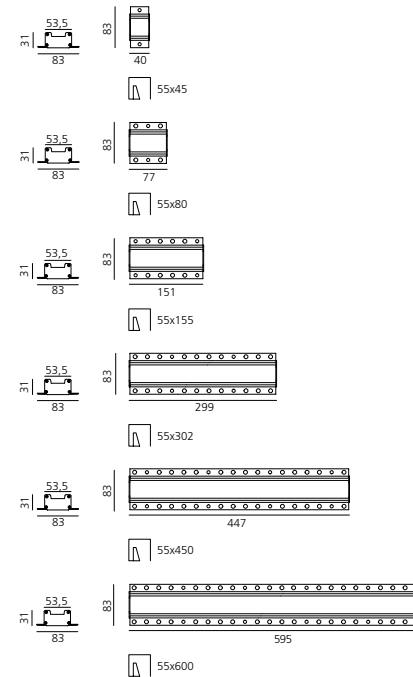


Louvres



1X
2X
4X

Code

AF950. 01/04
AF951. 01/04
AF952. 01/04



Accessories




Sharping wall grazer lens Kit (4pcs)
26°x70° elliptical lenses kit. It has to be used on top of S 20° reflectors to get an elliptical beam (greater axis along the module length). It contains 4 lenses.

Code

AF06000


Driver

	Vac	L _{mm}	W _{mm}	H _{mm}	Optic units	Min. ceiling depth (mm)		Code
7,2 W 900mA	220-240	76	32	22	1x / 2x	80 / 60	Undimmable	DV1001
19,8 W 900mA	220-240	125	38	23	4x	60	Undimmable	DV1002
20 W 900mA	220-240	180	32	32	4x	80	DALI	DV1008
32 W 1000mA	220-240	129,5	42	30	8x	80	Undimmable	DV1004
50 W 1050mA	220-240	124	79	22	12x / 16x	80	Undimmable	DV1005
40 W 900mA	220-240	97	43	30	8x / 16x	80	Undimmable	DV1006
25 W 900mA	220-240	164	38	24,5	1x / 2x / 4x / 8x	150 / 130 / 80 / 60	DALI	DV1003
48 W 900mA	220-240	110	75	25,7	12x / 16x	80 / 80	DALI	DV1007

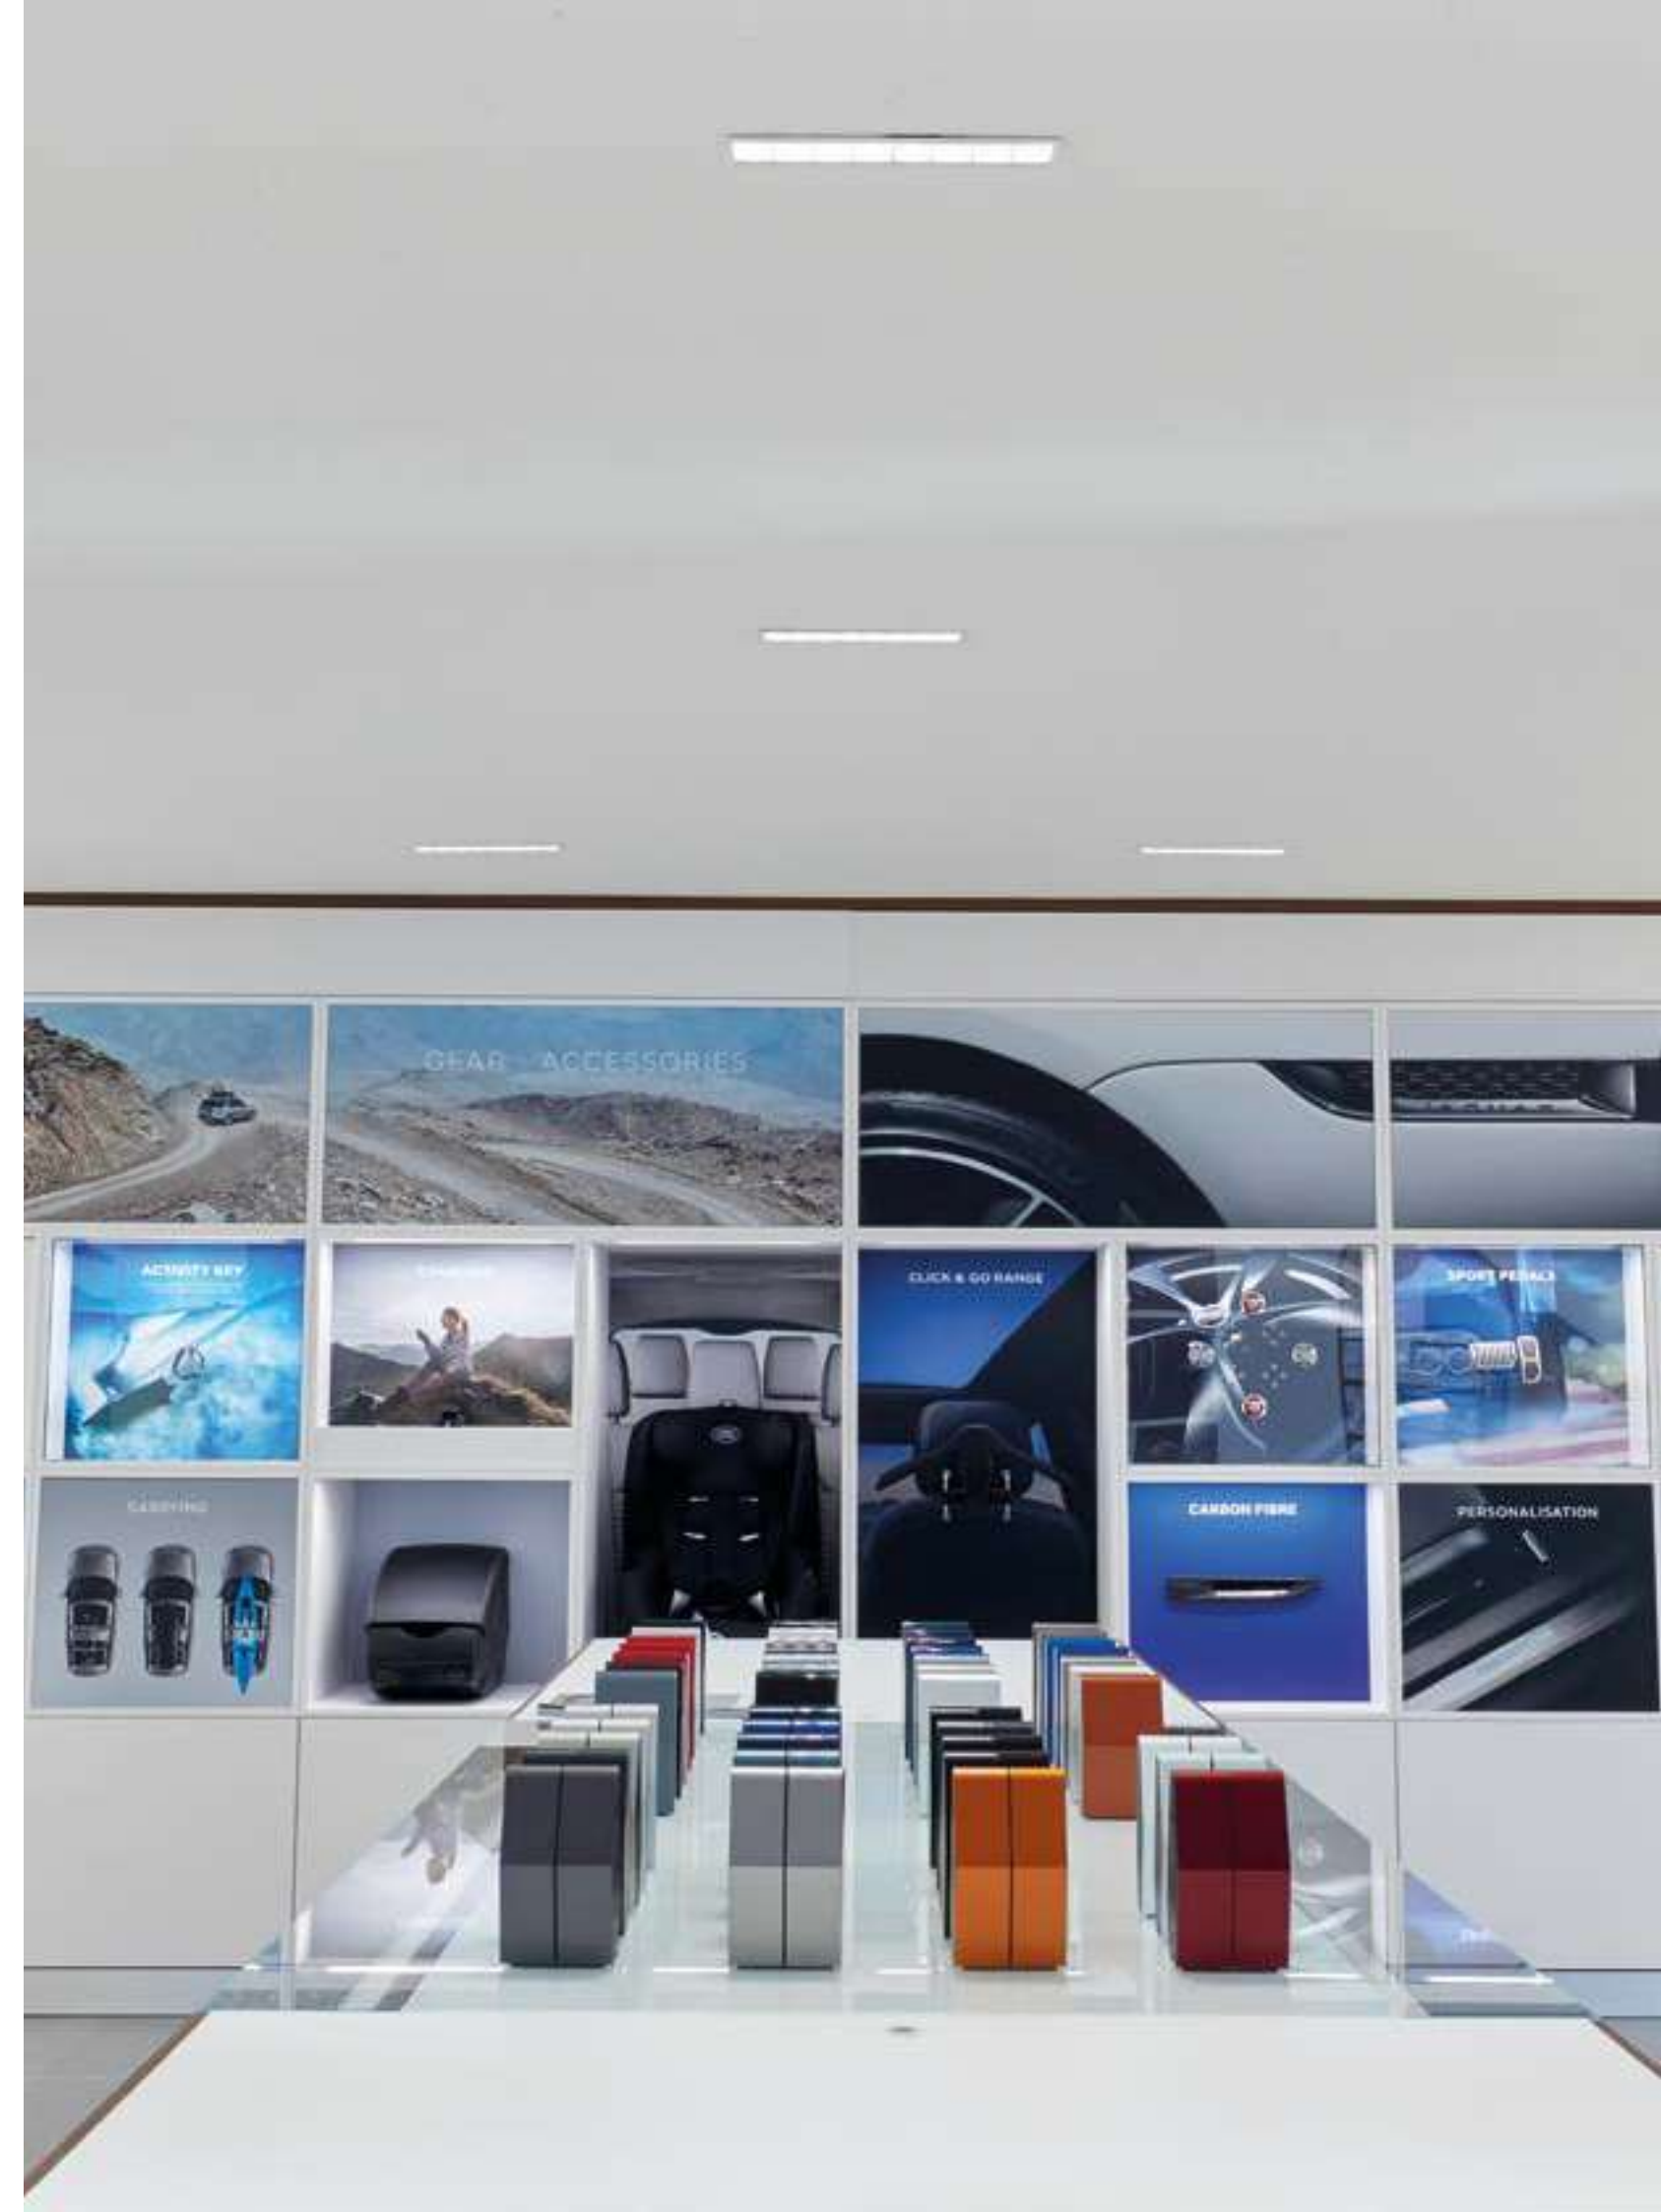


Sharp wall washer


SHARP TRIM WALL WASHER

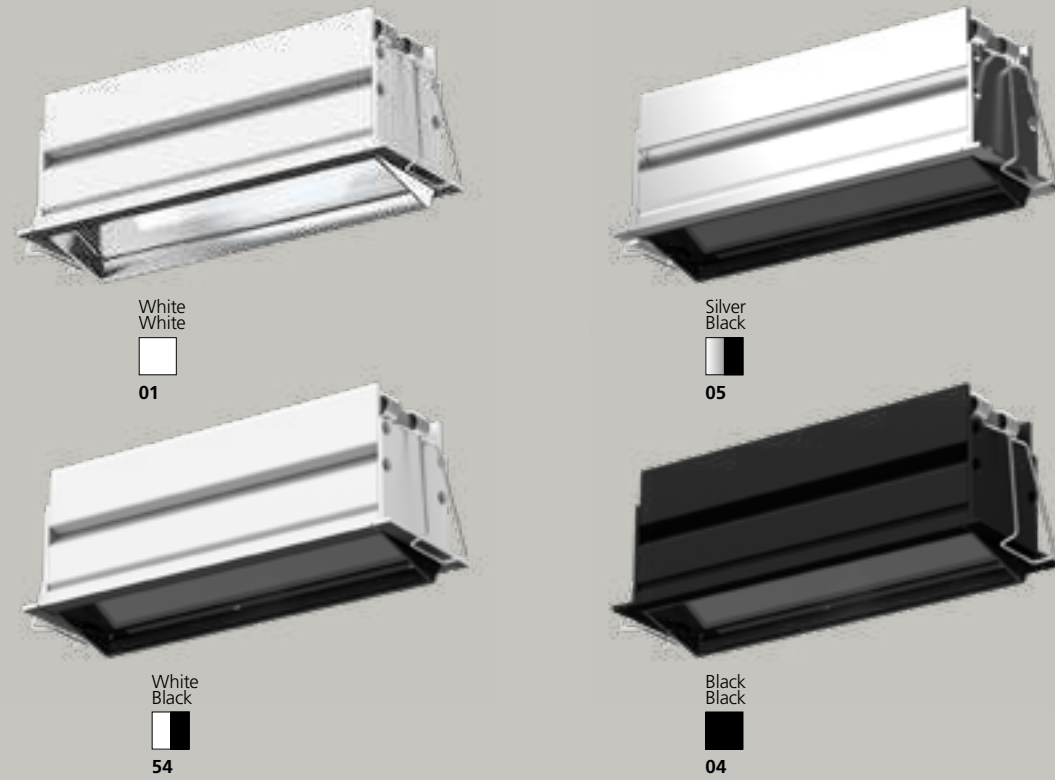

SHARP TRIMLESS WALL WASHER

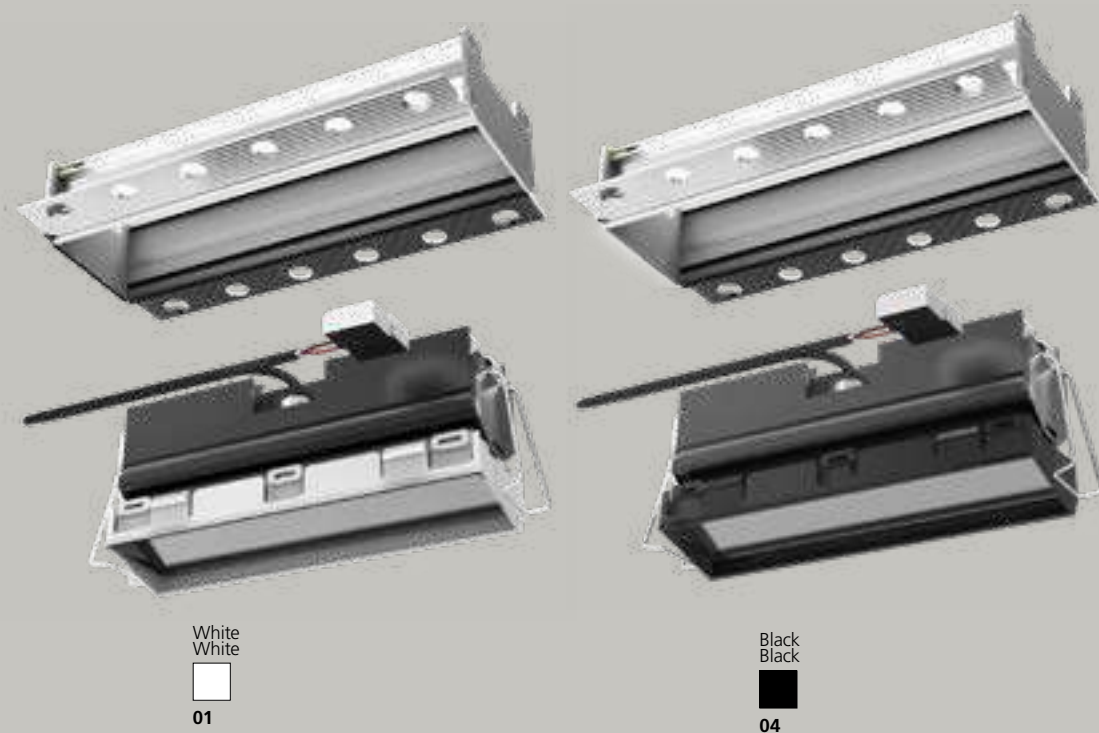

SHARP TRIM - TRIMLESS WALL WASHER




Driver 900mA SELV a supplied separately.
Louvres included.

MacAdam 2SDCM
Life L90 (17K) 103000h
CRI >90


TRIM

	W	Flux	CCT	Code
1 optic unit	12 W	657 lm	2700 K	AF109. 01/04/05/54
		657 lm	3000 K	AF110. 01/04/05/54
2 optic units	22 W	657 lm	4000 K	AF111. 01/04/05/54
		1314 lm	2700 K	AF156. 01/04/05/54
3 optic units	33 W	1314 lm	3000 K	AF157. 01/04/05/54
		1314 lm	4000 K	AF158. 01/04/05/54
4 optic units	44 W	1971 lm	2700 K	AF206. 01/04/05/54
		1971 lm	3000 K	AF207. 01/04/05/54
		1971 lm	4000 K	AF208. 01/04/05/54
		2628 lm	2700 K	AF256. 01/04/05/54
		2628 lm	3000 K	AF257. 01/04/05/54
		2628 lm	4000 K	AF258. 01/04/05/54

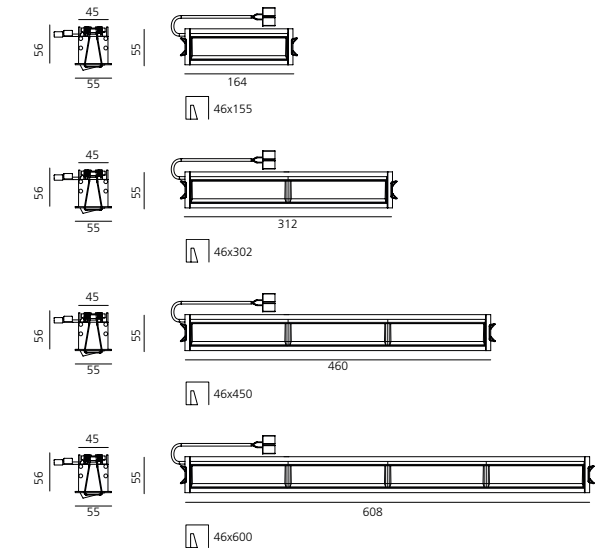

TRIMLESS


	W	Flux	CCT	Code
1 optic unit	12 W	657 lm	2700 K	AF609. 01/04
		657 lm	4000 K	AF610. 01/04
2 optic units	22 W	1314 lm	2700 K	AF656. 01/04
		1314 lm	3000 K	AF657. 01/04
3 optic units	33 W	1314 lm	4000 K	AF658. 01/04
		1971 lm	2700 K	AF706. 01/04
		1971 lm	3000 K	AF707. 01/04
		1971 lm	4000 K	AF708. 01/04
4 optic units	44 W	2628 lm	2700 K	AF756. 01/04
		2628 lm	3000 K	AF757. 01/04
		2628 lm	4000 K	AF758. 01/04

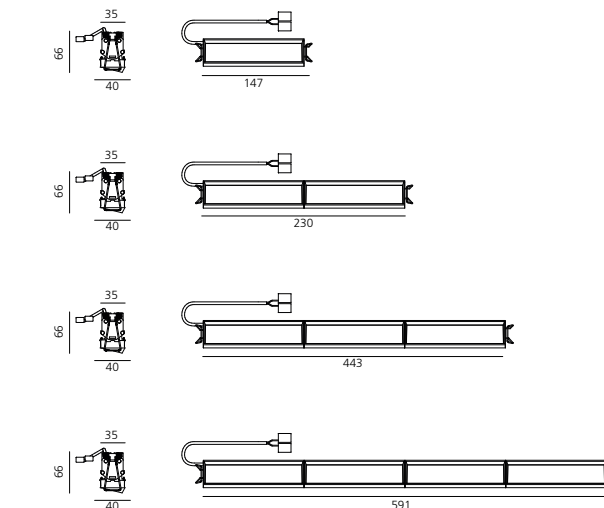

Frame for recessed installation



	Code
1X	AF90200
2X	AF90300
3X	AF90400
4X	AF90500

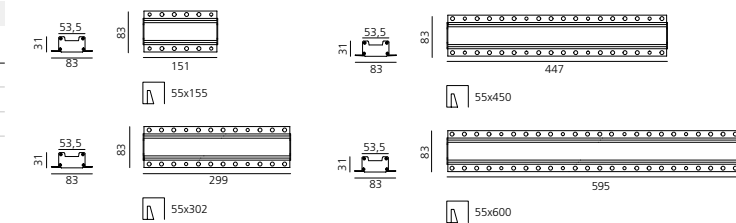

Driver	Vac	Lmm	Wmm	Hmm	Optic units	Min. ceiling depth (mm)		Code
19,8 W 900mA	220-240	125	38	23	1x	60	Undimmable	DV1002
20 W 900mA	220-240	180	32	32	1x	80	DALI	DV1008
32 W 1000mA	220-240	129,5	42	30	2x	80	Undimmable	DV1004
50 W 1050mA	220-240	124	79	22	3x / 4x	80	Undimmable	DV1005
40 W 900mA	220-240	97	43	30	2x / 4x	80	Undimmable	DV1006
25 W 900mA	220-240	164	38	24,5	1x / 2x	80 / 60	DALI	DV1003
48 W 900mA	220-240	110	75	25,7	3x / 4x	80 / 80	DALI	DV1007

Sharp ↪ SMD



Sharp SMD



1x - 2x - 4x




SHARP SMD

White 01 Black 04 Silver 05 S F WF Driver 24Vdc Selv and louvres supplied separately. MacAdam 2SDCM Life L90 (17K) 103000h CRI >90 IP20

	Watt	Beam	Flux	CCT	Code
1 optic unit	3,5 W	S 20°	189 lm	2700 K	AF310. 01/04/05
			201 lm	3000 K	AF313. 01/04/05
			215 lm	4000 K	AF316. 01/04/05
	F 36°	177 lm	2700 K	AF311. 01/04/05	
		188 lm	3000 K	AF314. 01/04/05	
		201 lm	4000 K	AF317. 01/04/05	
	WF 52°	183 lm	2700 K	AF312. 01/04/05	
		195 lm	3000 K	AF315. 01/04/05	
		208 lm	4000 K	AF318. 01/04/05	
2 optic units	6,5 W	S 20°	377 lm	2700 K	AF360. 01/04/05
			402 lm	3000 K	AF363. 01/04/05
			430 lm	4000 K	AF366. 01/04/05
			376 lm	3000 K	AF364. 01/04/05
	F 36°	353 lm	2700 K	AF361. 01/04/05	
		376 lm	3000 K	AF364. 01/04/05	
		403 lm	4000 K	AF367. 01/04/05	
		366 lm	2700 K	AF362. 01/04/05	
	WF 52°	389 lm	3000 K	AF365. 01/04/05	
		417 lm	4000 K	AF368. 01/04/05	
		755 lm	2700 K	AF410. 01/04/05	
		804 lm	3000 K	AF413. 01/04/05	
4 optic units	12 W	S 20°	860 lm	4000 K	AF416. 01/04/05
			706 lm	2700 K	AF411. 01/04/05
			752 lm	3000 K	AF414. 01/04/05
			805 lm	4000 K	AF417. 01/04/05
	F 36°	731 lm	2700 K	AF412. 01/04/05	
		779 lm	3000 K	AF415. 01/04/05	
		834 lm	4000 K	AF418. 01/04/05	
		731 lm	2700 K	AF412. 01/04/05	
	WF 52°	779 lm	3000 K	AF415. 01/04/05	
		834 lm	4000 K	AF418. 01/04/05	

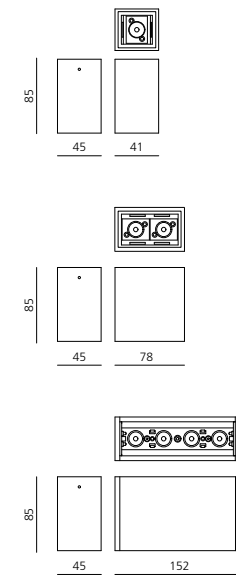


Louvres

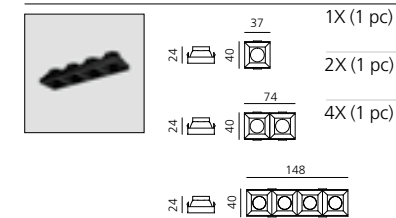

Code

AF950. 01/04
AF951. 01/04
AF952. 01/04

Accessories




Sharping wall grazer lens Kit (4pcs)
26°x70° elliptical lenses kit. It has to be used on top of S 20° reflectors to get an elliptical beam (greater axis along the module length). It contains 4 lenses.

Code

AF06000

Driver	W	Vin (V)	Vout (V)	L mm	W mm	H mm	W max	Min wire section mm ²	Max wire length m	n°device			Dimming			Code
										1x	2x	4x	DALI	1-10V	PUSH	
CV Selv	30	220-240 Vac	24Vdc	153	41	32	25	1.5	30	7	4	2	no	no	no	DV1032
CV Selv	75	220-240 Vac	24Vdc	180	52	30	63	1.5	30	18	10	5	no	no	no	DV1009
CV Selv	120	220-240 Vac	24Vdc	300	40	30	102	1.5	30	29	16	8	no	no	no	DV1033
Dimmer	NA	24Vdc	24Vdc PWM	80	54	24	max 100	1.5	30	see above			yes	yes	yes	DV1048

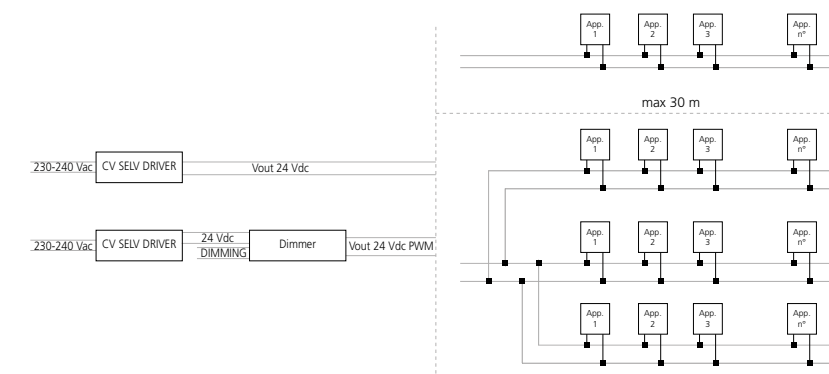

appliances number: see table



White	Black	Silver	S	F	WF	MacAdam 2SDCM	IP20
						Life L90 (17K) 103000h	
01	04	05				CRI >90	

	Watt	Beam	Flux	CCT	Undimmable		Dimmable DALI				
					Code		Code				
8 optic units	24 W	S 20°	1509 lm	2700 K	AF457.	01/04/05	AF476.	01/04/05			
			1608 lm	3000 K	AF460.	01/04/05	AF470.	01/04/05			
			1721 lm	4000 K	AF463.	01/04/05	AF473.	01/04/05			
			F 36°	1412 lm	2700 K	AF458.	01/04/05	AF477.	01/04/05		
			1504 lm	3000 K	AF461.	01/04/05	AF471.	01/04/05			
			1610 lm	4000 K	AF464.	01/04/05	AF474.	01/04/05			
		WF 52°	1462 lm	2700 K	AF459.	01/04/05	AF478.	01/04/05			
			1558 lm	3000 K	AF462.	01/04/05	AF472.	01/04/05			
			1667 lm	4000 K	AF465.	01/04/05	AF475.	01/04/05			
			12 optic units	37 W	S 20°	2263 lm	2700 K	AF807.	01/04/05	AF826.	01/04/05
						2412 lm	3000 K	AF810.	01/04/05	AF820.	01/04/05
						2581 lm	4000 K	AF813.	01/04/05	AF823.	01/04/05
F 36°	2118 lm	2700 K				AF808.	01/04/05	AF827.	01/04/05		
2256 lm	3000 K	AF811.				01/04/05	AF821.	01/04/05			
2415 lm	4000 K	AF814.				01/04/05	AF824.	01/04/05			
WF 52°	2193 lm	2700 K			AF809.	01/04/05	AF828.	01/04/05			
	2337 lm	3000 K			AF812.	01/04/05	AF822.	01/04/05			
	2501 lm	4000 K			AF815.	01/04/05	AF825.	01/04/05			
	16 optic units	47 W			S 20°	3018 lm	2700 K	AF857.	01/04/05	AF876.	01/04/05
						3215 lm	3000 K	AF860.	01/04/05	AF870.	01/04/05
						3442 lm	4000 K	AF863.	01/04/05	AF873.	01/04/05
F 36°			2824 lm	2700 K		AF858.	01/04/05	AF877.	01/04/05		
3009 lm			3000 K	AF861.		01/04/05	AF871.	01/04/05			
3220 lm			4000 K	AF864.		01/04/05	AF874.	01/04/05			
WF 52°			2924 lm	2700 K	AF859.	01/04/05	AF878.	01/04/05			
			3316 lm	3000 K	AF862.	01/04/05	AF872.	01/04/05			
			3335 lm	4000 K	AF865.	01/04/05	AF875.	01/04/05			



Sharp SMD

8x - 12x - 16x

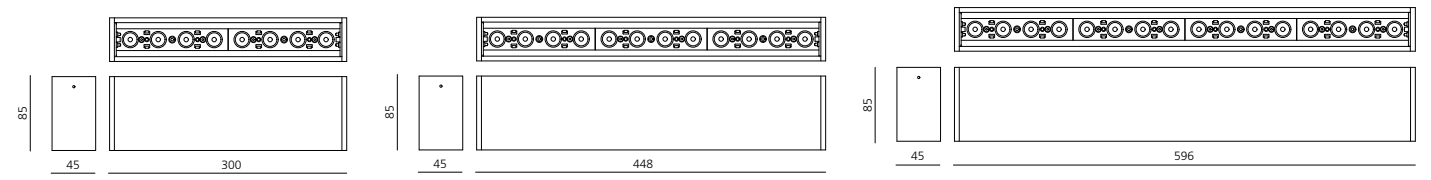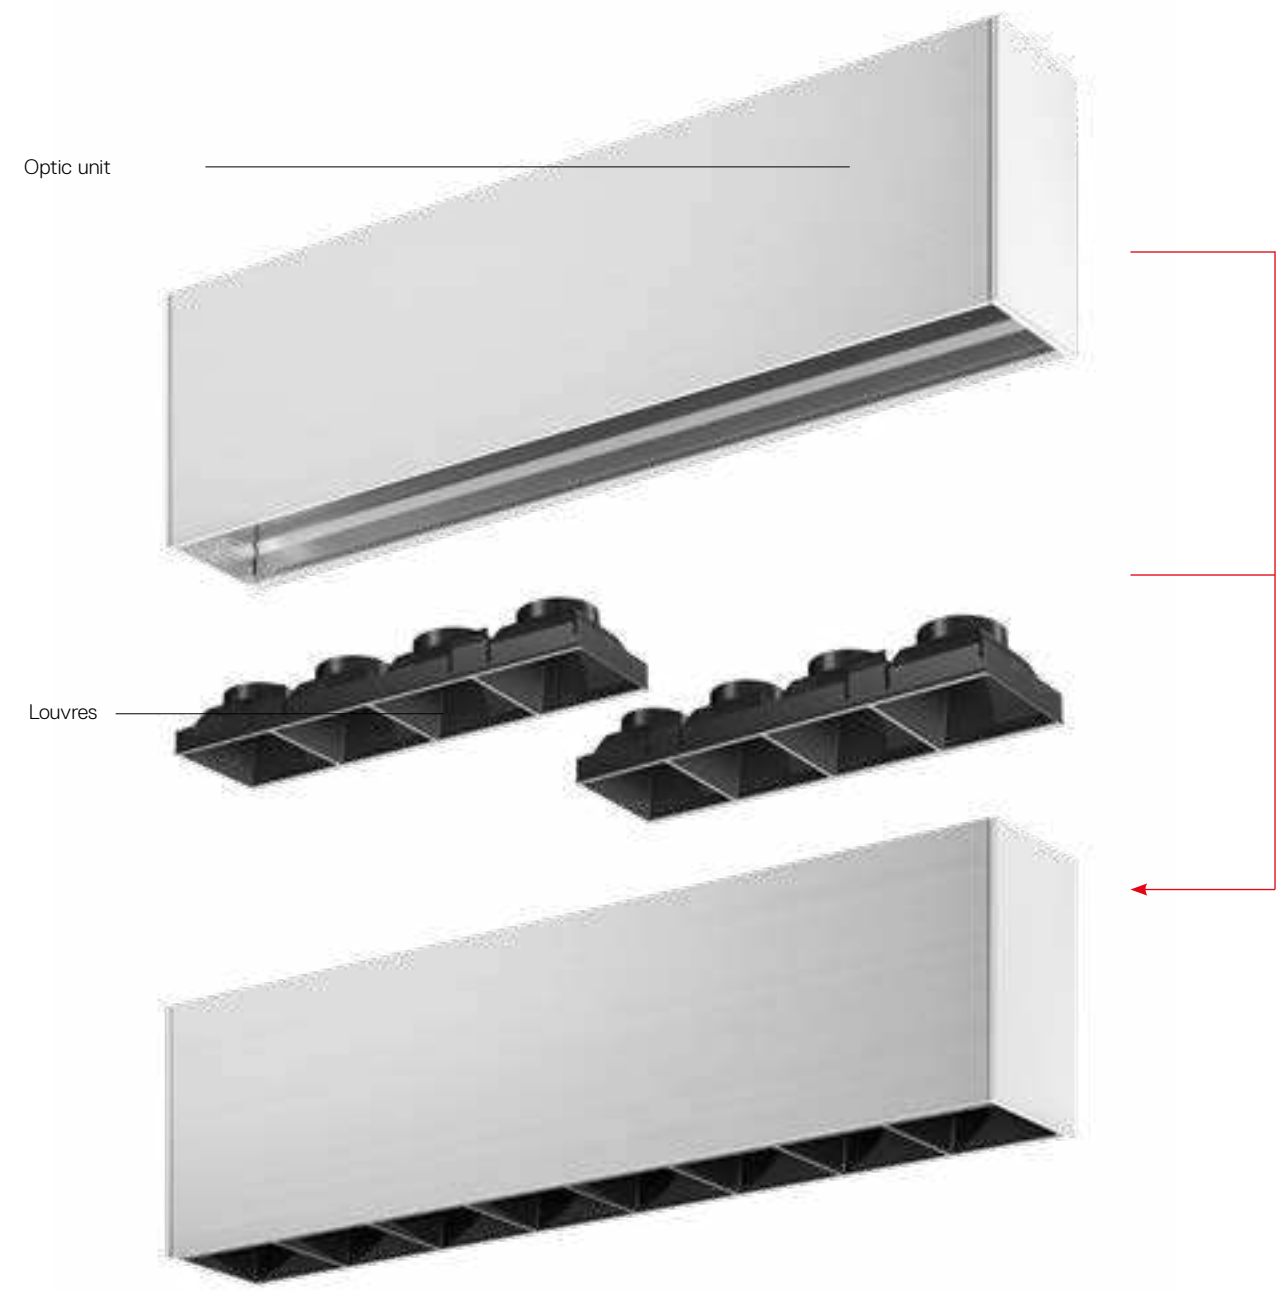

Louvres

148 4X (1pc)

Code
AF952. 01/04

Accessories

Sharpening wall grazer lens Kit (4pcs)
26°x70° elliptical lenses kit. It has to be used on top of S 20° reflectors to get an elliptical beam (greater axis along the module length). It contains 4 lenses.

Code
AF06000

Sharp SMD wall washer



White White
01



Silver Black
05




White Black
54



Black Black
04


SHARP SMD WALL WASHER




MacAdam 2SDCM IP20
Life L90 (17K) 103000h
CRI >90

Driver 24Vdc Selv a supplied separately.


W	Flux	CCT	Code
12 W	657 lm	2700 K	AF419. 01/04/05/54
	657 lm	3000 K	AF420. 01/04/05/54
	657 lm	4000 K	AF421. 01/04/05/54



Driver	W	Vin (V)	Vout (V)	L mm	W mm	H mm	W max	Min Wire section mm ²	Max wire length m	n°device	Dimming	Code
CV Selv	30	220-240 Vac	24Vdc	153	41	32	25	1.5	30	2	DALI 1-10V PUSH 0-10V potentiom.	DV1032
CV Selv	75	220-240 Vac	24Vdc	180	52	30	63	1.5	30	3	no no no	DV1009
CV Selv	120	220-240 Vac	24Vdc	300	40	30	102	1.5	30	4	no no no	DV1033
Dimmer	NA	24Vdc	24Vdc PWM	80	54	24	max 100	1.5	30	see above	yes yes yes	DV1048

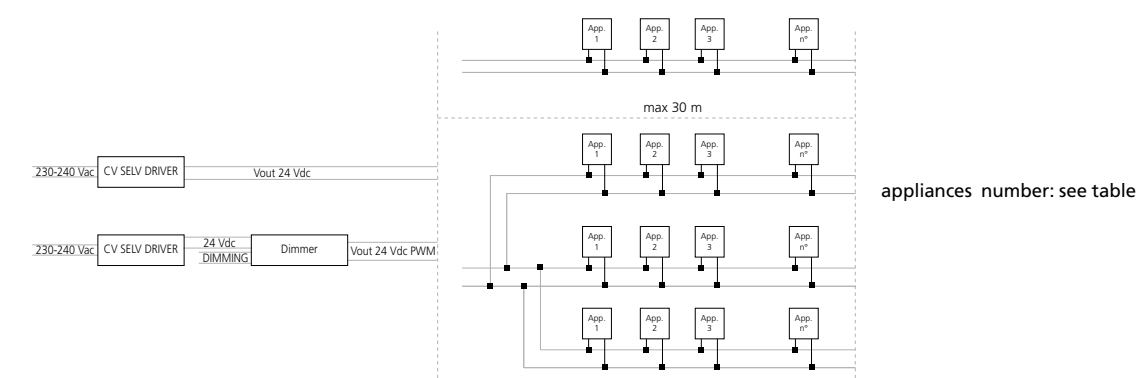

Electronic ballast included.	W	Flux	CCT	Undimmable Code	Dimmable DALI Code
2 optic units	22 W	1314 lm	2700 K	AF466. 01/04/05/54	AF479. 01/04/05/54
		1314 lm	3000 K	AF467. 01/04/05/54	AF480. 01/04/05/54
		1314 lm	4000 K	AF468. 01/04/05/54	AF481. 01/04/05/54
3 optic units	33 W	1971 lm	2700 K	AF816. 01/04/05/54	AF829. 01/04/05/54
		1971 lm	3000 K	AF817. 01/04/05/54	AF830. 01/04/05/54
		1971 lm	4000 K	AF818. 01/04/05/54	AF831. 01/04/05/54
4 optic units	44 W	2628 lm	2700 K	AF866. 01/04/05/54	AF880. 01/04/05/54
		2628 lm	3000 K	AF867. 01/04/05/54	AF881. 01/04/05/54
		2628 lm	4000 K	AF868. 01/04/05/54	AF882. 01/04/05/54

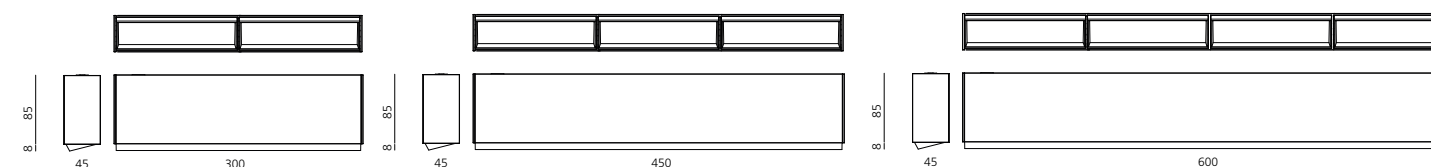



EVERYTHING 35
ROUND-SQUARE



EVERYTHING 55
ROUND-SQUARE



EVERYTHING 80
ROUND-SQUARE



EVERYTHING 105
ROUND-SQUARE



EVERYTHING 150
ROUND-SQUARE

Everything

Ernesto Gismondi

↪ 2013

EVERYTHING 35
ROUND-SQUARE

EVERYTHING 55
ROUND-SQUARE

EVERYTHING 80
ROUND-SQUARE

EVERYTHING 105
ROUND-SQUARE

EVERYTHING 150
ROUND-SQUARE



Everything typologies



For further information on Everything
 ↪ visit artemide.com



**Artemide
App**

↪ on request
 Only for 105/150 version

5 dimensions: 35 mm, 55 mm, 80 mm,
 105 mm, 150 mm.

Different options available: fixed or adjustable
 (excluding Everything 35), round or square, trim or
 trimless.

LED versions use an optical system based on a hybrid
 technology (lens and reflector) producing defined
 beams with high-power LEDs.

The extruded aluminium heat sink guarantees great
 thermal management, long life and high efficiency,
 while providing maximum luminous flux.

Adjustable versions (excluding Everything 80 option)
 are equipped with a blocking system to guarantee
 perfect framing.

Rotation up to 360°, beam angle +30°/-30°.

Separate electronic driver: non-dimmable or DALI
 dimmable options for LED products.



Compliant with standard EN60598-1 and other
 specific regulations.



↪ EVERYTHING 35


White Black Silver S F Driver 500 mA SELV supplied separately. MacAdam 3SDCM Life L80 (13K) 78600h CRI=90 IP20

Round						Code
W	Weight	Beam	Flux	CCT	Color	
1,4 W	0,10 kg	S 14°	70 lm	2700 K	○	NL4203010Y006
				●	NL4203010Y004	
				●	NL4203010Y002	
			98 lm	3000 K	○	NL4203010K006
				●	NL4203010K004	
				●	NL4203010K002	
		F 24°	70 lm	2700 K	○	NL4203025Y006
				●	NL4203025Y004	
				●	NL4203025Y002	
			98 lm	3000 K	○	NL4203025K006
				●	NL4203025K004	
				●	NL4203025K002	



∅ 29 mm

Square						Code
W	Weight	Beam	Flux	CCT	Color	
1,4 W	0,10 kg	S 14°	70 lm	2700 K	○	NL4203110Y006
				●	NL4203110Y004	
				●	NL4203110Y002	
			98 lm	3000 K	○	NL4203110K006
				●	NL4203110K004	
				●	NL4203110K002	
		F 24°	70 lm	2700 K	○	NL4203125Y006
				●	NL4203125Y004	
				●	NL4203125Y002	
			98 lm	3000 K	○	NL4203125K006
				●	NL4203125K004	
				●	NL4203125K002	



29 x 29 mm

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	Code
cc 8W 500mA slim	220-240	22	110	19	NL19041
cc 23W 500mA	220-240	156	52	26	M077401


*For use only on accessible ceiling

↪ EVERYTHING 55

White Black Silver F WF Driver 500 mA SELV supplied separately. MacAdam 3SDCM Life L80 (13K) 78600h CRI=80 IP20

Round						Code		
W	Weight	Beam	Flux	CCT	Color			
6,4 W	0,20 kg	F 20°	476 lm	2700 K	○	NL4203518Y006		
				●	NL4203518Y004			
				●	NL4203518Y002			
				476 lm	3000 K	○	NL4203518K006	
					●	NL4203518K004		
					●	NL4203518K002		
			WF 34°	442 lm	2700 K	○	NL4203534Y006	
					●	NL4203534Y004		
					●	NL4203534Y002		
				442 lm	3000 K	○	NL4203534K006	
					●	NL4203534K004		
					●	NL4203534K002		
		8,5 W	0,30 kg	F 20°	634 lm	2700 K	○	NL4204118Y006
						●	NL4204118Y004	
						●	NL4204118Y002	
					634 lm	3000 K	○	NL4204118K006
						●	NL4204118K004	
						●	NL4204118K002	
				WF 34°	589 lm	2700 K	○	NL4204134Y006
						●	NL4204134Y004	
						●	NL4204134Y002	
					589 lm	3000 K	○	NL4204134K006
						●	NL4204134K004	
						●	NL4204134K002	


Adjustable		Code
○		NL4203318Y006
●		NL4203318Y004
●		NL4203318Y002
○		NL4203318K006
●		NL4203318K004
●		NL4203318K002
○		NL4203334Y006
●		NL4203334Y004
●		NL4203334Y002
○		NL4203334K006
●		NL4203334K004
●		NL4203334K002



∅ 50 mm

Square						Code		
W	Weight	Beam	Flux	CCT	Color			
6,4 W	0,20 kg	F 20°	476 lm	2700 K	○	NL4203418Y006		
				●	NL4203418Y004			
				●	NL4203418Y002			
				476 lm	3000 K	○	NL4203418K006	
					●	NL4203418K004		
					●	NL4203418K002		
			WF 34°	442 lm	2700 K	○	NL4203434Y006	
					●	NL4203434Y004		
					●	NL4203434Y002		
				442 lm	3000 K	○	NL4203434K006	
					●	NL4203434K004		
					●	NL4203434K002		
		8,5 W	0,30 kg	F 20°	634 lm	2700 K	○	NL4204218Y006
						●	NL4204218Y004	
						●	NL4204218Y002	
					634 lm	3000 K	○	NL4204218K006
						●	NL4204218K004	
						●	NL4204218K002	
				WF 34°	589 lm	2700 K	○	NL4204234Y006
						●	NL4204234Y004	
						●	NL4204234Y002	
					589 lm	3000 K	○	NL4204234K006
						●	NL4204234K004	
						●	NL4204234K002	

Adjustable		Code
○		NL4203218Y006
●		NL4203218Y004
●		NL4203218Y002
○		NL4203218K006
●		NL4203218K004
●		NL4203218K002
○		NL4203234Y006
●		NL4203234Y004
●		NL4203234Y002
○		NL4203234K006
●		NL4203234K004
●		NL4203234K002



50 x 50 mm

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	Code
cc 15W 500mA	220-240	150	22	19	Everything 55 - 6,4W
cc 25W 500mA	220-240	164	38	25	Everything 55 - 6,4W
*cc 23W 500mA	220-240	156	52	26	Everything 55 - 6,4W
cc 20W 700mA	220-240	125	38	23	Everything 55 - 8,5W
*cc 32W 700mA	220-240	103	67	21	Everything 55 - 8,5W
*cc 32W 700mA	220-240	103	67	21	Everything 55 - 8,5W
cc 25W 700mA	220-240	164	38	25	Everything 55 - 8,5W
*cc 28W 700mA	220-240	156	53	26	Everything 55 - 8,5W

Code
M077900
DV1003
M077401*
NL19036
M079300*
M079200*
DV1003
M077401*


*For use only on accessible ceiling

⇨ EVERYTHING 80 ROUND


Black White Silver Black White Polished metal F WF Driver 350mA SELV supplied separately. MacAdam 3SDCM Life L80 (9K) 50000h CRI=90 ▼ IP20 / ▲ IP44 850° 30°

Trim Deflector


Trim						Fixed		Adjustable		
W	Weight	Beam	Flux	CCT	Trim Deflector	Code	Code	Code	Code	
13 W	0,24 kg	F 23°	993 lm	2700 K	<input type="checkbox"/>	<input type="checkbox"/>	M325720	M325725	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	M331110	M331115	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	M331120	M331125	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	M326020	M326025	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	M326010	M326015	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	M326060	M326065	<input type="checkbox"/>	<input type="checkbox"/>
		1038 lm	3000 K	<input type="checkbox"/>	<input type="checkbox"/>	M251020	M251025	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M278610	M278615	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M278620	M278625	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M251620	M251625	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M251610	M251615	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M251660	M251665	<input type="checkbox"/>	<input type="checkbox"/>	
F 28°	1007 lm	2700 K	<input type="checkbox"/>	<input type="checkbox"/>	M325820	M325825	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M331210	M331215	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M331220	M331225	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M326120	M326125	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M326110	M326115	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M326160	M326165	<input type="checkbox"/>	<input type="checkbox"/>		
		1052 lm	3000 K	<input type="checkbox"/>	<input type="checkbox"/>	M251220	M251225	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M278810	M278815	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M278820	M278825	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M251820	M251825	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M251810	M251815	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M251860	M251865	<input type="checkbox"/>	<input type="checkbox"/>	
WF 46°	986 lm	2700 K	<input type="checkbox"/>	<input type="checkbox"/>	M325920	M325925	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M331310	M331315	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M331320	M331325	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M326220	M326225	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M326210	M326215	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M326260	M326265	<input type="checkbox"/>	<input type="checkbox"/>		
		1030 lm	3000 K	<input type="checkbox"/>	<input type="checkbox"/>	M251420	M251425	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M279010	M279015	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M279020	M279025	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M252020	M252025	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M252010	M252015	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M252060	M252065	<input type="checkbox"/>	<input type="checkbox"/>	




∅ 67 mm

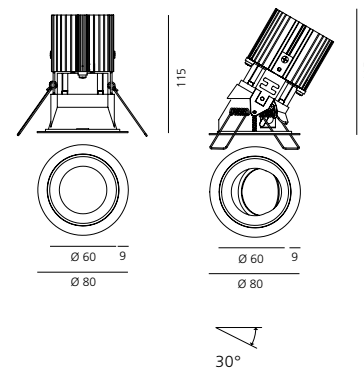

Trimless						Fixed		Adjustable	
W	Weight	Beam	Flux	CCT	Deflector	Code	Code	Code	Code
13 W	0,24 kg	F 23°	993 lm	2700 K	<input type="checkbox"/>	M326300	M326305	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	M326600	M326605	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	M331400	M331405	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	M252200	M252205	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	M252800	M252805	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	M279200	M279205	<input type="checkbox"/>	<input type="checkbox"/>
		1038 lm	3000 K	<input type="checkbox"/>	M326400	M326405	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	M326700	M326705	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	M331500	M331505	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	M252400	M252405	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	M253000	M253005	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	M279400	M279405	<input type="checkbox"/>	<input type="checkbox"/>	
F 28°	1007 lm	2700 K	<input type="checkbox"/>	M326500	M326505	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M326800	M326805	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M331600	M331605	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M252600	M252605	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M253200	M253205	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M279600	M279605	<input type="checkbox"/>	<input type="checkbox"/>		
1052 lm	3000 K	<input type="checkbox"/>	M252400	M252405	<input type="checkbox"/>	<input type="checkbox"/>			
		<input type="checkbox"/>	M253000	M253005	<input type="checkbox"/>	<input type="checkbox"/>			
		<input type="checkbox"/>	M279400	M279405	<input type="checkbox"/>	<input type="checkbox"/>			
		<input type="checkbox"/>	M326500	M326505	<input type="checkbox"/>	<input type="checkbox"/>			
		<input type="checkbox"/>	M326800	M326805	<input type="checkbox"/>	<input type="checkbox"/>			
		<input type="checkbox"/>	M331600	M331605	<input type="checkbox"/>	<input type="checkbox"/>			
WF 46°	986 lm	2700 K	<input type="checkbox"/>	M326500	M326505	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M326800	M326805	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M331600	M331605	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M252600	M252605	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M253200	M253205	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M279600	M279605	<input type="checkbox"/>	<input type="checkbox"/>		
1030 lm	3000 K	<input type="checkbox"/>	M252600	M252605	<input type="checkbox"/>	<input type="checkbox"/>			
		<input type="checkbox"/>	M253200	M253205	<input type="checkbox"/>	<input type="checkbox"/>			
		<input type="checkbox"/>	M279600	M279605	<input type="checkbox"/>	<input type="checkbox"/>			



∅ 67 mm

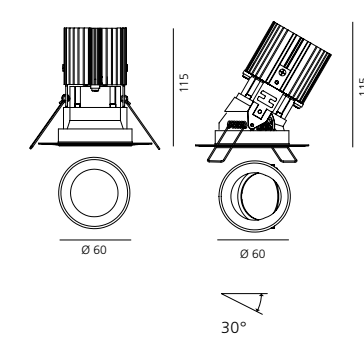


Driver	Vac	L _{mm}	W _{mm}	H _{mm}	Code
cc 15W 350mA	220-240	125	38	23	1max Undimmable M077500
cc 16W 350mA	220-240	156	52	26	1max DALI/PUSH/0-10V dimmable M077401

⇨ EVERYTHING 80 SQUARE


Black White Silver Black White Polished metal F WF Driver 350mA SELV supplied separately. MacAdam 3SDCM Life L80 (9K) 50000h CRI=90 ▼ IP20 / ▲ IP44 850° 30°

Trim Deflector

Trim						Fixed		Adjustable		
W	Weight	Beam	Flux	CCT	Trim Deflector	Code	Code	Code	Code	
13 W	0,24 kg	F 23°	992 lm	2700 K	<input type="checkbox"/>	<input type="checkbox"/>	M326920	M326925	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	M330510	M330515	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	M330520	M330525	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	M327220	M327225	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	M327210	M327215	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	<input type="checkbox"/>	M327260	M327265	<input type="checkbox"/>	<input type="checkbox"/>
		1037 lm	3000 K	<input type="checkbox"/>	<input type="checkbox"/>	M253420	M253425	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M273610	M273615	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M273620	M273625	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M254020	M254025	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M254010	M254015	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M254060	M254065	<input type="checkbox"/>	<input type="checkbox"/>	
F 28°	1003 lm	2700 K	<input type="checkbox"/>	<input type="checkbox"/>	M327020	M327025	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M330610	M330615	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M330620	M330625	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M327320	M327325	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M327310	M327315	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M327360	M327365	<input type="checkbox"/>	<input type="checkbox"/>		
		1048 lm	3000 K	<input type="checkbox"/>	<input type="checkbox"/>	M253620	M253625	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M273810	M273815	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M273820	M273825	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M254220	M254225	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M254210	M254215	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M254260	M254265	<input type="checkbox"/>	<input type="checkbox"/>	
WF 46°	986 lm	2700 K	<input type="checkbox"/>	<input type="checkbox"/>	M327120	M327125	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M330710	M330715	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M330720	M330725	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M327420	M327425	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M327410	M327415	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	M327460	M327465	<input type="checkbox"/>	<input type="checkbox"/>		
		1030 lm	3000 K	<input type="checkbox"/>	<input type="checkbox"/>	M253820	M253825	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M274010	M274015	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M274020	M274025	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M254420	M254425	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M254410	M254415	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	<input type="checkbox"/>	M254460	M254465	<input type="checkbox"/>	<input type="checkbox"/>	




67 x 67 mm

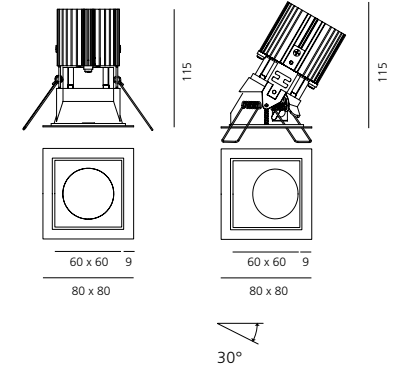

Trimless						Fixed		Adjustable	
W	Weight	Beam	Flux	CCT	Deflector	Code	Code	Code	Code
13 W	0,24 kg	F 23°	992 lm	2700 K	<input type="checkbox"/>	M327500	M327505	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	M327800	M327805	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	M330800	M330805	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	M254600	M254605	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	M255200	M255205	<input type="checkbox"/>	<input type="checkbox"/>
					<input type="checkbox"/>	M274200	M274205	<input type="checkbox"/>	<input type="checkbox"/>
		1037 lm	3000 K	<input type="checkbox"/>	M327600	M327605	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	M327900	M327905	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	M330900	M330905	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	M254800	M254805	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	M255400	M255405	<input type="checkbox"/>	<input type="checkbox"/>	
				<input type="checkbox"/>	M274400	M274405	<input type="checkbox"/>	<input type="checkbox"/>	
F 28°	1003 lm	2700 K	<input type="checkbox"/>	M327700	M327705	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M328000	M328005	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M331000	M331005	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M255000	M255005	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M255600	M255605	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M274600	M274605	<input type="checkbox"/>	<input type="checkbox"/>		
1048 lm	3000 K	<input type="checkbox"/>	M327700	M327705	<input type="checkbox"/>	<input type="checkbox"/>			
		<input type="checkbox"/>	M328000	M328005	<input type="checkbox"/>	<input type="checkbox"/>			
		<input type="checkbox"/>	M331000	M331005	<input type="checkbox"/>	<input type="checkbox"/>			
		<input type="checkbox"/>	M255000	M255005	<input type="checkbox"/>	<input type="checkbox"/>			
		<input type="checkbox"/>	M255600	M255605	<input type="checkbox"/>	<input type="checkbox"/>			
		<input type="checkbox"/>	M274600	M274605	<input type="checkbox"/>	<input type="checkbox"/>			
WF 46°	986 lm	2700 K	<input type="checkbox"/>	M327700	M327705	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M328000	M328005	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M331000	M331005	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M255000	M255005	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M255600	M255605	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	M274600	M274605	<input type="checkbox"/>	<input type="checkbox"/>		
1030 lm	3000 K	<input type="checkbox"/>	M255000	M255005	<input type="checkbox"/>	<input type="checkbox"/>			
		<input type="checkbox"/>	M255600	M255605	<input type="checkbox"/>	<input type="checkbox"/>			
		<input type="checkbox"/>	M274600	M274605	<input type="checkbox"/>	<input type="checkbox"/>			



67 x 67 mm

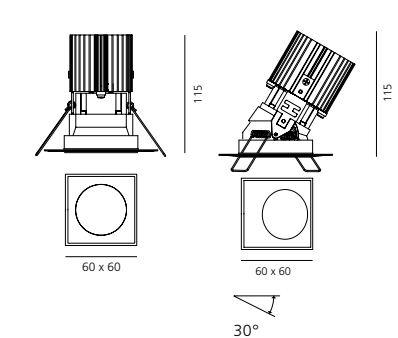

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	Code
cc 15W 350mA	220-240	125	38	23	1max Undimmable M077500
cc 16W 350mA	220-240	156	52	26	1max DALI/PUSH/0-10V dimmable M077401



↳ EVERYTHING 105 TRIM


Black White Silver Black Polished metal
Trim Deflector

F WF


Driver 350mA SELV supplied separately.
 MacAdam 3SDCM Life L80 (9K) 50000h CRI=90

▼ IP20 / ▲ IP44
 850°
 30° 360°


Round						Fixed	Adjustable			
W	Weight	Beam	Flux	CCT	Trim	Deflector	Code	Code		
13 W	0,30 kg	F 25°	821 lm	2700 K	○	●	M328120	M328125		
					●	●	M328160	M328165		
					○	○	M328140	M328145		
					●	●	M328420	M328425		
					○	○	M328460	M328465		
					●	●	M328440	M328445		
					858 lm	3000 K	○	●	M255820	M255825
							●	●	M255860	M255865
							○	○	M255840	M255845
							●	●	M256420	M256425
							○	○	M256460	M256465
							●	●	M256440	M256445
		F 28°	818 lm	2700 K	○	●	M328220	M328225		
					●	●	M328260	M328265		
					○	○	M328240	M328245		
					●	●	M328520	M328525		
					○	○	M328560	M328565		
					●	●	M328540	M328545		
		855 lm	3000 K	○	●	M256020	M256025			
				●	●	M256060	M256065			
				○	○	M256040	M256045			
				●	●	M256620	M256625			
				○	○	M256660	M256665			
				●	●	M256640	M256645			
WF 46°	696 lm	2700 K	○	●	M328320	M328325				
			●	●	M328360	M328365				
			○	○	M328340	M328345				
			●	●	M256220	M256225				
			○	○	M256260	M256265				
			●	●	M256240	M256245				
727 lm	3000 K	○	●	M256220	M256225					
		●	●	M256260	M256265					
		○	○	M256240	M256245					




∅ 92 mm

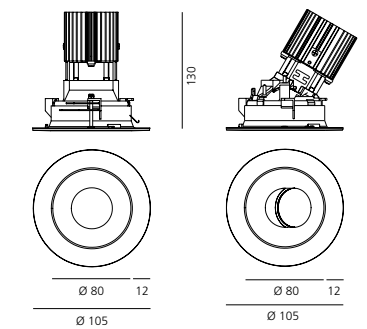

Square						Fixed	Adjustable			
W	Weight	Beam	Flux	CCT	Trim	Deflector	Code	Code		
13 W	0,30 kg	F 25°	850 lm	2700 K	○	●	M329320	M329325		
					●	●	M329360	M329365		
					○	○	M329340	M329345		
					●	●	M329620	M329625		
					○	○	M329660	M329665		
					●	●	M329640	M329645		
					888 lm	3000 K	○	●	M258220	M258225
							●	●	M258260	M258265
							○	○	M258240	M258245
							●	●	M258820	M258825
							○	○	M258860	M258865
							●	●	M258840	M258845
		F 28°	866 lm	2700 K	○	●	M329420	M329425		
					●	●	M329460	M329465		
					○	○	M329440	M329445		
					●	●	M329720	M329725		
					○	○	M329760	M329765		
					●	●	M329740	M329745		
		905 lm	3000 K	○	●	M258420	M258425			
				●	●	M258460	M258465			
				○	○	M258440	M258445			
				●	●	M259020	M259025			
				○	○	M259060	M259065			
				●	●	M259040	M259045			
WF 46°	708 lm	2700 K	○	●	M329520	M329525				
			●	●	M329560	M329565				
			○	○	M329540	M329545				
			●	●	M258620	M258625				
			○	○	M258660	M258665				
			●	●	M258640	M258645				
739 lm	3000 K	○	●	M258620	M258625					
		●	●	M258660	M258665					
		○	○	M258640	M258645					



92 x 92 mm

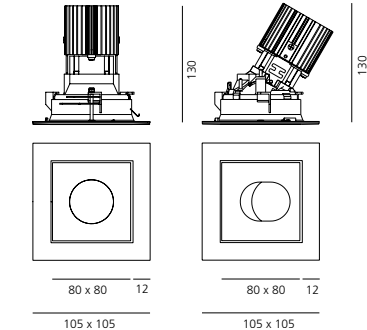

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	Code
cc 15W 350mA	220-240	125	38	23	1max Undimmable
cc 16W 350mA	220-240	156	52	26	1max DALI/PUSH/0-10V dimmable

↳ EVERYTHING 105 KIT TRIMLESS

Black Polished metal


F WF

Driver 350mA SELV supplied separately.
 MacAdam 3SDCM Life L80 (9K) 50000h CRI=90


▼ IP20 / ▲ IP44
 850°
 30° 360°

Fitting to be completed with installation frame for recessing into ceiling.

Round optical unit: trimless						Fixed	Adjustable			
W	Weight	Beam	Flux	CCT	Deflector	Code	Code			
13 W	0,30 kg	F 25°	821 lm	2700 K	●	●	M328700	M328705		
					○	○	M329000	M329005		
					●	●	M257000	M257005		
					○	○	M257600	M257605		
					●	●	M328800	M328805		
					○	○	M329100	M329105		
		858 lm	3000 K	●	●	M257200	M257205			
				○	○	M257800	M257805			
				●	●	M328900	M328905			
				○	○	M257400	M257405			
				F 28°	818 lm	2700 K	●	●	M328700	M328705
							○	○	M329000	M329005
●	●	M257000	M257005							
○	○	M257600	M257605							
●	●	M328800	M328805							
○	○	M329100	M329105							
855 lm	3000 K	●	●	M257200	M257205					
		○	○	M257800	M257805					
		●	●	M328900	M328905					
		○	○	M257400	M257405					
		WF 46°	696 lm	2700 K	●	●	M328700	M328705		
					○	○	M329000	M329005		
●	●				M257000	M257005				
○	○				M257600	M257605				
●	●				M328800	M328805				
○	○				M329100	M329105				
727 lm	3000 K	●	●	M257200	M257205					
		○	○	M257800	M257805					
		●	●	M328900	M328905					
		○	○	M257400	M257405					



∅ 92 mm

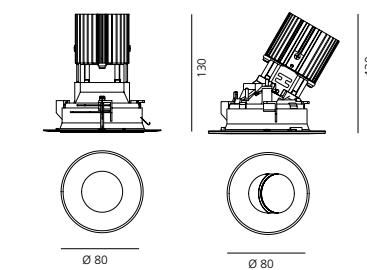


Frame

Round frame for recessed installation


Code M273400

∅ 92 mm

Square optical unit: trimless						Fixed	Adjustable			
W	Weight	Beam	Flux	CCT	Deflector	Code	Code			
13 W	0,30 kg	F 25°	850 lm	2700 K	●	●	M329900	M329905		
					○	○	M330200	M330205		
					●	●	M259400	M259405		
					○	○	M260000	M260005		
					●	●	M330000	M330005		
					○	○	M330300	M330305		
		888 lm	3000 K	●	●	M259600	M259605			
				○	○	M260200	M260205			
				●	●	M330100	M330105			
				○	○	M259800	M259805			
				F 28°	866 lm	2700 K	●	●	M329900	M329905
							○	○	M330200	M330205
●	●	M259400	M259405							
○	○	M260000	M260005							
●	●	M330000	M330005							
○	○	M330300	M330305							
905 lm	3000 K	●	●	M259600	M259605					
		○	○	M260200	M260205					
		●	●	M330100	M330105					
		○	○	M259800	M259805					
		WF 46°	708 lm	2700 K	●	●	M329900	M329905		
					○	○	M330200	M330205		
●	●				M259400	M259405				
○	○				M260000	M260005				
●	●				M330000	M330005				
○	○				M330300	M330305				
739 lm	3000 K	●	●	M259600	M259605					
		○	○	M260200	M260205					
		●	●	M330100	M330105					
		○	○	M259800	M259805					



92 x 92 mm

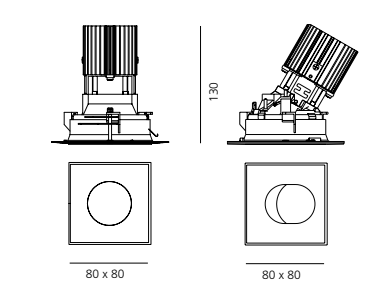

Frame

Square frame for recessed installation

Code M273500

92 x 92 mm

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	Code
cc 15W 350mA	220-240	125	38	23	1max Undimmable
cc 16W 350mA	220-240	156	52	26	1max DALI/PUSH/0-10V dimmable

↳ EVERYTHING 150 TRIM

Black White Silver Black Polished metal

Trim Deflector


F WF

Driver 700mA SELV supplied separately.


MacAdam 3SDCM Life L80 (9K) 50000h CRI=90

▼ IP20 / ▲ IP44
 ⌀ 850°
 30° 360°

Round						Fixed	Adjustable			
W	Weight	Beam	Flux	CCT	Trim	Code	Code			
24 W	0,30 kg	F 18°	1957 lm	2700 K	○	M323320	M323325			
					●	M323360	M323365			
					○	M323340	M323345			
					●	M323620	M323625			
					○	M323660	M323665			
					●	M323640	M323645			
					2045 lm	3000 K	○	M260620	M260625	
							●	M260660	M260665	
							○	M260640	M260645	
							●	M261220	M261225	
							○	M261260	M261265	
							●	M261240	M261245	
					F 28°	1727 lm	2700 K	○	M323420	M323425
								●	M323460	M323465
								○	M323440	M323445
								●	M323820	M323825
								○	M323860	M323865
								●	M323840	M323845
					1804 lm	3000 K	○	M260820	M260825	
							●	M260860	M260865	
							○	M260840	M260845	
							●	M261620	M261625	
							○	M261660	M261665	
							●	M261640	M261645	
WF 46°	1606 lm	2700 K	○	M323520	M323525					
			●	M323560	M323565					
			○	M323540	M323545					
			●	M261020	M261025					
			○	M261060	M261065					
			●	M261040	M261045					



⌀ 136 mm

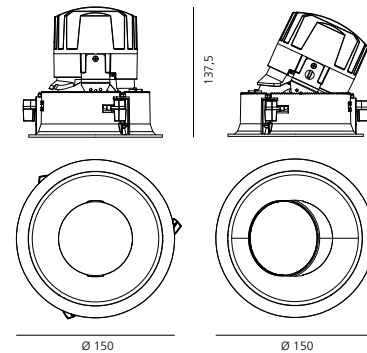

↳ EVERYTHING 150 KIT TRIMLESS

Black Polished metal

F WF


Driver 700mA SELV supplied separately.

MacAdam 3SDCM Life L80 (9K) 50000h CRI=90


▼ IP20 / ▲ IP44
 ⌀ 850°
 30° 360°

Fitting to be completed with installation frame for recessing into ceiling.

Round optical unit: trimless						Fixed	Adjustable					
W	Weight	Beam	Flux	CCT	Deflector	Code	Code					
24 W	0,30 kg	F 18°	1957 lm	2700 K	●	M323900	M323905					
					○	M324200	M324205					
					●	M261800	M261805					
					○	M262400	M262405					
					●	M324000	M324005					
					○	M324300	M324305					
					2045 lm	3000 K	●	M262000	M262005			
							○	M262600	M262605			
							●	M324100	M324105			
							○	M262200	M262205			
							F 28°	1727 lm	2700 K	●	M324000	M324005
										○	M324300	M324305
					●	M262000				M262005		
					○	M262600				M262605		
					●	M324100				M324105		
					○	M262200				M262205		
					1804 lm	3000 K	●	M262000	M262005			
							○	M262600	M262605			
							●	M324100	M324105			
							○	M262200	M262205			
							WF 46°	1606 lm	2700 K	●	M324100	M324105
										○	M262200	M262205
					●	M262000				M262005		
					○	M262600				M262605		
●	M324100	M324105										
○	M262200	M262205										



⌀ 136 mm

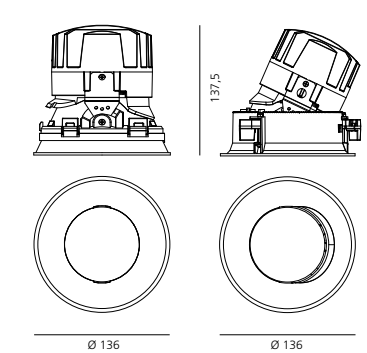

Frame

Round frame for recessed installation


⌀ 136 mm

Code
M274800


Square						Fixed	Adjustable			
W	Weight	Beam	Flux	CCT	Trim	Code	Code			
24 W	0,30 kg	F 18°	1957 lm	2700 K	○	M324520	M324525			
					●	M324560	M324565			
					○	M324540	M324545			
					●	M324820	M324825			
					○	M324860	M324865			
					●	M324840	M324845			
					2045 lm	3000 K	○	M263020	M263025	
							●	M263060	M263065	
							○	M263040	M263045	
							●	M263620	M263625	
							○	M263660	M263665	
							●	M263640	M263645	
					F 28°	1727 lm	2700 K	○	M324620	M324625
								●	M324660	M324665
								○	M324640	M324645
								●	M325020	M325025
								○	M325060	M325065
								●	M325040	M325045
					1804 lm	3000 K	○	M263220	M263225	
							●	M263260	M263265	
							○	M263240	M263245	
							●	M264020	M264025	
							○	M264060	M264065	
							●	M264040	M264045	
WF 46°	1606 lm	2700 K	○	M324720	M324725					
			●	M324760	M324765					
			○	M324740	M324745					
			●	M263420	M263425					
			○	M263460	M263465					
			●	M263440	M263445					




136 x 136 mm

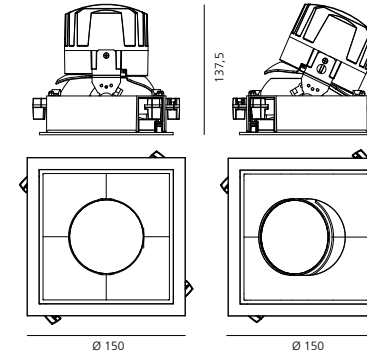

Square optical unit: trimless						Fixed	Adjustable					
W	Weight	Beam	Flux	CCT	Deflector	Code	Code					
24 W	0,30 kg	F 18°	1957 lm	2700 K	●	M325100	M325105					
					○	M325400	M325405					
					●	M264200	M264205					
					○	M264800	M264805					
					●	M325200	M325205					
					○	M325500	M325505					
					2045 lm	3000 K	●	M264400	M264405			
							○	M265000	M265005			
							●	M325300	M325305			
							○	M264600	M264605			
							F 28°	1727 lm	2700 K	●	M325200	M325205
										○	M325500	M325505
					●	M264400				M264405		
					○	M265000				M265005		
					●	M325300				M325305		
					○	M264600				M264605		
					1804 lm	3000 K	●	M264400	M264405			
							○	M265000	M265005			
							●	M325300	M325305			
							○	M264600	M264605			
							WF 46°	1606 lm	2700 K	●	M325300	M325305
										○	M264600	M264605
					●	M264400				M264405		
					○	M265000				M265005		
●	M325300	M325305										
○	M264600	M264605										



136 x 136 mm

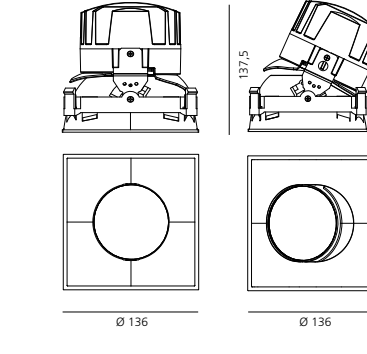

Frame

Square frame for recessed installation

136 x 136 mm

Code
M274900

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	Code
cc 30W 700mA	220-240	165	43	30	1max Undimmable M076800
cc 36W 700mA	220-240	103	67	21	1max DALI dimmable M079200
cc 32W 700mA	220-240	103	67	21	1max PUSH/0-10V dimmable M079300

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	Code
cc 30W 700mA	220-240	165	43	30	1max Undimmable M076800
cc 36W 700mA	220-240	103	67	21	1max DALI dimmable M079200
cc 32W 700mA	220-240	103	67	21	1max PUSH/0-10V dimmable M079300



Una Pro 75

Carlotta de Bevilacqua

↪ 2010



High-power LED lighting appliance mounted on a thin (3 mm) flat aluminium sheet with improved heat dissipation.

Each head accommodates 4-LED circuits.

Available with three different emissions: 6°, 20°, 38°.

The different versions feature 1 or 2 heads.

The junction allows 360° rotation and 30° tilting in all directions.

The addition of a clear cap with magnetic joint allows to reach protection rating IP44.



For further information on Una Pro 75
↳ visit artemide.com



**Artemide
App**



↳ on request

Only for recessed version





Una Pro 75 beam angles

↪ 6° - EXTRA SPOT

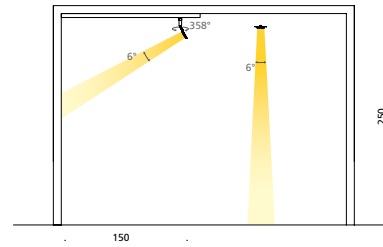



XS = extra spot (<math><8^\circ</math>)

↪ 20° - FLOOD

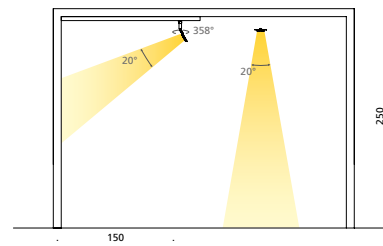

F = flood (15°-30°)

↪ 38° - WIDE FLOOD

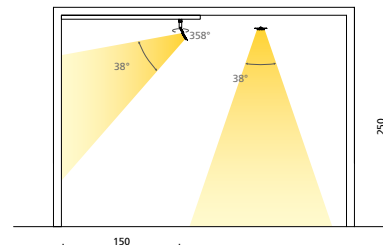

WF = wide flood (30°-45°)

Una Pro 75 colors

White



Black



White



Aluminium



Black




Black



Black




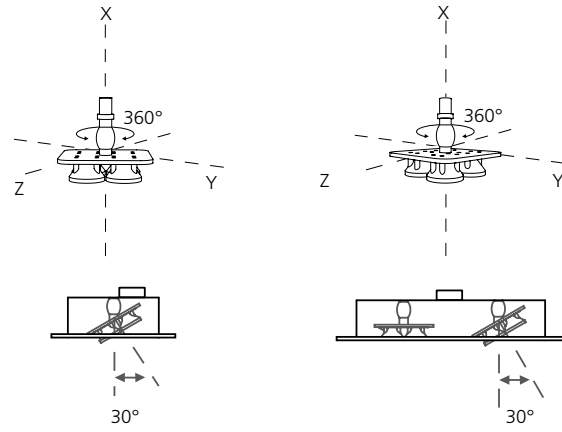

Una Pro 75 joint

The junction allows 360° rotation and 30° tilting in all directions. This movement is suited either to reach any individual points on horizontal or vertical surfaces requiring accent light or to evenly distribute the emitted light through space.


Each 4-LED head in the multiple compositions can be adjusted individually, so that each light beam can be directed independently of the others to stress different points in space by installing one appliance.

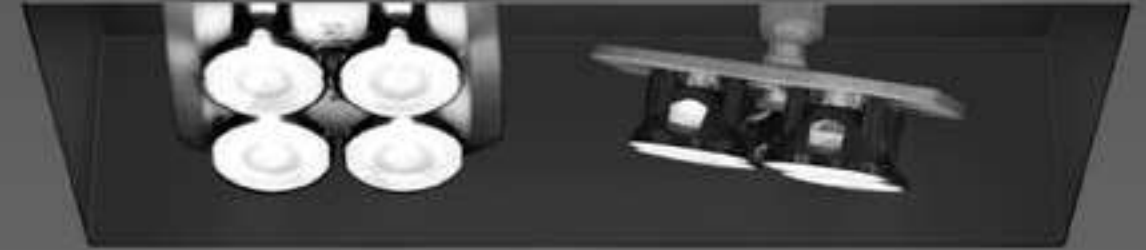



UNA PRO 75 RECESSED

White Aluminium Black
XS F WF
Electronic ballast included not dimmable
MacAdam 4SDCM Life L70 (7K) 42300h CRI =80/85
IP20

Undimmable										
W	Weight	Beam	CRI	Flux	CCT	Box	Head	Holder	Code	
4 LED 6 W	0,40 kg	6°	=85	320 lm	3000K	●	○	●	DD0014I00D1W	
			=80	340 lm	3700K	○	○	○	DD0014I10D1BW	
		20°	=85	313 lm	3000K	●	○	●	DD0014I00D1	
			=80	333 lm	3700K	○	○	○	DD0014I10D1B	
			=85	297 lm	3000K	○	○	○	DD0014I00D2W	
			=80	316 lm	3700K	○	○	○	DD0014I10D2BW	
2x4 LED 14 W	0,90 kg	6°	=85	640 lm	3000K	●	○	●	DD0014I00D2	
			=80	680 lm	3700K	○	○	○	DD0014I10D2	
		20°	=85	626 lm	3000K	○	○	○	DD0014I00D2B	
			=80	666 lm	3700K	○	○	○	DD0014I10D2B	
			38°	=85	594 lm	3000K	○	○	○	DD0014L00D3W
				=80	632 lm	3700K	○	○	○	DD0014L10D3BW



4 LED: 110x110 mm
2x 4 LED: 110x210 mm



Accessories


	Color	Code
	○	DD0014IFR10
	●	DD0014IFR09
	○	DD0014LFR10
	●	DD0014LFR09
		DD0014ICLT44



UNA PRO 75 SMD

White Aluminium Black
XS F WF
Electronic ballast included not dimmable
MacAdam 4SDCM Life L70 (7K) 42300h CRI =80/85
IP20

Undimmable										
W	Weight	Beam	CRI	Flux	CCT	Box	Head	Holder	Code	
4 LED 6 W	0,50 kg	6°	=85	320 lm	3000K	●	○	○	DD0014I09D1SW	
			=80	340 lm	3700K	○	○	○	DD0014I10D1SW	
		20°	=85	313 lm	3000K	●	○	○	DD0014I00D1SW	
			=80	333 lm	3700K	○	○	○	DD0014I09D1S	
			=85	297 lm	3000K	○	○	○	DD0014I10D1S	
			=80	316 lm	3700K	○	○	○	DD0014I00D1S	
2x4 LED 14 W	0,90 kg	6°	=85	640 lm	3000K	●	○	○	DD0014I09D2SW	
			=80	680 lm	3700K	○	○	○	DD0014I10D2SW	
		20°	=85	626 lm	3000K	○	○	○	DD0014I00D2S	
			=80	666 lm	3700K	○	○	○	DD0014I09D2S	
			38°	=85	594 lm	3000K	○	○	○	DD0014I10D2S
				=80	632 lm	3700K	○	○	○	DD0014L00D3SW



Accessories

	Code
	DD0014ICLT44





Una Pro 150

Carlotta de Bevilacqua

↪ 2010

High-power LED lighting appliance mounted on a thin (3 mm) flat aluminium sheet with improved heat dissipation

The head accommodates a 9-LED circuit

Available with three different emissions: 6°, 20°, 38°

Available in two different heights (15 cm or 30 cm)





For further information on Una Pro 150
↪ visit artemide.com






Una Pro 150 beam angles

↪ 6° - EXTRA SPOT

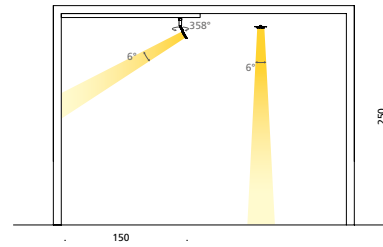



XS = extra spot (<math><8^\circ</math>)

↪ 20° - FLOOD

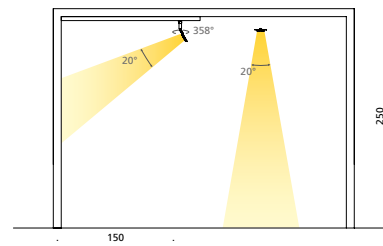

F = flood (15°-30°)

↪ 38° - WIDE FLOOD

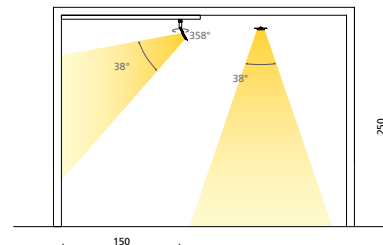

WF = wide flood (30°-45°)

Una Pro 150 colors

White



Black



White



Aluminium



Black



Black



Black






↪ UNA PRO 150

White	Aluminium	Black	XS	F	WF	Electronic ballast included not dimmable	MacAdam 4SDCM Life L70 (7K) 42300h CRI = 80/85	IP20

H 15

W	Weight	Beam	CRI	Flux	CCT	Box	Head	Holder	
9 LED 10,5 W	1,10 kg	6°	85	536 lm	3000K	●	●	●	
						○	○	○	
			80	570 lm	3700K	●	●	●	
						○	○	○	
			20°	85	529 lm	3000K	●	●	●
							○	○	○
		80		563 lm	3700K	●	●	●	
						○	○	○	
		38°	85	517 lm	3000K	●	●	●	
						○	○	○	
			80	550 lm	3700K	●	●	●	
						○	○	○	


Code
DD0016A09A1CW
DD0016A10A1CW
DD0016A00A1CW
DD0016A09A1C
DD0016A10A1C
DD0016A00A1C
DD0016A09A2CW
DD0016A10A2CW
DD0016A00A2CW
DD0016A09A2C
DD0016A10A2C
DD0016A00A2C
DD0016A09A3CW
DD0016A10A3CW
DD0016A00A3CW
DD0016A09A3C
DD0016A10A3C
DD0016A00A3C



H 30

W	Weight	Beam	CRI	Flux	CCT	Box	Head	Holder	
9 LED 10,5 W	1,80 kg	6°	85	536 lm	3000K	●	●	●	
						○	○	○	
			80	570 lm	3700K	●	●	●	
						○	○	○	
			20°	85	529 lm	3000K	●	●	●
							○	○	○
		80		563 lm	3700K	●	●	●	
						○	○	○	
		38°	85	517 lm	3000K	●	●	●	
						○	○	○	
			80	550 lm	3700K	●	●	●	
						○	○	○	

Code
DD0016A09A1LW
DD0016A10A1LW
DD0016A00A1LW
DD0016A09A1L
DD0016A10A1L
DD0016A00A1L
DD0016A09A2LW
DD0016A10A2LW
DD0016A00A2LW
DD0016A09A2L
DD0016A10A2L
DD0016A00A2L
DD0016A09A3LW
DD0016A10A3LW
DD0016A00A3LW
DD0016A09A3L
DD0016A10A3L
DD0016A00A3L





Pad 80

Carlotta de Bevilacqua
↪ 2012





Pad 80 typologies



Efficient, clear accent lighting,
fixed and adjustable.

Excellent lighting efficiency > 70lm/W.

High adjustability: 360° rotation,
+90°/-90° tilt angle.

Fixed version available as IP44.

Easy installation of light modules,
no tools required.

Lighting units available in 3 finishes:
gloss aluminium, painted white, painted black.

Structural elements of recessed-mounted version
available in 3 sizes, for use with 1, 2, 3 and 2x2
modules. 3 compatible finishes (polished
aluminium, white, and black).

Housing of ceiling-mounted version available
in 3 sizes (1, 2, 3 lighting units), and 3 compatible
finishes (polished aluminium, white and black).

Recessed-mounted version available as trimless
or framed.

Materials: body in anodised extruded aluminium,
diffuser in opal polycarbonate.

Complies with standard EN60598-1
and other specific standards.



For further information on Pad 80
→ visit artemide.com



**Artemide
App**

↳ on request

Only for recessed version

↳ PAD80 STRUCTURE

White Black Gloss anodised



PAD 80 RECESSED

Frame for recessed installation


for 1 optic unit	103x103
for 2 optic units	103x186
for 3 optic units	103x271
for 4 optic units	189x189

Trim

Code
M2468. 20/10
M2469. 20/10
M2470. 20/10
M2471. 20/10


Trimless

Code
M2464. 20/10
M2465. 20/10
M2466. 20/10
M2467. 20/10




Independent power supply and optic units, to be ordered separately.
Plasterboard thickness from 1mm to 40mm

Trimless



Trim

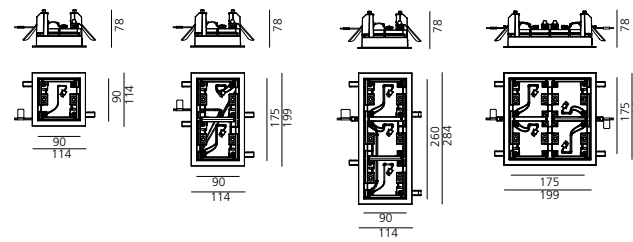

PAD 80 CEILING


Frame for ceiling version

			Code
for 1 optic unit	11 W	96x96x109 h	M2472. 20/10 60
for 2 optics units	21 W	96x181x109 h	M2473. 20/10 60
for 3 optics units	32 W	96x266x109 h	M2474. 20/10 60

Code
M2472. 20/10 60
M2473. 20/10 60
M2474. 20/10 60




Optic units, to be ordered separately.




↳ PAD80 LIGHT UNIT

White Black Gloss anodised S F WF XF



MacAdam4SDCM
Life L90 (10K) 60500h
CRI=80

▼ IP20 / ▲ IP44




PAD 80 LED WITH FIXED LENSES

LED optic unit

W	Weight	Beam	Flux	CCT
9,5 W	0,35 kg	S 15°	710 lm	3000 K
			810 lm	4000 K
		F 24°	610 lm	3000 K
			695 lm	4000 K
		WF 36°	645 lm	3000 K
			735 lm	4000 K

Code
M2450. 20/10 60
M2454. 20/10 60
M2451. 20/10 60
M2455. 20/10 60
M2452. 20/10 60
M2456. 20/10 60




PAD 80 LED WITH ADJUSTABLE LENSES

LED optic unit

W	Weight	Beam	Flux	CCT
9,5 W	0,36 kg	S 15°	710 lm	3000 K
			810 lm	4000 K
		F 24°	610 lm	3000 K
			695 lm	4000 K
		WF 36°	645 lm	3000 K
			735 lm	4000 K

Code
M2458. 20/10 60
M2461. 20/10 60
M2459. 20/10 60
M2462. 20/10 60
M2460. 20/10 60
M2463. 20/10 60




PAD 80 FIXED DIFFUSER

LED optic unit

W (LED)	Weight	Beam	Flux	CCT
9,5 W	0,35 kg	XF 98°	620 lm	3000 K
			704 lm	4000 K

Code
M2453. 20/10 60
M2457. 20/10 60



Driver Vac optc unit

Driver	Vac	optc unit	Code
19W 350mA SELV.	220-240	1	Undimmable
20W 350mA SELV.	220-240	2	Undimmable
2x20W 350mA SELV.	220-240	2x2	Undimmable
35W 350mA SELV.120	220-240	3	Undimmable
20W 350mA SELV.	220-240	1 / 2	DALI
35W 350mA SELV.120	220-240	3	DALI
2x20W 350mA SELV.	220-240	2x2	DALI


Code
M074600
DV1058
DV1058 (x2)
M076400
DV1003
M076600
DV1003 (x2)



Private residence, Milan (Italy)



Arts&Foods, Triennale di Milano, Milano (It), 2015, Studio Italo Rota, ph. Federico Villa

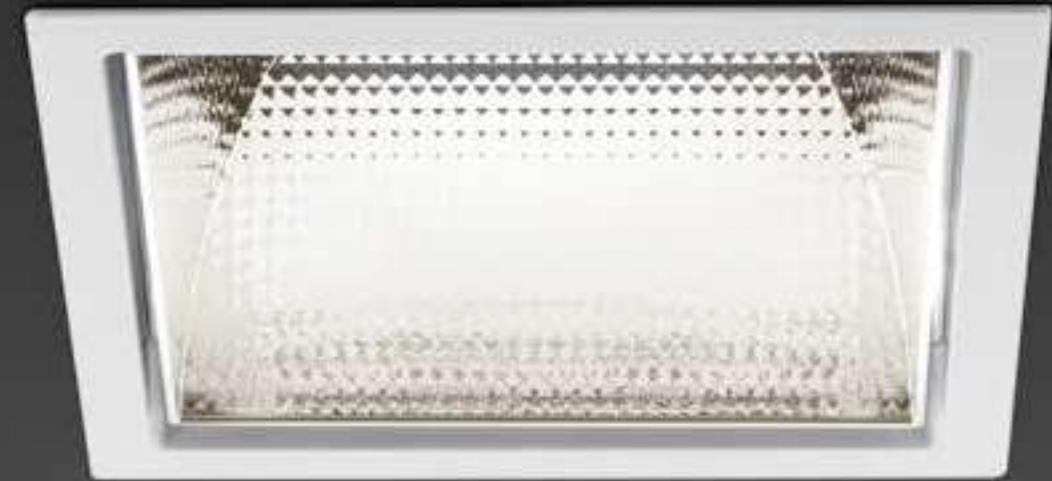

Luceri

Studio Artemide
↪ 2011



For further information on Luceri
↪ visit artemide.com



LUCERI LED TRIM



LUCERI LED TRIMLESS



- White frame
- Grey frame
- Black frame



Sharp edge trim



Rounded edge trim

Luceri

↪ Round

Recessed fixed downlighters using high-output LEDs.

Two versions: trim (with bezel) and Trimless (recessed ceiling mounted without bezel)

Materials: bezel, white reflector and screens in polycarbonate, reflectors in vacuum-metalled polycarbonate with anti-scratch surface treatment.

Standard version IP44.
IP54 with the addition of an optional screen.

Compliant to standard EN60598-1, EN62471 and other specific standards.

Luceri trim

Complete with optic housing and trim.
Trim available in white, black or grey.

Professional mirror optic with UGR Luminance Control <19 for office spaces with computer screens.

Installation brackets for an easy, tool-free installation on false ceilings of thicknesses between 1 and 25 mm.

Optional screens in transparent polycarbonate, easy to install, opal and prismoptic diffuser, with a 90 degree turn.

Wide beam symmetrical distribution.

Luceri trimless

2 available trims:
Sharp edge
Rounded edge

2 available optic housings.

Professional mirror optic with UGR Luminance Control <19 for office spaces with computer screens.

Comfort white optics.

Optics housings and trim to be ordered separately.

Optional screens in transparent polycarbonate, easy to install, opal and prismoptic diffuser, with a 90 degree turn.
Wide beam symmetrical distribution.

↳ LUCERI ROUND TRIMLESS




White XF 220/240Vac 50/60Hz supplied separately. MacAdam 1SDCM Life L80 (10K) 55000h CRI= 90

▼ IP20 / ▲ IP44 screenless.
▼ IP20 / ▲ IP54 with screen.

Fitting to be completed with installation frame.



COMFORT WHITE OPTICS

Fixed white						Code
W	Weight	Beam	CCT	Driver Flux		
max 54 W	1,70 kg	69°	3000 K	50 W	4420 lm	BB00300
				35 W	2538 lm	
				50 W	4712 lm	BB00400
				35 W	2714 lm	



TW[®]
Artemide Tunable White



Tunable white						DALI 8 Code
W	CRI	Weight	Beam	CCT	Flux	
17 W	=80	1,70 kg	70°	2700 K-	1559 lm	BB00500
				6500 K	1804 lm	



220/240Vac 50/60Hz electronic ballast included


FACETED MIRROR OPTICS

Fixed white						Code
W	Weight	Beam	CCT	Driver Flux		
max 54 W	1,70 kg	72°	3000 K	50 W	4528 lm	BB01000
				35 W	2600 lm	
				50 W	4828 lm	BB01100
				35 W	2781 lm	



TW[®]
Artemide Tunable White

Tunable white						DALI 8 Code
W	CRI	Weight	Beam	CCT	Flux	
16 W	=80	1,70 kg	71°	2700 K-	1583 lm	BB01200
				6500 K	1830 lm	



220/240Vac 50/60Hz electronic ballast included

Installation frame

		Code
	Sharp edge trim	M240500
	Support with rounded edge trim	M240600
	Accessory for ceiling installation	M239820




↳ LUCERI ROUND TRIM

White Black Grey XF 220/240Vac 50/60Hz supplied separately. MacAdam 1SDCM Life L80 (10K) 55000h CRI= 90

▼ IP20 / ▲ IP44 screenless.
▼ IP20 / ▲ IP54 with screen.



FACETED MIRROR OPTICS

Fixed white						Code
W	Weight	Beam	CCT	Driver Flux		
max 54 W	1,70 kg	72°	3000 K	50 W	4528 lm	BB020. 01/04
				35 W	2600 lm	
				50 W	4828 lm	BB021. 01/04
				35 W	2781 lm	



TW[®]
Artemide Tunable White

Tunable white						DALI 8 Code
W	CRI	Weight	Beam	CCT	Flux	
17 W	=80	1,70 kg	71°	2700 K-	1583 lm	BB022. 01/04
				6500 K	1830 lm	



220/240Vac 50/60Hz electronic ballast included

Accessories

		Code
	Transparent screen in polycarbonate	M239200
	Opal screen in PMMA	M239700
	Prismoptic screen in polycarbonate	M239600

With screen



Screenless




Driver	Vac	L _{mm}	W _{mm}	H _{mm}		Code
cc 50W 1400mA	220-240	165	43	30	1max	Undimmable DV1015
cc 50W 1400mA	220-240	153	41	32	1max	DALI 1-10 Push DV1034
cc 35W 700mA	220-240	103	67	21	1max	Undimmable DV1017
cc 35W 700mA	220-240	103	67	21	1max	DALI dimmable M079200
cc 35W 700mA	220-240	103	67	21	1max	1-10 Push M079300



Banca di Caraglio - Credito Cooperativo Caraglio (CN) - Italy
Arch: Studio Kudra, Photo: Federico Villa



Centro Studi dello Studentato Universitario di Trento, Trento (Italy)
Studio Palerm & Tabares de Nava S.L. Arquitectos, Photo: Federico Villa

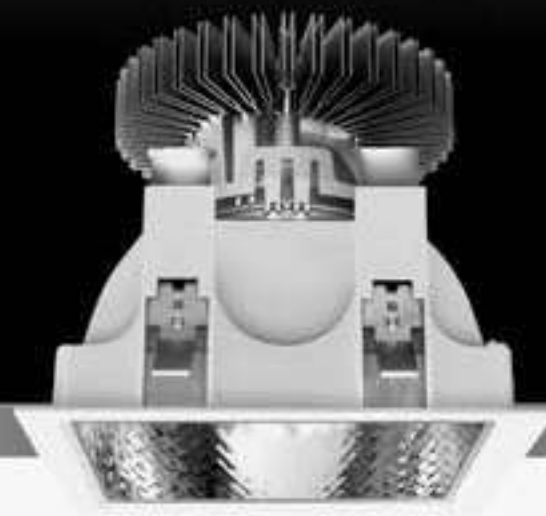


Luceri LED trim




- White frame
- Grey frame
- Black frame



Luceri LED trimless

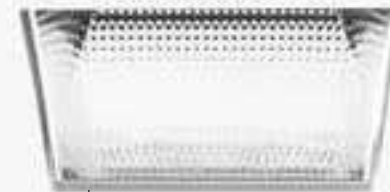

Sharp edge trim

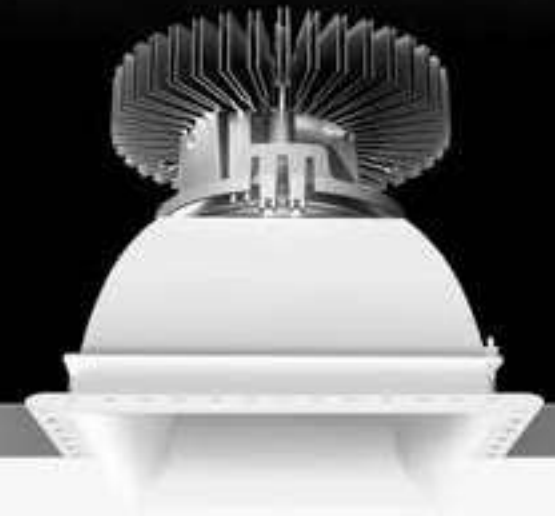

Rounded edge trim

Luceri

↪ Kadro

Recessed fixed downlighters using high-output LEDs.

Two versions: trim (with bezel) and Trimless (recessed ceiling mounted without bezel)

Materials: bezel, white reflector and screens in polycarbonate, reflectors in vacuum-metalled polycarbonate with anti-scratch surface treatment.

Standard version IP44.
IP54 with the addition of an optional screen.

Compliant to standard EN60598-1, EN62471 and other specific standards.

Luceri trim

Complete with optic housing and trim.
Trim available in white, black or grey.

Professional mirror optic with UGR Luminance Control <19 for office spaces with computer screens.

Installation brackets for an easy, tool-free installation on false ceilings of thicknesses between 1 and 25 mm.

Optional screens in transparent polycarbonate, easy to install, opal and prismoptic diffuser, with a 90 degree turn.

Wide beam symmetrical distribution.

Luceri trimless

2 available trims:
Sharp edge
Rounded edge

2 available optic housings.
Professional mirror optic with UGR Luminance Control <19 for office spaces with computer screens.

Comfort white optics.

Optics housings and trim to be ordered separately.

Optional screens in transparent polycarbonate, easy to install, opal and prismoptic diffuser, with a 90 degree turn.
Wide beam symmetrical distribution.

↳ LUCERI KADRO TRIMLESS

White XF 220/240Vac 50/60Hz supplied separately. MacAdam 1SDCM Life L80 (10K) 55000h CRI= 90



White XF

Fitting to be completed with installation frame.

▼ IP20 / ▲ IP44 screenless.
▼ IP20 / ▲ IP54 with screen.


COMFORT WHITE OPTICS

Fixed white							
W	Weight	Beam	CCT	Driver Flux			
max 54 W	1,70 kg	69°	3000 K	50 W	3969 lm	Code	
				35 W	2279 lm		BB10300
				50 W	4232 lm		BB10400
				35 W	2438 lm		



TW®
Artemide Tunable White



Tunable white							
W	CRI	Weight	Beam	CCT	Flux		
17 W	=80	1,70 kg	60°	2700 K-	1381 lm	Code	
				6500 K	1596 lm		BB10500



220/240Vac 50/60Hz electronic ballast included



FACETED MIRROR OPTICS

Fixed white							
W	Weight	Beam	CCT	Driver Flux			
max 54 W	1,70 kg	72°	3000 K	50 W	4388 lm	Code	
				35 W	2520 lm		BB11000
				50 W	4679 lm		BB11100
				35 W	2695 lm		



TW®
Artemide Tunable White

Tunable white							
W	CRI	Weight	Beam	CCT	Flux		
16 W	=80	1,70 kg	56°	2700 K-	1530 lm	Code	
				6500 K	1770 lm		BB11200



220/240Vac 50/60Hz electronic ballast included

Installation frame

Installation frame		Code
	Sharp edge trim	M240700
	Support with rounded edge trim	M240800
	Accessory for ceiling installation	M239920

↳ LUCERI KADRO TRIM

White Black Grey XF 220/240Vac 50/60Hz supplied separately. MacAdam 1SDCM Life L80 (10K) 55000h CRI= 90

White Black Grey XF



01 04 05

Fitting to be completed with installation frame.

▼ IP20 / ▲ IP44 screenless.
▼ IP20 / ▲ IP54 with screen.


FACETED MIRROR OPTICS

Fixed white							
W	Weight	Beam	CCT	Driver Flux			
max 54 W	1,70 kg	72°	3000 K	50 W	4388 lm	Code	
				35 W	2519 lm		BB120. 01/04
				50 W	4679 lm		BB121. 01/04
				35 W	2695 lm		05



TW®
Artemide Tunable White

Tunable white							
W	CRI	Weight	Beam	CCT	Flux		
17 W	=80	1,70 kg	56°	2700 K-	1530 lm	Code	
				6500 K	1770 lm		BB122. 01/04
							05




220/240Vac 50/60Hz electronic ballast included


Accessories

Accessories		Code
	Transparent screen in polycarbonate	M239300
	Opal screen in PMMA	M239400
	Prismoptic screen in polycarbonate	M239500

With screen


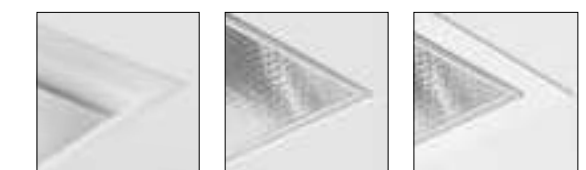


Screenless

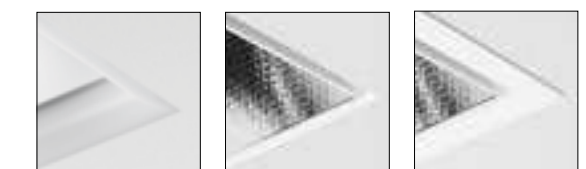

Driver	Vac	L _{mm}	W _{mm}	H _{mm}		
cc 50W 1400mA	220-240	165	43	30	1max	Undimmable
cc 50W 1400mA	220-240	153	41	32	1max	DALI 1-10 Push
cc 35W 700mA	220-240	103	67	21	1max	Undimmable
cc 35W 700mA	220-240	103	67	21	1max	DALI dimmable
cc 35W 700mA	220-240	103	67	21	1max	1-10 Push

Code	
DV1015	
DV1034	
DV1017	
M079200	
M079300	

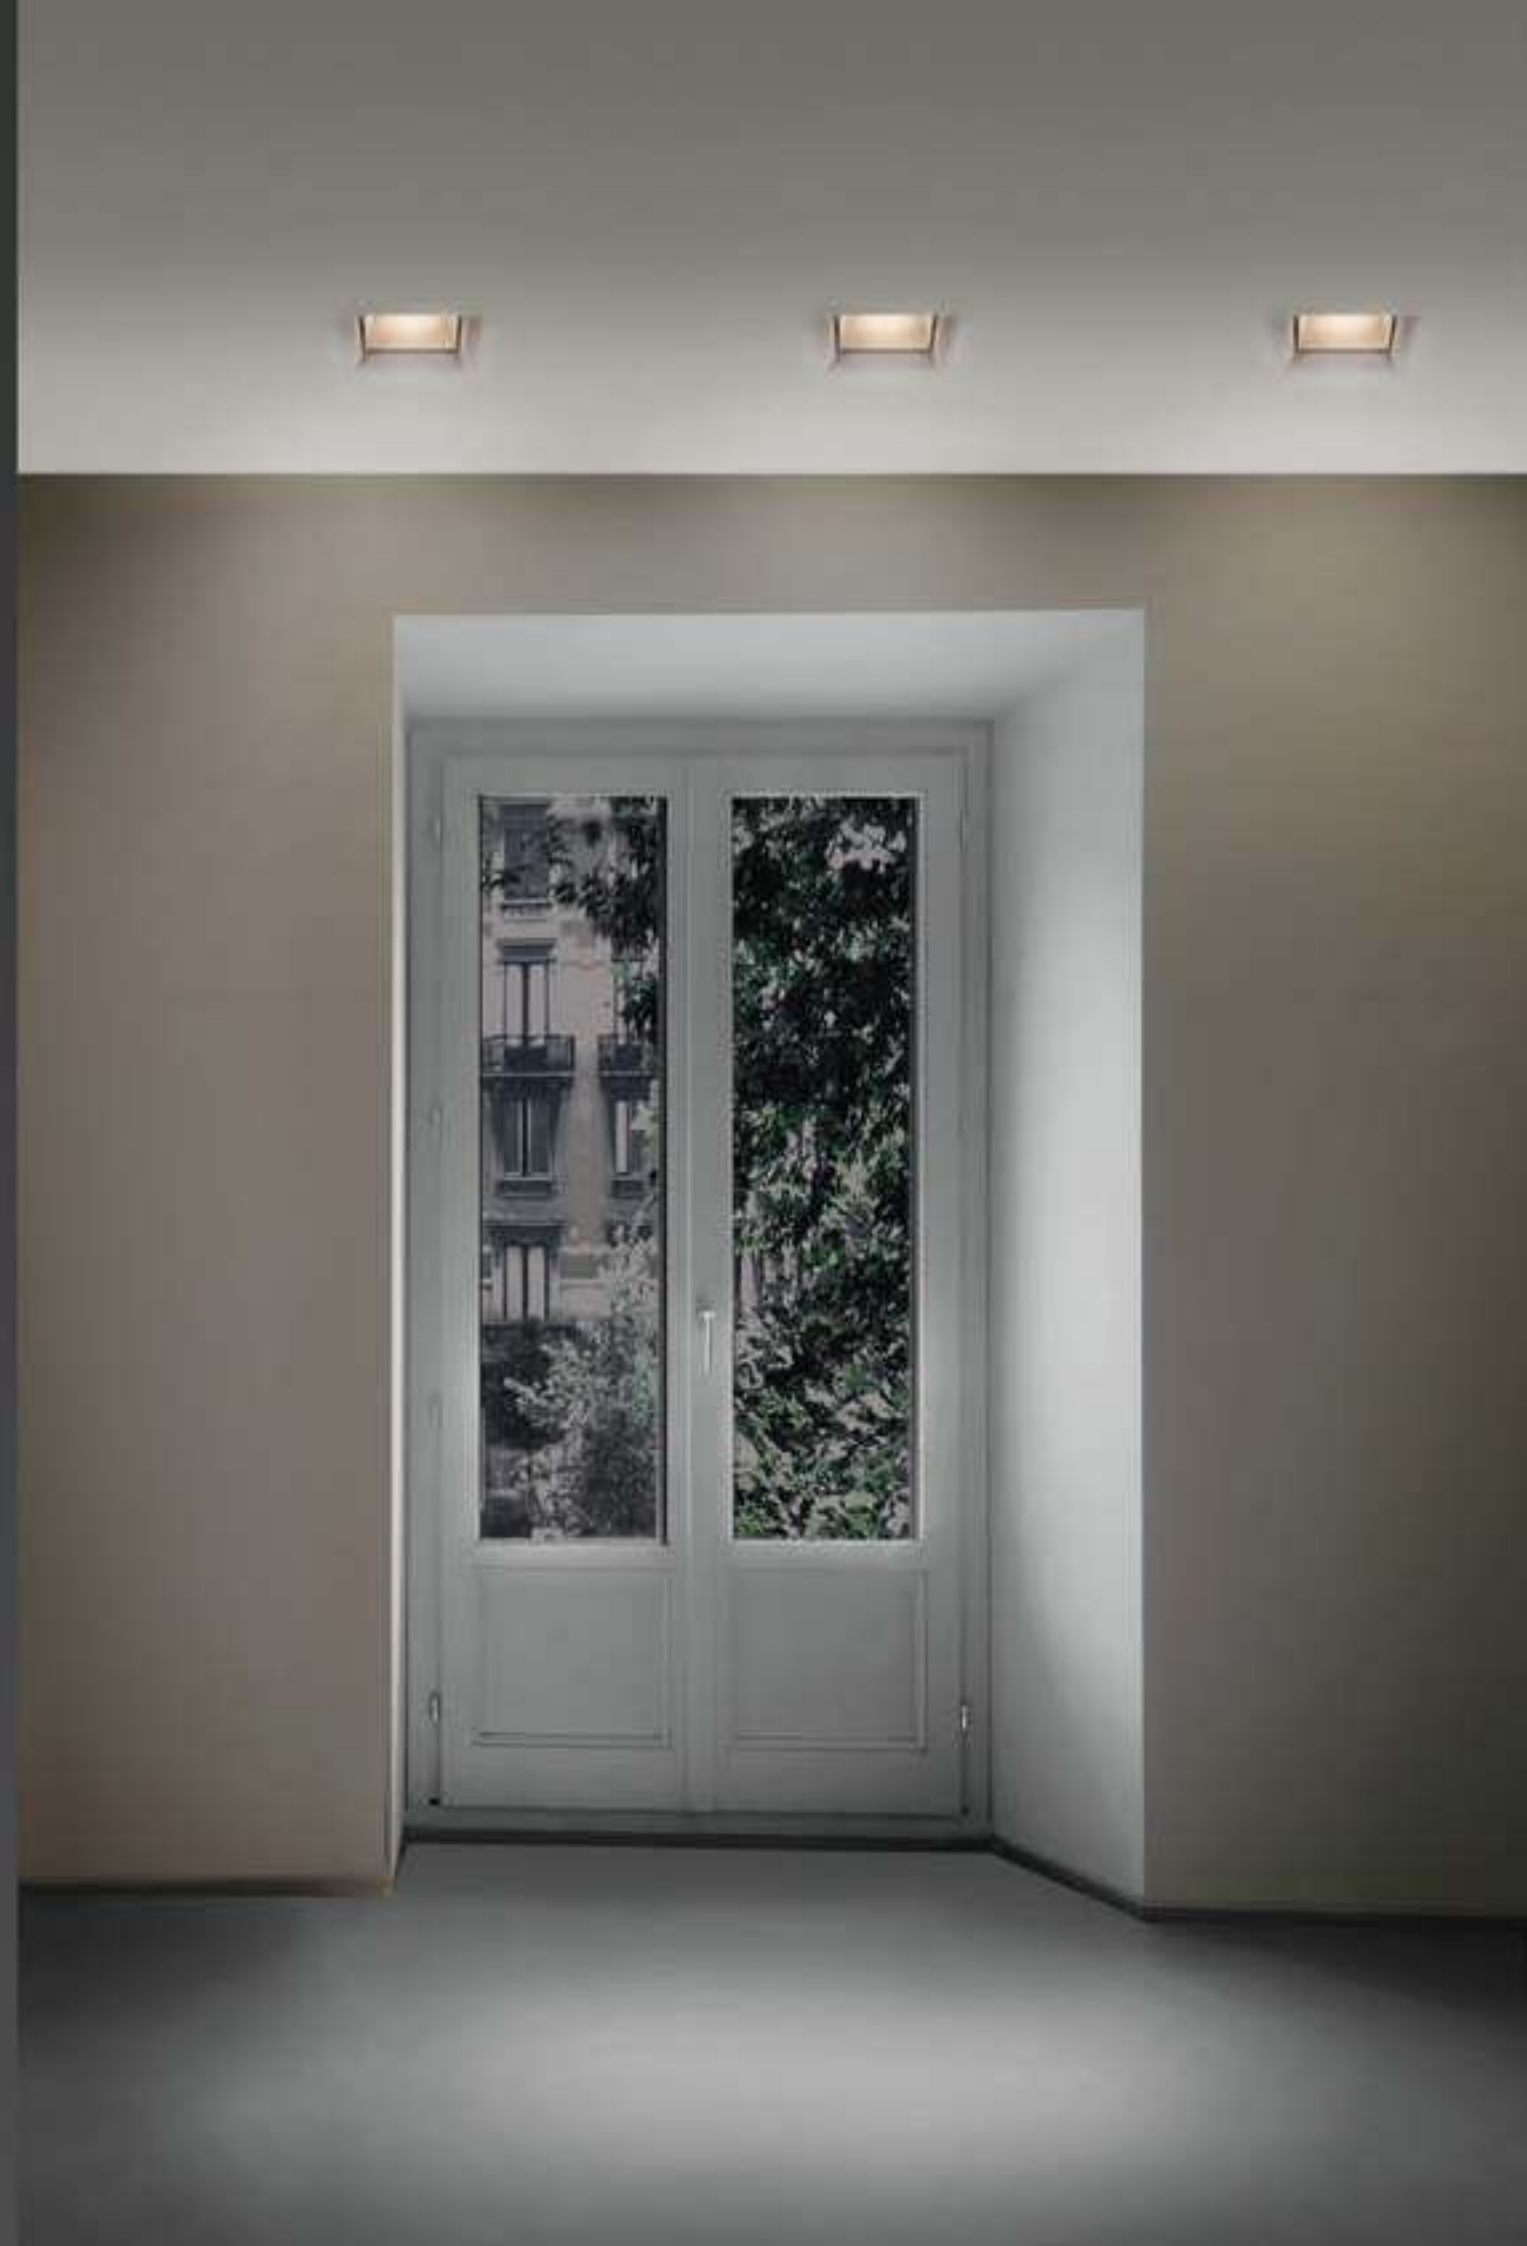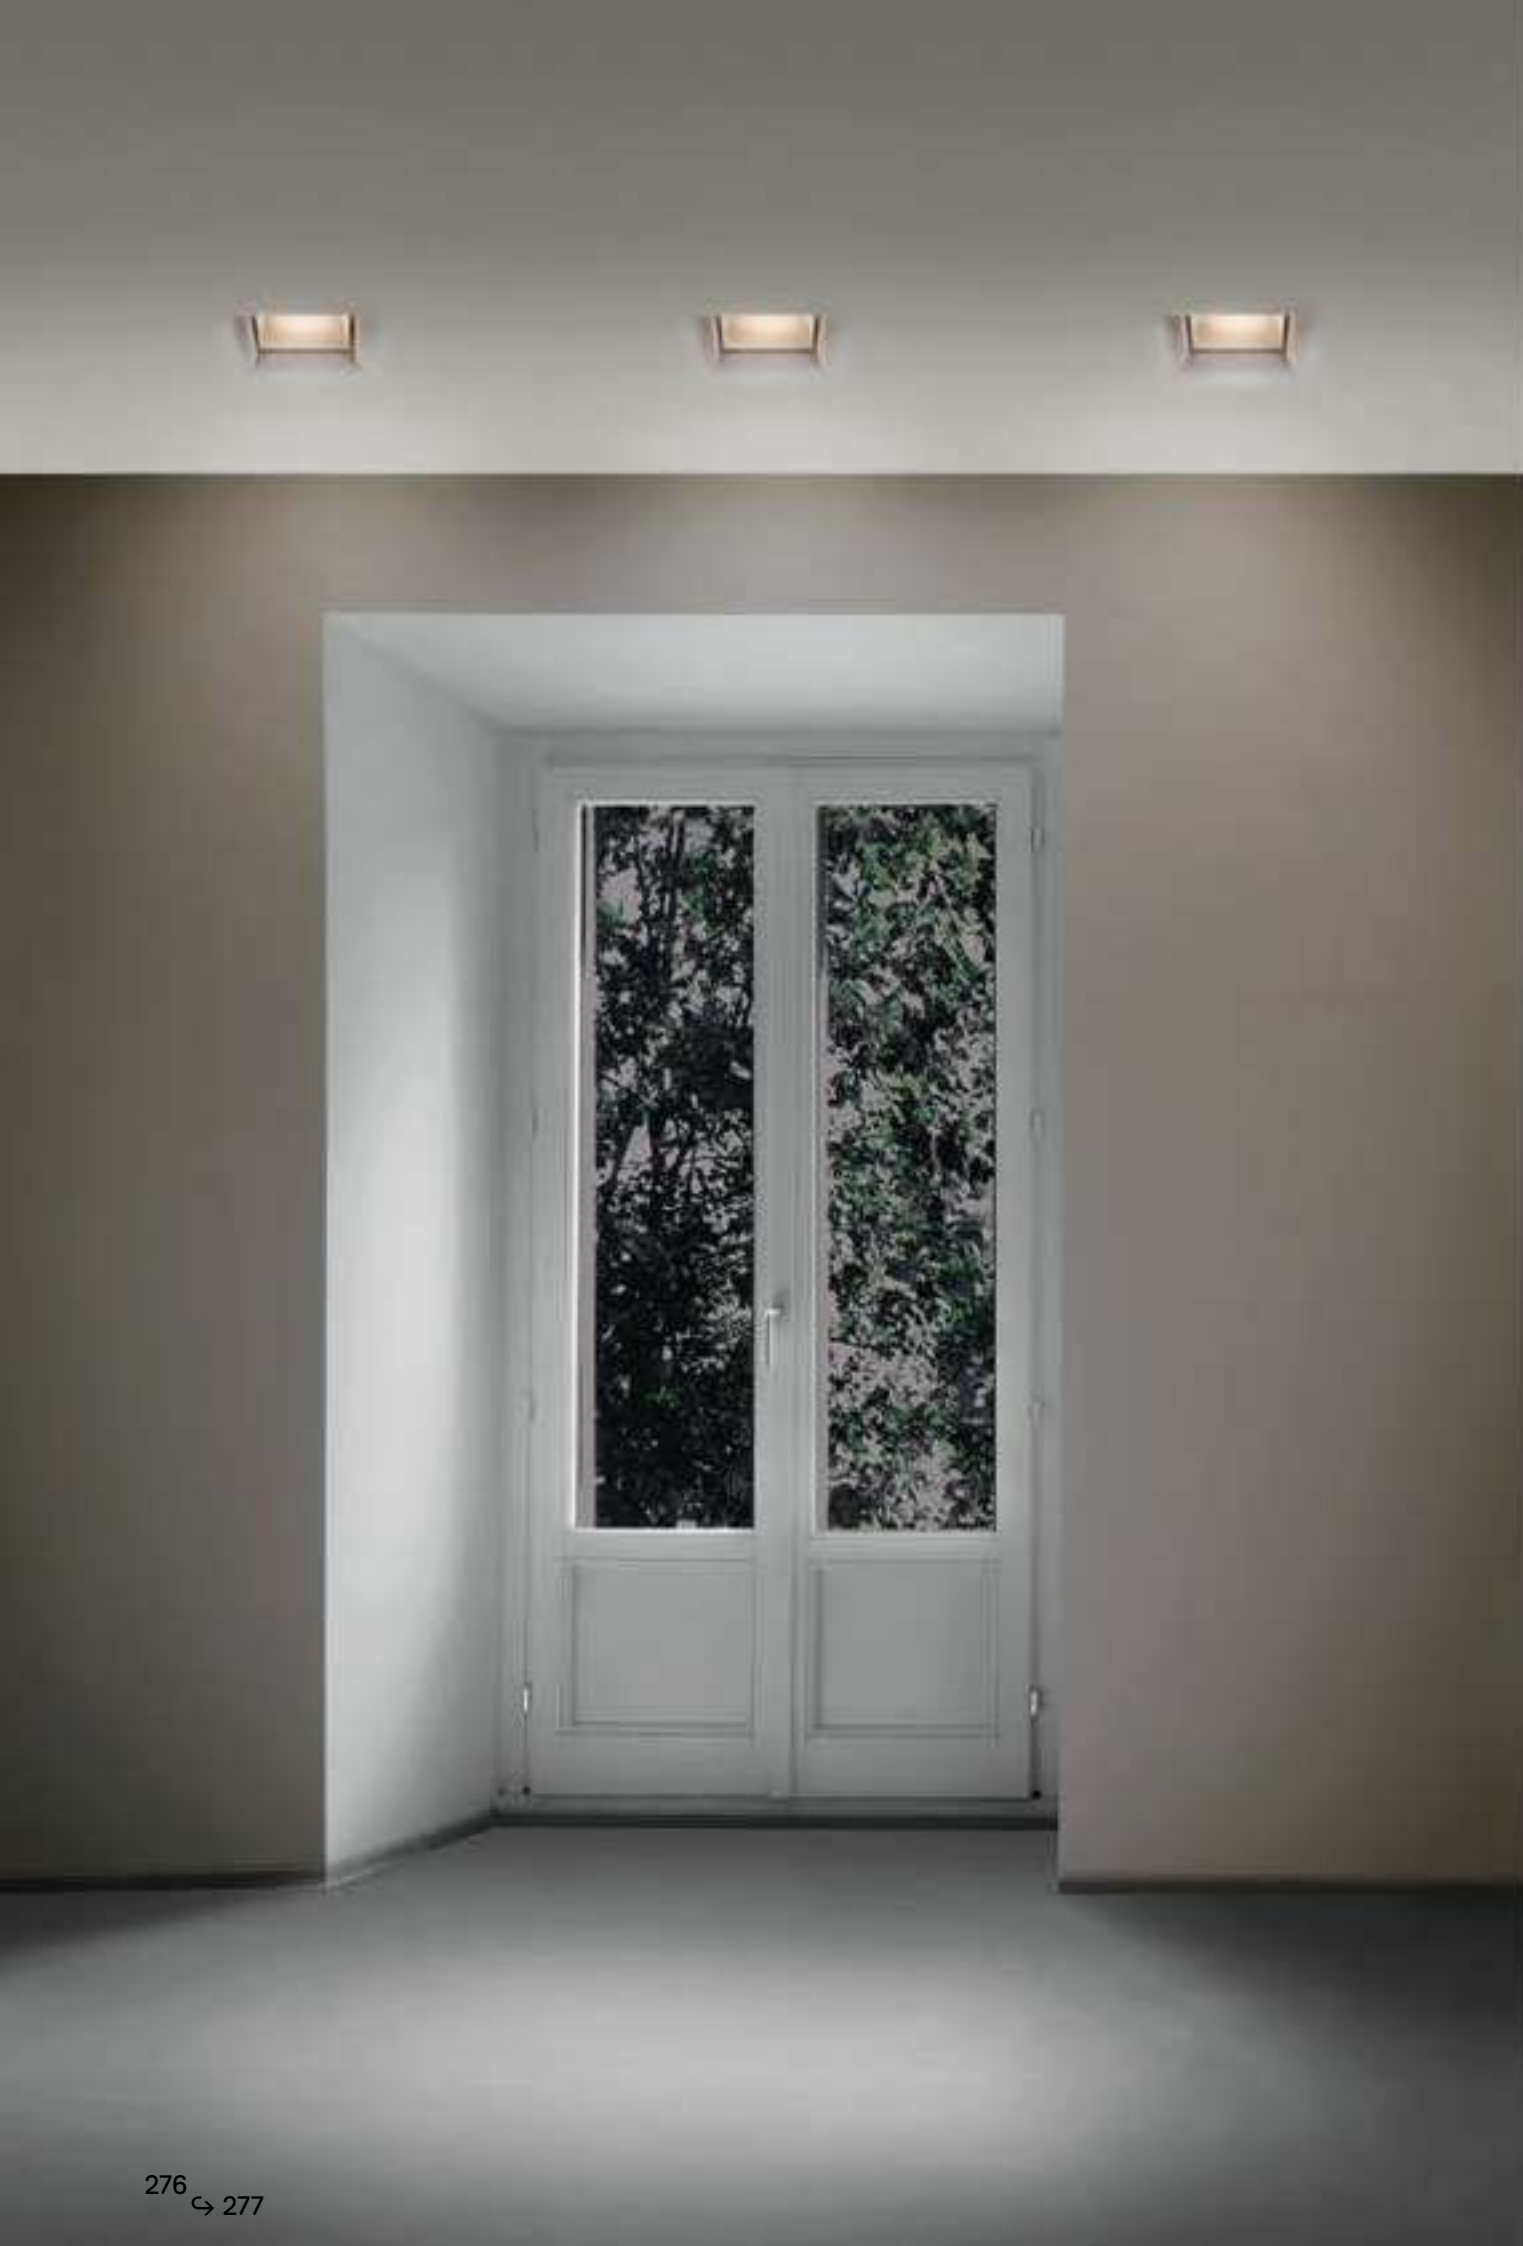

↪ PICTO RECESSED



White 01	Silver 05	F	WF	Driver 1200mA SELV supplied separately.	MacAdam 3SDCM Life L70 (6K) 50000h CRI =90	IP20
-------------	--------------	---	----	--	--	------




Picto Recessed				Code
W	Beam	Flux	CCT	
41 W	F 18°	3773 lm	3000K	AD601. 01/05
		3851 lm	4000K	AD641. 01/05
	WF 40°	3757 lm	3000K	AD602. 01/05
		3835 lm	4000K	AD642. 01/05



∅ 165 mm



Picto Recessed High Flux				Code
W	Beam	Flux	CCT	
60 W	F 17°	5507 lm	3000K	AD603. 01/05
		5672 lm	4000K	AD643. 01/05
	WF 41°	5515 lm	3000K	AD604. 01/05
		5680 lm	4000K	AD644. 01/05



Driver	Vac	L _{mm}	W _{mm}	H _{mm}		Code
cc 50W 1200mA	220-240	152	81	30	1max	Undimmable DV1012
cc 50W 1200mA	220-240	152	81	30	1max	DALI dimmable DV1011
cc 70W 1200mA	220-240	171	81	30	1max	Undimmable DV1014
cc 70W 1200mA	220-240	171	81	30	1max	DALI dimmable DV1013

Picto Recessed

Studio Artemide
↪ 2018

Set of fixed recessed downlight equipment using high efficiency LEDs

Available in one dimension with two different power ratings, each with two opening angles of the light beam (flood and wide flood).

Dali dimmable or non dimmable driver not included.

Available in two finishes: painted white or silver.

Technical features of the equipment compliant with EN60598-1.

ENEC certification.



For further information on Picto recessed
↪ visit artemide.com



Parabola

↪ 2010

Light fixture with high-performance LED light sources.
Consists of: frame, body, lens, fixing springs.
Frame in injection mould of aluminium.
Heat sink body in extruded aluminium.
Lens in polycarbonate with 3 different versions of beam.

Fixing springs in harmonic steel.
Electrical connection to the driver by means of a FEP-
FEP cable and a terminal board.
Technical features of light fixtures in compliance with
EN60598-1.



For further information on Parabola
↪ visit artemide.com

↳ PARABOLA 80


White Black Silver XF


06 04 02


Driver 350 mA SELV supplied separately.


MacAdam 3SDCM
 Life L70 (6K) > 60000h
 CRI = 90


IP40


Round					Fixed	
W	Weight	Beam	Flux	CCT	Code	
12 W	0,28 kg	XF 52°	1095 lm	2700 K	NL1906340Y0.06/04/02	
			1145 lm	3000 K	NL1906340K0.06/04/02	
			1139 lm	3000 K	NL1906360K0.06/04/02	
		XF 64°	1090 lm	2700 K	NL1906360Y0.06/04/02	
			1139 lm	3000 K	NL1906360K0.06/04/02	
			1130 lm	2700 K	NL1906380Y0.06/04/02	
XF 76°	1130 lm	2700 K	NL1906380Y0.06/04/02			
	1181 lm	3000 K	NL1906380K0.06/04/02			

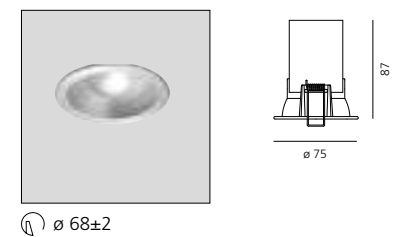

Round					Adjustable	
W	Weight	Beam	Flux	CCT	Code	
12 W	0,28 kg	XF 52°	1095 lm	2700 K	NL1906440Y0.06/04/02	
			1145 lm	3000 K	NL1906440K0.06/04/02	
			1139 lm	3000 K	NL1906460K0.06/04/02	
		XF 64°	1090 lm	2700 K	NL1906460Y0.06/04/02	
			1139 lm	3000 K	NL1906460K0.06/04/02	
			1130 lm	2700 K	NL1906480Y0.06/04/02	
XF 76°	1130 lm	2700 K	NL1906480Y0.06/04/02			
	1181 lm	3000 K	NL1906480K0.06/04/02			

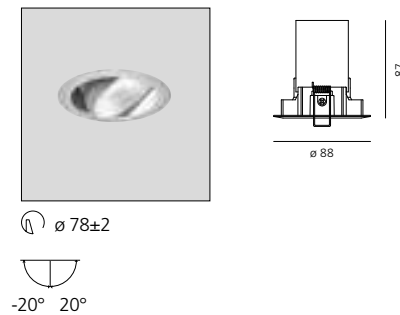

Square					Fixed	
W	Weight	Beam	Flux	CCT	Code	
12 W	0,28 kg	XF 52°	1095 lm	2700 K	NL1907140Y0.06/04/02	
			1145 lm	3000 K	NL1907140K0.06/04/02	
			1139 lm	3000 K	NL1907160K0.06/04/02	
		XF 64°	1090 lm	2700 K	NL1907160Y0.06/04/02	
			1139 lm	3000 K	NL1907160K0.06/04/02	
			1130 lm	2700 K	NL1907180Y0.06/04/02	
XF 76°	1130 lm	2700 K	NL1907180Y0.06/04/02			
	1181 lm	3000 K	NL1907180K0.06/04/02			

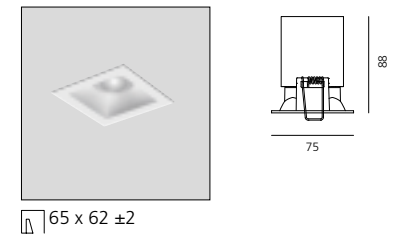

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	n°device	Code
cc 15W 350mA	220-240	156	52	26	1 max	Undimmable M077500
cc 16W 350mA	220-240	156	52	26	1 max	DALI/PUSH/0-10V dimmable M077401
cc 19W 350mA	220-240	164	38	25	1 max	DALI/PUSH dimmable DV1003

↳ PARABOLA 100


White Black Silver XF


06 04 02


Driver 500 mA SELV supplied separately.


MacAdam 3SDCM
 Life L70 (6K) > 60000h
 CRI = 90


IP40


Round					Fixed	
W	Weight	Beam	Flux	CCT	Code	
17 W	0,50 kg	XF 50°	1493 lm	2700 K	NL1907240Y0.06/04/02	
			1560 lm	3000 K	NL1907240K0.06/04/02	
			1467 lm	2700 K	NL1907260Y0.06/04/02	
		XF 64°	1467 lm	2700 K	NL1907260Y0.06/04/02	
			1533 lm	3000 K	NL1907260K0.06/04/02	
			1477 lm	2700 K	NL1907280Y0.06/04/02	
XF 76°	1477 lm	2700 K	NL1907280Y0.06/04/02			
	1544 lm	3000 K	NL1907280K0.06/04/02			

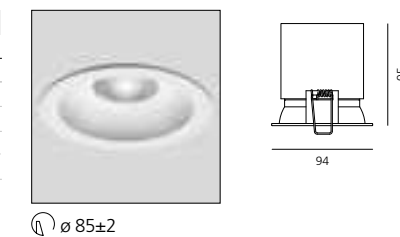

Round					Adjustable	
W	Weight	Beam	Flux	CCT	Code	
17 W	0,50 kg	XF 50°	1493 lm	2700 K	NL1907440Y0.06/04/02	
			1560 lm	3000 K	NL1907440K0.06/04/02	
			1467 lm	2700 K	NL1907460Y0.06/04/02	
		XF 64°	1467 lm	2700 K	NL1907460Y0.06/04/02	
			1533 lm	3000 K	NL1907460K0.06/04/02	
			1477 lm	2700 K	NL1907480Y0.06/04/02	
XF 76°	1477 lm	2700 K	NL1907480Y0.06/04/02			
	1544 lm	3000 K	NL1907480K0.06/04/02			

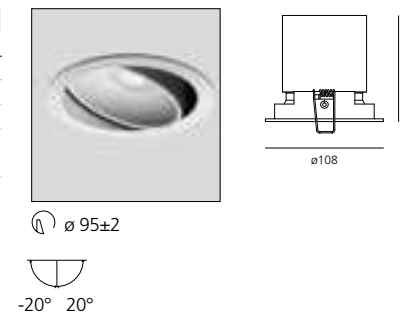

Square					Fixed	
W	Weight	Beam	Flux	CCT	Code	
17 W	0,50 kg	XF 50°	1493 lm	2700 K	NL1907340Y0.06/04/02	
			1560 lm	3000 K	NL1907340K0.06/04/02	
			1467 lm	2700 K	NL1907360Y0.06/04/02	
		XF 64°	1467 lm	2700 K	NL1907360Y0.06/04/02	
			1533 lm	3000 K	NL1907360K0.06/04/02	
			1477 lm	2700 K	NL1907380Y0.06/04/02	
XF 76°	1477 lm	2700 K	NL1907380Y0.06/04/02			
	1544 lm	3000 K	NL1907380K0.06/04/02			

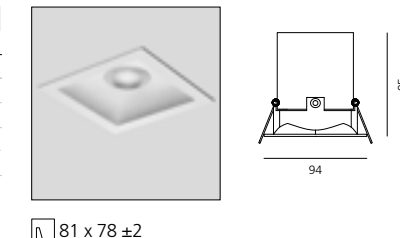

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	n°device	Code
cc 20W 500mA	220-240	125	38	23	1 max	Undimmable M077600
cc 25W 500mA	220-240	156	52	26	1 max	DALI/PUSH/0-10V dimmable M077401
cc 25W 500mA	220-240	164	38	25	1 max	DALI/PUSH dimmable DV1003




Le Roland Garros Restaurant, Paris - FR



Ibis Hotel, Heilbronn - DE



For further information on Rastaf
↳ visit artemide.com

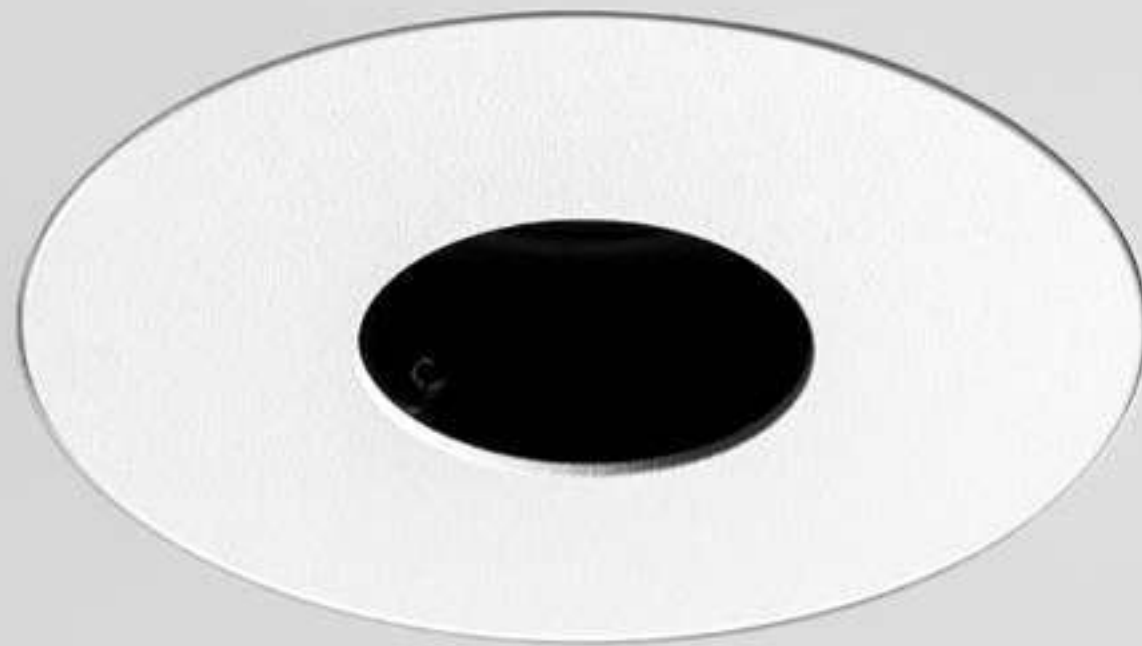

Rastaf




Studio Artemide

↳ 2000




Series of LED recessed luminaires.
Fixed and adjustable versions available.
No accessories needed in the IP44 fixed version
(IP44 from below)
Tilt angle up to 45°.
White steel recessing plate available separately,
for 2 or 3 downlighters.
Range of recessing accessories available.
Separate power supply.
Compliant with EN60598-1 standard
and other specific standards.


↪ RASTAF

White 	F 	WF 	Driver 350 mA SELV supplied separately.	MacAdam 3SDCM Life L70 (6K) 50000h CRI =90	▼ IP20 / ▲ IP44 ⊕ 72 mm
--	--	---	--	--	-------------------------------


Fixed optic					Code
W	Weight	Beam	Flux	CCT	
12 W	0,32 kg	F 20°	391 lm	2700 K	M038200
			408 lm	3000 K	M038500
		WF 32°	311 lm	2700 K	M038300
			324 lm	3000 K	M038700

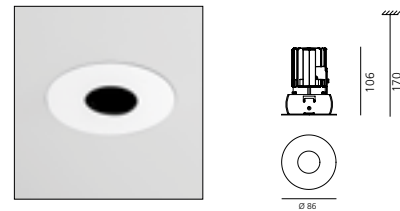


Adjustable optic					Code
W	Weight	Beam	Flux	CCT	
12 W	0,32 kg	F 20°	391 lm	2700 K	M038205
			408 lm	3000 K	M038505
		WF 32°	311 lm	2700 K	M038305
			324 lm	3000 K	M038705

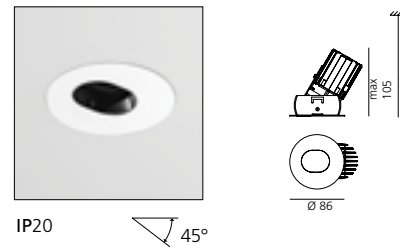






LED (GU10)		Fix
Weight	Code	
230-240V	0,15 kg	M047900






Adjustable	
Code	
M047905	



Accessories		Code
	Recessing ring for mineral fiber false ceilings for Rastaf 86 fixed or adjustable. ⌀ 78 mm	M080018
	Aluminium recessing ring for Rastaf 86 fixed or adjustable. ⌀ 78 mm	M080028
	Steel recessing ring with springs for plasterboard false ceilings for Rastaf 86 fixed or adjustable.	M080038
	Steel recessing plate for 2 spots for Rastaf 86 fixed or adjustable. ⌀ 86 125 275 260x 78 mm	M017300
	Steel recessing plate for 3 spots for Rastaf 86 fixed or adjustable. ⌀ 86 125 425 410x 78 mm	M017400

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	Code			
cc 15W	350mA	220-240	125	38	23	1max	Non dimmable	M077500
cc 16W	350mA	220-240	156	52	26	1max	DALI/PUSH/0-10V dimmable	M077401

Rastafante Larte - Milano (Italy)
 Interior project: Lorenzo Morganti, Grisoni Service
 Photo: Federico Villa

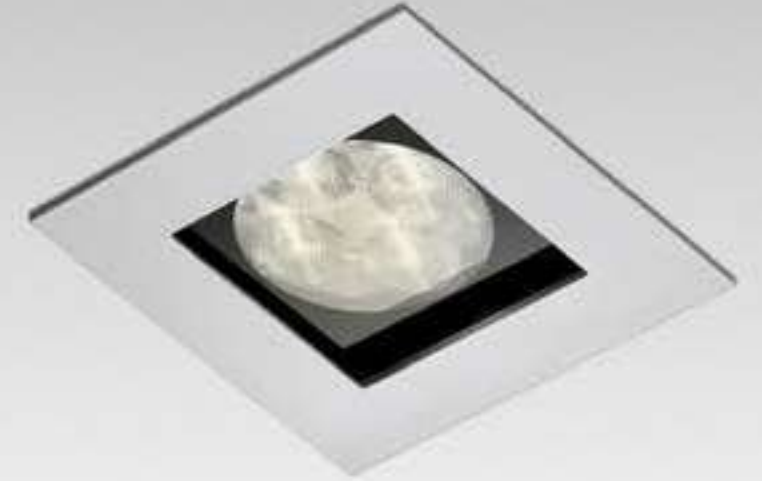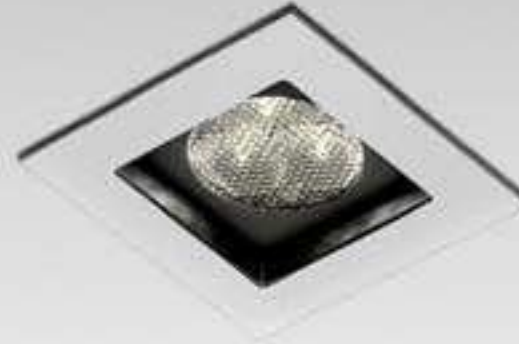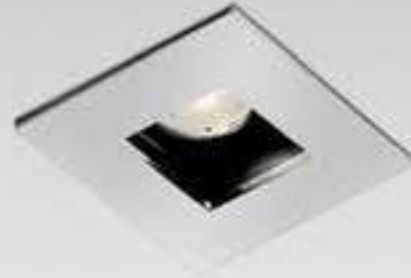

Zeno Up

Jan Van Lierde

↪ 2011

Light fixture with high-performance LED light sources.

Low recessed depth.

Consists of: body, frame, black silkscreened tempered glass, fixing springs.

Body in EN AB44100 aluminium, silicone gaskets.

Frame in aluminium.

Black silkscreened tempered glass, 4mm-thick.

Fixing springs in harmonic steel.

Power connection to the mains by means of a H05RN-r cable and IP68 electrical terminal board, supplied with the fixture.



For further information on Zeno Up
↪ visit artemide.com

Glass surface temperature lower than 40°C.

Fixed optics. PMMA lenses in 2 different versions of beams.

Painted die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, antioxydant primer, polyester paint.

Technical features of light fixtures in compliance with EN60598-1.



**Artemide
App**

↪ on request
Only for Zeno Up 4




Yacht San Lorenzo SL104

↪ ZENO UP

White 06	Silver 02	Chrome 03	S	F	Driver 500/700mA supplied separately.	MacAdam4SDCM Life L70 (6K) 39300h CRI =80	IP65 CE
-------------	--------------	--------------	---	---	--	---	------------

ZENO UP 2

W	Weight	Beam	Flux	CCT	Code
2 W	0,12 kg	S 13°	128 lm	3000 K	NL1708410K0.06/02
		F 24°	133 lm	3000 K	NL1708425K0.06/02




38 x 36

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	IP	n°device	Code
cc 14W	700mA	220-240	79	38	25	67 1-5max	Undimmable DV3003
cc 10W	700mA	220-240	75	38	25	20 1-4max	Undimmable NL19035
cc 25W	700mA	220-240	164	38	25	20 1-9max	DALI/PUSH dimmable DV1003
cc 38W	700mA	220-240	185	35	33	67 1-12max	DALI DV1042
*cc 28W	700mA	220-240	156	52	26	20 1-7max	DALI/PUSH/1-10V/0-10V dimmable *M077401

*Verify driver / recessed hole's dimensions.

ZENO UP 3

W	Weight	Beam	Flux	CCT	Code
5 W	0,21 kg	S 16°	269 lm	3000 K	NL1708510K0.06/02/03
		F 24°	280 lm	3000 K	NL1708525K0.06/02/03




52 x 56

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	IP	n°device	Code
cc 14W	500mA	220-240	79	38	25	67 1-2max	Undimmable DV3002
cc 28W	500mA	220-240	120	38	25	67 3-4max	Undimmable DV1039
cc 10W	500mA	220-240	22	110	19	27 1max	Undimmable NL10941
cc 25W	500mA	220-240	164	38	25	20 1-4max	DALI/PUSH dimmable DV1003
cc 28W	500mA	220-240	185	35	33	67 1-4max	DALI DV1042
*cc 20W	500mA	220-240	156	52	26	20 1-4max	DALI/PUSH/1-10V/0-10V dimmable *M077401

*Verify driver / recessed hole's dimensions.

ZENO UP 4

W	Weight	Beam	Flux	CCT	Code
6,5 W	0,34 kg	S 10°	364 lm	3000 K	NL1708610K0.06/02/03
		F 30°	376 lm	3000 K	NL1708625K0.06/02/03



79 x 79

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	IP	n°device	Code
cc 14W	500mA	220-240	79	38	25	67 1-2max	Undimmable DV3002
cc 28W	500mA	220-240	120	38	25	67 3-4max	Undimmable DV1039
cc 10W	500mA	220-240	22	110	19	27 1max	Undimmable NL10941
cc 25W	500mA	220-240	164	38	25	20 1-4max	DALI/PUSH dimmable DV1003
cc 28W	500mA	220-240	185	35	33	67 1-3max	DALI DV1042
*cc 20W	500mA	220-240	156	52	26	20 1-4max	DALI/PUSH/1-10V/0-10V dimmable *M077401

*Verify driver / recessed hole's dimensions.



↳ ZENO UP FROSTED

White	XF	Driver 500/700mA supplied separately.	MacAdam 4SDCM Life L70 (6K)> 39300h CRI = 80	IP40 CE
-------	----	--	--	------------



ZENO UP 4 FROSTED

W	CRI	Weight	Beam	Flux	CCT	Code
10 W	=80	0,30 kg	XF	464 lm	3000K	NL17092K0





Ø103

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	IP	n°device	Code
cc 20W	700mA	220-240	125	38	23	20 1max	Undimmable NL19036
cc 25W	700mA	220-240	164	38	25	20 1-2max	DALI/PUSH dimmable DV1003
cc 28W	700mA	220-240	156	52	26	20 1-2max	DALI/PUSH/1-10V/0-10V dimmable M077401

ZENO UP 3 FROSTED

W	CRI	Weight	Beam	Flux	CCT	Code
5 W	=80	0,30 kg	XF	138 lm	3000K	NL17090K0



Ø70

Driver	Vac	L _{mm}	W _{mm}	H _{mm}	IP	n°device	Code
cc 10W	500mA	220-240	22	110	19	20 1max	Undimmable NL10941
cc 25W	500mA	220-240	164	38	25	20 1-2max	DALI/PUSH dimmable DV1003
cc 28W	500mA	220-240	156	52	26	20 1-2max	DALI/PUSH/1-10V/0-10V dimmable M077401

Zeno Up Frosted

Jan Van Lierde

↳ 2011

Light fixture with high-performance LED light sources.

Consists of: frame, body, fixing springs.

Frame in frosted opal glass, 4mm thick.

Body in injection mould of aluminium.

Fixing springs in harmonic steel.

Electrical connection to the driver by means of a FROR cable and a terminal board.


Technical features of light fixtures in compliance with EN60598-1.



For further information on Zeno Up Frosted
↳ visit artemide.com



Professional Lighting

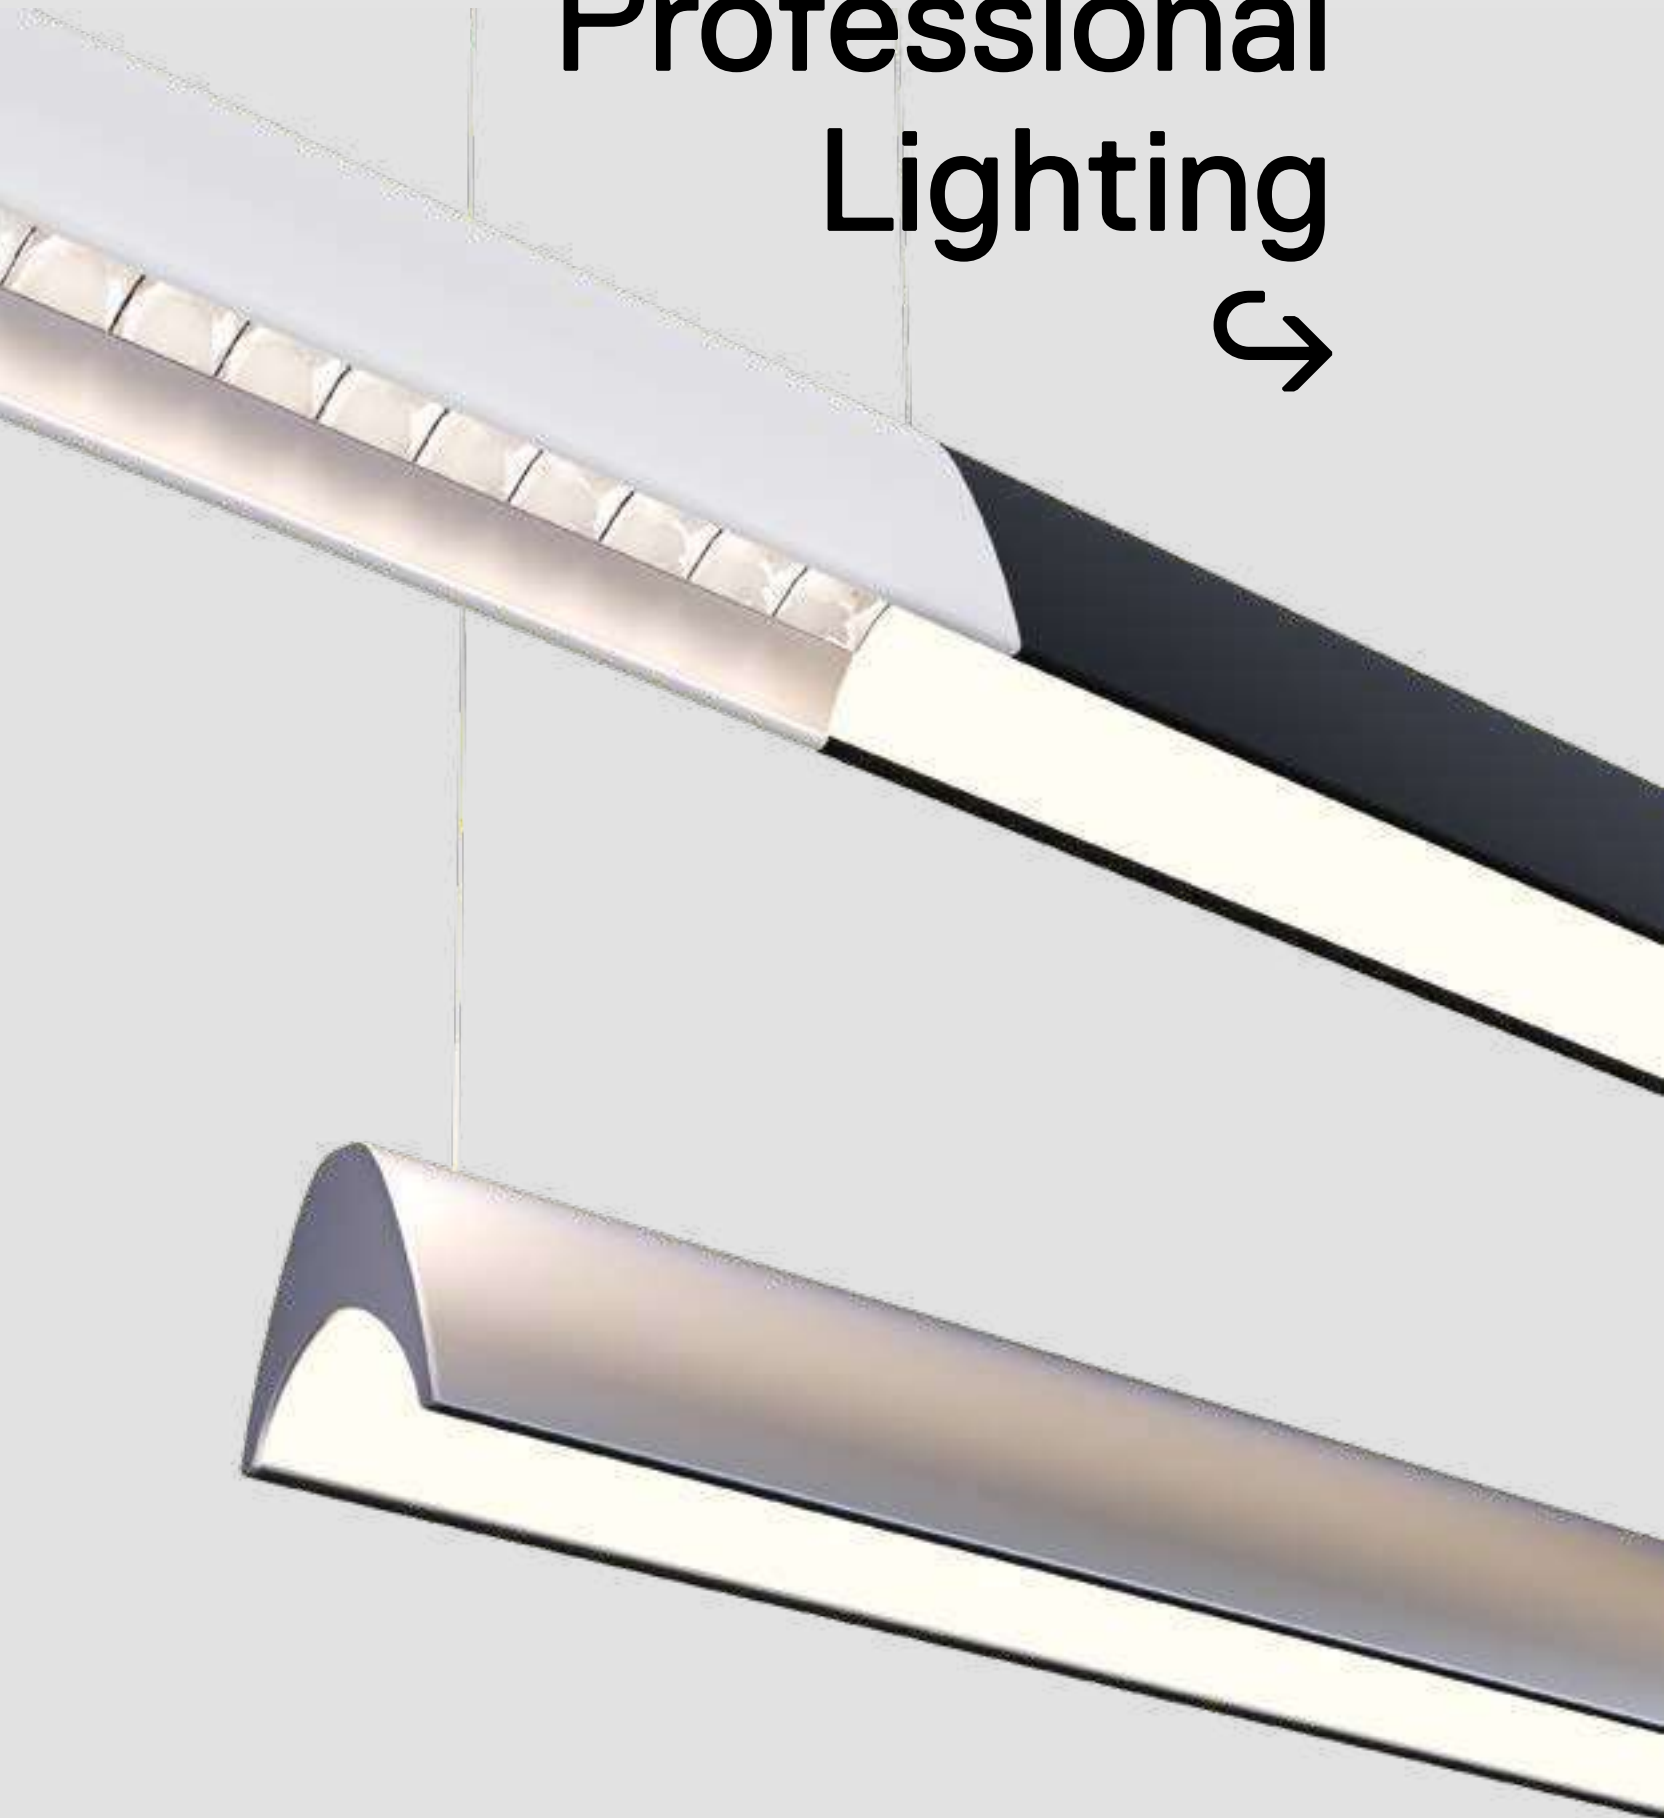

A.24 _____	298	
A.39 _____	368	
Algoritmo _____	408	
Smart Office _____		458
Series Y _____	464	
Calipso _____	486	
Grafa System _____		504
Pad System _____		516
Uglare 19 _____	522	
Chocolate Floor _____		524
Chocolate _____	530	
Surf System _____		532
Surf Wall _____	538	
Eggboard _____	540	
Silent Field 2.0 _____	566	
Nur 1618 Acoustic _____		572

A.24 is a fluid system

Carlotta de Bevilacqua
↳ 2017



For further information on A.24
↳ visit artemide.com

→ PATENT PENDING



A.24 System typologies



90° ANGLE MAGNETIC
301 x 301 mm



90° ANGLE DIFFUSED
301 x 301 mm



90° ANGLE SHARPING
301 x 301 mm



CIRCULAR DIFFUSED
RADIUS 561 mm (60° - 90°)
RADIUS 750 mm (45° - 90°)

CIRCULAR SHARPING
RADIUS 561 mm (60° - 90°)
RADIUS 750 mm (45° - 90°)

CIRCULAR MAGNETIC
RADIUS 561 mm (60° - 90°)
RADIUS 750 mm (45° - 90°)



LINEAR MAGNETIC TRACK
1176 - 2352 mm



LINEAR DIFFUSED
1176 - 2352 mm



LINEAR SHARPING
1176 - 2352 mm

A.24 Stand-alone typologies

LINEAR MAGNETIC TRACK
1176 - 2352 mm



LINEAR DIFFUSED
1176 - 2352 mm




LINEAR SHARPING
1176 - 2352 mm



CIRCULAR SHARPING
Ø 1122 mm
Ø 1500 mm

CIRCULAR DIFFUSED
Ø 1122 mm
Ø 1500 mm

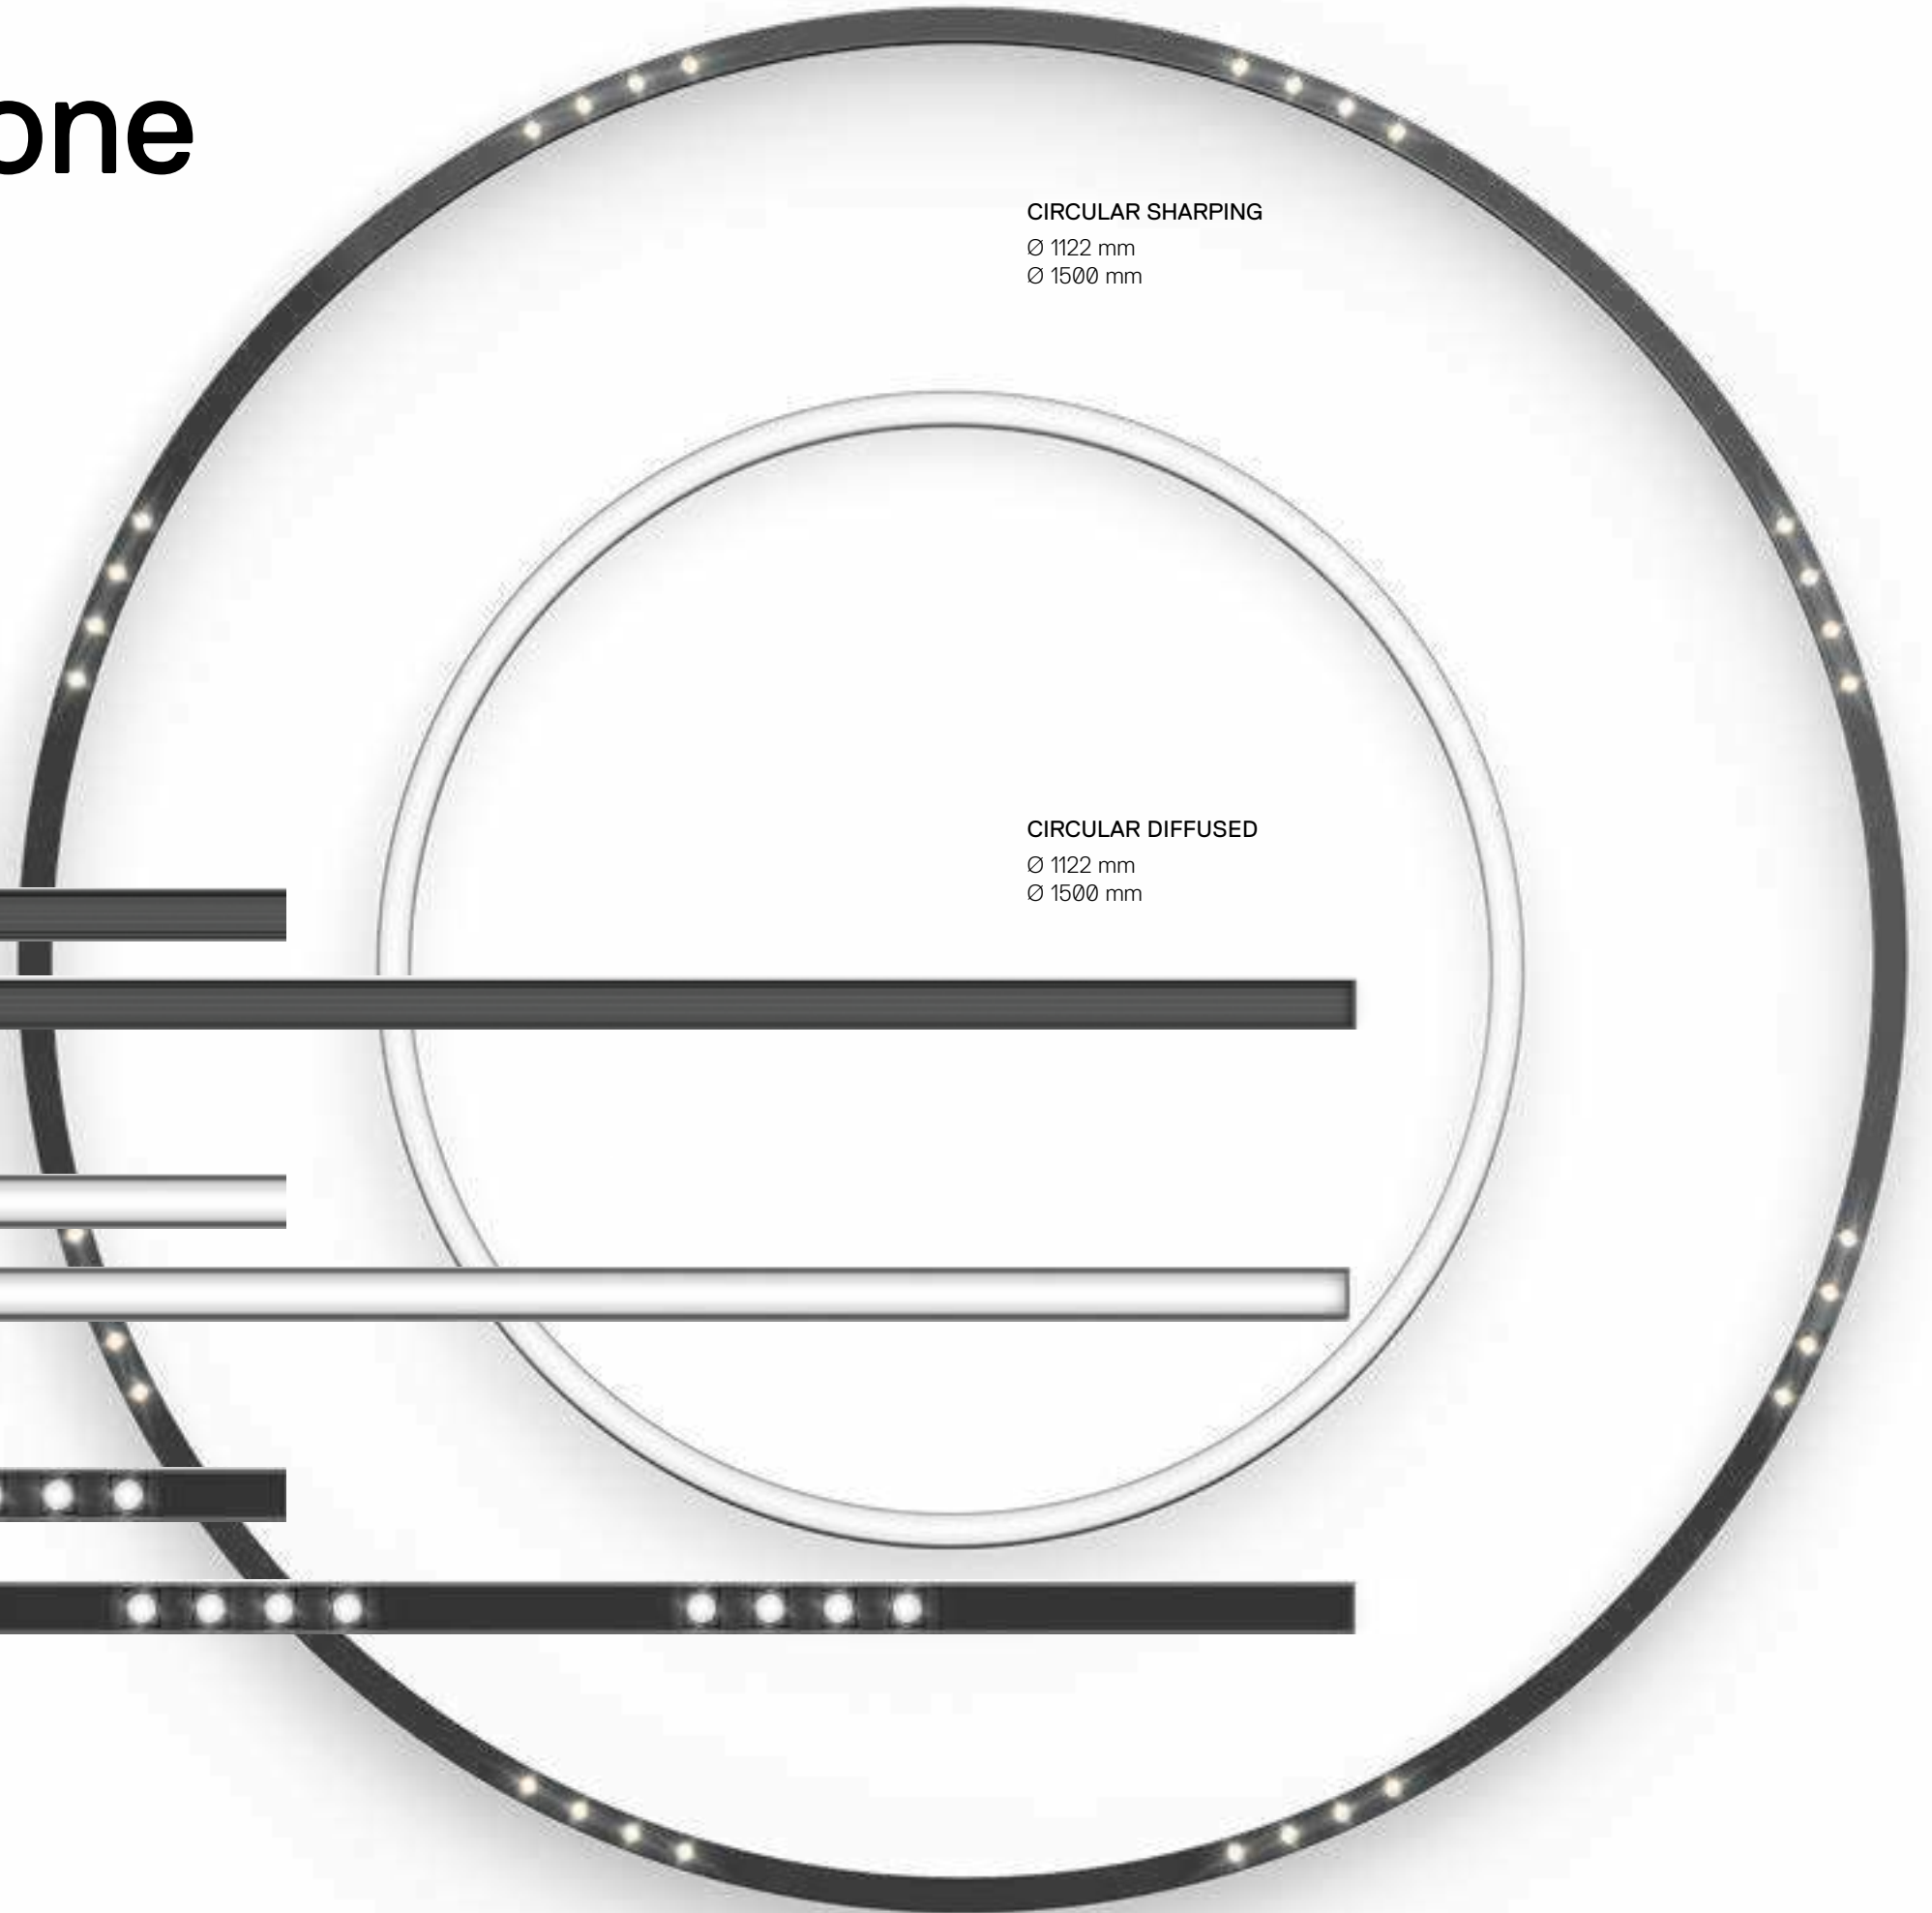



A.24/ Vector colors

White



01



Black



04



Bronze



20



Brushed Copper



18



Brushed Silver



15



→ Fast delivery

→ Delivery time on demand

A.24

color temperatures



→ Fast delivery



→ Delivery time on demand



A.24 is fully addressable


Each module and spot can be managed separately by Artemide App or by DALI control up to 64 IP Address



16W / 33W
MacAdam 2SDC
CRI=80
CCT: 2700K / 3000K / 4000K




10W
MacAdam 3SDC
CRI=90
CCT: 2700K / 3000K / 4000K




S 13° 540 lm
F 20° 584 lm
WF 28° 528 lm

26W
MacAdam 3SDC
CRI=90
CCT: 2700K / 3000K / 4000K





S 16° 1492 lm
F 22° 1465 lm
WF 32° 1596 lm

23W
MacAdam 3SDC
CRI=90
CCT: 2700K / 3000K / 4000K



S 22° 660 lm → WF 32° 1137 lm

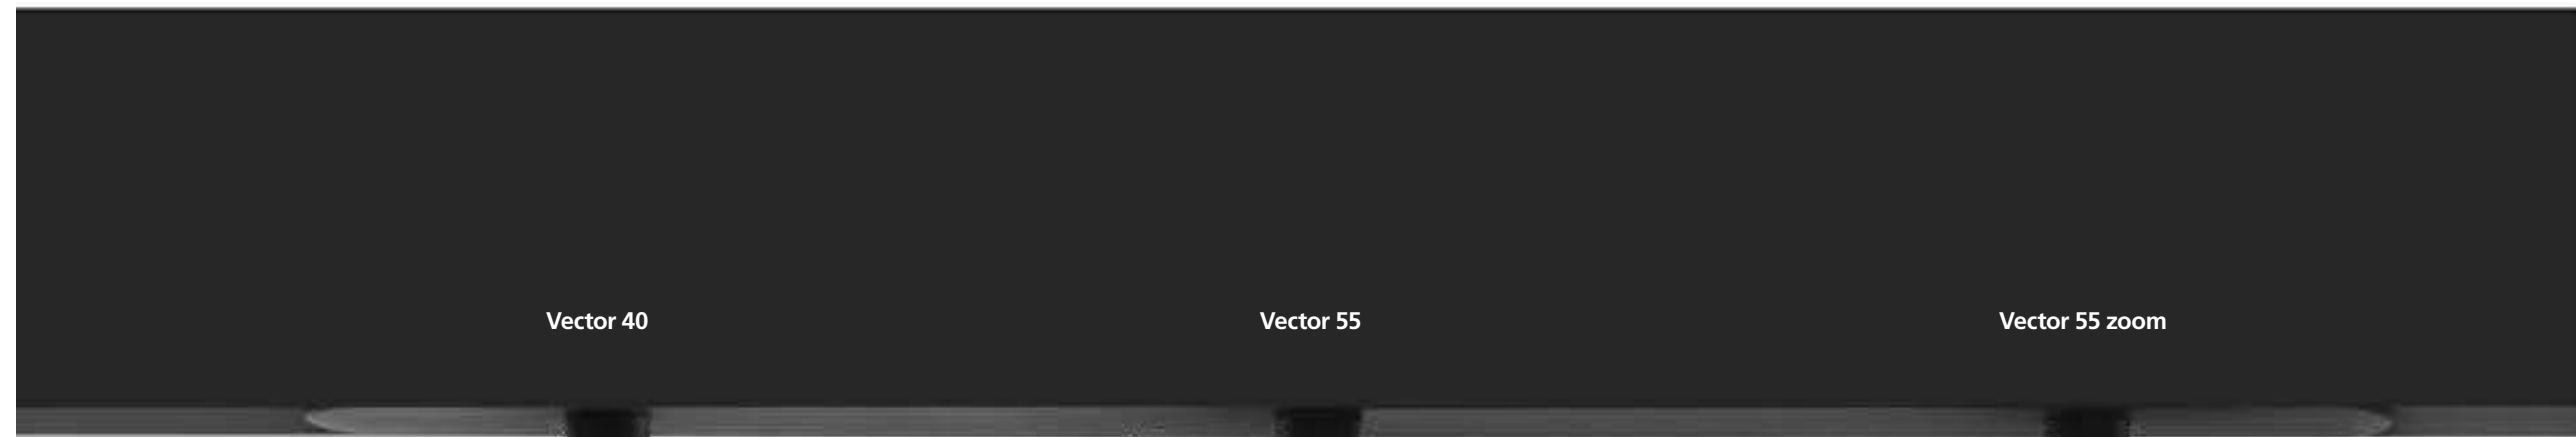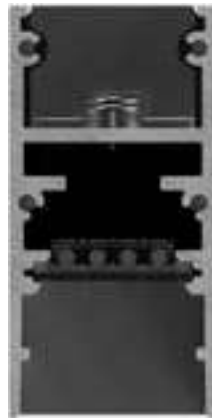

Vector 40

Vector 55

Vector 55 zoom



A.24
↪ Magnetic

A.24 Magnetic is Artemide SELV

a unique feature developed for a real
safe DALI interface.


D.art® is a technology patented by Artemide that overcomes the safety limits of the DALI signal in devices where the same signal is accessible to the touch.

The DALI signal is transformed to an “SELV” voltage ensuring the total safety of the appliance.

A.24 has been designed in compliance with international certifications.



16W / 33W
MacAdam 2SDC
CRI=80
CCT: 2700K / 3000K / 4000K

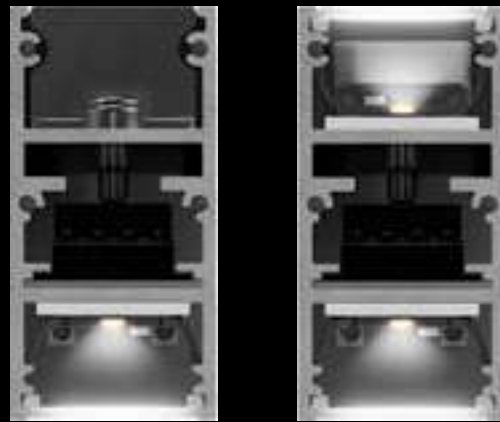


33W / 66W
MacAdam 2SDC
CRI=80
CCT: 2700K / 3000K / 4000K



A.24 Diffused



16W / 33W
MacAdam 2SDC
CRI=80
CCT: 2700K / 3000K / 4000K

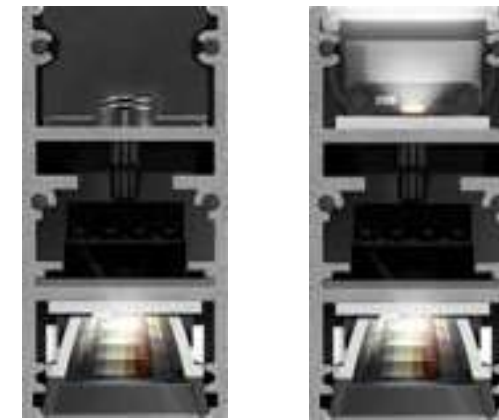

MacAdam 2SDC
CRI=90
CCT: 2700K / 3000K / 4000K



22W S 24° 22W XF 62° 46W S 24° 46W XF 62°

A.24 Sharping

RECESSED
TRIMLESS

CEILING

SUSPENSION

SUSPENSION WITH
INDIRECT EMISSION


A.24 space fittings



A.24 is balanced



NO TRACK'S ROTATION WHEN THE SPOTLIGHTS ARE TILTED IN THE SAME DIRECTION.
SUSPENSION CABLE NO STIFF STEMS.

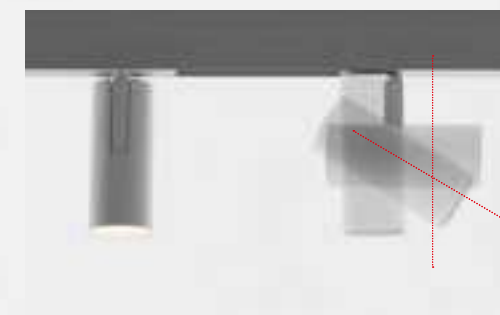



The junction arm is integrated with the spotlight body.

The center of balance is perfectly aligned with the track.

The pivoting and arm orientation are lockable.

A.24 / Vector infinite possibilities

- 1. A.24 Recessed diffused emission
- 2. Vector 40 magnetic
- 3. Vector 55 magnetic
- 4. A.24 Ceiling - wall diffused emission
- 5. A.24 Suspension sharpening emission 24°
- 6. A.24 Suspension diffused emission
- 7. A.24 Suspension sharpening emission 64°
- 8. Vector 55 zoom magnetic
- 9. Vector 40 /Unterlinden magnetic pendant
- 10. A.24 Suspension indirect diffused emission

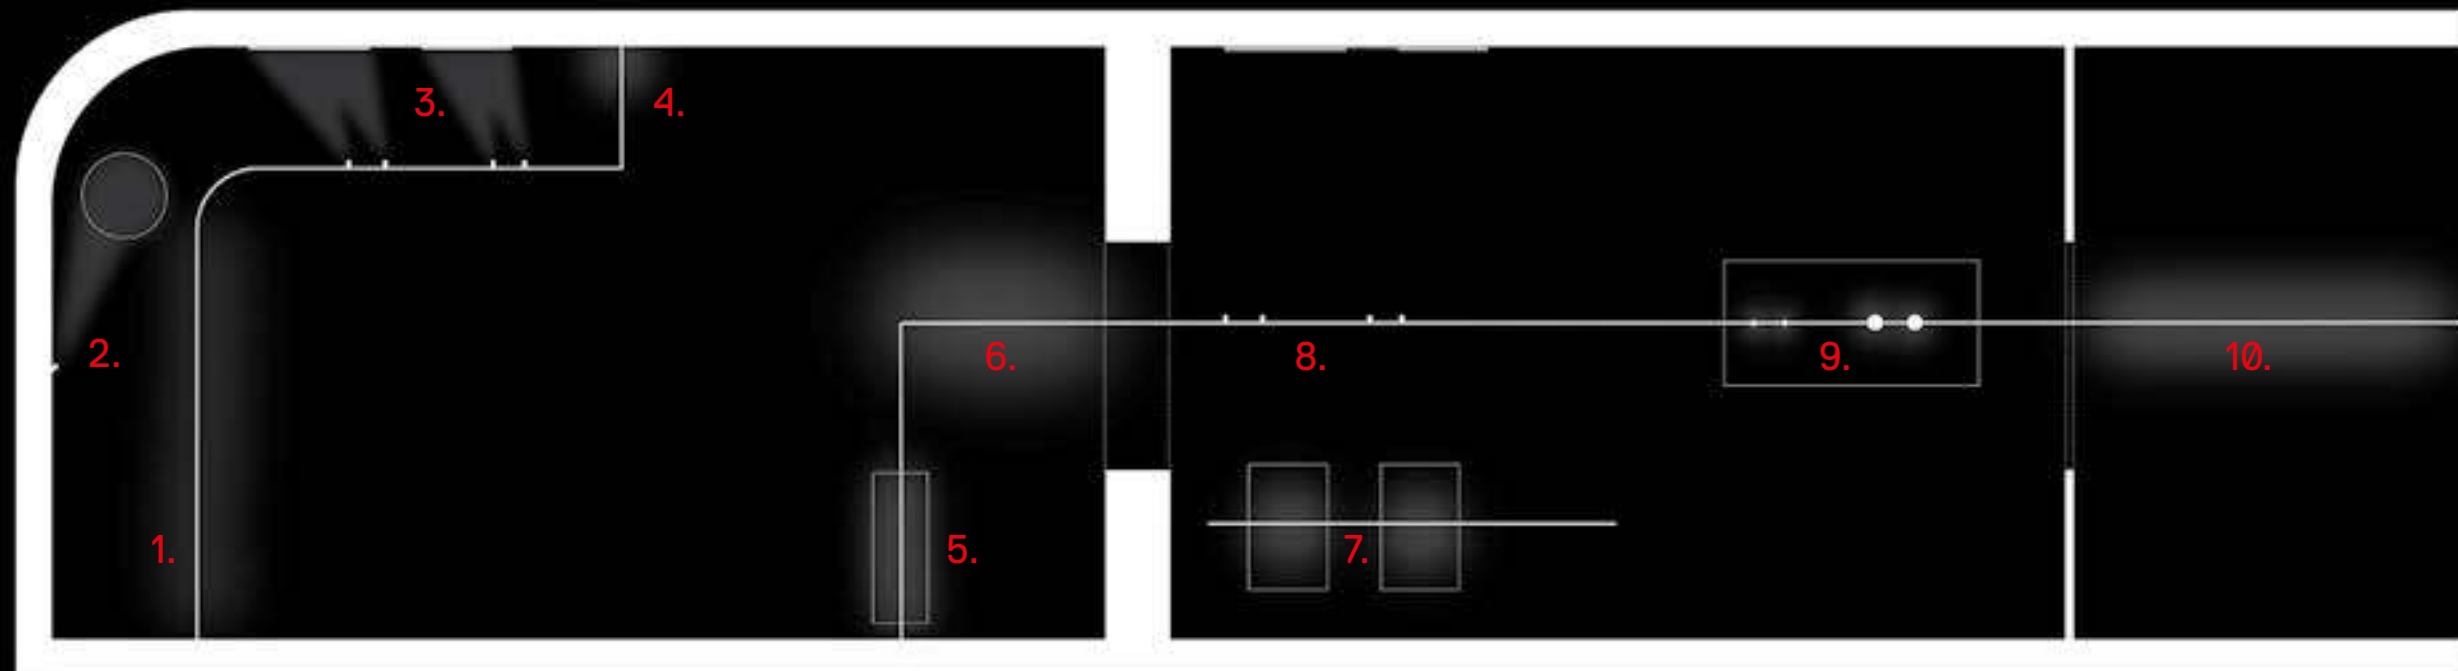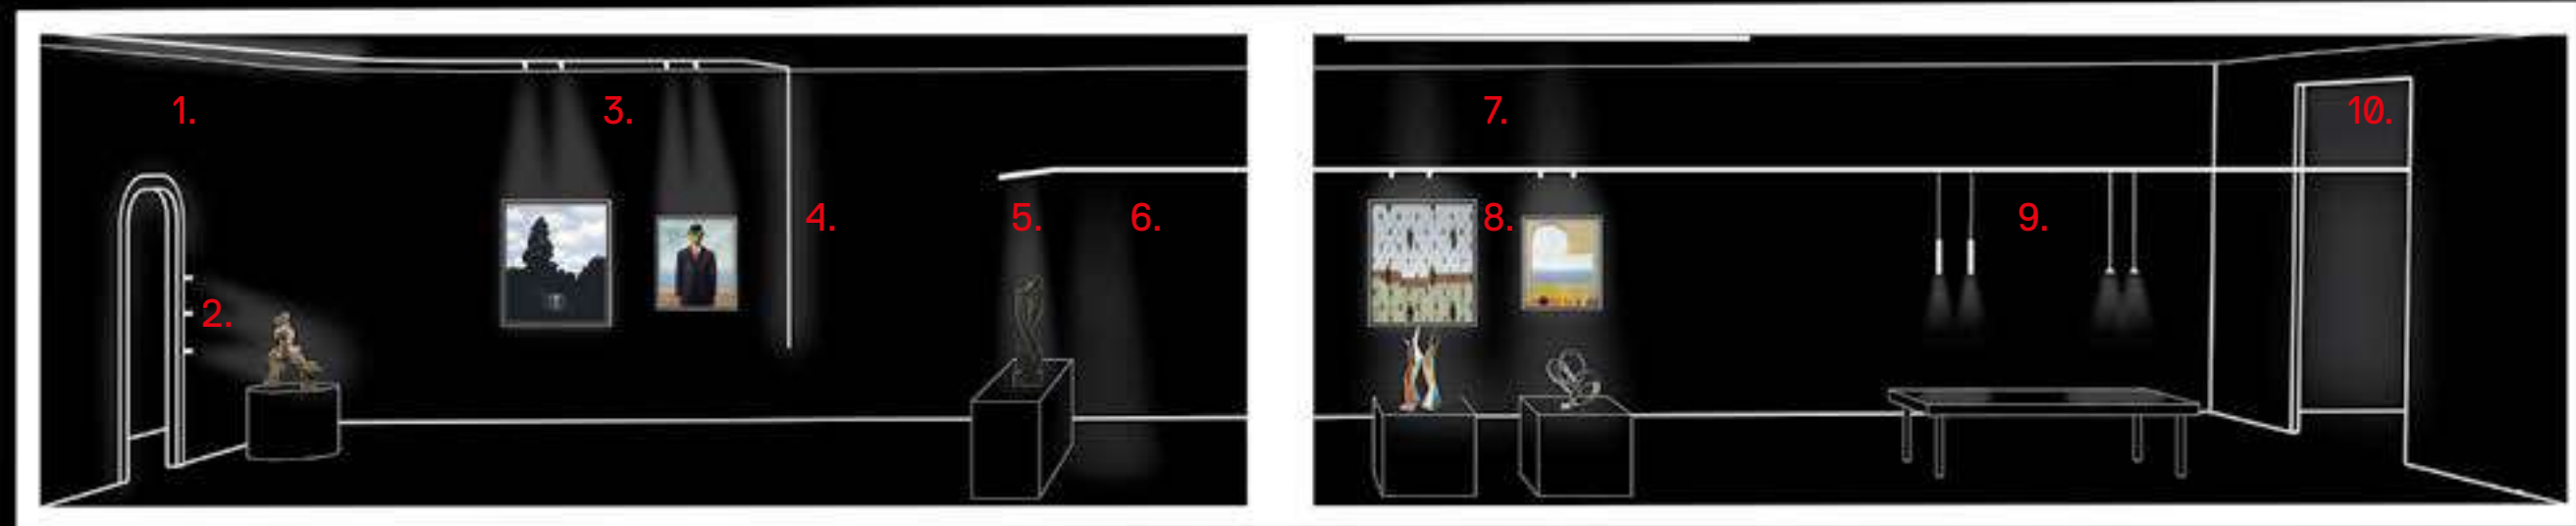


A.24

pre-configured modules

Each module (magnetic track, diffused, sharpening) is pre-configured and it is provided with:

- Ø1. the specific optical engine (magnetic, diffused, sharpening).
- Ø2. the mechanical and electrical connections to combine for a continuous run.
- Ø3. each suspension module is equipped with a suspension cable.
- Ø4. each ceiling module is equipped with 1 ceiling bracket for 1176 mm length or with 2 ceiling brackets for 2352 mm length.

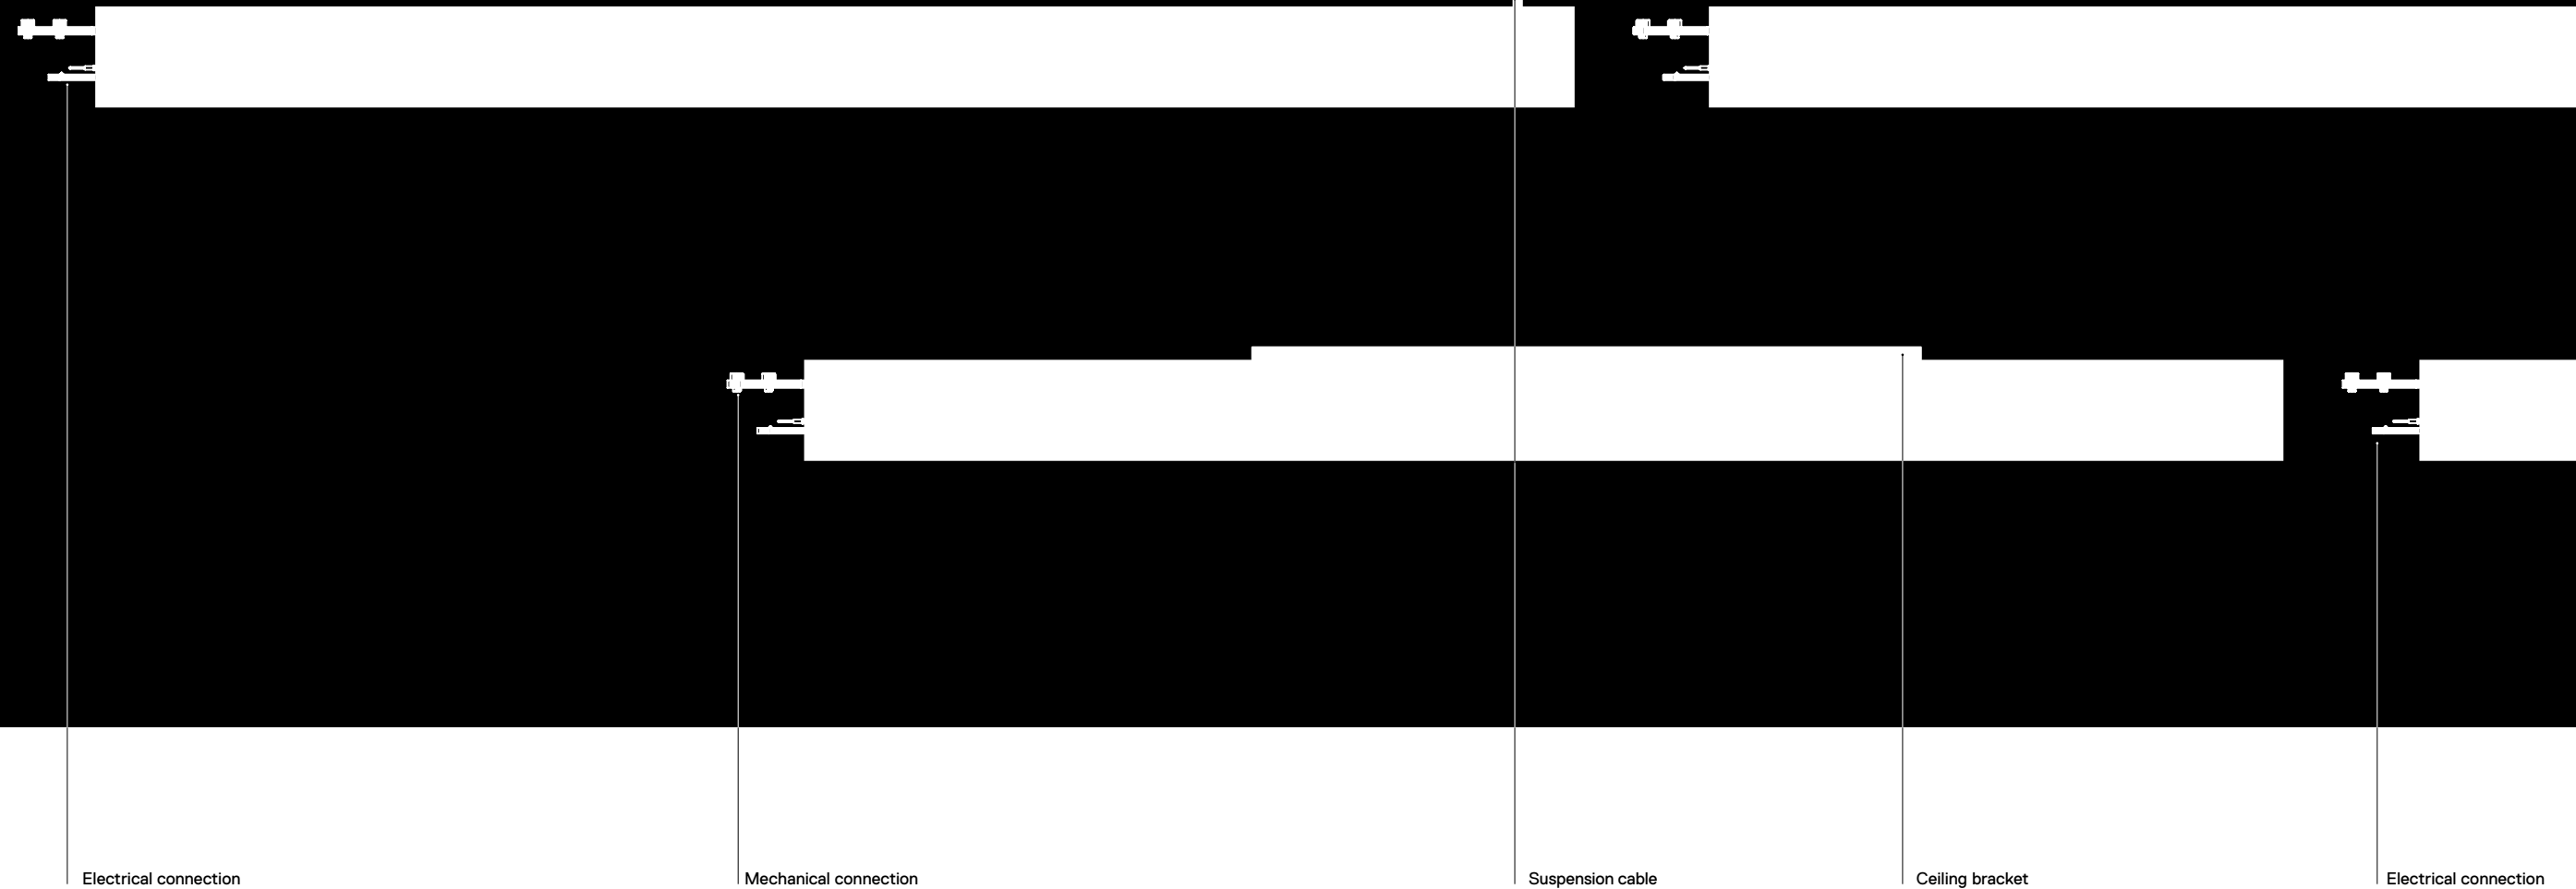

A.24 components

MAGNETIC TRACK

FEEDING CABLES CAN BE LOCATED EVERYWHERE, INCLUDING CORNERS. TRACK ANGLED ELEMENTS CAN INDEPENDENTLY FEED EACH ARMS.

USE INSULATING SPACERS WHEN USING SEVERAL POWERSUPPLY KITS.

DIFFUSING AND JOINING ANGLED ELEMENTS FEED BOTH ARMS TOGETHER.

DIFFUSED

SHARPING

TRANSITION COMPONENT WHEN PASSING FROM ONE TECHNOLOGY TO A DIFFERENT ONE.

A.24 is powered by 48 Vdc

It permits long runs
in a small size 27x54 mm



MAGNETIC

VECTOR 40

max 12 with 1 Power Supply 150W - effective 125W
max 21 with 1 Power Supply 240W - effective 210W

VECTOR 55

max 4 with 1 Power Supply 150W - effective 125W
max 8 with 1 Power Supply 240W - effective 210W

DIFFUSED

DIRECT

max 4m with 1 Power Supply 150W - effective 125W
max 7m with 1 Power Supply 240W - effective 210W

DIRECT-INDIRECT

max 2m with 1 Power Supply 150W - effective 125W
max 4m with 1 Power Supply 240W - effective 210W

SHARPING

DIRECT

max 5m with 1 Power Supply 150W - effective 125W
max 9m with 1 Power Supply 240W - effective 210W

DIRECT-INDIRECT

max 3m with 1 Power Supply 150W - effective 125W
max 5m with 1 Power Supply 240W - effective 210W

A.24


power supply

CEILING
POWER SUPPLY
240W - 150W


RECESSED
POWER SUPPLY
240W - 150W

REMOTE BARE
POWER SUPPLY
240W - 150W


REMOTE BOX
POWER SUPPLY
240W - 150W

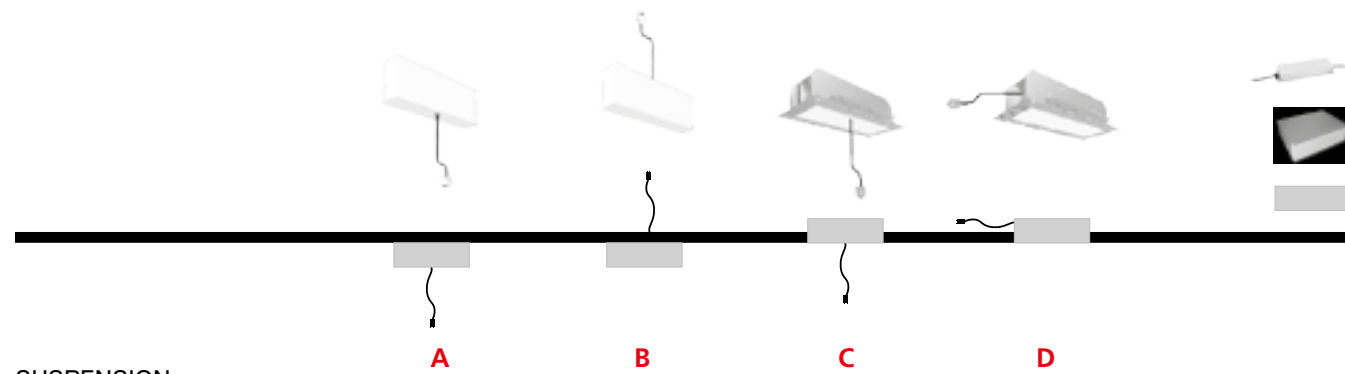


SUSPENSION




SMD



RECESSED



	A	B	C	D
SUSPENSION	●		●	●
SMD		●	●	●
RECESSED		●	●	●

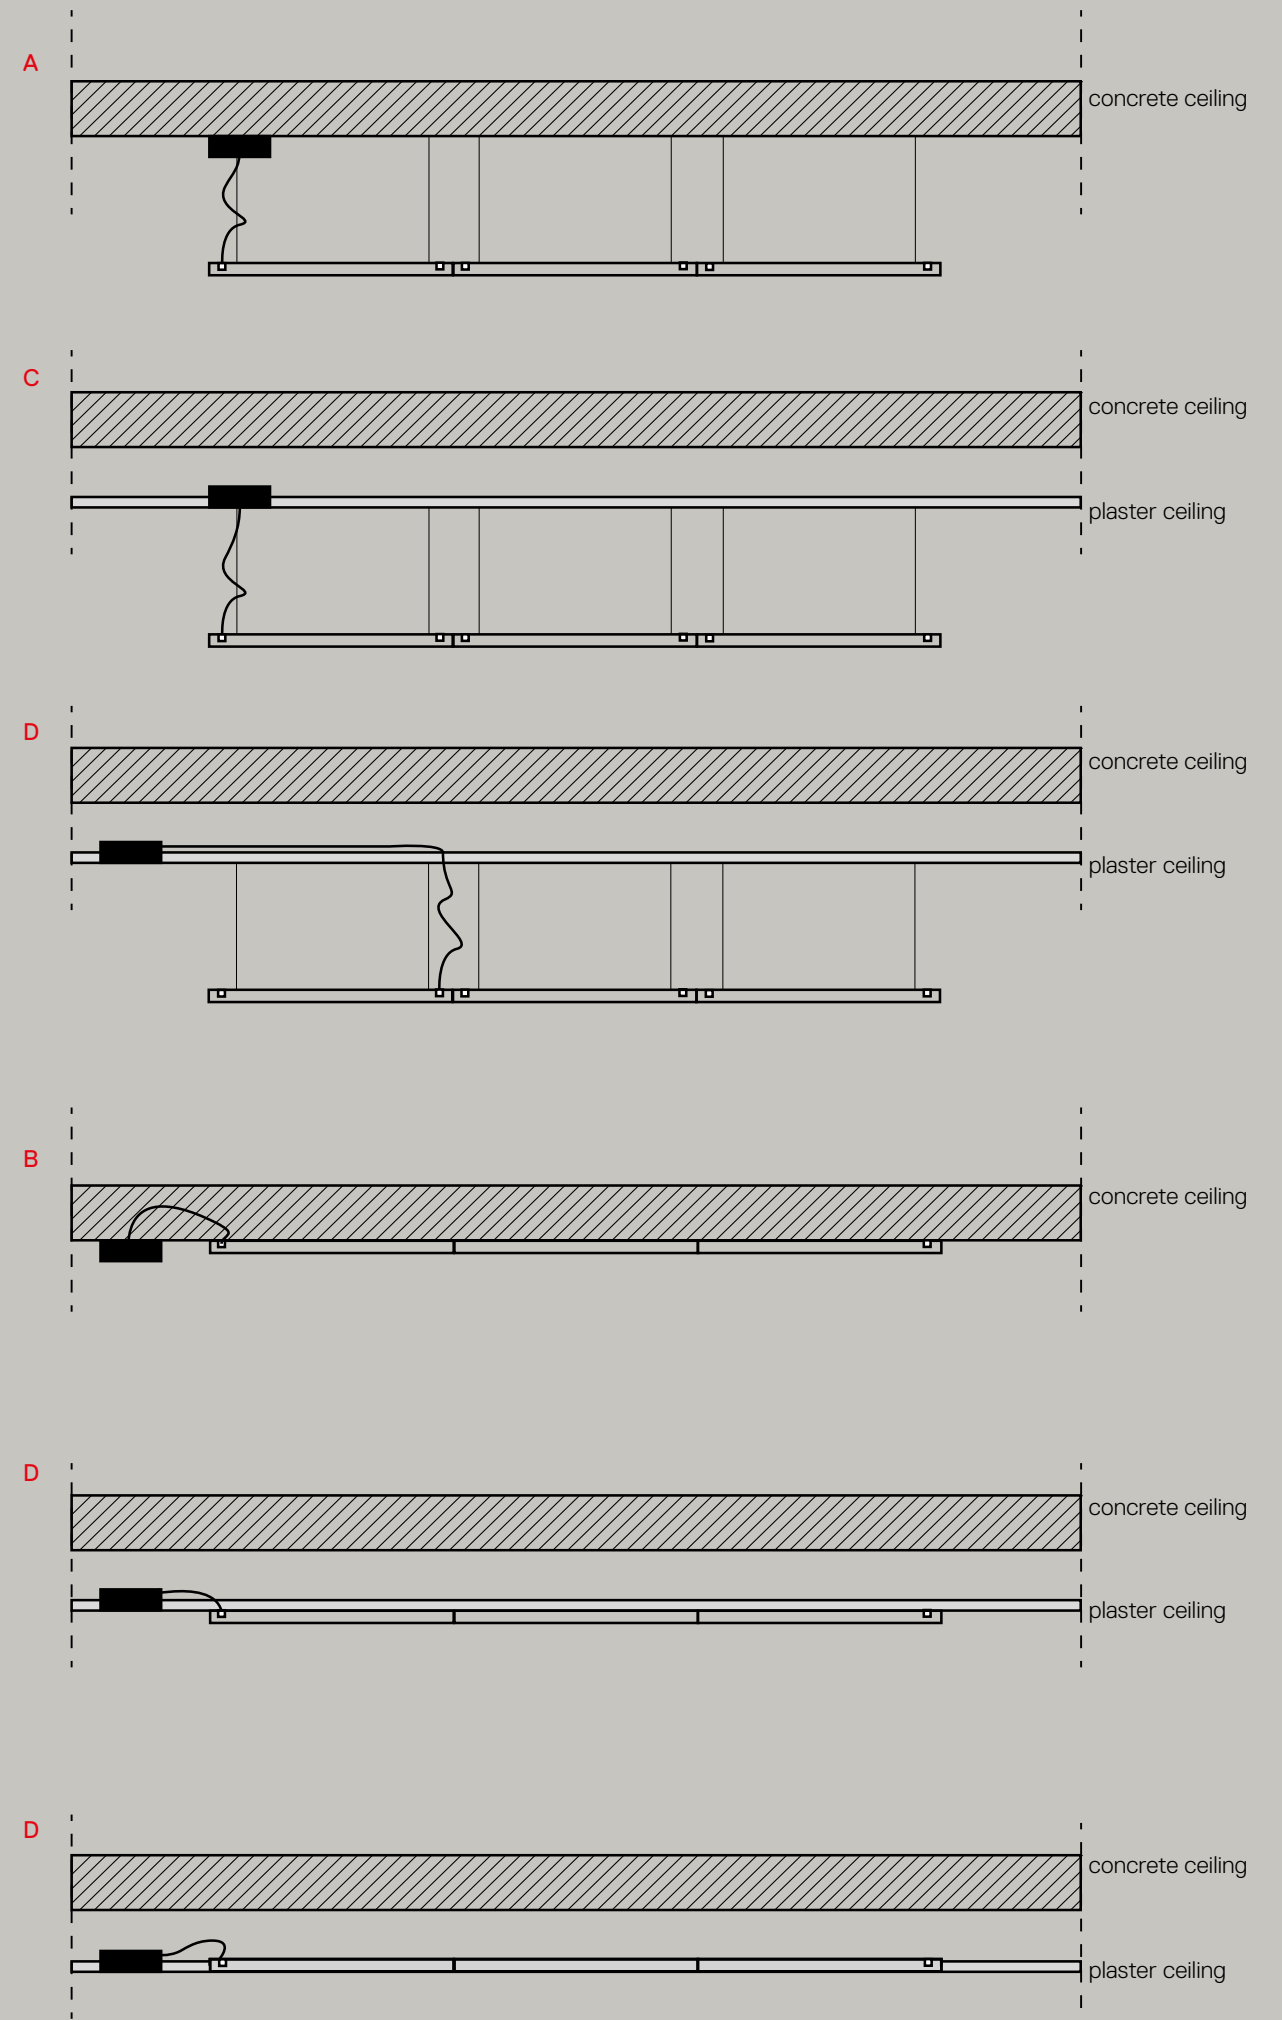



A.24
↪ System

↪ A.24 RECESSED MAGNETIC TRACK

White Black



IP20




Linear elements

Length

1176mm
2352 mm

Code

AQ150. 01/04
AQ151. 01/04

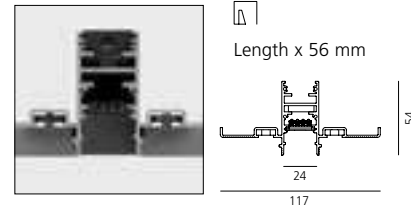


Angle elements

90° on same plane track angle elements
301 x 301 mm

Code


AQ155. 01/04

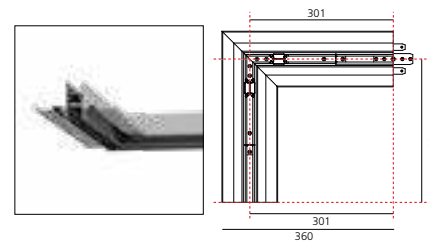

90° on perpendicular planes track angle elements
276x276mm

Code

AQ156. 01/04

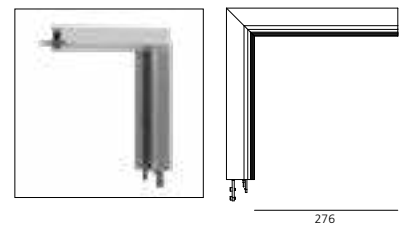


Curved joining elements (not magnetic)

Radius Alpha

561 mm 60°
90°
750 mm 45°
90°

Code

AQ500. 01/04
AQ510. 01/04
AQ520. 01/04
AQ530. 01/04

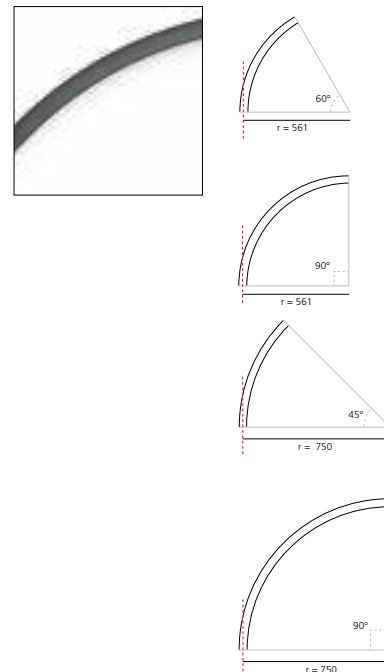

Formwork (aluminum)

Length	Radius	Alpha
Curved	561 mm	60°
		90°
	750 mm	45°
		90°

Code

AQ59000
AQ59100
AQ59200
AQ59300
AQ29400

End caps (2pcs)

Each linear, angle and curved element is provided with mechanical and electrical joints and installation accessories.
End caps have to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.
For the effective powers of the drivers, see the table on page. 331

Accessories



Insulating spacer
(1 pcs) use between modules powered by different power supplies

Code

AQ152. 01/04



End caps
(2 pcs)

AQ153. 01/04



Transition joint
use between different typology modules (track-diffusing-sharping)

AQ290. 01/04

Power supply



240W Recessed power supply kit (cable length 2,2 m) for recessed modules
230VAC-48VDC
IP20 Ⓢ
396x195x112H

Undimmable


Code

AQ17801



240W Ceiling power supply kit (cable length 2,2 m) for recessed modules
230VAC-48VDC
IP20 Ⓢ
351x61x111H

AQ173. 01/04



150W Ceiling power supply kit (cable length 2,2 m) for recessed modules
230VAC-48VDC
IP20 Ⓢ
351x61x111H

AQ179. 01/04



240W Bare power supply + plug ON-OFF 230VAC-48VDC
IP20 Ⓢ
(for dimmable version to be combined with "DALI-Selv interface") **244x68x38H**

AQ18000



150W Bare power supply + plug ON-OFF 230VAC-48VDC
IP20 Ⓢ
(for dimmable version to be combined with "DALI-Selv interface") **244x68x38H**

AQ18100



240W Recessed power supply kit (cable length 2,2 m) for recessed modules
230VAC-48VDC
IP20 Ⓢ
396x195x112H

Dimmable DALI /APP

Code

AQ16801
AQ16801APP




240W Ceiling power supply kit (cable length 2,2 m) for recessed modules
230VAC-48VDC
IP20 Ⓢ
321x91x111H

AQ172. 01/04
AQ172. 01/04 **APP**




150W Ceiling power supply kit (cable length 2,2 m) for recessed modules
230VAC-48VDC
IP20 Ⓢ
321x91x111H

AQ177. 01/04
AQ177. 01/04 **APP**



DALI to DALI-Selv Interface
103x67x21H

AQ18200



240W Remote box power supply kit (2 connectors)
230VAC-48VDC
IP20 Ⓢ
313x243x57,5H

AQ16000
AQ16000APP

↪ A.24 SUSPENSION MAGNETIC TRACK

White	Black	Brushed Silver	Brushed Copper	Brushed Bronze	WF	*Uses 1 DALI address	IP20
01	04	15	18	20			
Fast delivery		Delivery time on demand					

Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
 1 suspension cable is also included.
 End caps have to be ordered separately.
 The APP driver can not be controlled by DALI dimming system and viceversa.
 For the effective powers of the drivers, see the table on page. 331


Linear elements		Code
Length	1176 mm	AQ400. 01/04 15/18/20
	2352 mm	AQ401. 01/04 15/18/20




Linear + indirect emission elements						Code
Length	W	CRI	Flux	CCT		
1176 mm*	16W	80	1524 lm	2700K	AQ406. 01/04 15/18/20	
				3000K	AQ402. 01/04 15/18/20	
				4000K	AQ403. 01/04 15/18/20	
2352 mm	33W	80	3049 lm	2700K	AQ407. 01/04 15/18/20	
				3000K	AQ404. 01/04 15/18/20	
				4000K	AQ405. 01/04 15/18/20	



90° angle elements		Code
90° suspended track corner (on same plane)	301x301mm	AQ492. 01/04 15/18/20

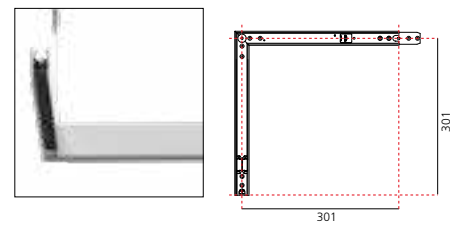

Curved joining elements (not magnetic)			Code
Radius	Alpha		
561 mm	60°		AQ700. 01/04 15/18/20
	90°		AQ710. 01/04 15/18/20
750 mm	45°		AQ720. 01/04 15/18/20
	90°		AQ730. 01/04 15/18/20

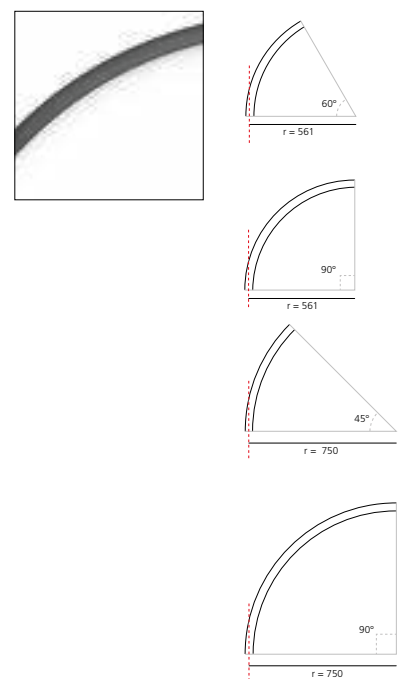

Accessories		Code
	Insulating spacer (1 pcs) between modules powered by different power supplies	AQ491. 01/04 15/18/20
	End cap (2 pcs) including 2 suspension cables 200H	AQ490. 01/04 15/18/20
	Transition joint between different typology modules (track-diffusing- sharping)	AQ494. 01/04 15/18/20

Power supply		Undimmable	Dimmable DALI / APP
	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	Code AQ174. 01/04	Code AQ154. 01/04 AQ154. 01/04 APP
	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ171. 01/04	AQ161. 01/04 AQ161. 01/04 APP
	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ176. 01/04	AQ175. 01/04 AQ175. 01/04 APP
	240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18000	AQ18200
	150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18100	AQ16000 AQ16000APP
	240W Remote box power supply kit (2 connectors) 230VAC-48VDC IP20 313x243x57,5H		


↪ A.24 CEILING MAGNETIC TRACK

White	Black	Brushed Silver	Brushed Copper	Brushed Bronze	IP20
01	04	15	18	20	
Fast delivery		Delivery time on demand			

Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
Bracket for fixing to ceiling is included: 1 for 1176 mm length or 2 for 2352 mm length.
End caps have to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.
For the effective powers of the drivers, see the table on page. 331


Linear elements

Length	Code
1176 mm	AQ300. 01/04 15/18/20
2352 mm	AQ301. 01/04 15/18/20




90° angle elements

90° on same plane track angle elements 301 x 301 mm	Code AQ392. 01/04 15/18/20
--	--

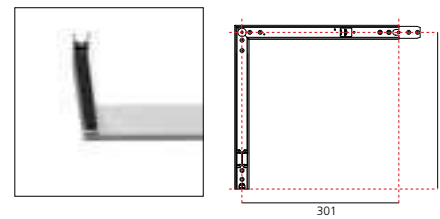


90° on perpendicular planes track angle elements
330 x 330 mm

Code AQ393. 01/04 15/18/20
--

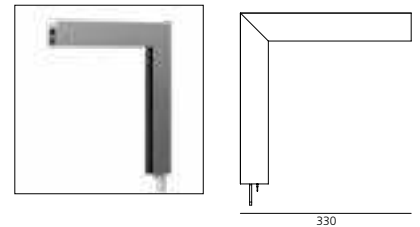

Curved joining elements (not magnetic)

Radius	Alpha	Code
561 mm	60°	AQ600. 01/04 15/18/20
	90°	AQ610. 01/04 15/18/20
750 mm	45°	AQ620. 01/04 15/18/20
	90°	AQ630. 01/04 15/18/20

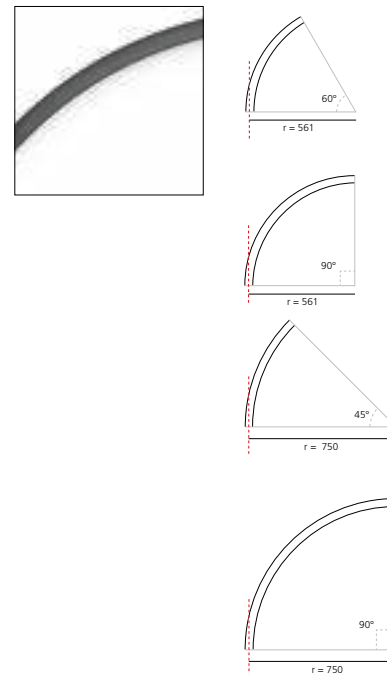

Accessories

	Insulating spacer (1 pcs) use between modules powered by different power supplies	Code AQ391. 01/04 15/18/20
	End caps (2 pcs)	AQ390. 01/04 15/18/20
	Cap for cable passage (1 pcs)	AQ395. 01/04 15/18/20
	Transition joint use between different typology modules (track-diffusing-sharping)	AQ394. 01/04 15/18/20

Power supply

	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 Ⓢ 396x195x112H
	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC 240W IP20 Ⓢ 351x61x111H
	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC 240W IP20 Ⓢ 351x61x111H
	240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 Ⓢ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H
	150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 Ⓢ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H

Undimmable

Code AQ17801
AQ173. 01/04
AQ179. 01/04
AQ18000
AQ18100

	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 Ⓢ 396x195x112H
	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 Ⓢ 321x91x111H
	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 Ⓢ 321x91x111H
	DALI to DALI-Selv Interface 103x67x21H
	240W Remote box power supply kit (2 connectors) 230VAC-48VDC IP20 Ⓢ 313x243x57,5H

Dimmable DALI / APP

Code AQ16801 AQ16801APP
AQ172. 01/04 AQ172. 01/04 APP
AQ177. 01/04 AQ177. 01/04 APP
AQ18200
AQ16000 AQ16000APP

↳ VECTOR MAGNETIC TRACK

White Black
 01 04
 Fast delivery

Brushed Silver Brushed Copper Brushed Bronze
 15 18 20
 Delivery time on demand

S F WF


Delivery time on demand
 2700K / 4000K

MacAdam 3SDCM
 CRI = 80

IP20
 90°
 360°

VECTOR 20 MAGNETIC


W	Beam	Flux	CCT	Dimmable DALI Code
2 W	S 10°	175 lm	2700K	AP711. 01/04 15/18/20
			3000K	AP701. 01/04 15/18/20
			4000K	AP751. 01/04 15/18/20
	F 24°	160 lm	2700K	AP712. 01/04 15/18/20
			3000K	AP702. 01/04 15/18/20
			4000K	AP752. 01/04 15/18/20
WF 32°	140 lm	2700K	AP713. 01/04 15/18/20	
		3000K	AP703. 01/04 15/18/20	
		4000K	AP753. 01/04 15/18/20	

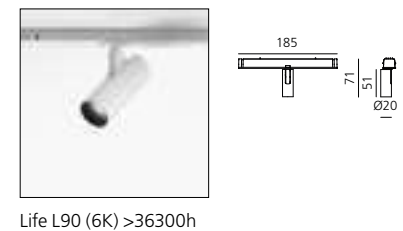

Life L90 (6K) >36300h

VECTOR 30 MAGNETIC

W	Beam	Flux	CCT	Dimmable DALI Code
6 W	XS 6°	475 lm	2700K	AP811. 01/04 15/18/20
			3000K	AP801. 01/04 15/18/20
			4000K	AP851. 01/04 15/18/20
	F 24°	450 lm	2700K	AP812. 01/04 15/18/20
			3000K	AP802. 01/04 15/18/20
			4000K	AP852. 01/04 15/18/20
WF 40°	425 lm	2700K	AP813. 01/04 15/18/20	
		3000K	AP803. 01/04 15/18/20	
		4000K	AP853. 01/04 15/18/20	

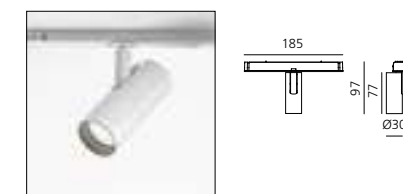

Life L90 (10K) >60500h

VECTOR MAGNETIC TRACK

White Black
 01 04
 Fast delivery

Brushed Silver Brushed Copper Brushed Bronze
 15 18 20
 Delivery time on demand

S F WF


Delivery time on demand
 2700K / 4000K

MacAdam 3SDCM
 *MacAdam 2SDCM
 CRI = 90

IP20
 90°
 360°

VECTOR 40 MAGNETIC


W	Beam	Flux	CCT	Dimmable DALI Code
10 W	S 13°	540 lm	2700K	AP011. 01/04 15/18/20
			3000K	AP001. 01/04 15/18/20
			4000K	AP051. 01/04 15/18/20
	*F 20°	584 lm	2700K	AP012. 01/04 15/18/20
			3000K	AP002. 01/04 15/18/20
			4000K	AP052. 01/04 15/18/20
*WF 28°	528 lm	2700K	AP013. 01/04 15/18/20	
		3000K	AP003. 01/04 15/18/20	
		4000K	AP053. 01/04 15/18/20	

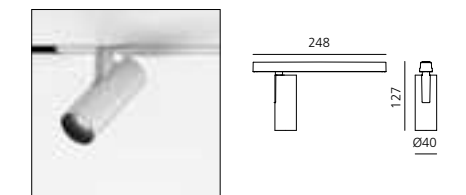

Life L90 (10K) 60500h

VECTOR 55 MAGNETIC

W	Beam	Flux	CCT	Dimmable DALI Code
26 W	S 16°	1492 lm	2700K	AP111. 01/04 15/18/20
			3000K	AP101. 01/04 15/18/20
			4000K	AP151. 01/04 15/18/20
	F 22°	1465 lm	2700K	AP112. 01/04 15/18/20
			3000K	AP102. 01/04 15/18/20
			4000K	AP152. 01/04 15/18/20
WF 32°	1596 lm	2700K	AP113. 01/04 15/18/20	
		3000K	AP103. 01/04 15/18/20	
		4000K	AP153. 01/04 15/18/20	

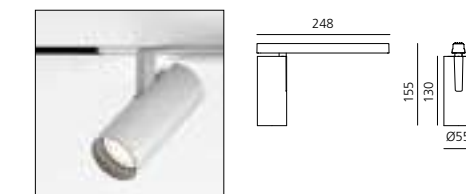

Life L80 (9K) >50000h


Accessoires	Color	Vector 40 Code	Vector 55 Code
Accessories holder		AP90100	AP91100
Lens for elliptical emission		AP90200	AP91200
Soft filter		AP90300	AP91300
Anti-dazzle louvre		AP90400	AP91400
Adjustable dowsers			AP91500

↳ VECTOR MAGNETIC TRACK

White	Black	Brushed Silver	Brushed Copper	Brushed Bronze	S	F	WF	Delivery time on demand 2700K / 4000K	MacAdam 3SDCM CRI = 90	IP20 90° 360°
01	04	15	18	20						
Fast delivery		Delivery time on demand								

VECTOR 55 ZOOM MAGNETIC


W	Beam	Flux	CCT	Dimmable DALI Code
23 W	F 22°-WF 32°	660 - 1137 lm	2700K	AP114. 01/04 15/18/20
			3000K	AP104. 01/04 15/18/20
			4000K	AP154. 01/04 15/18/20

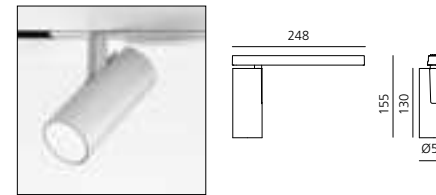

Life L80 (9K)>50000h

VECTOR 40 PENDANT MAGNETIC


W	Beam	Flux	CCT	Dimmable DALI Code
10 W	S 13°	540 lm	2700K	AP211. 01/04 15/18/20
			3000K	AP201. 01/04 15/18/20
			4000K	AP251. 01/04 15/18/20
	F 20°	584 lm	2700K	AP212. 01/04 15/18/20
			3000K	AP202. 01/04 15/18/20
	4000K	AP252. 01/04 15/18/20		
WF 28°	528 lm	2700K	AP213. 01/04 15/18/20	
		3000K	AP203. 01/04 15/18/20	
		4000K	AP253. 01/04 15/18/20	

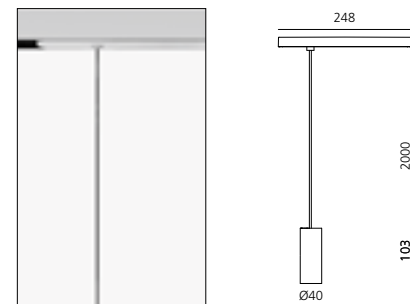

Life L90 (10K) 60500h

VECTOR 55 PENDANT MAGNETIC


W	Beam	Flux	CCT	Dimmable DALI Code
26 W	S 16°	1492 lm	2700K	AP311. 01/04 15/18/20
			3000K	AP301. 01/04 15/18/20
			4000K	AP351. 01/04 15/18/20
	F 22°	1465 lm	2700K	AP312. 01/04 15/18/20
			3000K	AP302. 01/04 15/18/20
	4000K	AP352. 01/04 15/18/20		
WF 32°	1596 lm	2700K	AP313. 01/04 15/18/20	
		3000K	AP303. 01/04 15/18/20	
		4000K	AP353. 01/04 15/18/20	

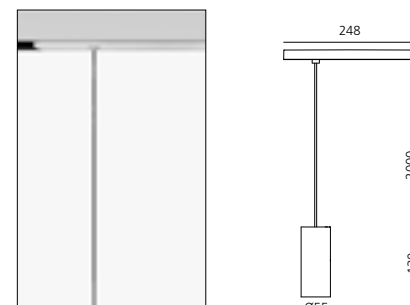

Life L80 (9K)>50000h




↪ A.24 RECESSED DIFFUSED EMISSION

White  01	WF 	*Uses 1 DALI address ** Uses 2 DALI addresses	MacAdam 2SDCM Life L80 (10K)>55000h CRI = 80	IP20 
---	---	--	--	---

Each formwork module is provided with a mechanical joint to connect two recessed coplanar formwork modules. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately. The APP driver can not be controlled by DALI dimming system and viceversa. For the effective powers of the drivers, see the table on page. 331


Formwork (aluminum)			
Length	Radius	Alpha	Code
Linear 1176mm			AQ29100
Linear 2352 mm			AQ29200
90° angle on the same plane			AQ29300
90° angle on perpendicular			AQ29500
Curved	561 mm	60°	AQ59000
	750 mm	90°	AQ59100
		45°	AQ59200
		90°	AQ59300
End caps (2pcs)			AQ29400

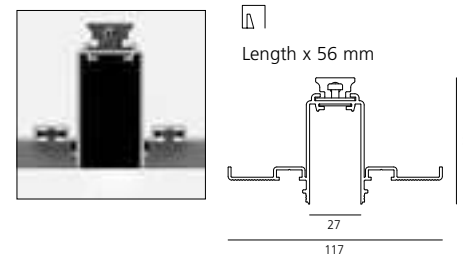


Linear direct emission elements			
Length	W	Flux	CCT
1176mm*	33W	2841 lm	2700K
		2884 lm	3000K
		3013 lm	4000K
2352 mm**	66W	5682 lm	2700K
		5769 lm	3000K
		6027 lm	4000K




90° angle direct emission elements			
	W	Flux	CCT
90° on same plane angle direct emission elements	16W	1420 lm	2700K
		1442 lm	3000K
		1506 lm	4000K

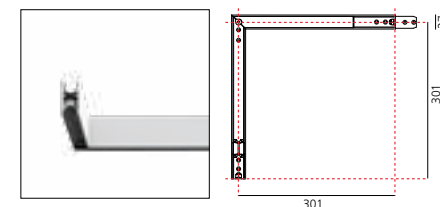



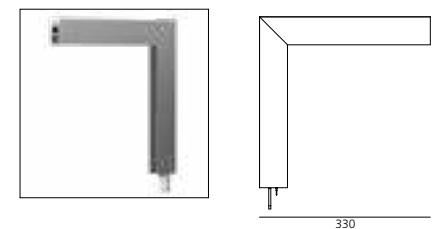



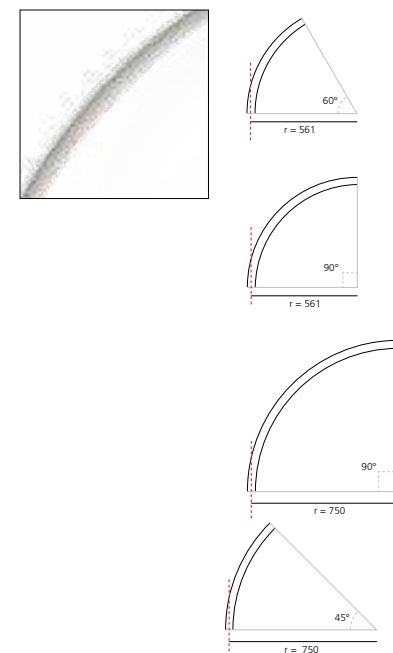




	W	Flux	CCT
90° on perpendicular plane angle direct emission elements	16W	1362 lm	2700K
		1383 lm	3000K
		1444 lm	4000K



Curved direct emission elements				
Radius	Alpha	W	Flux	CCT
561 mm*	60°	17W	1187 lm	2700K
				3000K
				4000K
90°	25W	1781 lm	2700K	
			3000K	
			4000K	
750 mm*	45°	17W	1187 lm	2700K
				3000K
				4000K
90°	34W	2374 lm	2700K	
			3000K	
			4000K	



Accessories		Code
	Insulating spacer (1 pcs) between modules powered by different power supplies	AQ20601
	End caps (2 pcs)	AQ25001
	Transition joint use between different typology modules (track-diffusing-sharping)	AQ29001
	Opal diffusing screen	
	10m	AQ16200
	25m	AQ16300
	50m	AQ16400
	1176 mm	AQ16500
	2352 mm	AQ16600
	3528 mm	AQ16700
	Flexible opal diffusing screen	
	5m	AQ90300
	10m	AQ90000
	25m	AQ90100
	50m	AQ90200

Power supply		Undimmable	Dimmable DALI / APP
	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	AQ17801	AQ16801 AQ16801APP
	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ17301	AQ172. 01/04 AQ172. 01/04 APP
	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ17901	AQ177. 01/04 AQ177. 01/04 APP
	240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18000	AQ18200
	150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18100	AQ16000 AQ16000APP
	DALI to DALI-Selv Interface 103x67x21H		
	240W Remote box power supply kit (2 connectors) 230VAC-48VDC IP20 313x243x57,5H		

↪ A.24 SUSPENSION DIFFUSED EMISSION


White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	WF	*Uses 1 DALI address ** Uses 2 DALI addresses *** Uses 3 DALI addresses	MacAdam 2SDCM Life L80 (10K)>55000h CRI = 80	IP20
------------------------------	-------------	---	----------------------	----------------------	----	---	--	------

Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories.
1 suspension cable is also included.
End caps have to be ordered separately.
Opal diffusing screen has to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.
For the effective powers of the drivers, see the table on page. 331

Linear direct emission elements

Length	W	Flux	CCT
1176 mm*	33W	2841 lm	2700K
		2884 lm	3000K
		3013 lm	4000K
2352 mm**	66W	5682 lm	2700K
		5769 lm	3000K
		6027 lm	4000K



Code
AQ416. 01/04 15/18/20
AQ410. 01/04 15/18/20
AQ411. 01/04 15/18/20
AQ417. 01/04 15/18/20
AQ412. 01/04 15/18/20
AQ413. 01/04 15/18/20



Linear direct and indirect emission elements

Length	W	Flux	CCT
1176 mm**	33W direct	2841 lm direct	2700K
		1502 lm indirect	
	16W indirect	2884 lm direct	3000K
		1524 lm indirect	
		3013 lm direct	4000K
2352 mm***	66W direct	5682 lm direct	2700K
		3004 lm indirect	
	32W indirect	5769 lm direct	3000K
		3049 lm indirect	
		6027 lm direct	4000K
		3185 lm indirect	


Code
AQ464. 01/04 15/18/20
AQ460. 01/04 15/18/20
AQ461. 01/04 15/18/20
AQ465. 01/04 15/18/20
AQ462. 01/04 15/18/20
AQ463. 01/04 15/18/20



90° angle direct emission elements

90° on same plane angle elements	W	Flux	CCT
301 x 301 mm*	16W	1420 lm	2700K
		1442 lm	3000K
		1506 lm	4000K


Code
AQ418. 01/04 15/18/20
AQ414. 01/04 15/18/20
AQ415. 01/04 15/18/20



Curved direct emission elements

Radius	Alpha	W	Flux	CCT
561 mm*	60°	17W	1187 lm	2700K
			3000K	
			4000K	
	90°	25W	1781 lm	2700K
			3000K	
			4000K	
750 mm*	45°	17W	1187 lm	2700K
			3000K	
			4000K	
	90°	34W	2374 lm	2700K
			3000K	
			4000K	

Code
AQ707. 01/04 15/18/20
AQ701. 01/04 15/18/20
AQ702. 01/04 15/18/20
AQ717. 01/04 15/18/20
AQ711. 01/04 15/18/20
AQ712. 01/04 15/18/20
AQ727. 01/04 15/18/20
AQ721. 01/04 15/18/20
AQ722. 01/04 15/18/20
AQ737. 01/04 15/18/20
AQ731. 01/04 15/18/20
AQ732. 01/04 15/18/20

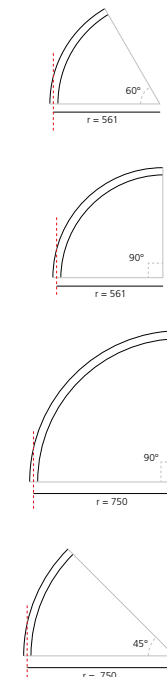

Accessories

Image	Description	Code
	Insulating spacer (1 pcs) between modules powered by different power supplies	AQ452. 01/04 15/18/20
	End caps (2 pcs) including 2 suspension cables 200H	AQ451. 01/04 15/18/20
	Transition joint use between different typology modules (track-diffusing-sharpping)	AQ494. 01/04 15/18/20
	Opal diffusing screen 10m 25m 50m 1176 mm 2352 mm 3528 mm	AQ16200 AQ16300 AQ16400 AQ16500 AQ16600 AQ16700
	Flexible opal diffusing screen 5m 10m 25m 50m	AQ90300 AQ90000 AQ90100 AQ90200

Power supply

Image	Description	Code
	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	AQ174. 01/04
	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ171. 01/04
	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ176. 01/04
	240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18000
	150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18100

Image	Description	Code
	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	AQ154. 01/04 AQ154. 01/04 APP
	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 321x91x111H	AQ161. 01/04 AQ161. 01/04 APP
	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 321x91x111H	AQ175. 01/04 AQ175. 01/04 APP
	DALI to DALI-Selv Interface 103x67x21H	AQ18200
	240W Remote box power supply kit (2 connectors) 230VAC-48VDC IP20 313x243x57,5H	AQ16000 AQ16000APP

↪ A.24 CEILING - WALL DIFFUSED EMISSION


White	Black	Brushed Silver	Brushed Copper	Brushed Bronze	WF	*Uses 1 DALI address ** Uses 2 DALI addresses	MacAdam 2SDCM Life L80 (10K)>55000h CRI = 80	IP20
01	04	15	18	20				
Fast delivery		Delivery time on demand						

Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
Bracket for fixing to ceiling is included: 1 for 1176 mm lenght. 2 for 2352 mm lenght.
End caps have to be ordered separately.
Opal diffusing screen has to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.
For the effective powers of the drivers, see the table on page. 331

Linear direct emission elements

Length	W	Flux	CCT
1176 mm*	33W	2841 lm	2700K
		2884 lm	3000K
		3013 lm	4000K
2352 mm**	66W	5682 lm	2700K
		5769 lm	3000K
		6027 lm	4000K


Code
AQ370. 01/04 15/18/20
AQ310. 01/04 15/18/20
AQ311. 01/04 15/18/20
AQ371. 01/04 15/18/20
AQ312. 01/04 15/18/20
AQ313. 01/04 15/18/20



90° angle direct emission elements


	W	Flux	CCT
90° on same plane angle elements	16W	1420 lm	2700K
301 x 301 mm*		1442 lm	3000K
		1506 lm	4000K

Code
AQ372. 01/04 15/18/20
AQ314. 01/04 15/18/20
AQ315. 01/04 15/18/20

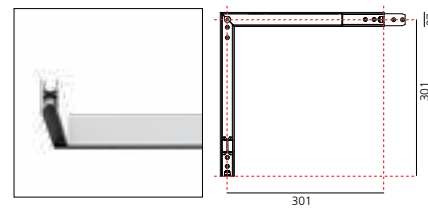

	W	Flux	CCT
90° on perpendicular planes angle elements	16W	1362 lm	2700K
330 x 330 mm*		1383 lm	3000K
		1444 lm	4000K


Code
AQ373. 01/04 15/18/20
AQ316. 01/04 15/18/20
AQ317. 01/04 15/18/20

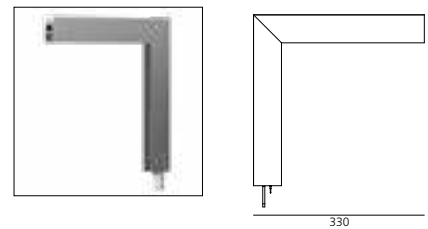

Curved direct emission elements

Radius	Alpha	W	Flux	CCT
561 mm*	60°	17W	1187 lm	2700K
				3000K
				4000K
90°	25W	1781 lm	2700K	
			3000K	
			4000K	
750 mm*	45°	17W	1187 lm	2700K
				3000K
				4000K
90°	34W	2374 lm	2700K	
			3000K	
			4000K	

Code
AQ607. 01/04 15/18/20
AQ601. 01/04 15/18/20
AQ602. 01/04 15/18/20
AQ617. 01/04 15/18/20
AQ611. 01/04 15/18/20
AQ612. 01/04 15/18/20
AQ627. 01/04 15/18/20
AQ621. 01/04 15/18/20
AQ622. 01/04 15/18/20
AQ637. 01/04 15/18/20
AQ631. 01/04 15/18/20
AQ632. 01/04 15/18/20

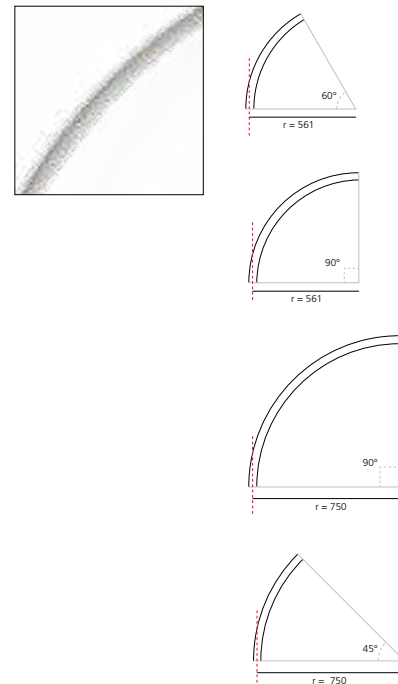

Accessories

	Code
Insulating spacer (1 pc) between modules powered by different power supplies	AQ351. 01/04 15/18/20
End cap (2 pcs)	AQ350. 01/04 15/18/20
Cap for cable passage (1 pcs)	AQ353. 01/04 15/18/20
Transition cap track - diffusing track - sharpening diffusing - sharpening	AQ394. 01/04 15/18/20

	Code
Opal diffusing screen	AQ16200
10m	AQ16300
25m	AQ16400
50m	AQ16500
1176 mm	AQ16600
2352 mm	AQ16700
3528 mm	
Flexible opal diffusing screen	
5m	AQ90300
10m	AQ90000
25m	AQ90100
50m	AQ90200

Power supply

240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H		
240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC 240W IP20 351x61x111H	AQ173. 01/04	
150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC 240W IP20 351x61x111H	AQ179. 01/04	
240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18000	
150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18100	

Undimmable

Code
AQ17801
AQ173. 01/04
AQ179. 01/04
AQ18000
AQ18100

Dimmable DALI/APP

Code
AQ16801
AQ16801APP
AQ172. 01/04
AQ172. 01/04 APP
AQ177. 01/04
AQ177. 01/04 APP
AQ18200
AQ16000
AQ16000APP

A.24 MODULE

Structural module

Mechanical and electrical connections

Optics

SHARPING KIT

End Cover

Louvre


Intermediate Cover

↪ A.24 RECESSED SHARPING EMISSION

White Black F XF *Uses 1 DALI address MacAdam 2SDCM IP20
 01 04 ** Uses 2 DALI addresses Life L90 (20K) 118000h
 CRI = 90

Each formwork module is provided with a mechanical joint to connect two recessed coplanar formwork modules. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately. Sharping kit (louvers and covers) has to be ordered separately. The APP driver can not be controlled by DALI dimming system and viceversa. For the effective powers of the drivers, see the table on page. 331


Formwork (aluminum)			Code
Length	Radius	Alpha	
Linear 1176mm			AQ29100
Linear 2352 mm			AQ29200
90° angle on the same plane			AQ29300
Curved	561 mm	60°	AQ59000
		90°	AQ59100
	750 mm	45°	AQ59200
		90°	AQ59300
End caps (2pcs)			AQ29400

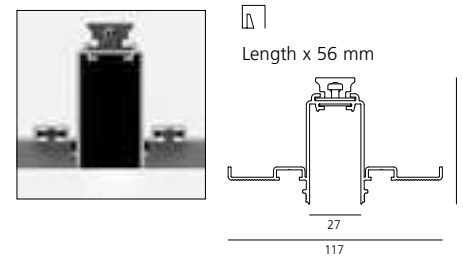


Linear direct emission elements					Code
Length	W	Beam	Flux	CCT	
1176mm*	22W	F 24°	1528 lm	2700K	AQ214. 01/04
			1628 lm	3000K	AQ210. 01/04
			1742 lm	4000K	AQ211. 01/04
		XF 62°	1624 lm	2700K	AQ234. 01/04
			1731 lm	3000K	AQ230. 01/04
			1852 lm	4000K	AQ231. 01/04
2352 mm**	46W	F 24°	3056 lm	2700K	AQ215. 01/04
			3256 lm	3000K	AQ212. 01/04
			3485 lm	4000K	AQ213. 01/04
		XF62°	3249 lm	2700K	AQ235. 01/04
			3461 lm	3000K	AQ232. 01/04
			3704 lm	4000K	AQ233. 01/04



90° angle joining elements (not lit)		Code
90° recessed corner (on same plane)		AQ240. 01/04
301x301mm		

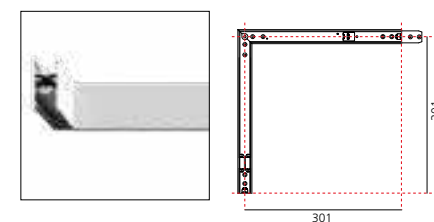

Curved direct emission elements						Code	
Radius	Alpha	W	Beam	Flux	CCT		
561 mm*	60°	12W	F 24°	839 lm	2700K	AQ508. 01/04	
						3000K	AQ503. 01/04
						4000K	AQ505. 01/04
			XF 62°	777 lm	2700K	AQ509. 01/04	
						3000K	AQ504. 01/04
						4000K	AQ506. 01/04
90°	12W	F 24°	839 lm	2700K	AQ518. 01/04		
					3000K	AQ513. 01/04	
					4000K	AQ515. 01/04	
		XF 62°	777 lm	2700K	AQ519. 01/04		
					3000K	AQ514. 01/04	
					4000K	AQ516. 01/04	
750 mm*	45°	12W	F 24°	839 lm	2700K	AQ528. 01/04	
						3000K	AQ523. 01/04
						4000K	AQ525. 01/04
			XF 62°	777 lm	2700K	AQ529. 01/04	
						3000K	AQ524. 01/04
						4000K	AQ526. 01/04
90°	25W	F 24°	1678 lm	2700K	AQ538. 01/04		
					3000K	AQ533. 01/04	
					4000K	AQ535. 01/04	
		XF 62°	1555 lm	2700K	AQ539. 01/04		
					3000K	AQ534. 01/04	
					4000K	AQ536. 01/04	

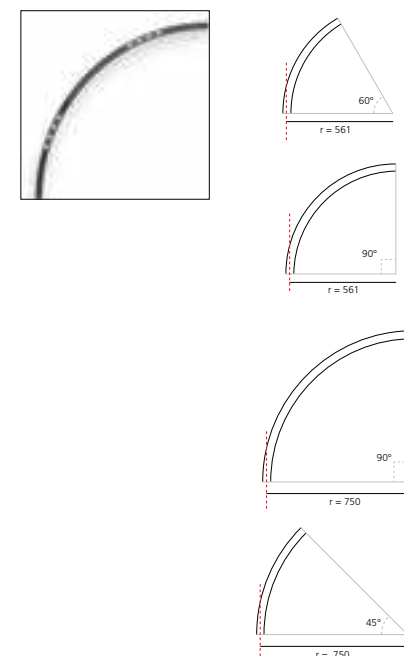

Accessories		Code		Code
	Insulating spacer (1 pc) between modules powered by different power supplies	AQ241. 01/04		Louvers for linear elements Sharping kit L=1176mm (2 louvers - 1 intermediate cover - 2 end covers) AQ260. 01/04 Louvers for linear elements Sharping kit L=2352mm (4 louvers - 3 intermediate cover - 2 end covers) AQ261. 01/04 90° angle cover (2 pcs) AQ262. 01/04
	End caps (2 pcs)	AQ250. 01/04		Louvers for curved elements R=561mm/R=750mm AQ911. 01/04 R=561mm 60° order 1 pc 90° order 1 pc R=750mm 45° order 1 pc 90° order 2 pcs Flexible cover 2m AQ921. 01/04 Flexible cover 10m AQ920. 01/04
	Transition joint use between different typology modules (track-diffusing-sharping)	AQ290. 01/04		


Power supply		Undimmable	Dimmable DALI / APP
	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	AQ17801	AQ16801 AQ16801APP
	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ173. 01/04	AQ172. 01/04 AQ172. 01/04 APP
	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 351x61x111H	AQ179. 01/04	AQ177. 01/04 AQ177. 01/04 APP
	240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18000	AQ18200
	150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18100	AQ16000 AQ16000APP
	DALI to DALI-Selv Interface 103x67x21H		
	240W Remote box power supply kit (2 connectors) 230VAC-48VDC IP20 313x243x57,5H		

↪ A.24 SUSPENSION SHARPING EMISSION


White	Black	Brushed Silver	Brushed Copper	Brushed Bronze	F	XF	*Uses 1 DALI address	MacAdam 2SDCM	IP20
01	04	15	18	20			** Uses 2 DALI addresses	Life L90 (20K) 118000h	
Fast delivery		Delivery time on demand					*** Uses 3 DALI addresses	CRI = 90	

Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
1 suspension cable is also included.
End caps have to be ordered separately.
Sharping kit (louvers and covers) has to be ordered separately.


Linear direct emission elements					Code
Length	W	Beam	Flux	CCT	
1176 mm*	22W	F 24°	1528 lm	2700K	AQ424. 01/04
			1628 lm	3000K	AQ420. 01/04
			1742 lm	4000K	AQ421. 01/04
		XF 62°	1624 lm	2700K	AQ444. 01/04
			1731 lm	3000K	AQ440. 01/04
			1852 lm	4000K	AQ441. 01/04
			3056 lm	2700K	AQ425. 01/04
			3256 lm	3000K	AQ422. 01/04
			3485 lm	4000K	AQ423. 01/04
2352 mm**	46W	F 24°	3249 lm	2700K	AQ445. 01/04
			3461 lm	3000K	AQ442. 01/04
			3704 lm	4000K	AQ443. 01/04
		XF 62°	3249 lm	2700K	AQ445. 01/04
			3461 lm	3000K	AQ442. 01/04
			3704 lm	4000K	AQ443. 01/04




Linear direct and indirect emission elements					Code		
Length	W	Beam	Flux	CCT			
1176 mm**	22W direct 16W indirect	F 24°	1528 lm direct	2700K	AQ482. 01/04		
			1406 lm indirect				
			1628 lm direct	3000K	AQ470. 01/04		
		XF 62°	1525 lm indirect				
			1742 lm direct	4000K	AQ471. 01/04		
			1587 lm indirect				
			1624 lm direct	2700K	AQ486. 01/04		
			1502 lm indirect				
			1731 lm direct	3000K	AQ478. 01/04		
		2352 mm***	46W indirect 32W indirect	F 24°	1524 lm indirect		
					1858 lm direct	4000K	AQ479. 01/04
					1587 lm indirect		
				XF 62°	3056 lm direct	2700K	AQ483. 01/04
					3004 lm indirect		
					3256 lm direct	3000K	AQ472. 01/04
2352 mm***	46W indirect 32W indirect	F 24°	3049 lm indirect				
			3485 lm direct	4000K	AQ473. 01/04		
			3185 lm indirect				
		XF 62°	3249 lm direct	2700K	AQ487. 01/04		
			3004 lm indirect				
			3461 lm direct	3000K	AQ480. 01/04		
			3049 lm indirect				
			3704 lm direct	4000K	AQ481. 01/04		
			3185 lm indirect				



90° angle joining elements (not lit)		Code
90° suspension corner (on same plane)	301x301mm	AQ450. 01/04
		15/18/20







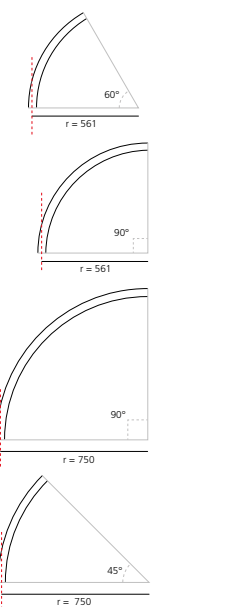










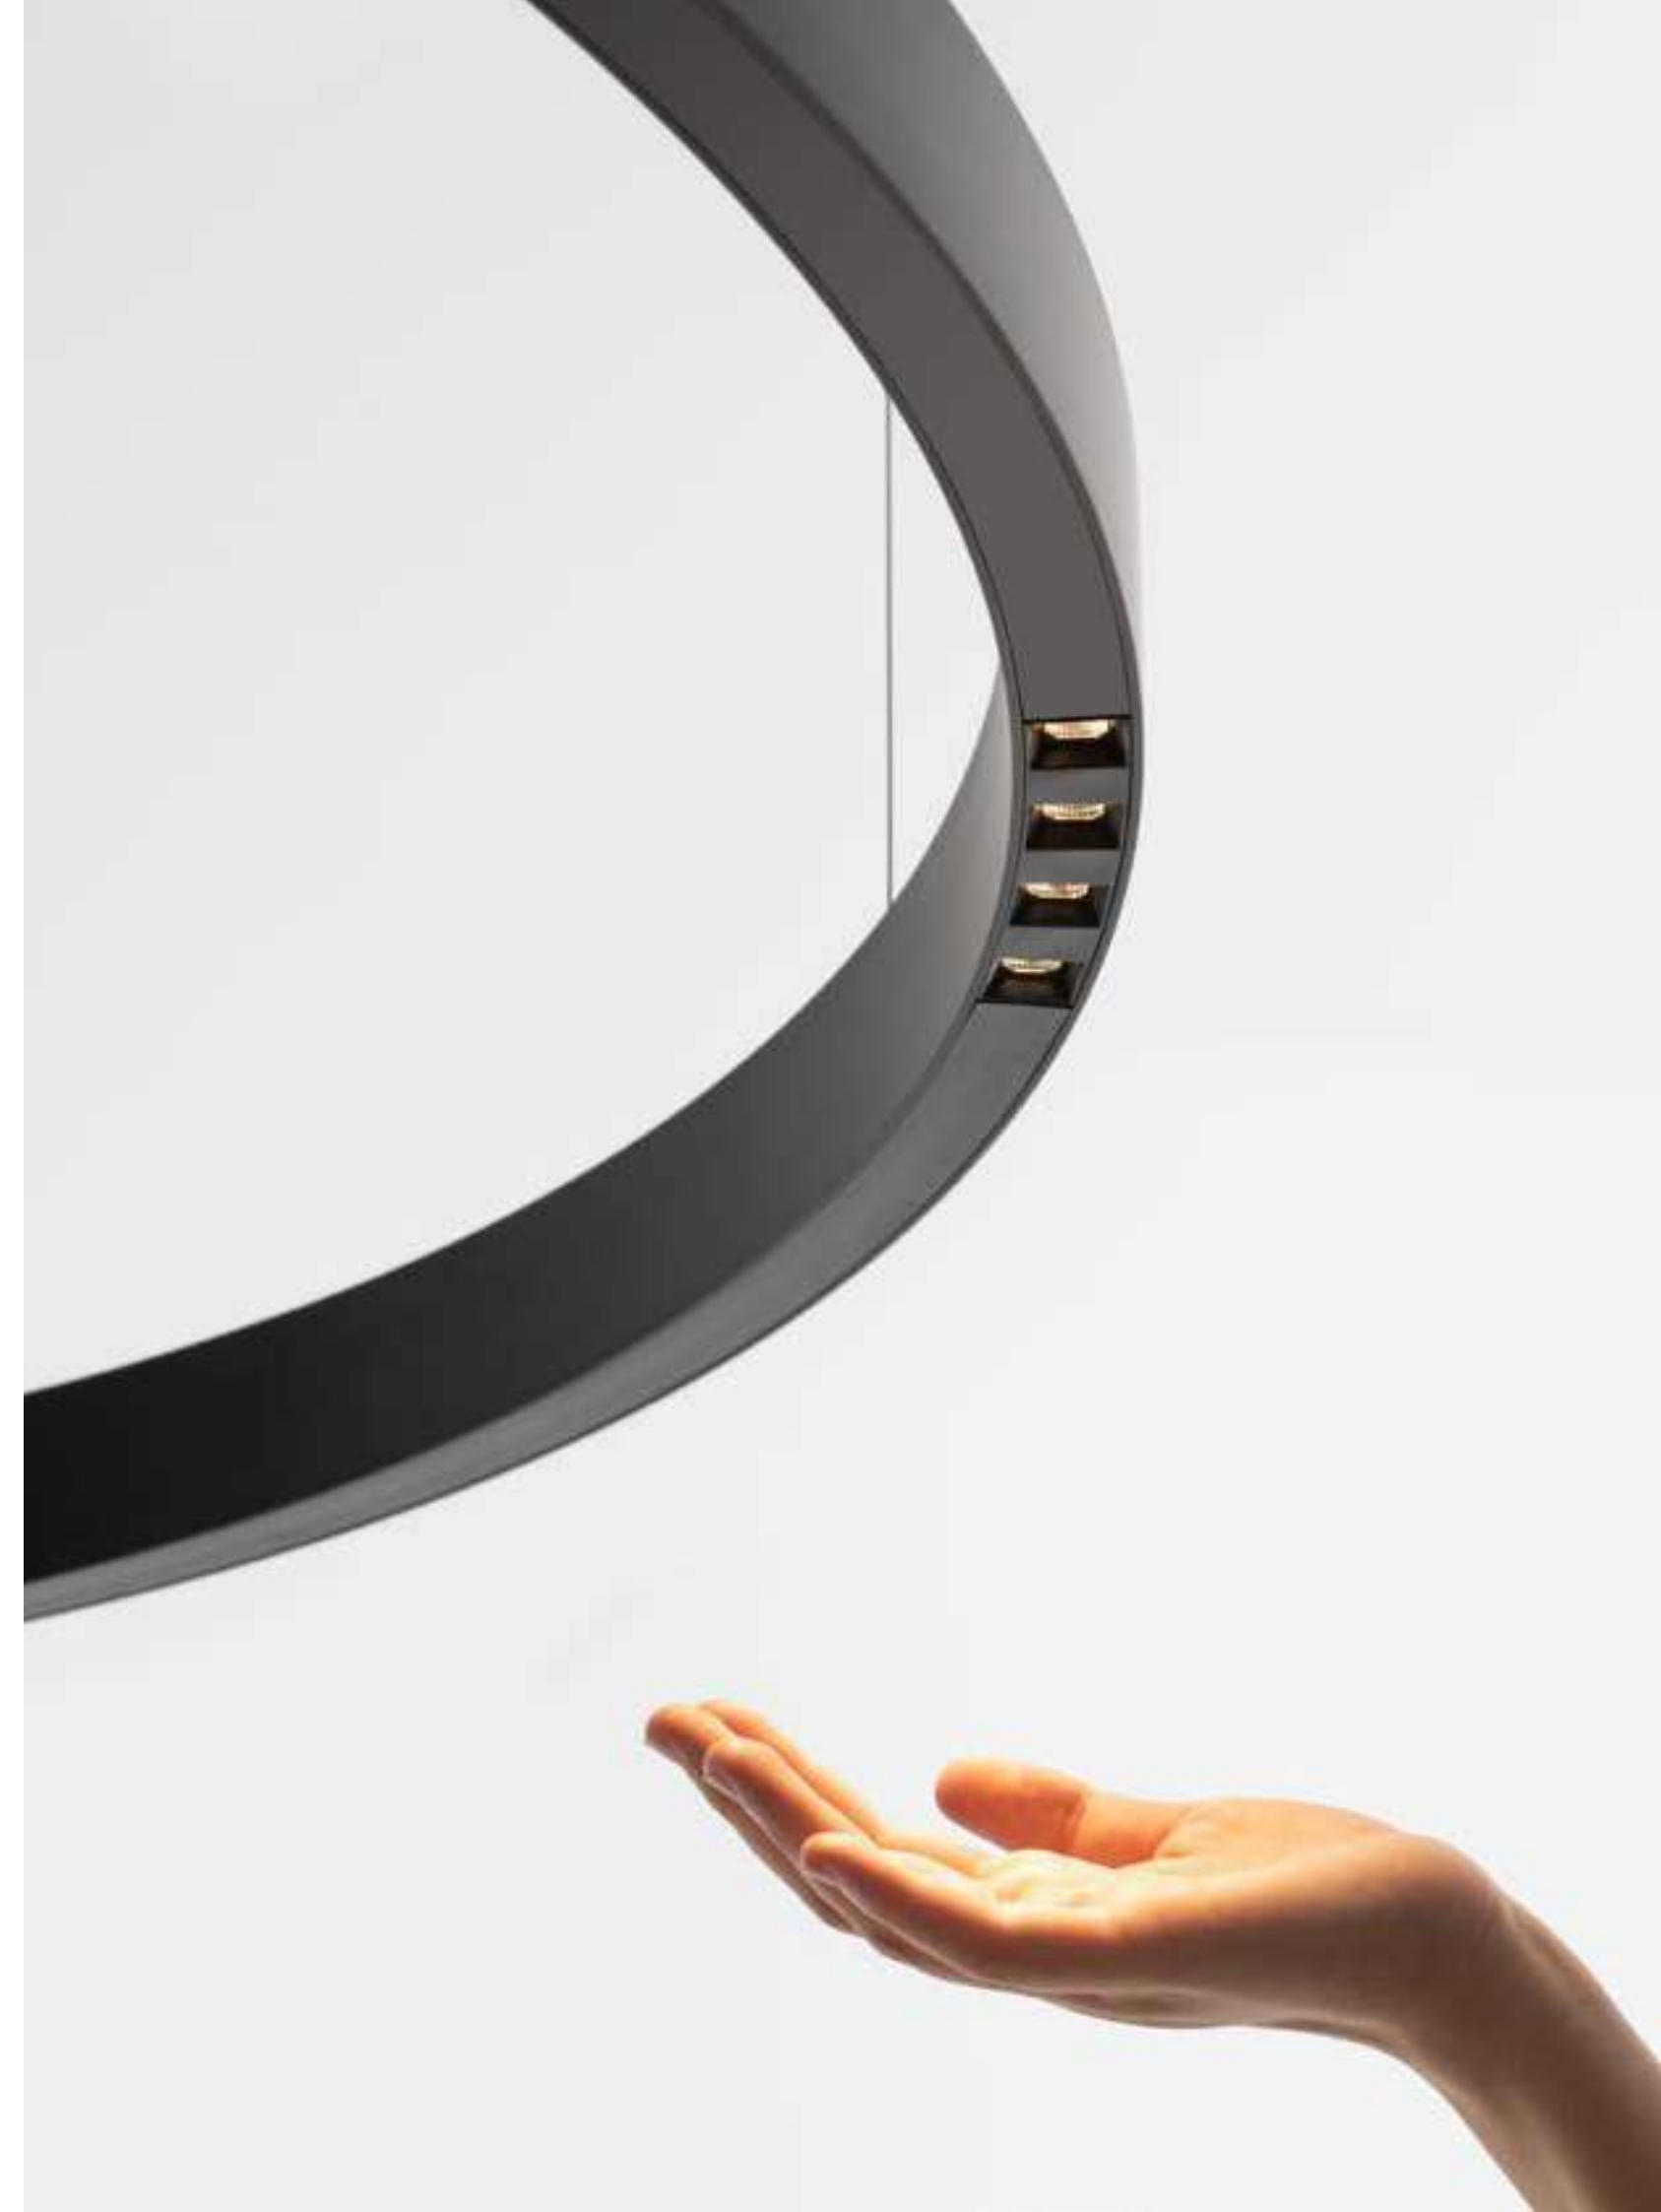
Curved direct emission elements						Code
Radius	Alpha	W	Beam	Flux	CCT	
561 mm*	60°	12W	F 24°	839 lm	2700K	AQ708. 01/04
					3000K	AQ703. 01/04
					4000K	AQ705. 01/04
		XF 62°	777 lm	2700K	AQ709. 01/04	
			3000K			
			4000K	AQ704. 01/04		
	90°	12W	F 24°	839 lm	2700K	AQ718. 01/04
					3000K	AQ713. 01/04
					4000K	AQ715. 01/04
		XF 62°	777 lm	2700K	AQ719. 01/04	
			3000K			
			4000K	AQ714. 01/04		
750 mm*	45°	12W	F 24°	839 lm	2700K	AQ728. 01/04
					3000K	AQ723. 01/04
					4000K	AQ725. 01/04
		XF 62°	777 lm	2700K	AQ729. 01/04	
			3000K			
			4000K	AQ724. 01/04		
	90°	25W	F 24°	1678 lm	2700K	AQ738. 01/04
					3000K	AQ733. 01/04
					4000K	AQ735. 01/04
		XF 62°	1555 lm	2700K	AQ739. 01/04	
			3000K			
			4000K	AQ734. 01/04		
						AQ736. 01/04
						15/18/20



↪ A.24 SUSPENSION SHARPING EMISSION

Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
 1 suspension cable is also included.
 End caps have to be ordered separately.
 Sharping kit (louvers and covers) has to be ordered separately.
 The APP driver can not be controlled by DALI dimming system and viceversa.
 For the effective powers of the drivers, see the table on page. 331

Accessories		Code			Code
	Insulating spacer (1 pcs) between modules powered by different power supplies	AQ453. 01/04 15/18/20		Louvers for linear elements Sharping kit L=1176mm (2 louvers - 1 intermediate cover - 2 end covers) Sharping kit L=2352mm (4 louvers - 3 intermediate cover - 2 end covers) 90° angle cover (2 pcs)	AQ260. 01/04 AQ261. 01/04 AQ262. 01/04
	End caps (2 pcs) including 2 suspension cables 200H	AQ451. 01/04 15/18/20		Louvers for curved elements R=561mm/R=750mm R=561mm 60° order 1 pc 90° order 1 pc R=750mm 45° order 1 pc 90° order 2 pcs	AQ911. 01/04
	Transition cap track - diffusing track - sharpening diffusing - sharpening	AQ494. 01/04 15/18/20		Flexible cover 2m Flexible cover 10m	AQ921. 01/04 AQ920. 01/04
Power supply		Undimmable			Dimmable DALI / APP
	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 ☉ 396x195x112H	AQ174. 01/04		240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 ☉ 396x195x112H	AQ154. 01/04 AQ154. 01/04 APP
	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 ☉ 351x61x111H	AQ171. 01/04		240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 ☉ 321x91x111H	AQ161. 01/04 AQ161. 01/04 APP
	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 ☉ 351x61x111H	AQ176. 01/04		150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 ☉ 321x91x111H	AQ175. 01/04 AQ175. 01/04 APP
	240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 ☉ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18000		DALI to DALI-Selv Interface 103x67x21H	AQ18200
	150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 ☉ (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18100		240W Remote box power supply kit (2 connectors) 230VAC-48VDC IP20 ☉ 313x243x57,5H	AQ16000 AQ16000APP



↪ A.24 CEILING SHARPING EMISSION

White Black
 01 04
 Fast delivery

Brushed Silver Brushed Copper Brushed Bronze
 15 18 20
 Delivery time on demand


F XF
 *Uses 1 DALI address
 ** Uses 2 DALI addresses

MacAdam 2SDCM
 Life L90 (20K) 118000h
 CRI = 90

IP20

Linear direct emission elements



Length	W	CRI	Beam	Flux	CCT	Code				
1176 mm*	22W	90	F 24°	1528 lm	2700K	AQ324. 01/04 15/18/20				
				1628 lm	3000K	AQ320. 01/04 15/18/20				
				1742 lm	4000K	AQ321. 01/04 15/18/20				
			XF 62°	1624 lm	2700K	AQ344. 01/04 15/18/20				
				1731 lm	3000K	AQ340. 01/04 15/18/20				
				1852 lm	4000K	AQ341. 01/04 15/18/20				
				2352 mm**	46W	90	F 24°	3056 lm	2700K	AQ325. 01/04 15/18/20
								3256 lm	3000K	AQ322. 01/04 15/18/20
								3485 lm	4000K	AQ323. 01/04 15/18/20
							XF 62°	3249 lm	2700K	AQ345. 01/04 15/18/20
3461 lm	3000K	AQ342. 01/04 15/18/20								
3704 lm	4000K	AQ343. 01/04 15/18/20								



90° angle joining elements (not lit)

90° ceiling corner (on same plane)
301x301mm


Code
AQ360. 01/04 15/18/20



Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
Bracket for fixing to ceiling is included: 1 for 1176 mm length - 2 for 2352 mm length.
End caps have to be ordered separately.
Sharpening kit (louvers and covers) has to be ordered separately.







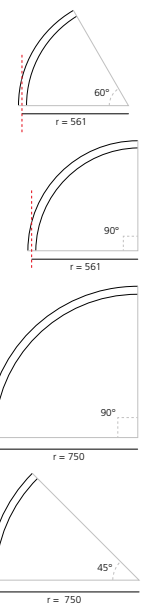

Curved direct emission elements






Radius	Alpha	W	CRI	Beam	Flux	CCT	Code				
561 mm*	60°	12W	90	F 24°	839 lm	2700K	AQ608. 01/04 15/18/20				
					3000K	AQ603. 01/04 15/18/20					
					4000K	AQ605. 01/04 15/18/20					
				XF 62°	777 lm	2700K	AQ609. 01/04 15/18/20				
					3000K	AQ604. 01/04 15/18/20					
					4000K	AQ606. 01/04 15/18/20					
					90°	12W	90	F 24°	839 lm	2700K	AQ618. 01/04 15/18/20
									3000K	AQ613. 01/04 15/18/20	
									4000K	AQ615. 01/04 15/18/20	
								XF 62°	777 lm	2700K	AQ619. 01/04 15/18/20
3000K	AQ614. 01/04 15/18/20										
4000K	AQ616. 01/04 15/18/20										
750 mm*	45°	12W	90	F 24°	839 lm	2700K	AQ628. 01/04 15/18/20				
					3000K	AQ623. 01/04 15/18/20					
					4000K	AQ625. 01/04 15/18/20					
				XF 62°	777 lm	2700K	AQ629. 01/04 15/18/20				
					3000K	AQ624. 01/04 15/18/20					
					4000K	AQ626. 01/04 15/18/20					
					90°	25W	90	F 24°	1678 lm	2700K	AQ638. 01/04 15/18/20
									3000K	AQ633. 01/04 15/18/20	
									4000K	AQ635. 01/04 15/18/20	
								XF 62°	1555 lm	2700K	AQ639. 01/04 15/18/20
3000K	AQ634. 01/04 15/18/20										
4000K	AQ636. 01/04 15/18/20										



↪ A.24 CEILING SHARPING EMISSION

Each linear, angle and curved elements are provided with mechanical and electrical joints, and installation accessories.
Bracket for fixing to ceiling is included: 1 for 1176 mm length - 2 for 2352 mm length.
End caps have to be ordered separately.
Sharping kit (louvers and covers) has to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.
For the effective powers of the drivers, see the table on page. 331

Accessories		Code	Accessories		Code
	Insulating spacer (1 pcs) between modules powered by differents power supply	AQ352. 01/04 15/18/20		Louvers for linear elements Sharping kit L=1176mm (2 louvers - 1 intermediate cover - 2 end covers)	AQ260. 01/04
	End caps (2 pcs)	AQ350. 01/04 15/18/20		Sharping kit L=2352mm (4 louvers - 3 intermediate cover - 2 end covers)	AQ261. 01/04
	Cap for cable passage (1 pcs)	AQ353. 01/04 15/18/20		90° angle cover (2 pcs)	AQ262. 01/04
	Transition cap track - diffusing track- sharpening diffusing - sharpening	AQ394. 01/04 15/18/20		Louvers for curved elements R=561mm/R=750mm	AQ911. 01/04
			R=561mm 60° order 1 pc 90° order 1 pc R=750mm 45° order 1 pc 90° order 2 pcs		
			Flexible cover 2m Flexible cover 10m	AQ921. 01/04 AQ920. 01/04	

Power supply	Undimmable		Dimmable DALI / APP
	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H	AQ17801	240W Recessed power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 396x195x112H
	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC 240W IP20 351x61x111H	AQ173. 01/04	240W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 321x91x111H
	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC 240W IP20 351x61x111H	AQ179. 01/04	150W Ceiling power supply kit (cable length 2,2 m) 230VAC-48VDC IP20 321x91x111H
	240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18000	DALI to DALI-Selv Interface 103x67x21H
	150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (for dimmable version to be combined with "DALI-Selv interface") 244x68x38H	AQ18100	240W Remote box power supply kit (2 connectors) 230VAC-48VDC IP20 313x243x57,5H
			AQ16000 AQ16000APP






A.24 circular
↪ Stand-alone



↪ A.24 STAND-ALONE CIRCULAR - DIFFUSED EMISSION


White Black
 01 04
 Fast delivery

Brushed Silver Brushed Copper Brushed Bronze
 15 18 20
 Delivery time on demand

WF


220/240Vac 50/60Hz electronic ballast included


MacAdam 2SDCM
 Life L80 (10K)>55000h
 CRI = 80
 Uses 1 DALI addresses.

IP20


RECESSED


Direct emission				Dimmable DALI		APP	
Ø	W	Flux	CCT	Code	Code	Code	Code
1122 mm	102W	7124 lm	2700K	AQ54401	AQ54401APP	AQ54001	AQ54001APP
		7443 lm	3000K	AQ54101	AQ54101APP	AQ54101	AQ54101APP
		9499 lm	4000K	AQ55401	AQ55401APP	AQ55401	AQ55401APP
1500 mm	136W	7124 lm	2700K	AQ55001	AQ55001APP	AQ55001	AQ55001APP
		7443 lm	3000K	AQ55101	AQ55101APP	AQ55101	AQ55101APP
		9924 lm	4000K				

Formwork (aluminum) included



SUSPENSION

Direct emission				Dimmable DALI		APP	
Ø	W	Flux	CCT	Code	Code	Code	Code
1122 mm	102W	7124 lm	2700K	AQ744. 01/04	AQ744. 01/04 APP	AQ744. 01/04	AQ744. 01/04 APP
		7443 lm	3000K	AQ740. 01/04	AQ740. 01/04 APP	AQ740. 01/04	AQ740. 01/04 APP
		9499 lm	4000K	AQ741. 01/04	AQ741. 01/04 APP	AQ741. 01/04	AQ741. 01/04 APP
1500 mm	136W	7124 lm	2700K	AQ754. 01/04	AQ754. 01/04 APP	AQ754. 01/04	AQ754. 01/04 APP
		7443 lm	3000K	AQ750. 01/04	AQ750. 01/04 APP	AQ750. 01/04	AQ750. 01/04 APP
		9924 lm	4000K	AQ751. 01/04	AQ751. 01/04 APP	AQ751. 01/04	AQ751. 01/04 APP



CEILING

Direct emission				Dimmable DALI		APP	
Ø	W	Flux	CCT	Code	Code	Code	Code
1122 mm	102W	7124 lm	2700K	AQ644. 01/04	AQ644. 01/04 APP	AQ644. 01/04	AQ644. 01/04 APP
		7443 lm	3000K	AQ640. 01/04	AQ640. 01/04 APP	AQ640. 01/04	AQ640. 01/04 APP
		9499 lm	4000K	AQ641. 01/04	AQ641. 01/04 APP	AQ641. 01/04	AQ641. 01/04 APP
1550 mm	136W	7124 lm	2700K	AQ654. 01/04	AQ654. 01/04 APP	AQ654. 01/04	AQ654. 01/04 APP
		7443 lm	3000K	AQ650. 01/04	AQ650. 01/04 APP	AQ650. 01/04	AQ650. 01/04 APP
		9924 lm	4000K	AQ651. 01/04	AQ651. 01/04 APP	AQ651. 01/04	AQ651. 01/04 APP

Accessories

Trimless frame to be used for recessing the power kit
 For suspension Stand-alone Ø 1122 and Ø 1500
 For ceiling Stand-alone Ø 1122 and Ø 1500


Code

AQ94000
 AQ94200

↪ A.24 STAND-ALONE CIRCULAR - SHARPING EMISSION


White Black
 01 04
 Fast delivery

Brushed Silver Brushed Copper Brushed Bronze
 15 18 20
 Delivery time on demand

F


220/240Vac 50/60Hz electronic ballast included

MacAdam 2SDCM
 Life L70 (6K) 50000h
 *Uses 1 DALI address
 ** Uses 2 DALI addresses


IP20


Sharping kit has to be ordered separately.

RECESSED


Direct emission						Dimmable DALI		APP	
Ø	W	CRI	Beam	Flux	CCT	Code	Code	Code	Code
1122 mm*	50W	90	F 24°	3356 lm	2700K	AQ545. 01/04	AQ545. 01/04 APP	AQ542. 01/04	AQ542. 01/04 APP
				3576 lm	4000K	AQ543. 01/04	AQ543. 01/04 APP	AQ543. 01/04	AQ543. 01/04 APP
				6713 lm	2700K	AQ555. 01/04	AQ555. 01/04 APP	AQ552. 01/04	AQ552. 01/04 APP
1500 mm**	100W	90	F 24°	3576 lm	4000K	AQ552. 01/04	AQ552. 01/04 APP	AQ553. 01/04	AQ553. 01/04 APP
				6713 lm	2700K				
				7152 lm	4000K				

Formwork (aluminum) included




SUSPENSION

Direct emission						Dimmable DALI		APP	
Ø	W	CRI	Beam	Flux	CCT	Code	Code	Code	Code
1122 mm*	50W	90	F 24°	3356 lm	2700K	AQ745. 01/04	AQ745. 01/04 APP	AQ745. 01/04	AQ745. 01/04 APP
				3576 lm	4000K	AQ742. 01/04	AQ742. 01/04 APP	AQ742. 01/04	AQ742. 01/04 APP
				6713 lm	2700K	AQ743. 01/04	AQ743. 01/04 APP	AQ743. 01/04	AQ743. 01/04 APP
1500 mm**	100W	90	F 24°	3576 lm	4000K	AQ755. 01/04	AQ755. 01/04 APP	AQ755. 01/04	AQ755. 01/04 APP
				6713 lm	2700K	AQ752. 01/04	AQ752. 01/04 APP	AQ752. 01/04	AQ752. 01/04 APP
				7152 lm	4000K	AQ753. 01/04	AQ753. 01/04 APP	AQ753. 01/04	AQ753. 01/04 APP




CEILING

Direct emission						Dimmable DALI		APP	
Ø	W	CRI	Beam	Flux	CCT	Code	Code	Code	Code
1122 mm*	50W	90	F 24°	3356 lm	2700K	AQ645. 01/04	AQ645. 01/04 APP	AQ645. 01/04	AQ645. 01/04 APP
				3576 lm	4000K	AQ642. 01/04	AQ642. 01/04 APP	AQ642. 01/04	AQ642. 01/04 APP
				6713 lm	2700K	AQ643. 01/04	AQ643. 01/04 APP	AQ643. 01/04	AQ643. 01/04 APP
1500 mm**	100W	90	F 24°	3576 lm	4000K	AQ655. 01/04	AQ655. 01/04 APP	AQ655. 01/04	AQ655. 01/04 APP
				6713 lm	2700K	AQ652. 01/04	AQ652. 01/04 APP	AQ652. 01/04	AQ652. 01/04 APP
				7152 lm	4000K	AQ653. 01/04	AQ653. 01/04 APP	AQ653. 01/04	AQ653. 01/04 APP



Sharping accessories



Sharping kit R=561mm
 (4 louvers - 4 covers)
 Sharping kit R=750mm
 (8 louvers - 8 covers)

Code

AQ930. 01/04
 AQ931. 01/04

Accessories

Trimless frame to be used for recessing the power kit
 For suspension Stand-alone Ø 1122 and Ø 1500
 For ceiling Stand-alone Ø 1122 and Ø 1500

Code

AQ94000
 AQ94200

A.39

Carlotta de Bevilacqua

↪ 2017




Artemide
App



For further information on A.39
↪ visit artemide.com

A.39 typologies

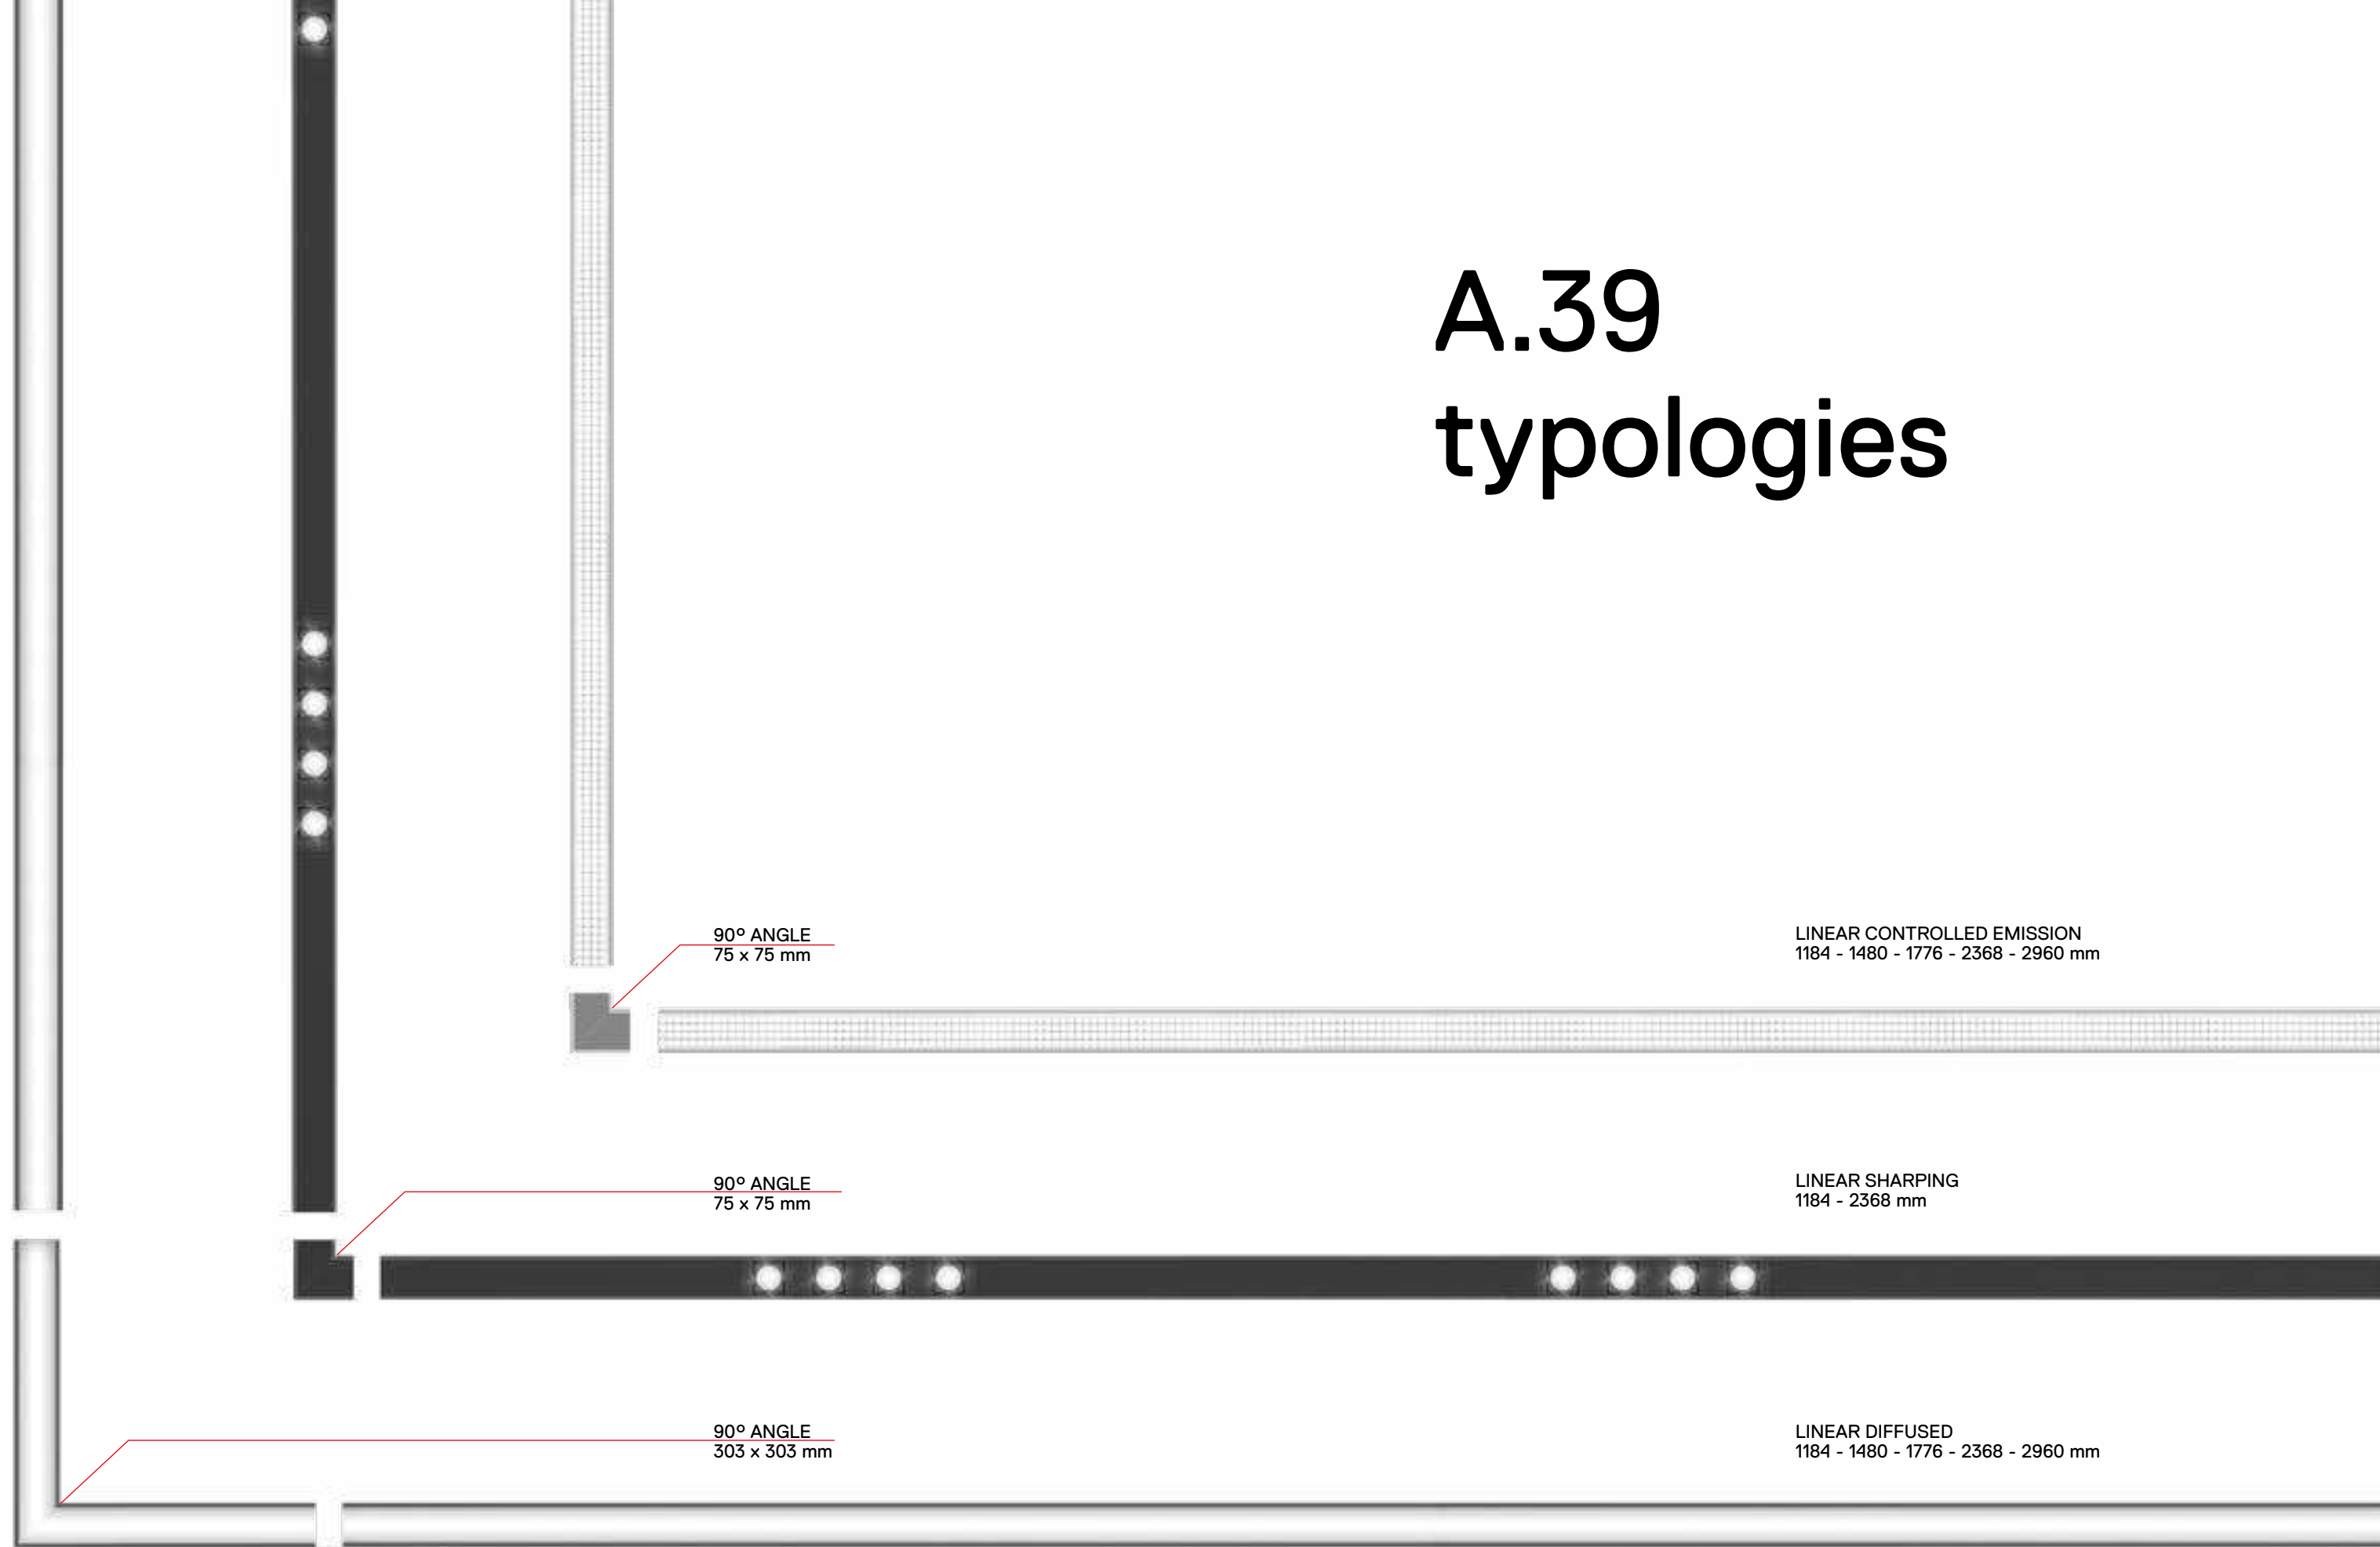

90° ANGLE
75 x 75 mm

LINEAR CONTROLLED EMISSION
1184 - 1480 - 1776 - 2368 - 2960 mm

90° ANGLE
75 x 75 mm

LINEAR SHARPING
1184 - 2368 mm

90° ANGLE
303 x 303 mm

LINEAR DIFFUSED
1184 - 1480 - 1776 - 2368 - 2960 mm

A.39 colors

White




Silver



Black



A.39 space fittings

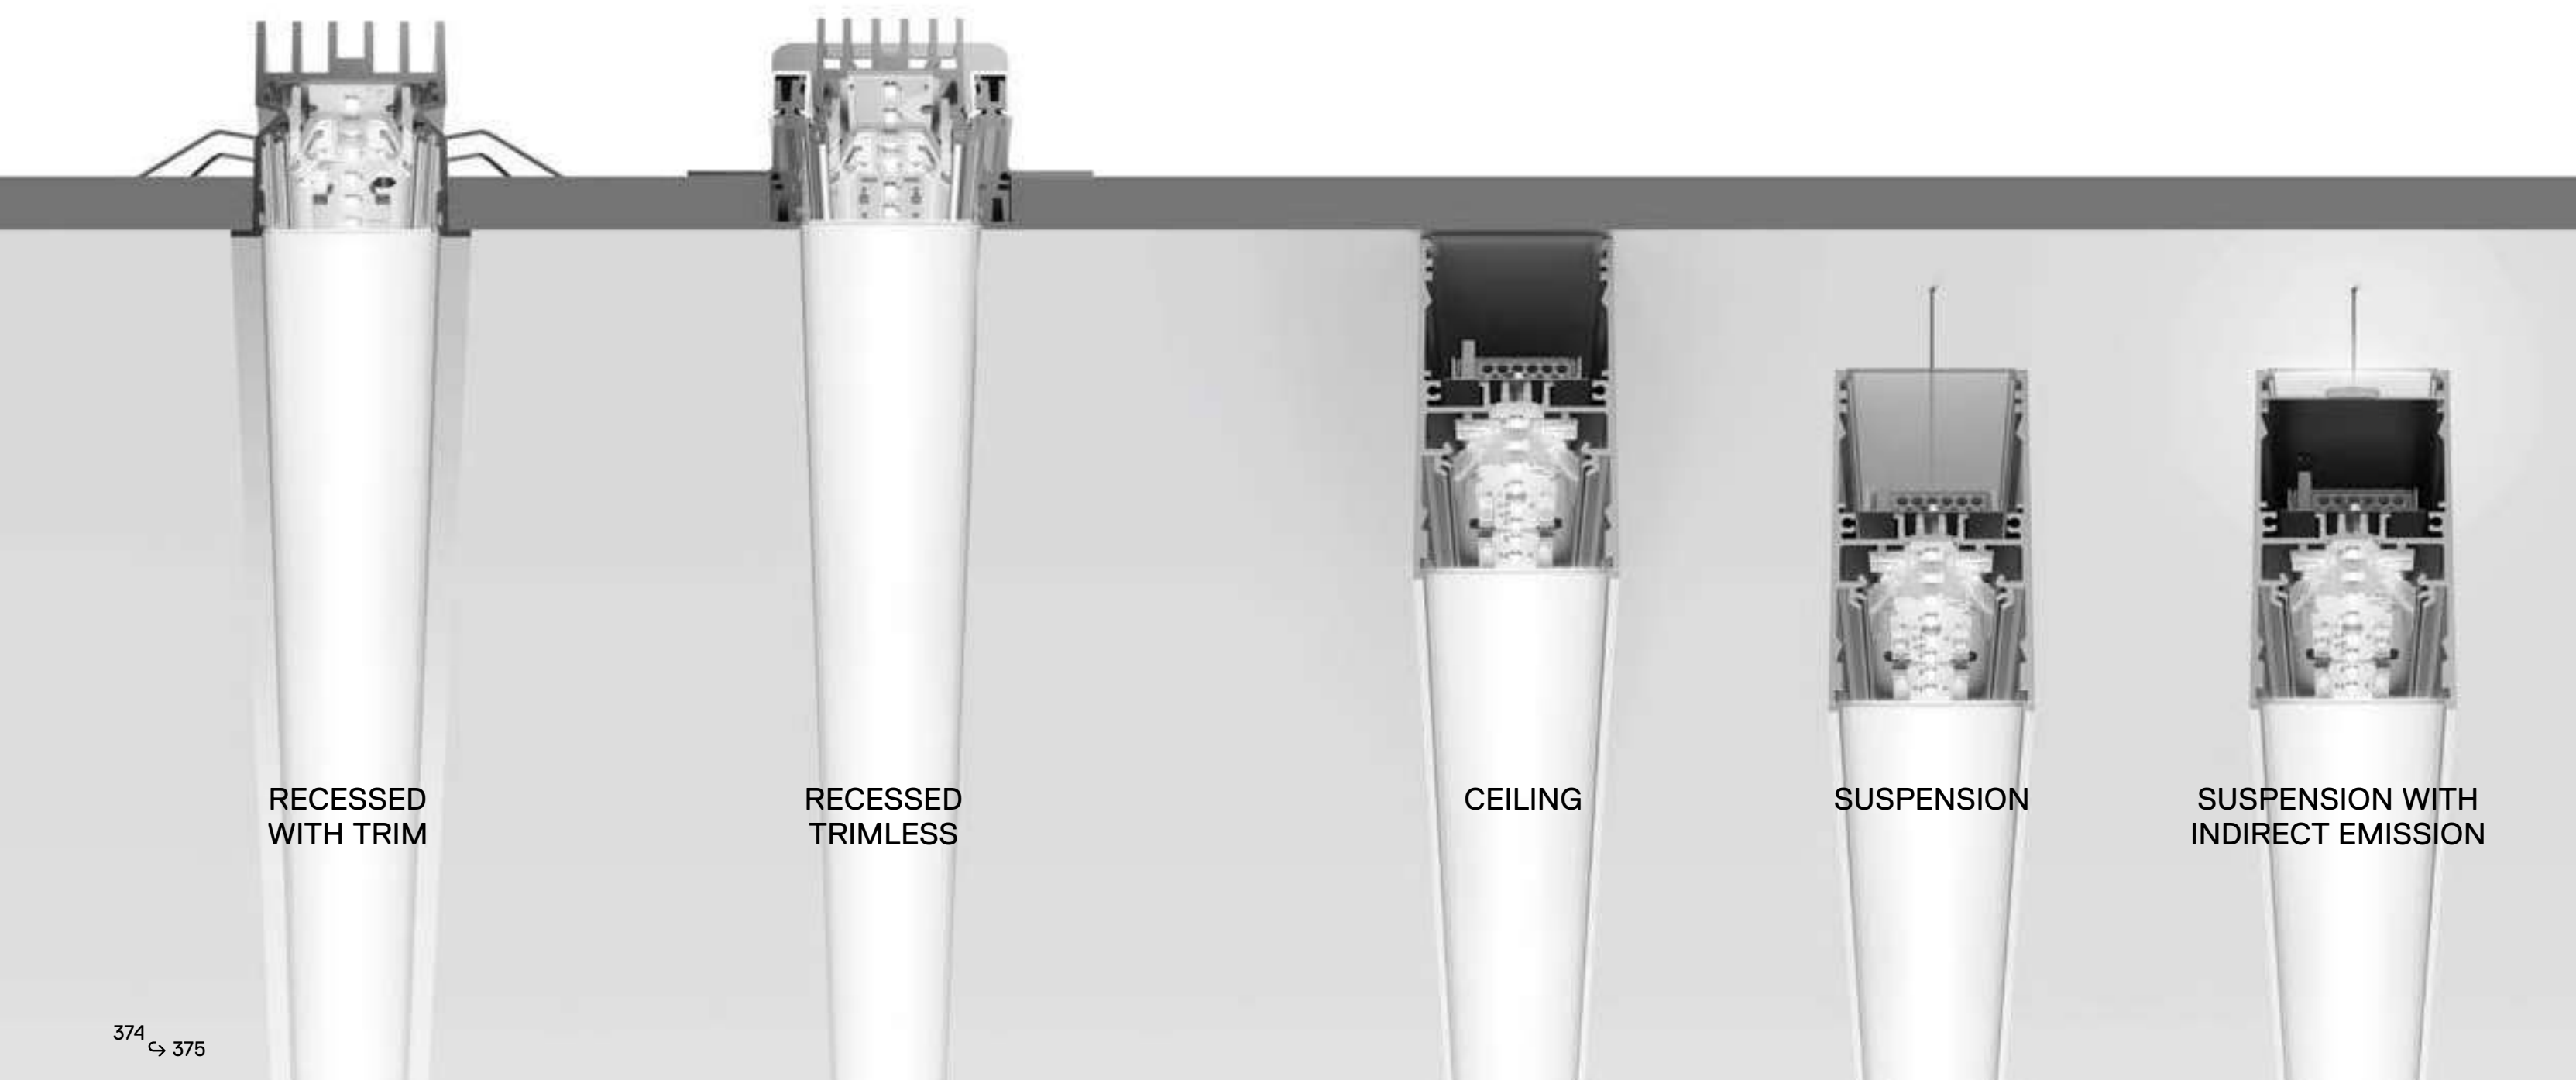

A.39

↪ diffused

01. "All in one" construction.

02. a seamless and uniform brightness with no visible
junctions thanks to a continuous roll diffuser.


03. continuous roll diffuser up to 50 m.

04. comfortable light emission.






→ TRIMLESS

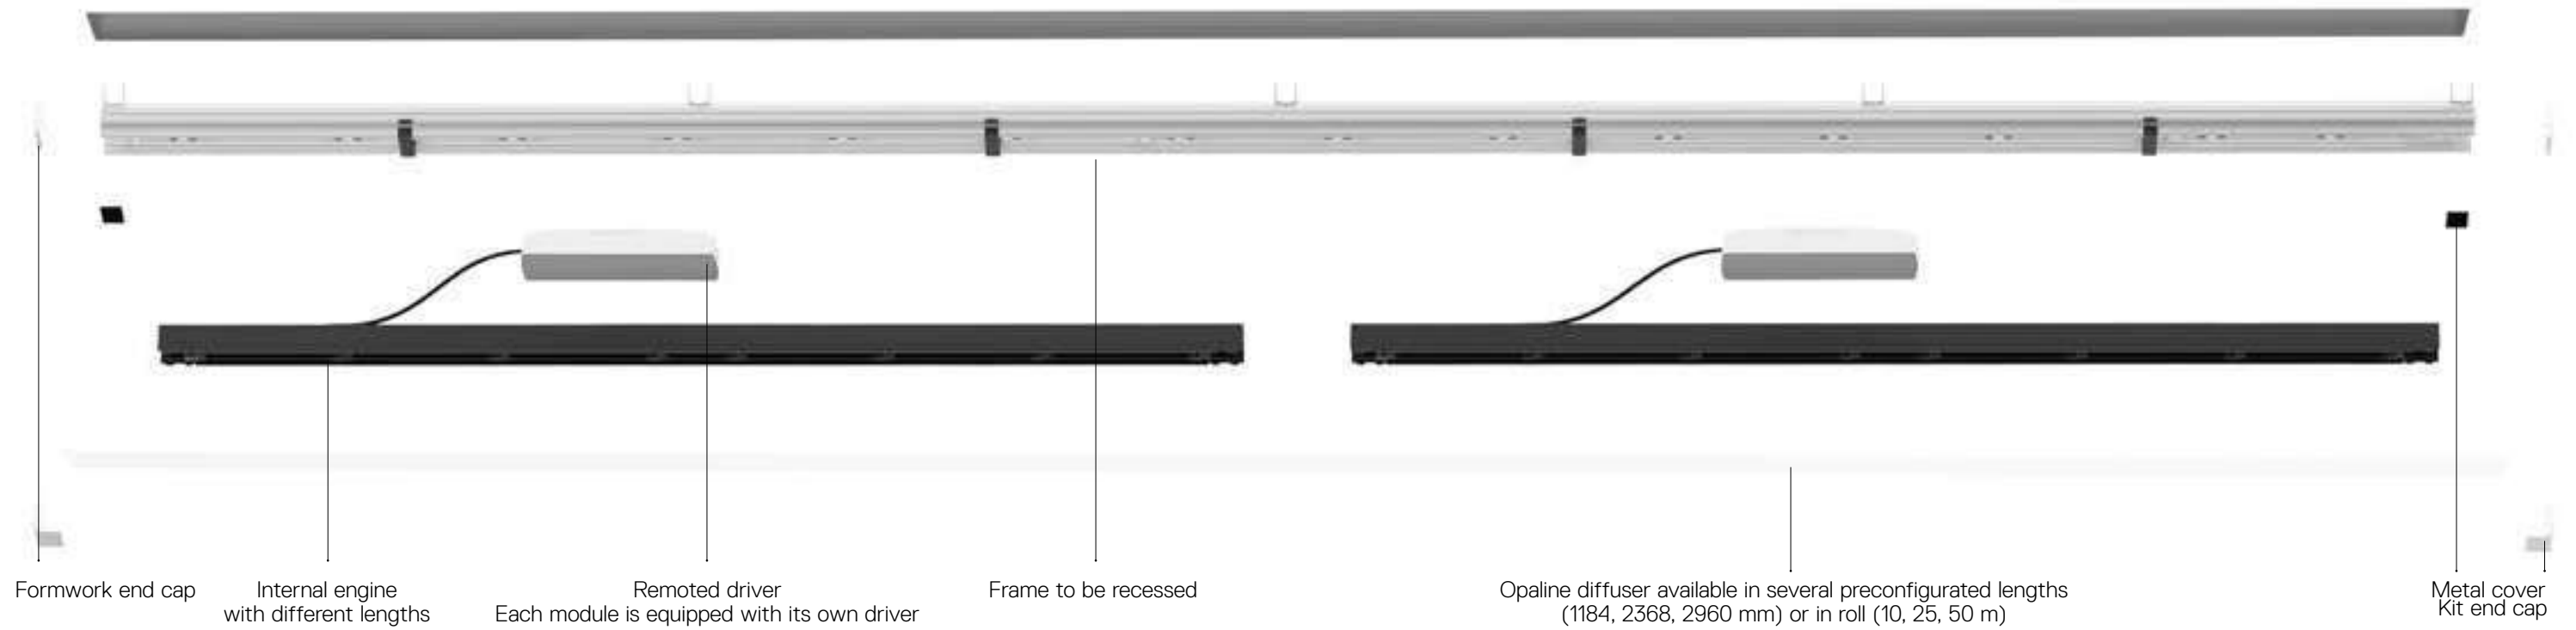


A.39 diffused recessed components

→ TRIM

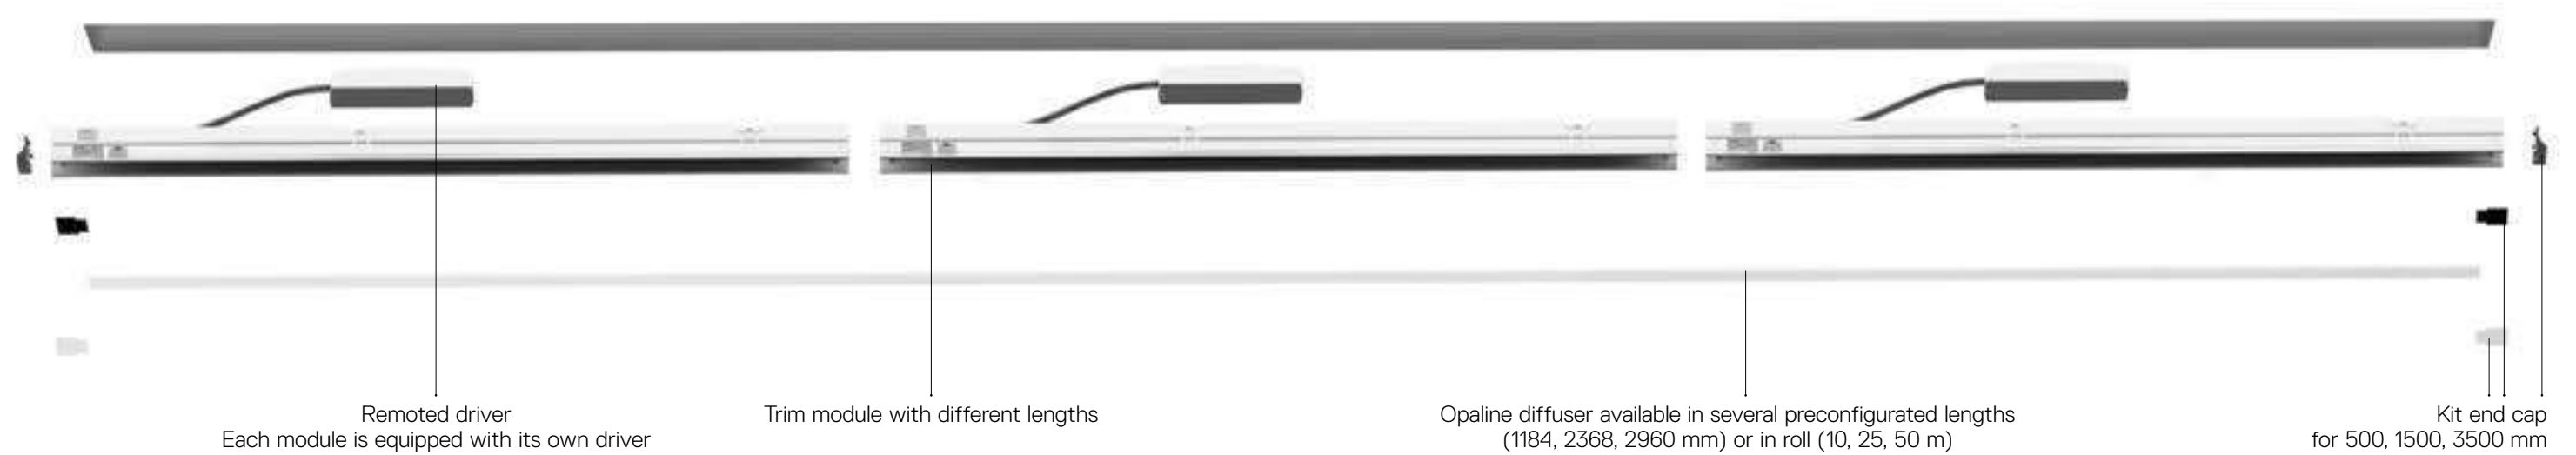


→ CEILING

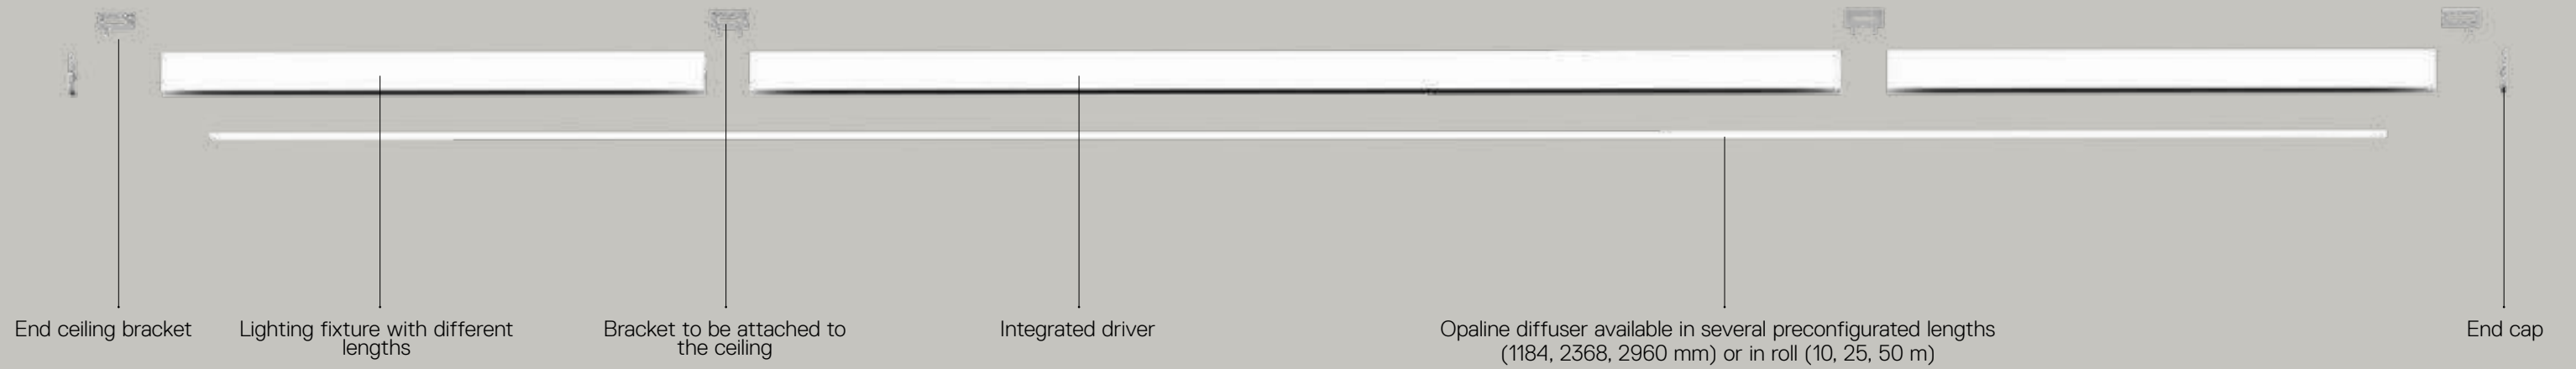

A.39 diffused ceiling, suspension components


→ SUSPENSION

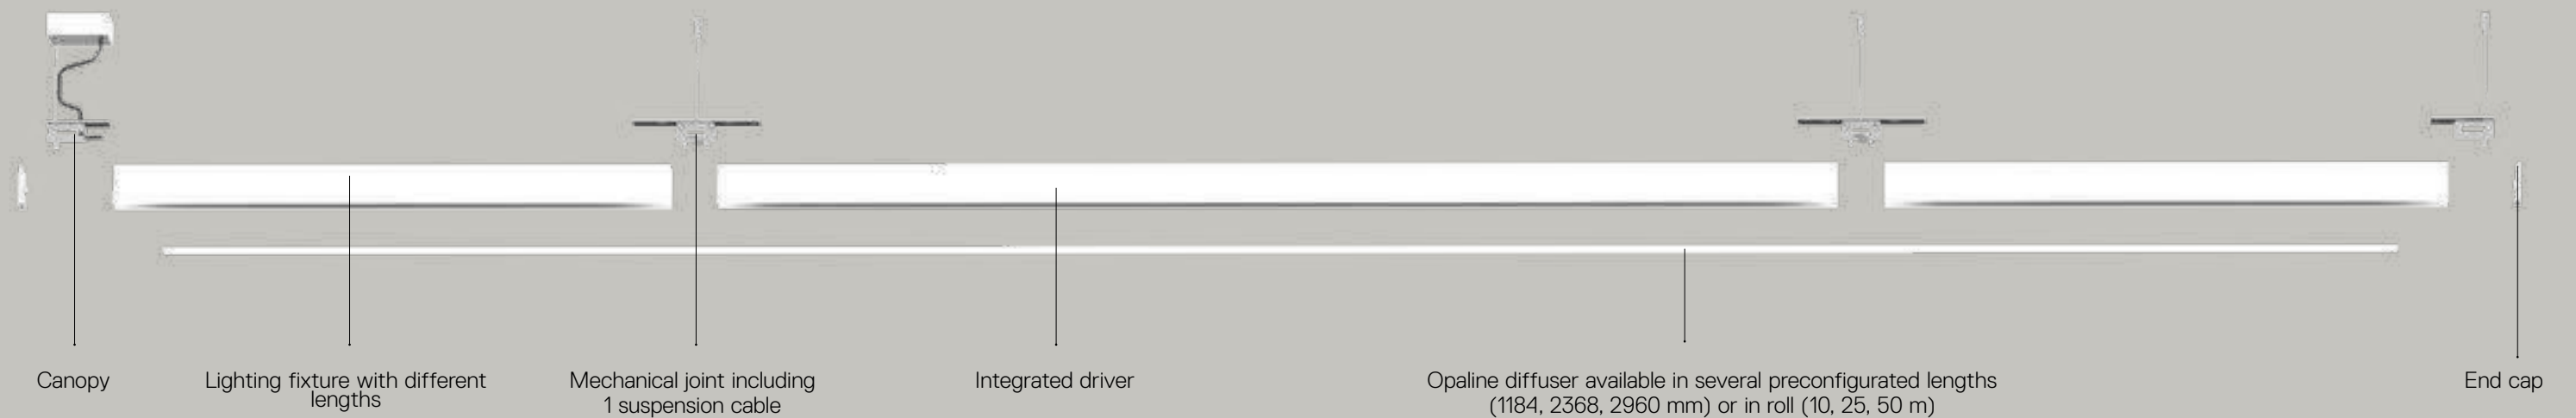

A.39 diffused system modules

	1184 mm	1482 mm	1776 mm	2368 mm	2960 mm	2960 - 5000 mm	5000 - 15000 mm	15000 - 35000 mm	50000 mm	
END CAP KIT TRIM	5000 mm	○————○					○			
	15000 mm						○—○			
	50000 mm							○—○		
DIFFUSER	1184 mm	○—○								
	2368 mm		○————○							
	2960 mm					○—○				
ROLL DIFFUSER	10 m					○————○				
	25 m					○————○				
	50 m					○————○				
FORMWORK TRIMLESS	1480 mm	○————○								
	4736 mm		○————○							
END CAP KIT TRIMLESS	50000 mm	○————○								
	SPECIAL								○—○	

TRIM - TRIMLESS

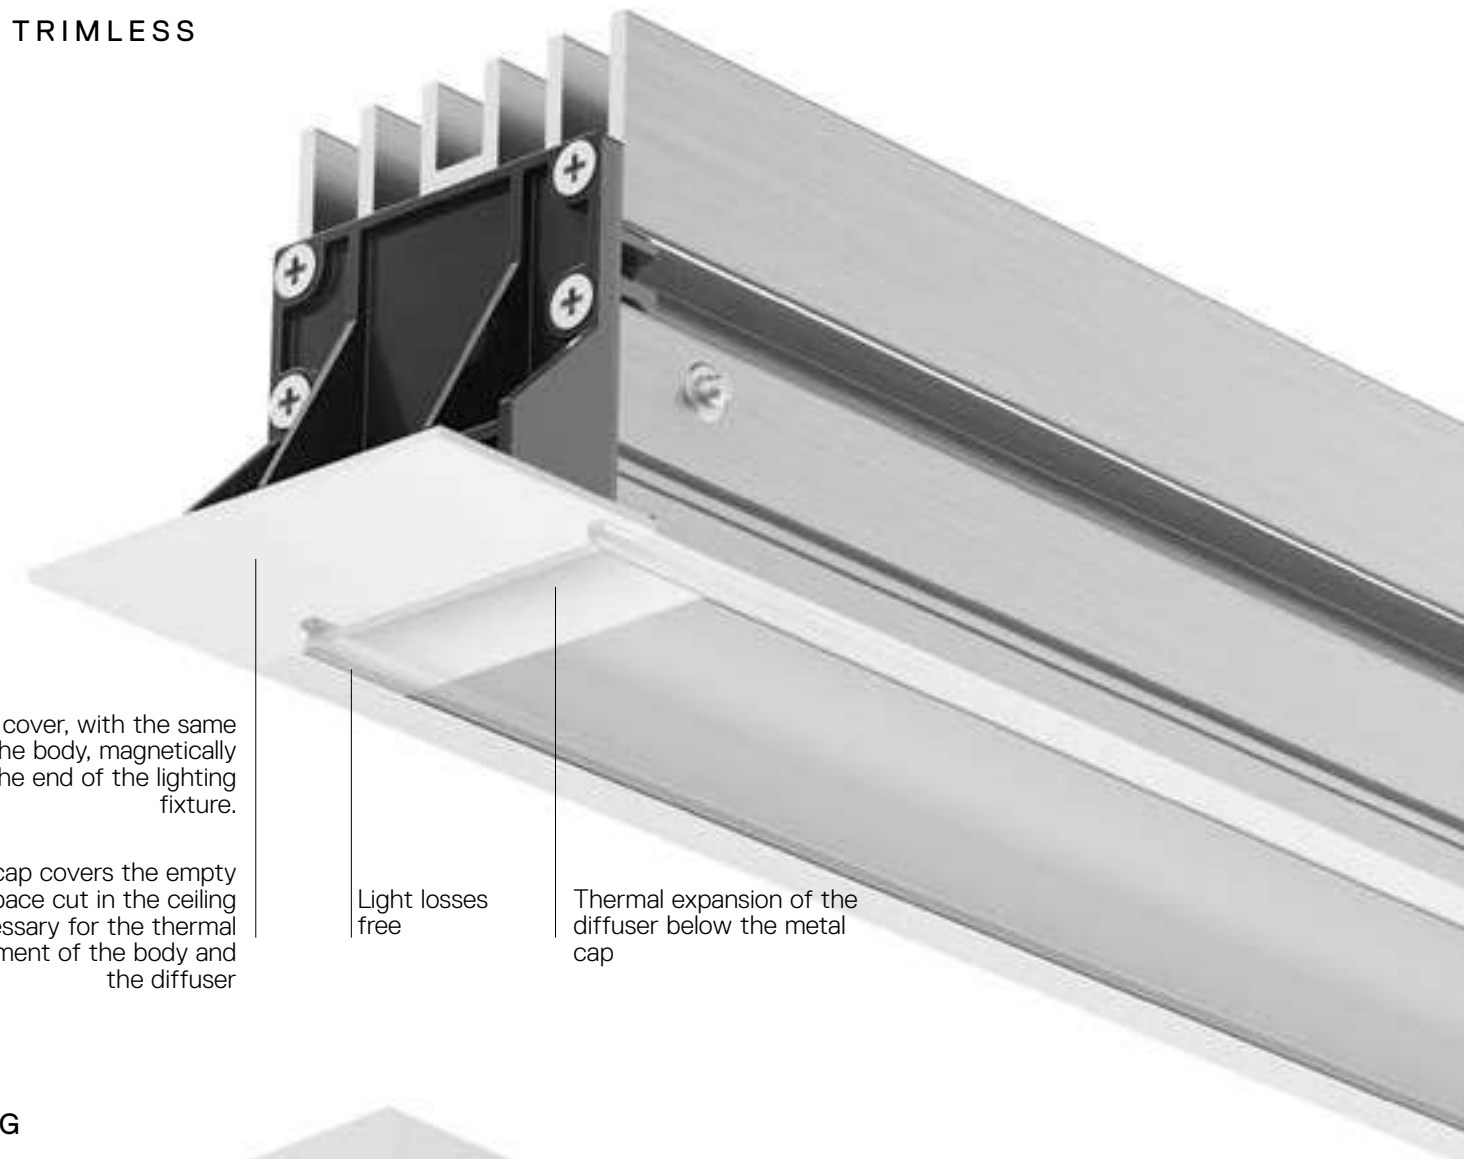


Metal cover, with the same color of the body, magnetically fixed at the end of the lighting fixture.

This cap covers the empty space cut in the ceiling necessary for the thermal adjustment of the body and the diffuser

Light losses free

Thermal expansion of the diffuser below the metal cap

CEILING

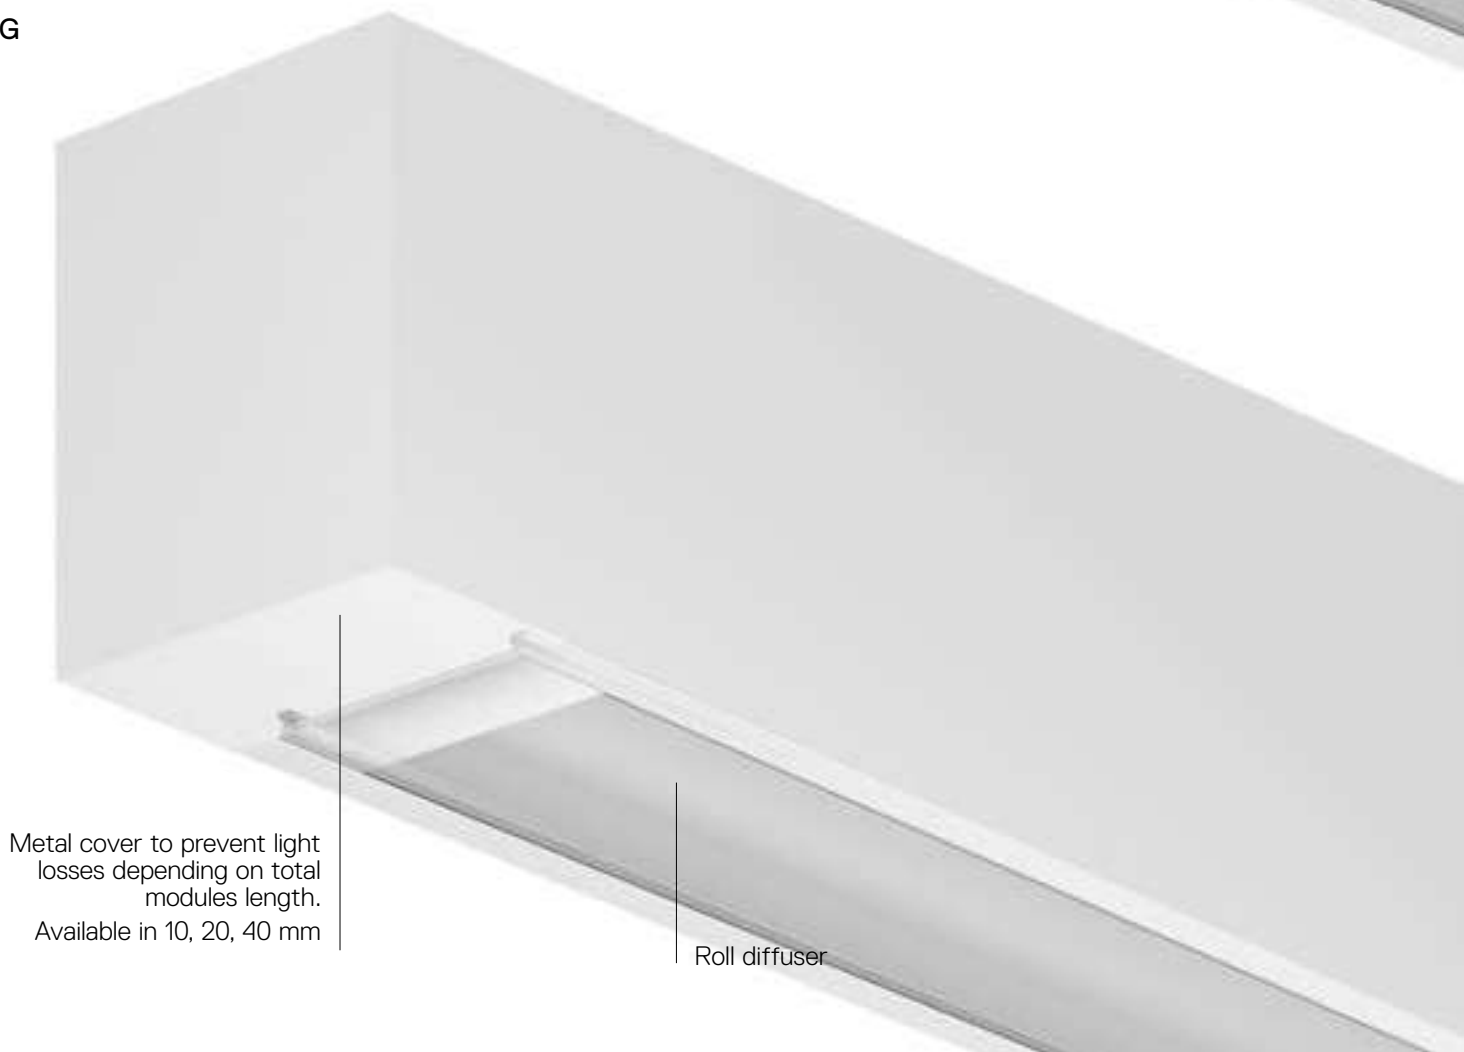

Metal cover to prevent light losses depending on total modules length. Available in 10, 20, 40 mm

Roll diffuser

↪ A.39 RECESSED TRIMLESS - DIFFUSED EMISSION

White Black Silver


Opal diffuser supplied separately.
APP interface supplied separately.
The APP driver can not be controlled by DALI dimming system and viceversa.

MacAdam 2SDCM
Life L70 (6K) 50000h
CRI = 80
* Driver uses 1 DALI address


IP20

01 04 05


Formwork (aluminum)		
	Length	Code
Trimless module frame kit	1488 mm	AT04000
	2368 mm	AT04200
	4736 mm	AT04100
Trimless module frame cap (2 pcs)		AT09300
End cap (2 pcs)		AT09301
90° trimless frame kit L=303x303		AT30400



Element Trimless				Undimmable	Dimmable DALI*
Length	W	Flux	CCT	Code	Code
1184 mm	33W	1981 lm	3000K	AT00100	AT00000
		2069 lm	4000K	AT00300	AT00200
1482 mm	41W	2476 lm	3000K	AT00500	AT00400
		2587 lm	4000K	AT00700	AT00600
1776 mm	49W	2971 lm	3000K	AT02100	AT02000
		3105 lm	4000K	AT02300	AT02200
2368 mm	63W	3962 lm	3000K	AT01100	AT01000
		4139 lm	4000K	AT01300	AT01200
2960 mm	81W	4952 lm	3000K	AT01500	AT01400
		5174 lm	4000K	AT01700	AT01600



Angle elements				Undimmable	Dimmable DALI*
	W	Flux	CCT	Code	Code
90° trimless	17W	1043 lm	3000K	AT30500	AT30600
recessed corner (on same plane) 303x303mm			4000K	AT30700	AT30800



Opal diffuser in polycarbonate (recessed)		Code
Length		
1184 mm		AT10100
2368 mm		AT10200
2960 mm		AT10300
10000 mm roll		AT10000
25000 mm roll		AT10800
50000 mm roll		AT10900

APP Interface	APP Code
BLL interface for APP with antenna Up to 40 addresses	DV1054APP

↪ A.39 RECESSED TRIM - DIFFUSED EMISSION

White Black Silver


Opal diffuser supplied separately.
APP interface supplied separately.
The APP driver can not be controlled by DALI dimming system and viceversa.

MacAdam 2SDCM
Life L70 (6K) 50000h
CRI = 80
* Driver uses 1 DALI address


IP20

01 04 05

Trim				Undimmable	Dimmable DALI*
Length	W	Flux	CCT	Code	Code
1184 mm	33W	2171 lm	3000K	AT051. 01/04/05	AT050. 01/04/05
		2269 lm	4000K	AT053. 01/04/05	AT052. 01/04/05
1482 mm	41W	2714 lm	3000K	AT055. 01/04/05	AT054. 01/04/05
		2836 lm	4000K	AT057. 01/04/05	AT056. 01/04/05
1776 mm	49W	3257 lm	3000K	AT065. 01/04/05	AT064. 01/04/05
		3403 lm	4000K	AT068. 01/04/05	AT066. 01/04/05
2368 mm	63W	4343 lm	3000K	AT061. 01/04/05	AT060. 01/04/05
		4538 lm	4000K	AT063. 01/04/05	AT062. 01/04/05
2960 mm	81W	5429 lm	3000K	AT070. 01/04/05	AT069. 01/04/05
		5673 lm	4000K	AT072. 01/04/05	AT071. 01/04/05



Angle elements				Undimmable	Dimmable DALI*
	W	Flux	CCT	Code	Code
90° trim	17W	1086 lm	3000K	AT300. 01/04/05	AT302. 01/04/05
recessed corner (on same plane) 303x303mm			4000K	AT301. 01/04/05	AT303. 01/04/05



	Code
Trim module end cap kit (2 pcs) up to 5 m	AT090. 01/04/05
up to 15 m	AT091. 01/04/05
up to 35 m	AT092. 01/04/05

Opal diffuser in polycarbonate (recessed)		Code
Length		
1184 mm		AT10100
2368 mm		AT10200
2960 mm		AT10300
10000 mm rouleau		AT10000
25000 mm rouleau		AT10800
50000 mm rouleau		AT10900

APP Interface	APP Code
BLL interface for APP with antenna Up to 40 addresses	DV1054APP

↪ A.39 CEILING - DIFFUSED EMISSION

White Black Silver
 01 04 05

Opal diffuser supplied separately.
 APP interface supplied separately.
 The APP driver can not be controlled by DALI dimming system and viceversa.



MacAdam 2SDCM
 Life L70 (6K) 50000h
 CRI = 80
 * Driver uses 1 DALI address

IP20

Ceiling direct emission			
Length	W	Flux	CCT
1184 mm	34W	2070 lm 2163 lm	3000K 4000K
1482 mm	42W	2588 lm 2704 lm	3000K 4000K
2368 mm	66W	4141 lm 4326 lm	3000K 4000K
2960 mm	82W	5176 lm 5408 lm	3000K 4000K


Undimmable	
Code	
AT131.	01/04/05
AT133.	01/04/05
AT141.	01/04/05
AT143.	01/04/05
AT151.	01/04/05
AT153.	01/04/05
AT181.	01/04/05
AT183.	01/04/05

Dimmable DALI*	
Code	
AT130.	01/04/05
AT132.	01/04/05
AT140.	01/04/05
AT142.	01/04/05
AT150.	01/04/05
AT152.	01/04/05
AT180.	01/04/05
AT182.	01/04/05



Angle elements			
	W	Flux	CCT
90° corner direct emission (on same plane) 303x303mm	17W	1081 lm	3000K 4000K

Dimmable DALI*	
Code	
AT350.	01/04/05
AT351.	01/04/05



Accessories	
	Code
End cap kit (2 pcs)	AT094. 01/04/05
Ceiling bracket and mechanical joint	AT09501
End ceiling bracket (2 pcs)	AT09502

Opal diffuser in polycarbonate	
Length	Code
1184 mm	AT09505
2368 mm	AT09506
2960 mm	AT09507
10000 mm roll	AT10000
25000 mm roll	AT10800
50000 mm roll	AT10900

APP Interface	
	APP Code
BLL interface for APP with antenna Up to 40 addresses	DV1054APP

↪ A.39 SUSPENSION - DIFFUSED EMISSION

White Black Silver
 01 04 05

Opal diffuser supplied separately.
 APP interface supplied separately.
 The APP driver can not be controlled by DALI dimming system and viceversa.



MacAdam 2SDCM
 Life L70 (6K) 50000h
 CRI = 80
 * Driver uses 1 DALI address
 ** Drivers use 2 DALI addresses

IP20

Suspension, ceiling direct emission			
Length	W	Flux	CCT
1184 mm	34W	2070 lm 2163 lm	3000K 4000K
1482 mm	42W	2588 lm 2704 lm	3000K 4000K
2368 mm	66W	4141 lm 4326 lm	3000K 4000K
2960 mm	82W	5176 lm 5408 lm	3000K 4000K

Undimmable	
Code	
AT131.	01/04/05
AT133.	01/04/05
AT141.	01/04/05
AT143.	01/04/05
AT151.	01/04/05
AT153.	01/04/05
AT181.	01/04/05
AT183.	01/04/05


Dimmable DALI*	
Code	
AT130.	01/04/05
AT132.	01/04/05
AT140.	01/04/05
AT142.	01/04/05
AT150.	01/04/05
AT152.	01/04/05
AT180.	01/04/05
AT182.	01/04/05



Suspension direct + indirect emission			
Length	W	Flux	CCT
1184 mm	34W direct	2070 lm direct	3000K
	23W indirect	2956 lm indirect	
		2163 lm direct 3088 lm indirect	4000K
1482 mm	42W direct	2588 lm direct	3000K
	31W indirect	3941 lm indirect	
		2704 lm direct 4118 lm indirect	4000K
2368 mm	66W direct	4141 lm direct	3000K
	50W indirect	5912 lm indirect	
		4326 lm direct 6177 lm indirect	4000K
2960 mm	82W direct	5176 lm direct	3000K
	67W indirect	7883 lm indirect	
		5408 lm direct 8236 lm indirect	4000K


Undimmable	
Code	
AT193.	01/04/05
AT221.	01/04/05
AT223.	01/04/05
AT231.	01/04/05
AT233.	01/04/05
AT241.	01/04/05
AT243.	01/04/05

Dimmable DALI	
Code	
*AT190.	01/04/05
*AT192.	01/04/05
*AT220.	01/04/05
*AT222.	01/04/05
**AT230.	01/04/05
**AT232.	01/04/05
**AT240.	01/04/05
**AT242.	01/04/05



Angle elements			
	W	Flux	CCT
90° corner direct emission (on same plane) 303x303mm	17W	1081 lm	3000K 4000K

Dimmable DALI*	
Code	
AT350.	01/04/05
AT351.	01/04/05



Accessories suspension	
	Code
Undimmable Feeding kit including 2 suspension cables 2000h mm (3 poles)	AT10400
Dimmable or APP Feeding kit including 2 suspension cables 2000h mm (5 poles)	AT10500 AT10500APP
Mechanical joint including 1 suspension cable	AT09500
End cap kit 2x	AT094. 01/04/05

Opal diffuser in polycarbonate (suspension, ceiling)	
Length	Code
1184 mm	AT09505
2368 mm	AT09506
2960 mm	AT09507
10000 mm roll	AT10000
25000 mm roll	AT10800
50000 mm roll	AT10900


A.39
↪ sharpening

→ TRIMLESS




A.39 sharpening recessed components

→ TRIM

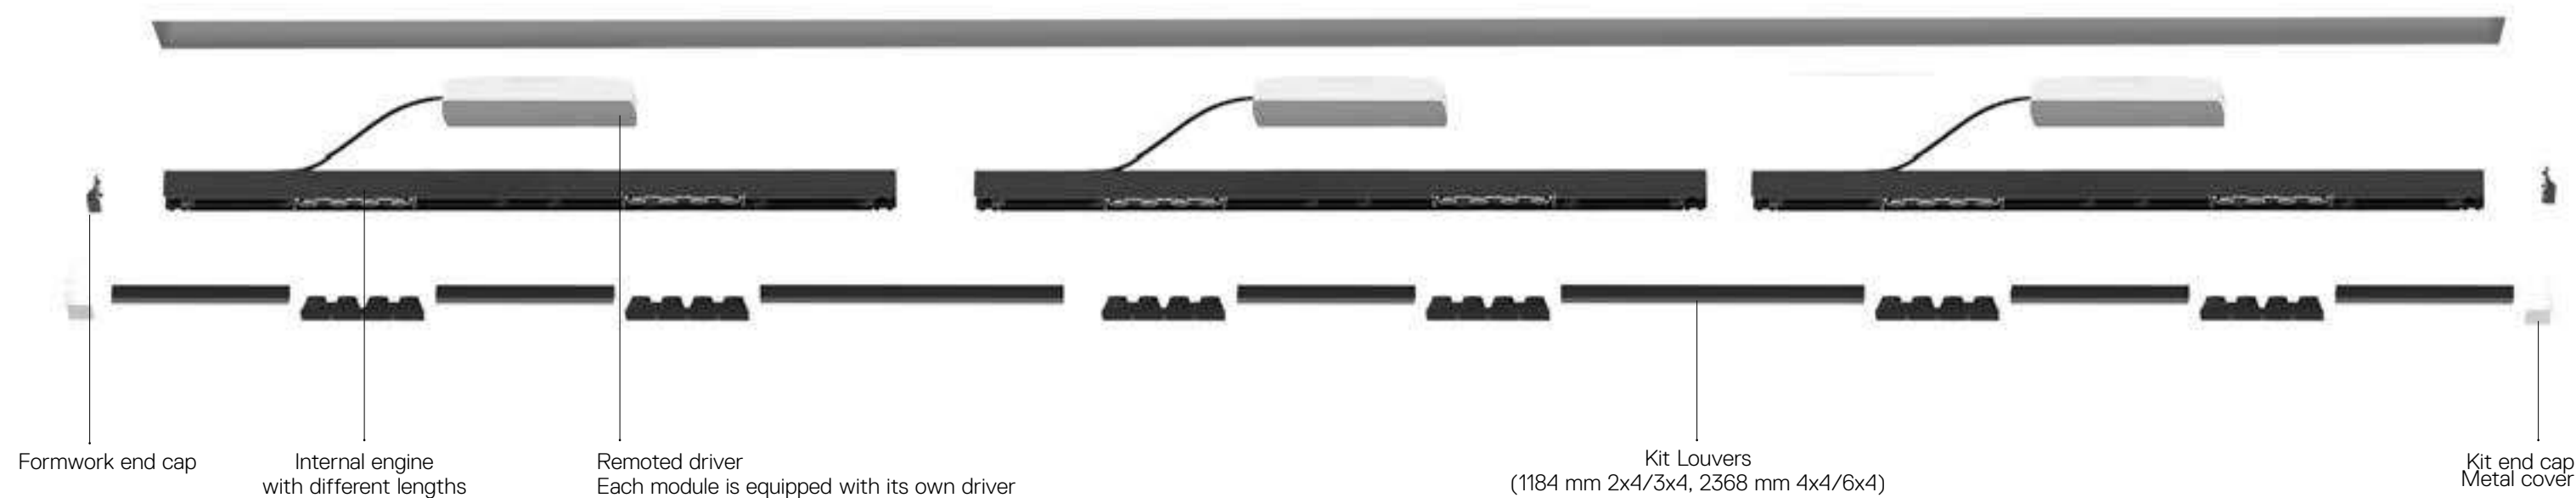


→ CEILING

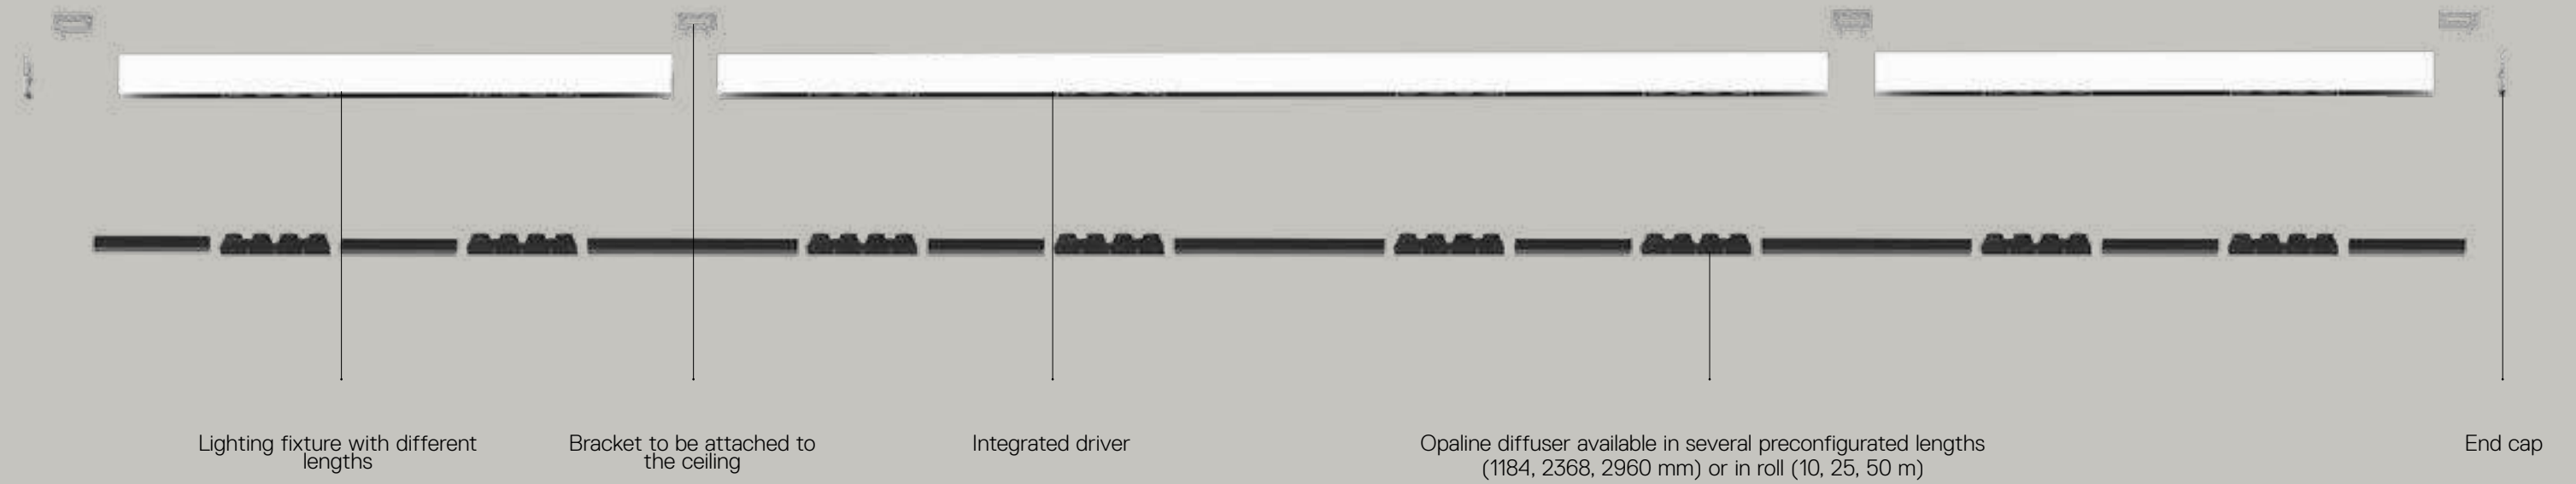

A.39 sharpening ceiling, suspension components

→ SUSPENSION

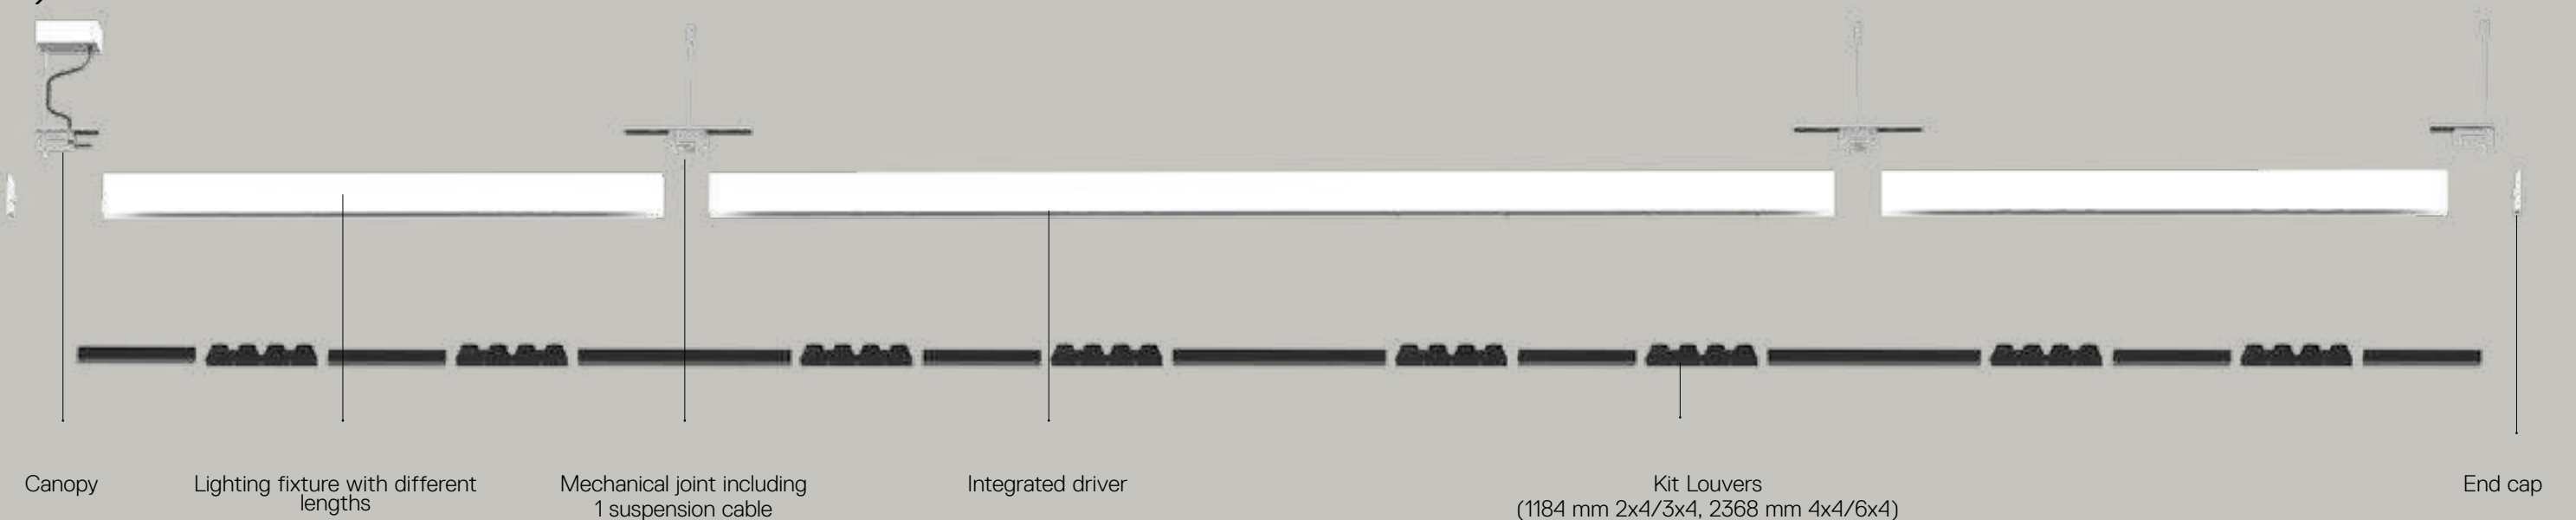


↪ A.39 RECESSED TRIMLESS - SHARPING EMISSION

White 01 Black 04 S F XF Louvers supplied separately. Driver 900mA SELV supplied separately. APP interface supplied separately. The APP driver can not be controlled by DALI dimming system and viceversa.

MacAdam 2SDCM L90 (20K) 118000h CRI >90 * Driver uses 1 DALI address IP20


Formwork (aluminum)	
Trimless recessed frame	
Length 1184	
Length 2368	
Trimless frame end cap (2 pcs)	
90° trimless formwork kit	
L=57x57 mm	

Code
BH30400
BH30500
BH30700
BH31101




Trimless						
Length	Optic	W LED	Beam	Flux	CCT	
1184 mm	2x4 optics	22 W	S 20°	1648 lm	3000 K	
			F 36°	1764 lm	4000 K	
			XF 52°	1542 lm	3000 K	
	3x4 optics	33 W	S 20°	1651 lm	4000 K	
			F 36°	1597 lm	3000 K	
			XF 52°	1709 lm	4000 K	
			S 20°	2473 lm	3000 K	
			F 36°	2646 lm	4000 K	
			XF 52°	2314 lm	3000 K	
2368 mm	4x4 optics	44 W	S 20°	2476 lm	4000 K	
			F 36°	2396 lm	3000 K	
			XF 52°	2564 lm	4000 K	
			S 20°	3297 lm	3000 K	
			F 36°	3528 lm	4000 K	
			XF 52°	3085 lm	3000 K	
	6x4 optics	66 W	S 20°	3301 lm	4000 K	
			F 36°	3195 lm	3000 K	
			XF 52°	3419 lm	4000 K	
			S 20°	4945 lm	3000 K	
			F 36°	5292 lm	4000 K	
			XF 52°	4627 lm	3000 K	
					4952 lm	4000 K
					4792 lm	3000 K
					5128 lm	4000 K

Code
BH24001
BH24101
BH24201
BH24301
BH24401
BH24501
BH25001
BH25101
BH25201
BH25301
BH25401
BH25501
BH26001
BH26101
BH26201
BH26301
BH26401
BH26501
BH27001
BH27101
BH27201
BH27301
BH27401
BH27501



Covers (not lit)	
	90° corner covers L=57x57 mm
Code	BH440. 01/04

Louvers	
Length	Optic
1184 mm	2x4 optics
	3x4 optics
2368 mm	4x4 optics
	6x4 optics
Code	AE400. 01/04
	AE410. 01/04
	AE420. 01/04
	AE430. 01/04

Optional accessories	
	Sharping wall grazer lens Kit (4pcs) 26°x70° elliptical lenses kit. It has to be used on top of S 20° reflectors to get an elliptical beam (greater axis along the module length). It contains 4 lenses.
Code	AF06000

Driver		
Optic units	W	Vac
1184 mm (2x4)	25 W 900mA	220-240
1184 mm (3x4)	45 W 900mA	220-240
2368 mm (4x4)	60 W 900mA	220-240
2368 mm (6x4) - order 2 pcs	45 W 900mA	220-240

Undimmable	DALI*	APP
Code	Code	Code
DV1022	DV1026	DV1053APP
DV1023	DV1027	DV1053APP
DV1024	DV1028	DV1053APP
DV1023	DV1029	DV1053APP (2x)


↪ A.39 RECESSED TRIM - SHARPING EMISSION


White 01 Black 04 Silver 05 S F XF Louvers supplied separately. Driver 900mA SELV supplied separately. APP interface supplied separately. The APP driver can not be controlled by DALI dimming system and viceversa.


MacAdam 2SDCM Life L90 (20K) 118000h CRI >90 * Driver uses 1 DALI address IP20

Trim						
Length	Optic	W LED	Beam	Flux	CCT	
1184 mm	2x4 optics	22 W	S 20°	1648 lm	3000 K	
			F 36°	1764 lm	4000 K	
			XF 52°	1542 lm	3000 K	
	3x4 optics	33 W	S 20°	1651 lm	4000 K	
			F 36°	1597 lm	3000 K	
			XF 52°	1709 lm	4000 K	
			S 20°	2473 lm	3000 K	
			F 36°	2646 lm	4000 K	
			XF 52°	2314 lm	3000 K	
2368 mm	4x4 optics	44 W	S 20°	2476 lm	4000 K	
			F 36°	2396 lm	3000 K	
			XF 52°	2564 lm	4000 K	
			S 20°	3297 lm	3000 K	
			F 36°	3528 lm	4000 K	
			XF 52°	3085 lm	3000 K	
	6x4 optics	66 W	S 20°	3301 lm	4000 K	
			F 36°	3195 lm	3000 K	
			XF 52°	3419 lm	4000 K	
			S 20°	4945 lm	3000 K	
			F 36°	5292 lm	4000 K	
			XF 52°	4627 lm	3000 K	
					4952 lm	4000 K
					4792 lm	3000 K
					5128 lm	4000 K

Code
BH200. 01/04/05
BH201. 01/04/05
BH202. 01/04/05
BH203. 01/04/05
BH204. 01/04/05
BH205. 01/04/05
BH210. 01/04/05
BH211. 01/04/05
BH212. 01/04/05
BH213. 01/04/05
BH214. 01/04/05
BH215. 01/04/05
BH220. 01/04/05
BH221. 01/04/05
BH222. 01/04/05
BH223. 01/04/05
BH224. 01/04/05
BH225. 01/04/05
BH230. 01/04/05
BH231. 01/04/05
BH232. 01/04/05
BH233. 01/04/05
BH234. 01/04/05
BH235. 01/04/05

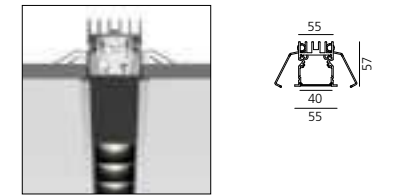


Angle elements (not lit)	
	90° trim recessed corner (on same plane) L=57x57 mm
Code	BH310. 01/04

Covers (not lit)	
	90° corner covers L=57x57 mm
Code	BH440. 01/04

Components	
Trim module end cap kit (2 pcs)	
up to 5 m	AT090. 01/04/05
up to 15 m	AT091. 01/04/05
up to 35 m	AT092. 01/04/05

Louvers	
Length	Optic
1184 mm	2x4 optics
	3x4 optics
2368 mm	4x4 optics
	6x4 optics
Code	AE400. 01/04
	AE410. 01/04
	AE420. 01/04
	AE430. 01/04

Optional accessories	
	Sharping wall grazer lens Kit (4pcs) 26°x70° elliptical lenses kit. It has to be used on top of S 20° reflectors to get an elliptical beam (greater axis along the module length). It contains 4 lenses.
Code	AF06000

Driver		
Optic units	W	Vac
1184 mm (2x4)	25 W 900mA	220-240
1184 mm (3x4)	45 W 900mA	220-240
2368 mm (4x4)	60 W 900mA	220-240
2368 mm (6x4) - order 2 pcs	45 W 900mA	220-240

Undimmable	DALI*	APP
Code	Code	Code
DV1022	DV1026	DV1053APP
DV1023	DV1027	DV1053APP
DV1024	DV1028	DV1053APP
DV1023	DV1029	DV1053APP (2x)



↪ A.39 CEILING - SHARPING EMISSION




Louvers supplied separately.
APP interface supplied separately.
APP interface supplied separately.
The APP driver can not be controlled by DALI dimming system and viceversa.

MacAdam 2SDCM
Life L90 (20K) 118000h
CRI >90
*Uses 1 DALI address
**Uses 2 DALI address

IP20
Ⓢ

Direct emission					
Length	Optic	W	Beam	Flux	CCT
1184 mm	2x4 optics	25 W	S 20°	1648 lm	3000 K
			F 36°	1764 lm	4000 K
			XF 52°	1597 lm	3000 K
	3x4 optics	38 W	S 20°	1651 lm	4000 K
			F 36°	1709 lm	4000 K
			XF 52°	1597 lm	4000 K
2368 mm	4x4 optics	50 W	S 20°	2473 lm	3000 K
			F 36°	2646 lm	4000 K
			XF 52°	2396 lm	3000 K
	6x4 optics	80 W	S 20°	2564 lm	4000 K
			F 36°	2792 lm	4000 K
			XF 52°	2564 lm	4000 K

Undimmable Code	Dimmable DALI* Code
BH040. 01/04/05	BH042. 01/04/05
BH041. 01/04/05	BH043. 01/04/05
BH044. 01/04/05	BH046. 01/04/05
BH045. 01/04/05	BH047. 01/04/05
BH048. 01/04/05	BH050. 01/04/05
BH049. 01/04/05	BH051. 01/04/05
BH000. 01/04/05	BH002. 01/04/05
BH001. 01/04/05	BH003. 01/04/05
BH004. 01/04/05	BH006. 01/04/05
BH005. 01/04/05	BH007. 01/04/05
BH008. 01/04/05	BH010. 01/04/05
BH009. 01/04/05	BH011. 01/04/05
BH060. 01/04/05	BH062. 01/04/05
BH061. 01/04/05	BH063. 01/04/05
BH064. 01/04/05	BH066. 01/04/05
BH065. 01/04/05	BH067. 01/04/05
BH068. 01/04/05	BH070. 01/04/05
BH069. 01/04/05	BH071. 01/04/05
Dimmable DALI**	
BH020. 01/04/05	BH022. 01/04/05
BH021. 01/04/05	BH023. 01/04/05
BH024. 01/04/05	BH026. 01/04/05
BH025. 01/04/05	BH027. 01/04/05
BH028. 01/04/05	BH030. 01/04/05
BH029. 01/04/05	BH031. 01/04/05



Angle elements (not lit)
90° suspension/ceiling corner (on same plane) L=57x57 mm

Code
BH350. 01/04/05



Covers (not lit)
90° corner covers L=57x57 mm

Code
BH440. 01/04



Louvers	Code
Length	Optic
1184 mm	2x4 optics
	3x4 optics
2368 mm	4x4 optics
	6x4 optics

Code
AE400. 01/04
AE410. 01/04
AE420. 01/04
AE430. 01/04

Accessories ceiling	Code
End caps (2 pcs)	BH164. 01/04/05
Ceiling bracket and mechanical joint	AT09501
End ceiling bracket (2 pcs)	AT09502

Optional accessories	APP Interface	APP
Sharping wall grazer lens Kit (4pcs) 26°x70° elliptical lenses kit. It has to be used on top of S 20° reflectors to get an elliptical beam (greater axis along the module length). It contains 4 lenses.	BLL interface for APP with antenna Up to 40 addresses	DV1054APP



Code
AF06000

Code
DV1054APP

↪ A.39 SUSPENSION - SHARPING EMISSION


White Black Silver S F XF Louvers supplied separately. MacAdam 2SDCM IP20
 01 04 05 APP interface supplied separately. Life L90 (20K) 118000h
 The APP driver can not be controlled by DALI dimming system and viceversa. CRI >90
 *Uses 1 DALI address

Direct emission						Undimmable		Dimmable DALI*	
Length	Optic	W	Beam	Flux	CCT	Code	Code	Code	Code
1184 mm	2x4 optics	27 W	S 20°	1648 lm	3000 K	BH040. 01/04/05	BH042. 01/04/05	BH042. 01/04/05	
				1764 lm	4000 K	BH041. 01/04/05	BH043. 01/04/05	BH043. 01/04/05	
			F 36°	1542 lm	3000 K	BH044. 01/04/05	BH046. 01/04/05	BH046. 01/04/05	
				1651 lm	4000 K	BH045. 01/04/05	BH047. 01/04/05	BH047. 01/04/05	
			XF 52°	1597 lm	3000 K	BH048. 01/04/05	BH050. 01/04/05	BH050. 01/04/05	
				1709 lm	4000 K	BH049. 01/04/05	BH051. 01/04/05	BH051. 01/04/05	
	3x4 optics	38 W	S 20°	2473 lm	3000 K	BH000. 01/04/05	BH002. 01/04/05	BH002. 01/04/05	
				2646 lm	4000 K	BH001. 01/04/05	BH003. 01/04/05	BH003. 01/04/05	
			F 36°	2314 lm	3000 K	BH004. 01/04/05	BH006. 01/04/05	BH006. 01/04/05	
				2476 lm	4000 K	BH005. 01/04/05	BH007. 01/04/05	BH007. 01/04/05	
			XF 52°	2396 lm	3000 K	BH008. 01/04/05	BH010. 01/04/05	BH010. 01/04/05	
				2564 lm	4000 K	BH009. 01/04/05	BH011. 01/04/05	BH011. 01/04/05	
2368 mm	4x4 optics	54 W	S 20°	3297 lm	3000 K	BH060. 01/04/05	BH062. 01/04/05	BH062. 01/04/05	
				3528 lm	4000 K	BH061. 01/04/05	BH063. 01/04/05	BH063. 01/04/05	
			F 36°	3085 lm	3000 K	BH064. 01/04/05	BH066. 01/04/05	BH066. 01/04/05	
				3301 lm	4000 K	BH065. 01/04/05	BH067. 01/04/05	BH067. 01/04/05	
			XF 52°	3195 lm	3000 K	BH068. 01/04/05	BH070. 01/04/05	BH070. 01/04/05	
				3419 lm	4000 K	BH069. 01/04/05	BH071. 01/04/05	BH071. 01/04/05	
	6x4 optics	70 W DALI	S 20°	4945 lm	3000 K	BH020. 01/04/05	BH022. 01/04/05	BH022. 01/04/05	
				5292 lm	4000 K	BH021. 01/04/05	BH023. 01/04/05	BH023. 01/04/05	
				4627 lm	3000 K	BH024. 01/04/05	BH026. 01/04/05	BH026. 01/04/05	
		75 W Undimmable	F 36°	4952 lm	4000 K	BH025. 01/04/05	BH027. 01/04/05	BH027. 01/04/05	
				4792 lm	3000 K	BH028. 01/04/05	BH030. 01/04/05	BH030. 01/04/05	
				5128 lm	4000 K	BH029. 01/04/05	BH031. 01/04/05	BH031. 01/04/05	



White Black Silver S F XF Louvers supplied separately. MacAdam 2SDCM IP20
 01 04 05 APP interface supplied separately. Life L90 (20K) 118000h
 The APP driver can not be controlled by DALI dimming system and viceversa. CRI >90
 ** Uses 2 DALI addresses

Direct and Indirect emission							Undimmable		Dimmable DALI**	
Length	Optic	W	Beam	Flux	CCT	Code	Code	Code	Code	
1184 mm	2x4 optics	27 W direct 26 W indirect	S 20°	1648 lm direct	3000 K	BH120. 01/04/05	BH122. 01/04/05	BH122. 01/04/05		
				2956 lm indirect	4000 K	BH121. 01/04/05	BH123. 01/04/05	BH123. 01/04/05		
			F 36°	1542 lm direct	3000 K	BH124. 01/04/05	BH126. 01/04/05	BH126. 01/04/05		
				2956 lm indirect	4000 K	BH125. 01/04/05	BH127. 01/04/05	BH127. 01/04/05		
			XF 52°	1597 lm direct	3000 K	BH128. 01/04/05	BH130. 01/04/05	BH130. 01/04/05		
				2956 lm indirect	4000 K	BH129. 01/04/05	BH131. 01/04/05	BH131. 01/04/05		
	3x4 optics	38 W direct 26 W indirect	S 20°	2473 lm direct	3000 K	BH080. 01/04/05	BH082. 01/04/05	BH082. 01/04/05		
				2956 lm indirect	4000 K	BH081. 01/04/05	BH083. 01/04/05	BH083. 01/04/05		
			F 36°	2314 lm direct	3000 K	BH084. 01/04/05	BH086. 01/04/05	BH086. 01/04/05		
				2956 lm indirect	4000 K	BH085. 01/04/05	BH087. 01/04/05	BH087. 01/04/05		
			XF 52°	2396 lm direct	3000 K	BH088. 01/04/05	BH090. 01/04/05	BH090. 01/04/05		
				2956 lm indirect	4000 K	BH089. 01/04/05	BH091. 01/04/05	BH091. 01/04/05		
2368 mm	4x4 optics	54 W direct 50 W indirect	S 20°	3297 lm direct	3000 K	BH140. 01/04/05	BH142. 01/04/05	BH142. 01/04/05		
				5912 lm indirect	4000 K	BH141. 01/04/05	BH143. 01/04/05	BH143. 01/04/05		
			F 36°	3085 lm direct	3000 K	BH144. 01/04/05	BH146. 01/04/05	BH146. 01/04/05		
				5912 lm indirect	4000 K	BH145. 01/04/05	BH147. 01/04/05	BH147. 01/04/05		
			XF 52°	3195 lm direct	3000 K	BH148. 01/04/05	BH150. 01/04/05	BH150. 01/04/05		
				5912 lm indirect	4000 K	BH149. 01/04/05	BH151. 01/04/05	BH151. 01/04/05		
	6x4 optics	70 W direct DALI	S 20°	4945 lm direct	3000 K	BH100. 01/04/05	BH102. 01/04/05	BH102. 01/04/05		
				5912 lm indirect	4000 K	BH101. 01/04/05	BH103. 01/04/05	BH103. 01/04/05		
				5292 lm direct	4000 K	BH104. 01/04/05	BH106. 01/04/05	BH106. 01/04/05		
		75 W direct Undimmable	F 36°	4952 lm direct	4000 K	BH105. 01/04/05	BH107. 01/04/05	BH107. 01/04/05		
				6177 lm indirect	3000 K	BH108. 01/04/05	BH110. 01/04/05	BH110. 01/04/05		
				5128 lm direct	4000 K	BH109. 01/04/05	BH111. 01/04/05	BH111. 01/04/05		



Angle elements (not lit)

90° suspension/ceiling corner
(on same plane)
L=57x57 mm



Code
BH350. 01/04/05

Covers (not lit)

90° corner covers
57x57mm



Code
BH440. 01/04

Louvers

Length	Optic
1184 mm	2x4 optics
	3x4 optics
2368 mm	4x4 optics
	6x4 optics

Code
AE400. 01/04
AE410. 01/04
AE420. 01/04
AE430. 01/04

Optional accessories

Sharping wall grazer lens Kit (4pcs)
26°x70° elliptical lenses kit. It has to be used on top of S 20° reflectors to get an elliptical beam (greater axis along the module length). It contains 4 lenses.



Code
AF06000

Accessories suspension

Mechanical joint including 1 suspension cable

Code
AT09500

End caps kit (2 pcs)

BH164. 01/04/05

Undimmable Feeding kit including 2 suspension cables (3 poles) 2000h mm

AT10400

Dimmable or APP Feeding kit including 2 suspension cables (5 poles) 2000h mm

AT10500
AT10500APP

Angle elements (not lit)

90° suspension corner
(on same plane)
L=57x57 mm



Code
BH350. 01/04/05

Covers (not lit)

90° corner covers
L=57x57 mm



Code
BH440. 01/04

Louvers

Length	Optic
1184 mm	2x4 optics
	3x4 optics
2368 mm	4x4 optics
	6x4 optics

Code
AE400. 01/04
AE410. 01/04
AE420. 01/04
AE430. 01/04

Accessories suspension

Mechanical joint including 1 suspension cable

Code
AT09500

End caps kit 2x

BH164. 01/04/05

Optional accessories

Sharping wall grazer lens Kit (4pcs)
26°x70° elliptical lenses kit. It has to be used on top of S 20° reflectors to get an elliptical beam (greater axis along the module length). It contains 4 lenses.



Code
AF06000

Undimmable Feeding kit including 2 suspension cables (3 poles) 2000h mm

AT10400

Dimmable or APP Feeding kit including 2 suspension cables (5 poles) 2000h mm

AT10500
AT10500APP



Controlled emission LED optic System
 UGR index control and 65°
 luminance (EN 12464)

Patent-pending proprietary optic system made by a thin black square-meshed grid and by a system of square plano-convex lenses of appropriate beam angle. The internal part of the grid is white painted and has a high reflection coefficient, so that the light incident on the grid is retrieved within the body.

A net 'cut off' at the required angle is obtained through this system.

The convex profile of the lens is designed with images optic techniques, so that the emission is limited within the 65° required by standard EN 12464.

UGR<19

Angle luminance equals to 65° and beyond: <3,000 cd/m2.


→ Patent pending

Operating diagram of the optical device used:

The grid positioned over the lenses allows only the rays falling into the required output angular limits to be incident to the lenses.

The rays beyond these limits are recovered and redirected inside the light box (if the ray is incident to the white surface) or cancelled (if the ray is incident to the black edge).

Functioning scheme

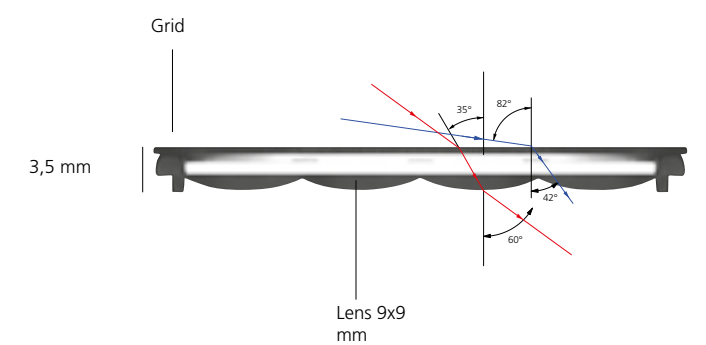


A.39


↳ controlled emission




light ON

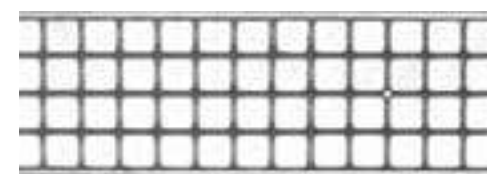

light OFF

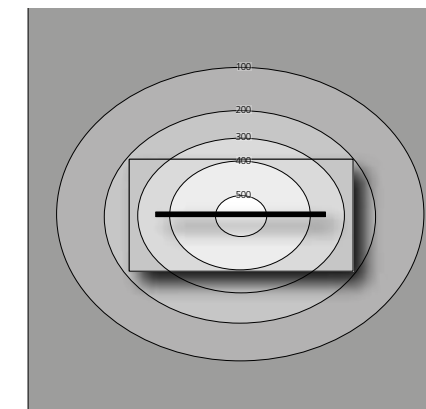


Direct emission

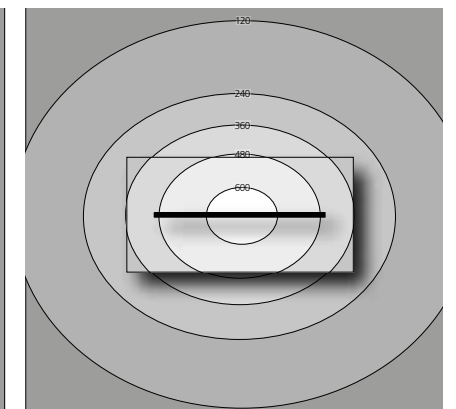


Direct emission + indirect

CEILING

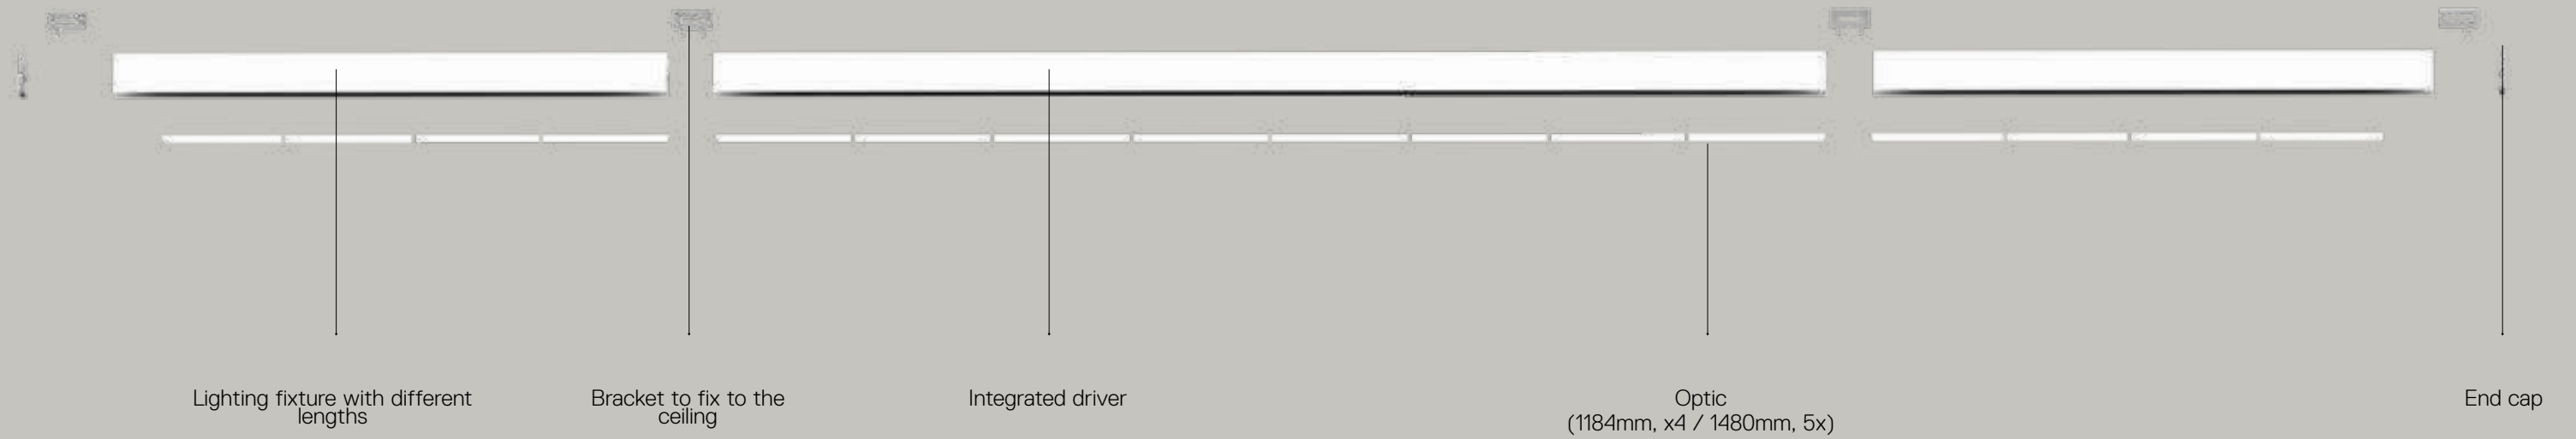

A.39 controlled emission ceiling, suspension components

→ SUSPENSION

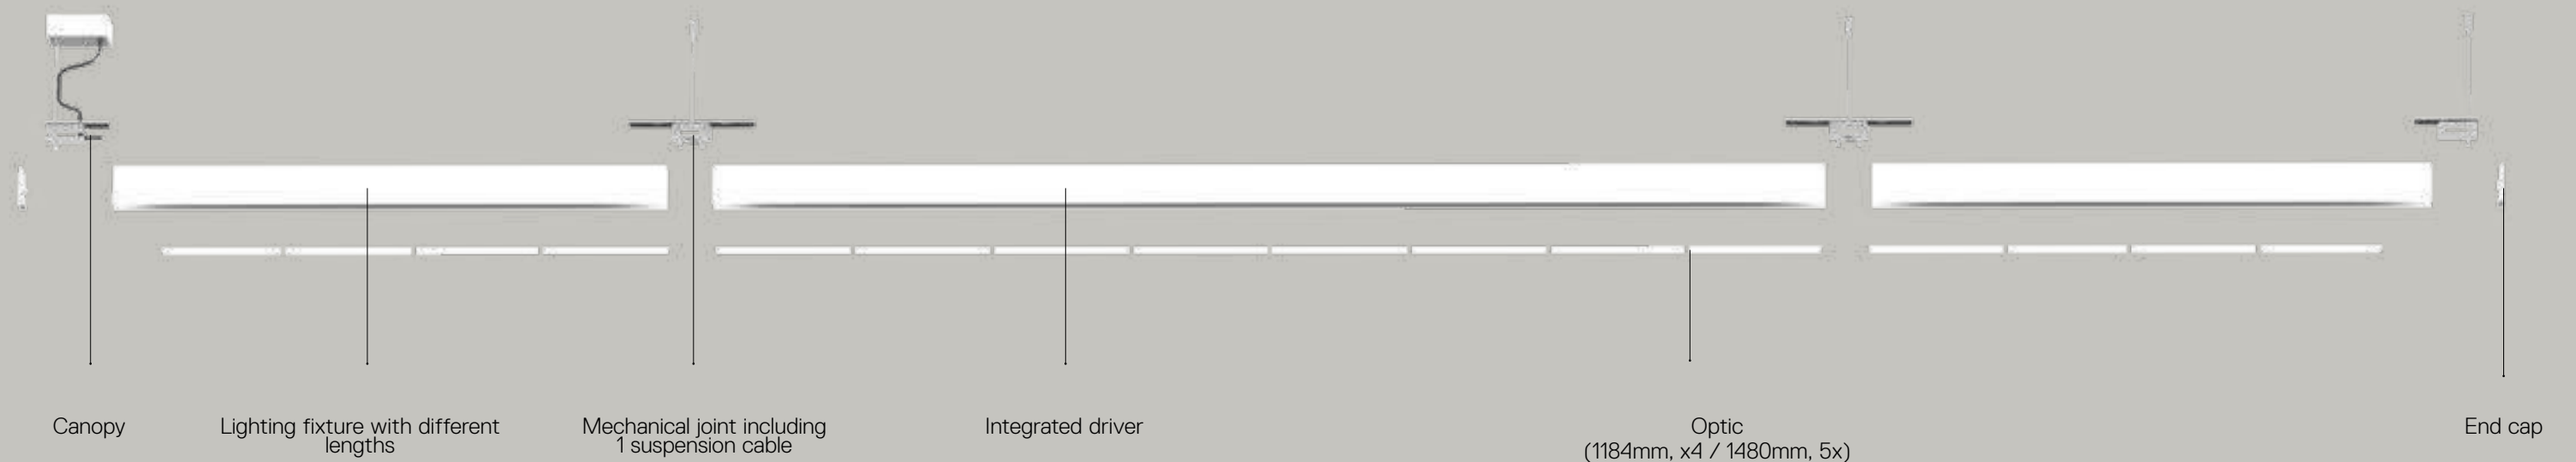

A.39

controlled emission space fittings

↪ A.39 SUSPENSION, CEILING CONTROLLED EMISSION

White	Black	Silver
01	04	05

Screens supplied separately.
APP interface supplied separately.
The APP driver can not be controlled by DALI dimming system and viceversa.



MacAdam 2SDCM
Life L70 (6K) 50000h
CRI=80
*Uses 1 DALI address
**Uses 2 DALI address

IP20
Ⓢ

Suspension, ceiling direct emission			
Length	W	Flux	CCT
1184 mm	34W	1955 lm	3000K
		2043 lm	4000K
1482 mm	42W	2444 lm	3000K
		2554 lm	4000K
2368 mm	66W	3911 lm	3000K
		4086 lm	4000K
2960 mm	82W	4889 lm	3000K
		5108 lm	4000K

Undimmable	
Code	
AT135.	01/04/05
AT137.	01/04/05
AT145.	01/04/05
AT147.	01/04/05
AT155.	01/04/05
AT157.	01/04/05
AT185.	01/04/05
AT187.	01/04/05




Dimmable DALI*	
Code	
AT134.	01/04/05
AT136.	01/04/05
AT144.	01/04/05
AT146.	01/04/05
AT154.	01/04/05
AT156.	01/04/05
AT184.	01/04/05
AT186.	01/04/05



Suspension direct + indirect emission			
Length	W	Flux	CCT
1184 mm	34W direct 23W indirect	1955 lm direct	3000K
		2956 lm indirect	
	42W direct 31W indirect	2043 lm direct	4000K
		3088 lm indirect	
1482 mm	42W direct 31W indirect	2444 lm direct	3000K
		3941 lm indirect	
	66W direct 50W indirect	2554 lm direct	4000K
		4118 lm indirect	
2368 mm	66W direct 50W indirect	3911 lm direct	3000K
		5912 lm indirect	
	82W direct 67W indirect	4086 lm direct	4000K
		6177 lm indirect	
2960 mm	82W direct 67W indirect	4889 lm direct	3000K
		7883 lm indirect	
	82W direct 67W indirect	5108 lm direct	4000K
		8236 lm indirect	

Undimmable	
Code	
AT195.	01/04/05
AT197.	01/04/05
AT225.	01/04/05
AT227.	01/04/05
AT235.	01/04/05
AT237.	01/04/05
AT245.	01/04/05
AT247.	01/04/05

Dimmable DALI	
Code	
*AT194.	01/04/05
*AT196.	01/04/05
*AT224.	01/04/05
*AT226.	01/04/05
**AT234.	01/04/05
**AT236.	01/04/05
**AT244.	01/04/05
**AT246.	01/04/05

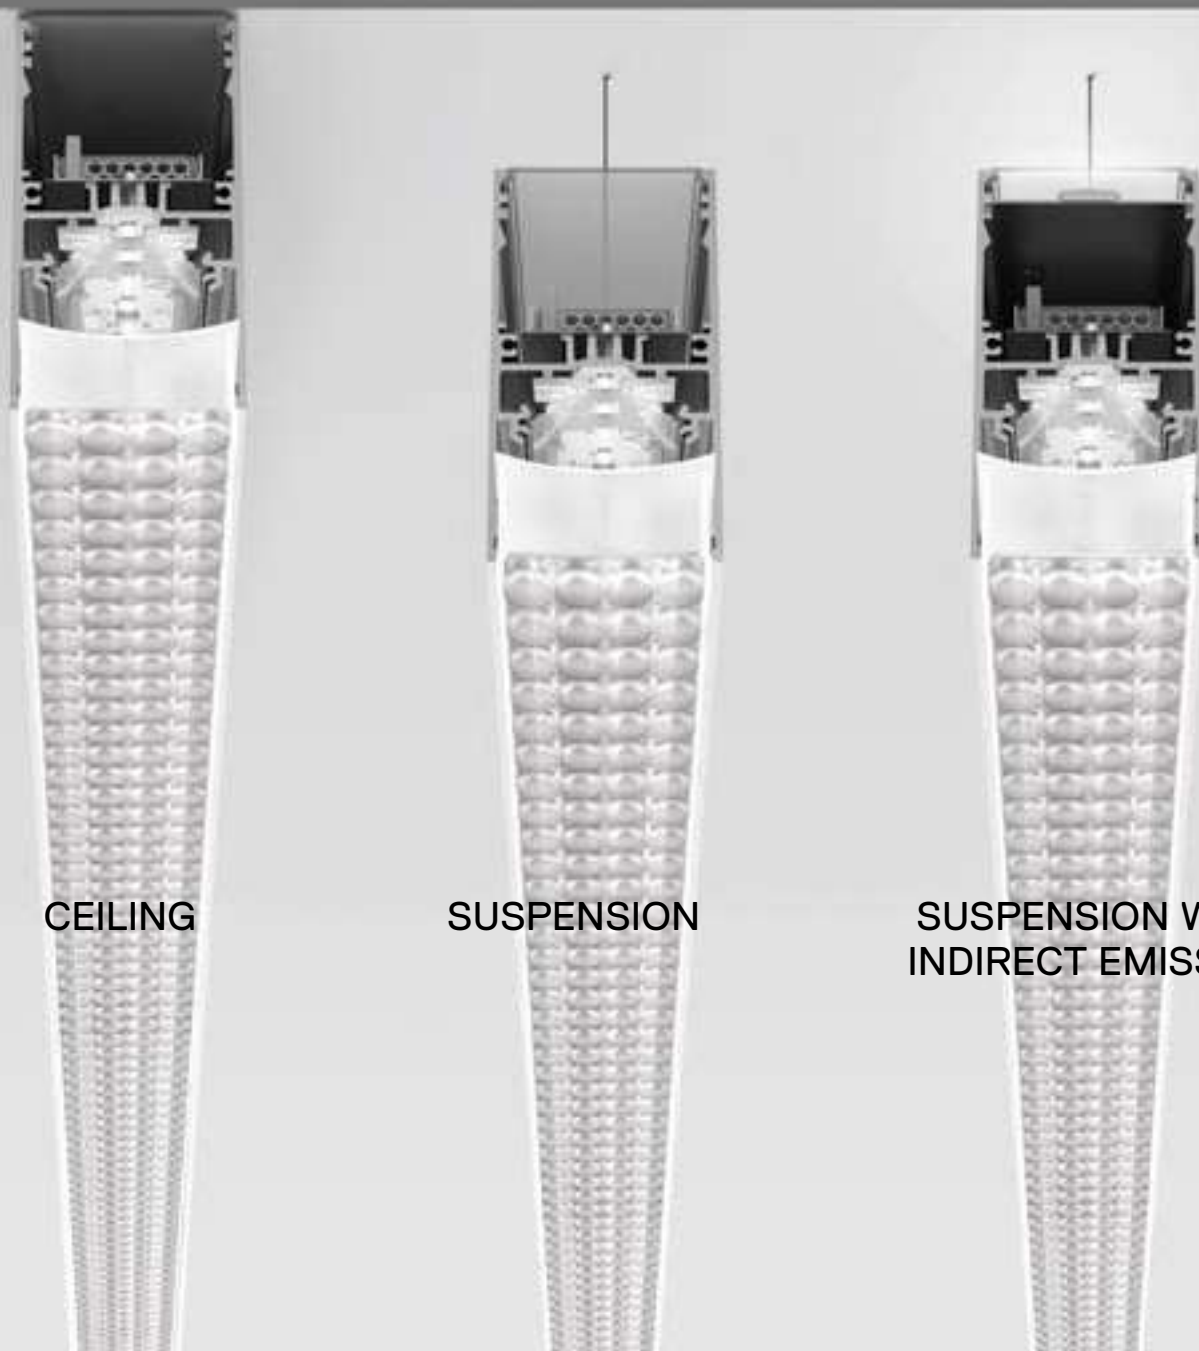

Optic	
Length	
1184 mm	(4 pcs)
1480 mm	(5 pcs)

Code	
M186700	
AT09900	

Length	Screen quantity to order
1184 mm	1 M186700
1482 mm	1 AT09900
2368 mm	2 M186700
2960 mm	2 AT09900

Angle elements (not lit)

90° suspension corner
(on same plane)
L=57x57 mm



Code	
AT310.	01/04/05

Accessories suspension

Undimmable Feeding kit including 2 suspension cables 2000h mm (3 poles)

Dimmable or APP Feeding kit including 2 suspension cables 2000h mm (5 poles)

Mechanical joint including 1 suspension cable

End cap kit 2x

Code	
AT10400	
AT10500	
AT10500APP	
AT09500	

Accessories ceiling

End cap kit (2 pcs)

Ceiling bracket and mechanical joint

End ceiling bracket (2 pcs)

BLL interface for APP with antenna
Up to 40 addresses

Code	
AT098.	01/04/05
AT09501	
AT09502	

DV1054APP

Algoritmo


Carlotta de Bevilacqua
Paola di Arianello
↪ 2010




Algoritmo typologies

Algoritmo Installation

Algoritmo System
wall- or ceiling recessed



LED emission



LED emission + LED indirect





Accent lighting






Direct emission white diffused or wall washer.
Direct emission white LED prismoptic and controlled emission.
Direct emission TW LED.
Accent lighting.

Algoritmo System
Wall/ceiling
surface-mounted
configurations, linear
or at a 90 degree angle.





Direct emission white diffused or wall washer.
Direct emission white LED prismoptic and controlled emission.
Direct emission TW LED.
Accent lighting.

Algoritmo System
Suspension
Linear or at a 90 degree
angle installations.



Direct emission white diffused or wall washer.
Direct emission white LED prismoptic or controlled emission.
Direct emission TW LED.
Direct emission white LED prismoptic or controlled emission and indirect emission diffused white LED.
Direct emission TW LED and indirect emission white LED diffused.
Direct emission white LED and indirect emission diffused white LED.
Accent lighting.

Algoritmo Stand-alone
Suspension
Surface-mounted
ceiling installation.



Direct emission white LED diffused.
Direct and indirect emission white LED diffused.



For further information on Algoritmo
↪ visit artemide.com



**Artemide
App**
↪ on request





CEILING
SUSPENSION



RECESSED
WITH TRIM



RECESSED
TRIMLESS

Algoritmo space fittings

Algoritmo colors

White



01

White Black Silver



20



10



90

Silver





05

Black



04

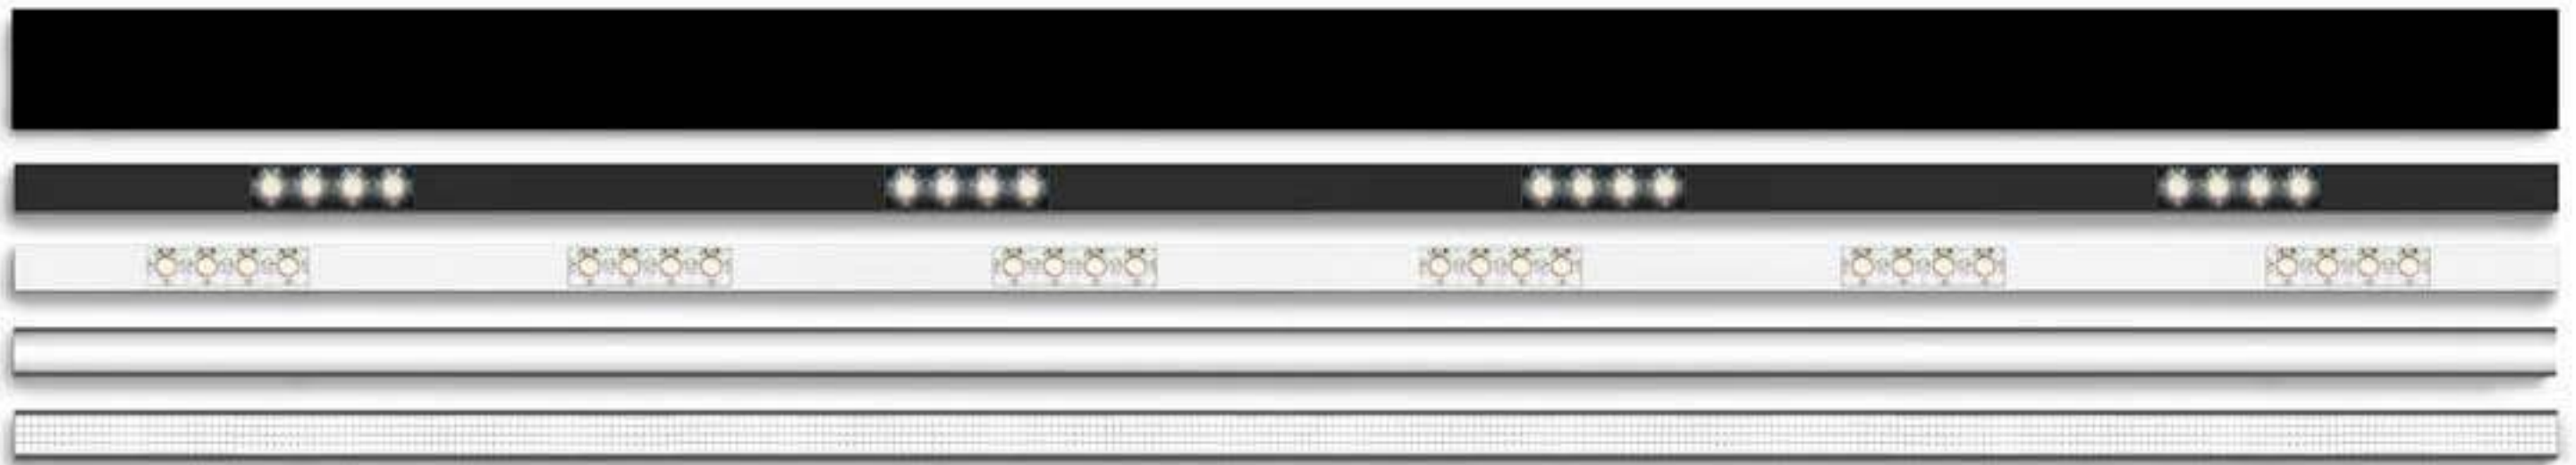

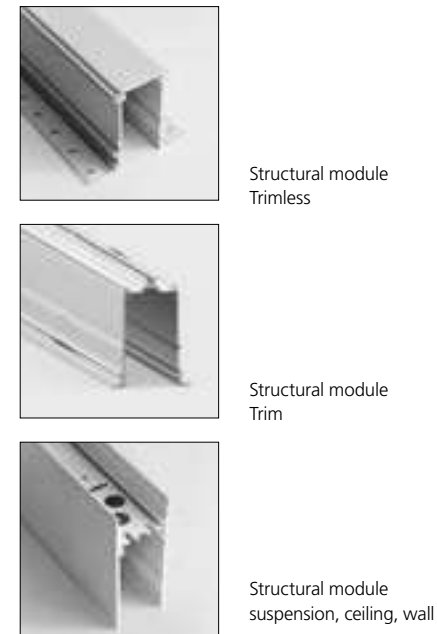

Algoritmo system is particularly flexible; it allows different lighting solutions to be coupled through the same shared electrical system. LED diffused or wall washer in warm (3000 K) or neutral white (4000 K), LED controlled and prismatic, accent lighting.

Installation in line or at a 90° angle.

Algoritmo system is composed of:

Structural modules in extruded aluminium, available in different lengths depending on the installation option and 3 finishes, white, black and silver.

Gear plates with through-wiring and rapid connectors.

Supplementary through-wiring with rapid connection.

Optical systems: diffusers, controlled optics for LED, wall washer optics for LED, 3 white LED monochromatic projectors (Pad, Pad square and 37 cube).

End caps and joints.

Supplying cables.

Pre-cabLED white LED (MV) plates equipped with electronic or electronic dimmable driver (DALI).

Power supply and LED management systems (LV) to be ordered separately.

Compliant with standard EN60598-1 and other specific standards.

SUSPENSION, CEILING, WALL				RECESSED				ELECTRICAL COMPONENTS				
Fixing components	Junction components	Junction components	Pre-wired gear plates	Electrical Components	Optical systems	Junction components	Spotlights	Power supplies and control systems				

Algoritmo
↪ diffused




↳ STRUCTURAL MODULE RECESSED


White Black Silver



Trimless		Code
Length	Weight	
1184 mm	1,80 kg	M204800
2368 mm	3,60 kg	M204900

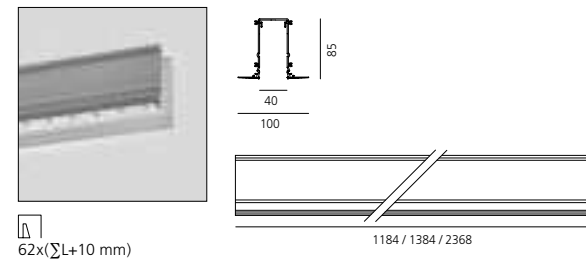

Trim		Code
Length	Weight	
1184 mm	1,80 kg	M2934. 20/10/90
2368 mm	3,60 kg	M2935. 20/10/90
3552 mm		M2936. 20/10/90
4736 mm		M2937. 20/10/90

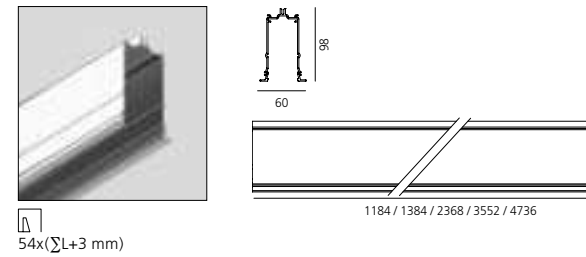

Accessories trimless	Code
<p>90° angle to mechanically connect two recessed modules on the same plane.</p>	M196600

Accessories trim	Code
<p>90° angle to mechanically connect two recessed modules on the same plane.</p>	M2939. 20/10/90

<p>End caps (set of 2)</p>	M197300
----------------------------	----------------

<p>90° angle to mechanically connect two recessed modules on perpendicular plans.</p>	M2938. 20/10/90
---	------------------------


<p>End caps (set of 2)</p>	M2940. 20/10/90
----------------------------	------------------------

↳ STRUCTURAL MODULE SUSPENSION, CEILING, WALL

White Black Silver Gloss anodised



		Code
Length	Weight	
1184 mm	2,30 kg	M2050. 20/10/90
2368 mm	4,60 kg	M2051. 20/10/90
3552 mm	6,90 kg	M2063. 20/10/90
4736 mm	9,20 kg	M1995. 20/10/90

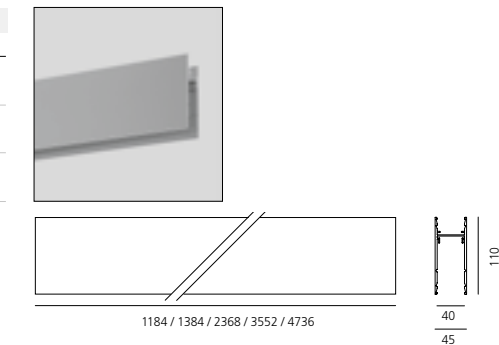

Accessories	Code
<p>90° angle To mechanically connect two recessed modules on one same plane. 0.30 kg.</p>	M1968. 20/10 90 60

		Code
<p>Steel suspension cable with quick adjustment Length 2 meters</p>		M189100
Length of a single module	no. pieces required for each module	
1184 mm	2	Please check on Artemide.com for continuous system installations with 2+ connected modules.
2368 mm	2	
3552mm	2	
4736mm	3	

<p>90° angle To mechanically connect of 2 modules on perpendicular plans. Includes through-wire extensions. 0.60 kg.</p>	M1967. 20/10 90 60
--	---------------------------------

<p>Suspension kit with power supply. Includes 1 single steel suspension cable + 1 power supply cable Length 2 meters</p>	
--	--

<p>MV (5x1,5mm²+2x0,5mm²) To power white LED plates and accent modules.</p>	M189300
---	----------------

<p>Bracket for fixing to wall/ceiling (1 piece)</p>	M199400
---	----------------

<p>Wall bracket To mechanically connect a wall-mounted module.</p>	M199300
--	----------------

		Code
Length of a single module	no. pieces required for each module	
1184 mm	2	Applicable also for system installations.
2368 mm	2	
3552mm	3	
4736mm	4	

<p>End caps (set of 2)</p>	M1888. 20/10 90 60
----------------------------	---------------------------------

<p>Linear connector</p>	M189000
-------------------------	----------------

WIRED GEAR PLATES WHITE LED

MV integrated through-cable.
 * Direct and indirect emission dimmable
 Protection screen for indirect cabled LED plate included.
 Occupies 2 DALI addresses

MacAdam 3SDC
 Life L70 (12K) 72000h
 CRI =80

IP20

Direct emission				DALI	
Length	W	Weight	CCT	Code	Code
1184 mm	34 W	1,10 kg	3000 K	M2882W00	M2882W01
			4000 K	M2882N00	M2882N01
2368 mm	68 W	2,00 kg	3000 K	M2884W00	M2884W01
			4000 K	M2884N00	M2884N01


Direct emission + indirect				Undimmable		DALI*	
Length	W	Weight	CCT	Code	Code	Code	Code
1184 mm	62 W	1,10 kg	3000 K	M2883W00	M2883W01	M2883N01	M2883N01
			4000 K	M2883N00	M2883N01	M2883N01	M2883N01
2368 mm	122 W	2,00 kg	3000 K	M2885W00	M2885W01	M2885N01	M2885N01
			4000 K	M2885N00	M2885N01	M2885N01	M2885N01

DIFFUSED EMISSION


Opal diffuser in polycarbonate

Length	Weight
1184 mm	0,10 kg
2368 mm	0,20 kg
3552 mm	0,30 kg
4736 mm	0,40 kg

Code
M197400
M186800
M203800
M197500



850°



Direct emission			
Length	W	CCT	Flux
1184 mm	34 W	3000 K	1961 lm
		4000 K	2053 lm
2368 mm	68 W	3000 K	3921 lm
		4000 K	4106 lm

Direct emission + indirect			
Length	W	CCT	Flux
1184 mm	62 W	3000 K	4436 lm
		4000 K	4645 lm
2368 mm	122 W	3000 K	8872 lm
		4000 K	9289 lm


WALL WASHER

Length	Weight
1184 mm	0,70 kg
2368 mm	1,40 kg


Code
M217300
M217400



650°



Direct emission			
Length	W	CCT	Flux
1184 mm	32 W	3000 K	2178 lm
		4000 K	2281 lm
2368 mm	65 W	3000 K	4357 lm
		4000 K	4561 lm

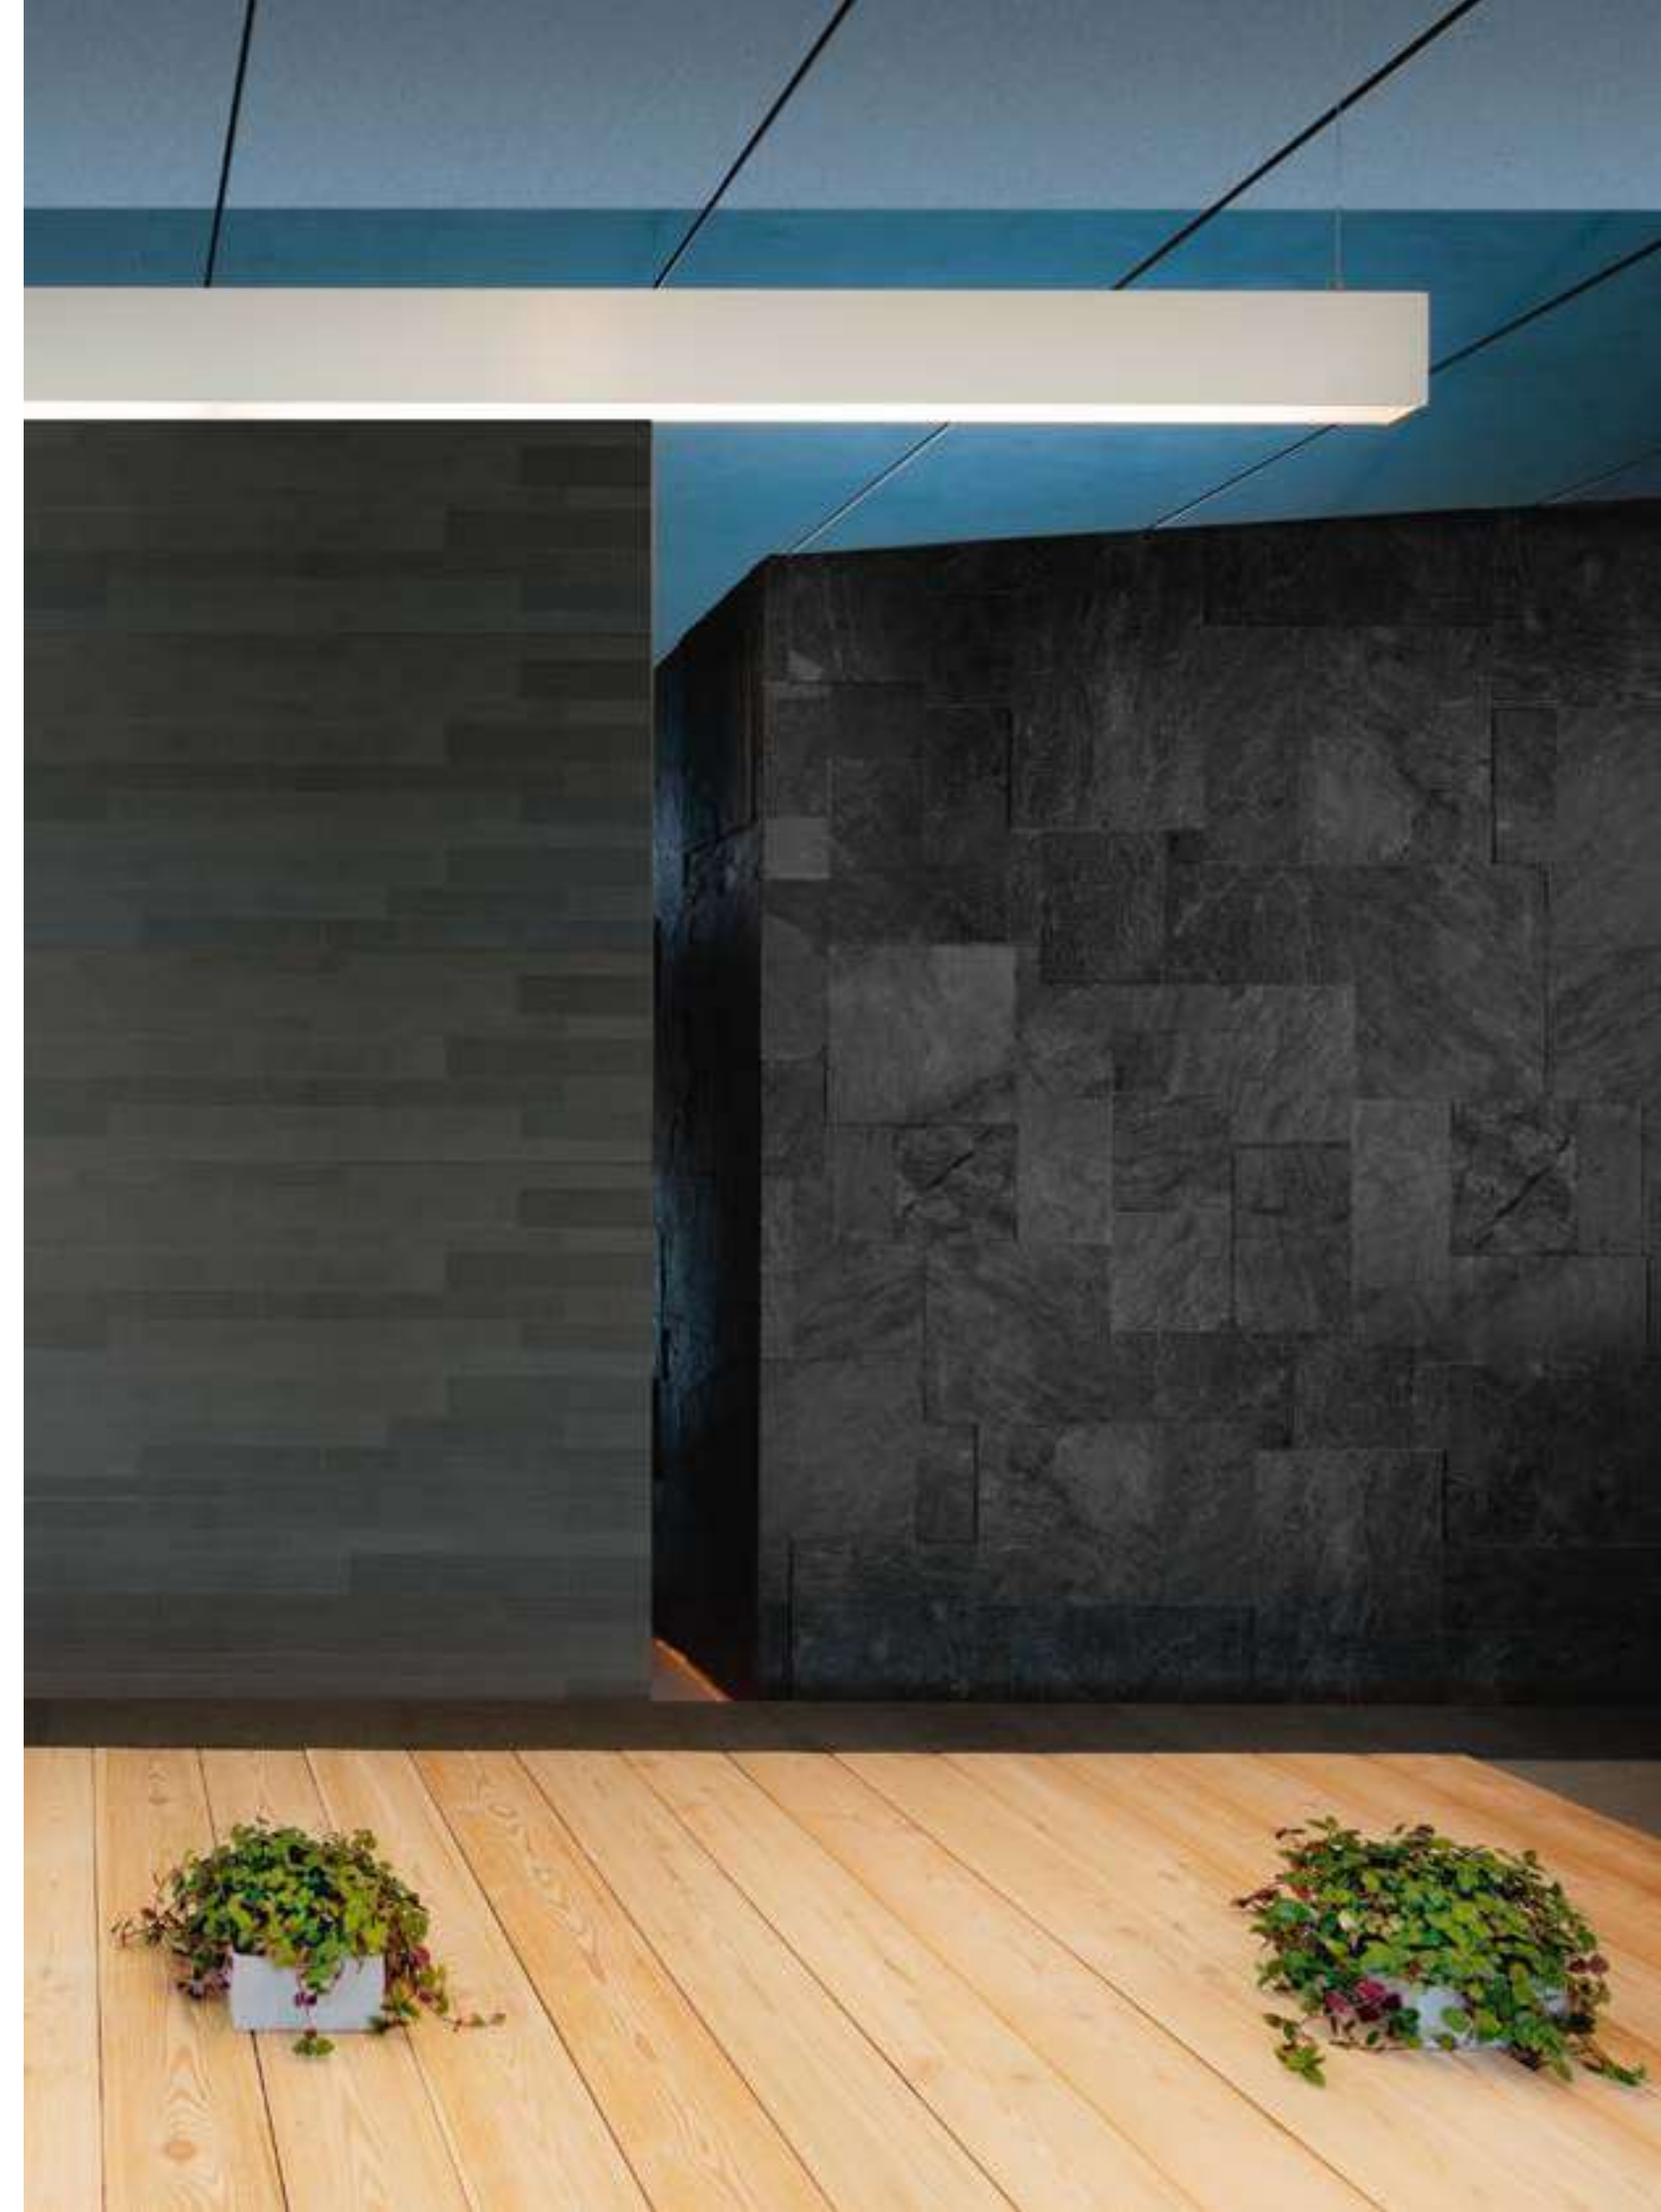

↪ ALGORITMO STAND-ALONE

* Direct emission dimmable
Protection screen for indirect cabled LED plate included.

MacAdam 3SDC
Life L70 (12K) 72000h
CRI =80


IP20
850° direct
650° direct/indirect

SUSPENSION DIFFUSED EMISSION

Direct emission					Undimmable	DALI
W	Length	Weight	Flux	CCT	Code	Code
34 W	1188 mm	3,80 kg	1961 lm	3000 K	M2910W20	M2910W21
			2053 lm	4000 K	M2910N20	M2910N21
68 W	2372 mm	7,10 kg	3921 lm	3000 K	M2912W20	M2912W21
			4106 lm	4000 K	M2912N20	M2912N21




Direct + Indirect emission					Undimmable	DALI*
W	Length	Weight	Flux	CCT	Code	Code
62 W	1188 mm	3,80 kg	4436 lm	3000 K	M2911W20	M2911W21
			4645 lm	4000 K	M2911N20	M2911N21
122 W	2372 mm	7,10 kg	8872 lm	3000 K	M2913W20	M2913W21
			9289 lm	4000 K	M2913N20	M2913N21



WALL/CEILING DIFFUSED EMISSION

Direct emission					Undimmable	DALI*
W	Length	Weight	Flux	CCT	Code	Code
34 W	1188 mm	3,80 kg	1961 lm	3000 K	M2914W20	M2914W21
			2053 lm	4000 K	M2914N20	M2914N21
68 W	2372 mm	7,10 kg	3921 lm	3000 K	M2915W20	M2915W21
			4106 lm	4000 K	M2915N20	M2915N21



↳ PRE-WIRED GEAR FOR PAD AND PAD SQUARE PROJECTORS

Gloss anodised	S	F	WF	MacAdam 4SDCM Life L70 (12K)> 72000h CRI =80	IP40 650° -90° 90°
----------------	---	---	----	--	--------------------------

Direct emission		DALI	
Length	Weight	Code	
1184 mm	1,20 kg	M217800	


Allows installation and supplying of 1-4 PAD 230V projectors.
MV through-wiring included.

Direct + indirect emission				Undimmable	DALI*
W	Length	Weight	CCT	Code	Code
27 W	1184 mm	1,20 kg	3000 K	M2945W00	M2945W01
			4000 K	M2945N00	M2945N01

Allows installation and powering of 1-4 PAD 230V + indirect projectors
MV through-wiring included.
* Only indirect emission is dimmable.


Double emission version, with upper screen in PMMA.
PAD projectors to be ordered separately.

PAD					Undimmable
W	Weight	Beam	Flux	CCT	Code
14,5 W	0,53 kg	S 12°	825 lm	3000 K	M200002
			880 lm	4000 K	M200102
		F 24°	825 lm	3000 K	M200202
			880 lm	4000 K	M200302
		WF 36°	805 lm	3000 K	M200402
			855 lm	4000 K	M200502



To be coupled with pre-wired gear plate.

PAD Square					Undimmable
W	Weight	Beam	Flux	CCT	Code
29 W	0,97 kg	S 12°	1650 lm	3000 K	M201502
			1750 lm	4000 K	M201602
		F 24°	1650 lm	3000 K	M201702
			1750 lm	4000 K	M201802
		WF 36°	1610 lm	3000 K	M201902
			1710 lm	4000 K	M202002



To be coupled with pre-wired gear plate.

Accessories		Code
	Blind panel, in polished metal grey steel. 1 piece required for each PAD empty position.	M217760
	Intermediate finishing cap (set of 2), in polished metal grey steel. To be used at the junction of PAD with LED modules.	M217660

↳ PRE-WIRED GEAR FOR 37 CUBE PROJECTORS

Gloss anodised	S	F	WF	MacAdam 4SDCM Life L70 (12K)> 72000h CRI =80	IP20 650° -90° 360°
----------------	---	---	----	--	---------------------------

Direct emission		DALI	
Length	Weight	Code	
1184 mm	1,20 kg	M219601	


Allows installation and supplying of 37 Cube, 1 or 2 groups of 3 projectors each. (max 6 projectors in total).
MV through-wiring included.

Direct + indirect emission				DALI*
W	Length	Weight	CCT	Code
27 W	1184 mm	1,20 kg	3000 K	M2198W01
			4000 K	M2198N01


Allows installation and supplying of 37 Cube, 1 or 2 groups of 3 projectors each. (max 6 projectors in total).
MV through-wiring included.
* Only indirect emission is dimmable.

Double emission version, with upper screen in PMMA.
37 Cube projectors to be ordered separately.

37 Cube					Undimmable
W	Weight	Beam	Flux	CCT	Code
3x8 W	0,47 kg	14°	3x483 lm	3000 K	M029100
			3x517 lm	4000 K	M029400
		18°	3x463 lm	3000 K	M029200
			3x495 lm	4000 K	M029500
		30°	3x468 lm	3000 K	M029300
			3x501 lm	4000 K	M029600



To be coupled with pre-wired gear plate.

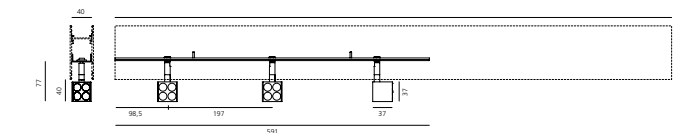

Accessories		Code
	Blind panel, in polished metal grey steel. Length 591mm. 1 piece required for each 37 Cube empty position.	M217560
	Intermediate finishing cap (set of 2), in polished metal grey steel. To be used at the junction of 37 Cube modules with LED modules.	M217660

↪ PRE-WIRED GEAR TRAY FOR RAIL

White Black



Double emission version, with upper screen in PMMA.
* Only indirect emission is dimmable.

IP20
⊕
650°

Direct rail			Undimmable Eutrac	DALI Eutrac
Length	Weight	Color rail	Code	Code
1184 mm	6,00 kg	white	M294110	M294111
		black	M294120	M294121
2368 mm	12,00 kg	white	M294210	M294211
		black	M294220	M294221

Direct rail+ indirect emission					Undimmable Eutrac	DALI Eutrac*
W	Length	Weight	CCT	Color rail	Code	Code
27 W	1184 mm	6,00 kg	3000 K	white	M2943W10	M2943W11
				black	M2943W20	M2943W21
			4000 K	white	M2943N10	M2943N11
				black	M2943N20	M2943N21
57 W	2368 mm	12,00 kg	3000 K	white	M2944W10	M2944W11
				black	M2944W20	M2944W21
			4000 K	white	M2944N10	M2944N11
				black	M2944N20	M2944N21





Algoritmo

↳ controlled emission
prismoptic emission





↳ ALGORITMO CONTROLLED EMISSION

↳ ALGORITMO PRISMOPTIC EMISSION



Controlled emission LED optic System
UGR index control and 65° luminance (EN 12464)

Patent-pending proprietary optic system made by a thin black square-meshed grid and by a system of square plano-convex lenses of appropriate beam angle. The internal part of the grid is white painted and has a high reflection coefficient, so that the light incident on the grid is retrieved within the body.

A net 'cut off' at the required angle is obtained through this system.

The convex profile of the lens is designed with images optic techniques, so that the emission is limited within the 65° required by standard EN 12464.

UGR<19

Angle luminance equals to 65° and beyond: <3,000 cd/m².


→ Patent pending

Operating diagram of the optical device used:

The grid positioned over the lenses allows only the rays falling into the required output angular limits to be incident to the lenses.

The rays beyond these limits are recovered and redirected inside the light box (if the ray is incident to the white surface) or cancelled (if the ray is incident to the black edge).

Functioning scheme

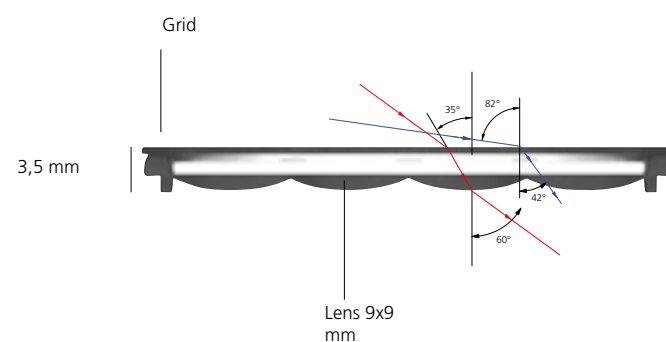


Comfort emission

The appliance is fitted with a clear plastic screen featuring an outer micro-prism pattern designed in order to obtain a focused luminous emission mostly within a 2x60° cone.


With this technology, Algoritmo Prismatic provides comfort lighting even when the appliance falls within the observer's visual cone.




light ON

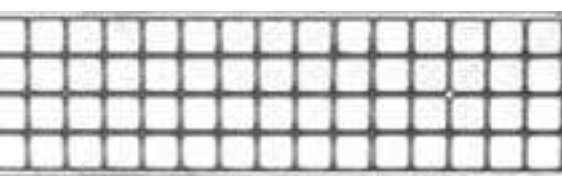


light OFF

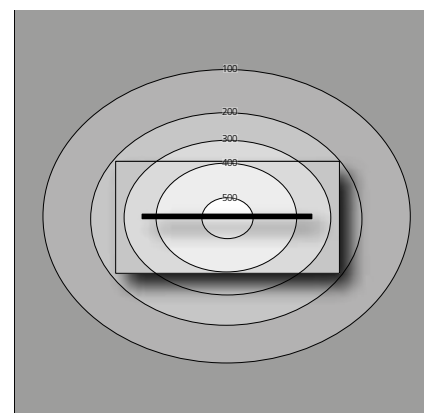


Direct emission

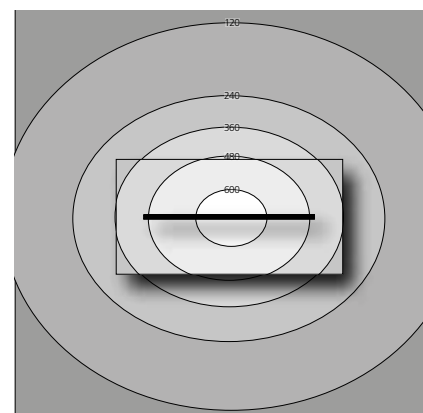

Direct emission + indirect

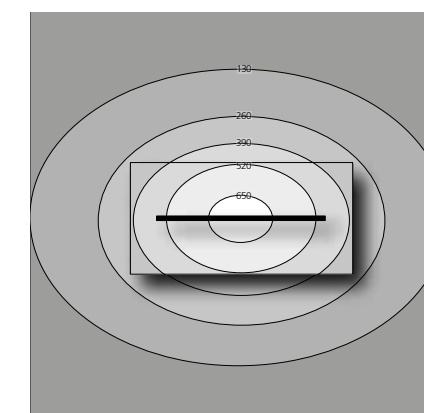

Direct emission

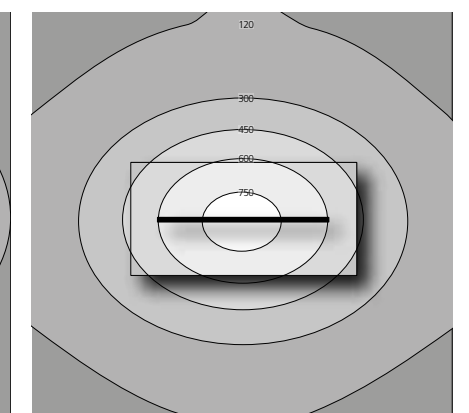


Direct emission + indirect

↳ STRUCTURAL MODULE RECESSED


White Black Silver
 20 10 90

Trimless		Code
Length	Weight	
1184 mm	1,80 kg	M204800
2368 mm	3,60 kg	M204900

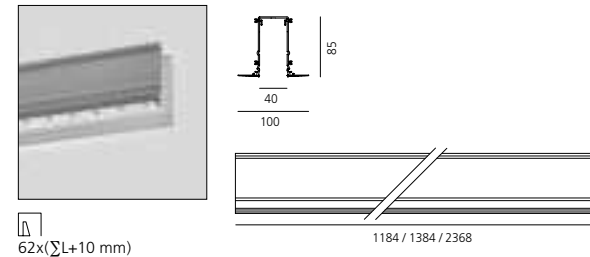

62x(ΣL+10 mm)


Trim		Code
Length	Weight	
1184 mm	1,80 kg	M2934. 20/10/90
2368 mm	3,60 kg	M2935. 20/10/90
3552 mm		M2936. 20/10/90
4736 mm		M2937. 20/10/90

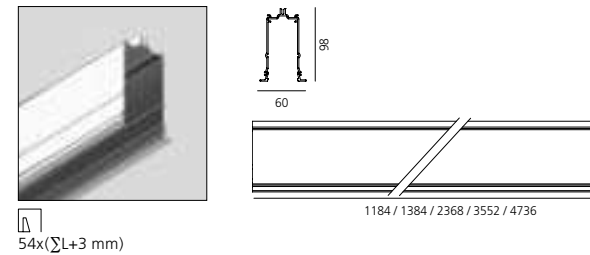

54x(ΣL+3 mm)

Accessories trimless

90° angle to mechanically connect two recessed modules on the same plane.



Code
M196600

Accessories trim

90° angle to mechanically connect two recessed modules on the same plane.



Code
M2939. 20/10/90

End caps (set of 2)




M197300

90° angle to mechanically connect two recessed modules on perpendicular plans.



M2938. 20/10/90

End caps (set of 2)




M2940. 20/10/90

↳ STRUCTURAL MODULE SUSPENSION, CEILING, WALL


White Black Silver Gloss anodised
 20 10 90 60

		Code
Length	Weight	
1184 mm	2,30 kg	M2050. 20/10/90 60
2368 mm	4,60 kg	M2051. 20/10/90 60
3552 mm	6,90 kg	M2063. 20/10/90 60
4736 mm	9,20 kg	M1995. 20/10/90 60

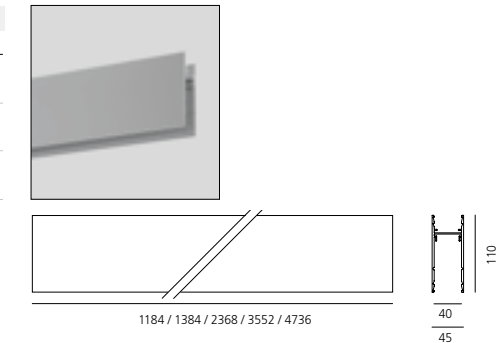

Accessories

90° angle To mechanically connect two recessed modules on one same plane. 0.30 kg.




Code
M1968. 20/10
90
60

Steel suspension cable with quick adjustment Length 2 meters

Length of a single module	no. pieces required for each module
1184 mm	2
2368 mm	2
3552 mm	2
4736 mm	3

Please check on Artemide.com for continuous system installations with 2+ connected modules.

90° angle To mechanically connect of 2 modules on perpendicular plans. Includes through-wire extensions. 0.60 kg.

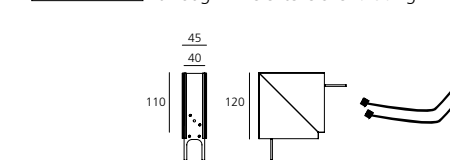


M1967. 20/10
90
60

Suspension kit with power supply. Includes 1 single steel suspension cable + 1 power supply cable Length 2 meters

MV (5x1,5mm2+2x0,5mm2) To power white LED plates and accent modules.

M189300

Wall bracket To mechanically connect a wall-mounted module.



M199300

Bracket for fixing to wall/ceiling (1 piece)



Length of a single module	no. pieces required for each module
1184 mm	2
2368 mm	2
3552 mm	3
4736 mm	4


Applicable also for system installations.

End caps (set of 2)



M1888. 20/10
90
60

Linear connector



M189000

↳ WIRED GEAR PLATES WHITE LED

MV integrated through-cable.
 * Direct and indirect emission dimmable
 Protection screen for indirect cabled LED plate included.
 Occupies 2 DALI addresses

MacAdam 3SDC
 Life L70 (12K)> 72000h
 CRI =80


IP20

Direct emission				DALI	
Length	W	Weight	CCT	Code	Code
1184 mm	34 W	1,10 kg	3000 K	M2882W00	M2882W01
			4000 K	M2882N00	M2882N01
2368 mm	68 W	2,00 kg	3000 K	M2884W00	M2884W01
			4000 K	M2884N00	M2884N01

Direct emission + indirect				Undimmable		DALI*	
Length	W	Weight	CCT	Code	Code	Code	Code
1184 mm	62 W	1,10 kg	3000 K	M2883W00	M2883W01	M2883N00	M2883N01
			4000 K	M2883N00	M2883N01		
2368 mm	122 W	2,00 kg	3000 K	M2885W00	M2885W01	M2885N00	M2885N01
			4000 K	M2885N00	M2885N01		

CONTROLLED EMISSION



Length	Weight	Code
1184 mm	0,20 kg	M186700
2368 mm	0,40 kg	M187300



Direct emission				Direct emission + indirect			
Length	W	CCT	Flux	Length	W	CCT	Flux
1184 mm	34 W	3000 K	2527 lm	1184 mm	62 W	3000 K	5003 lm
		4000 K	2644 lm			4000 K	5238 lm
2368 mm	68 W	3000 K	5054 lm	2368 mm	122 W	3000 K	10005 lm
		4000 K	5292 lm			4000 K	10475 lm

PRISMOPTIC

Length	Weight	Code
1184 mm	0,20 kg	M196900
2368 mm	0,40 kg	M197000



850°

Direct emission				Direct emission + indirect			
Length	W	CCT	Flux	Length	W	CCT	Flux
1184 mm	34 W	3000 K	2527 lm	1184 mm	62 W	3000 K	5003 lm
		4000 K	2644 lm			4000 K	5238 lm
2368 mm	68 W	3000 K	5054 lm	2368 mm	122 W	3000 K	10005 lm
		4000 K	5292 lm			4000 K	10475 lm

↳ WIRED GEAR PLATES TUNABLE WHITE



MV integrated through-cable.
 * Direct and indirect emission dimmable
 Protection screen for indirect cabled LED plate included.
 Occupies 2 DALI addresses

MacAdam 3SDC
 Life L70 (12K)> 72000h
 CRI =80


IP20

Direct emission				Dimmable DALI 8	
Length	W	Weight	CCT	Code	Code
1184 mm	35 W	1,10 kg	2700 K - 5700 K	M2990	

Direct emission + indirect				Dimmable DALI 8	
Length	W	Weight	CCT	Code	Code
1184 mm	62 W	1,10 kg	2700 K - 5700 K	M2991	

PRISMOPTIC

Length	Weight	Code
1184 mm	0,20 kg	M196900
2368 mm	0,40 kg	M197000

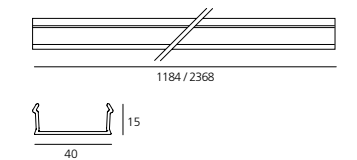

850°

Direct emission			
Length	W	CCT	Flux
1184 mm	35 W	2700 K	1778 lm
		6500 K	1991 lm
2368 mm	62 W	2700 K	4024 lm
		6500 K	4507 lm



↳ A.Sharping



A. Sharping optics

Algoritmo Sharping is very flexible and it allows to combine in continuity Sharp light modules, with indirect and diffused LED lighting in warm white (3000K) and neutral white (4000K).

Structural modules are in extruded aluminum, available in different lengths depending on the installation option, three finishes (white, black, silver or gloss anodized), two optic finishes (black and white) and three beams (17°, 34° and 54°).

→ Patent pending



OPTICAL UNITS 2X4



OPTICAL UNITS 3X4





OPTICAL UNITS 4X4



OPTICAL UNITS 6X4

A. Sharping components

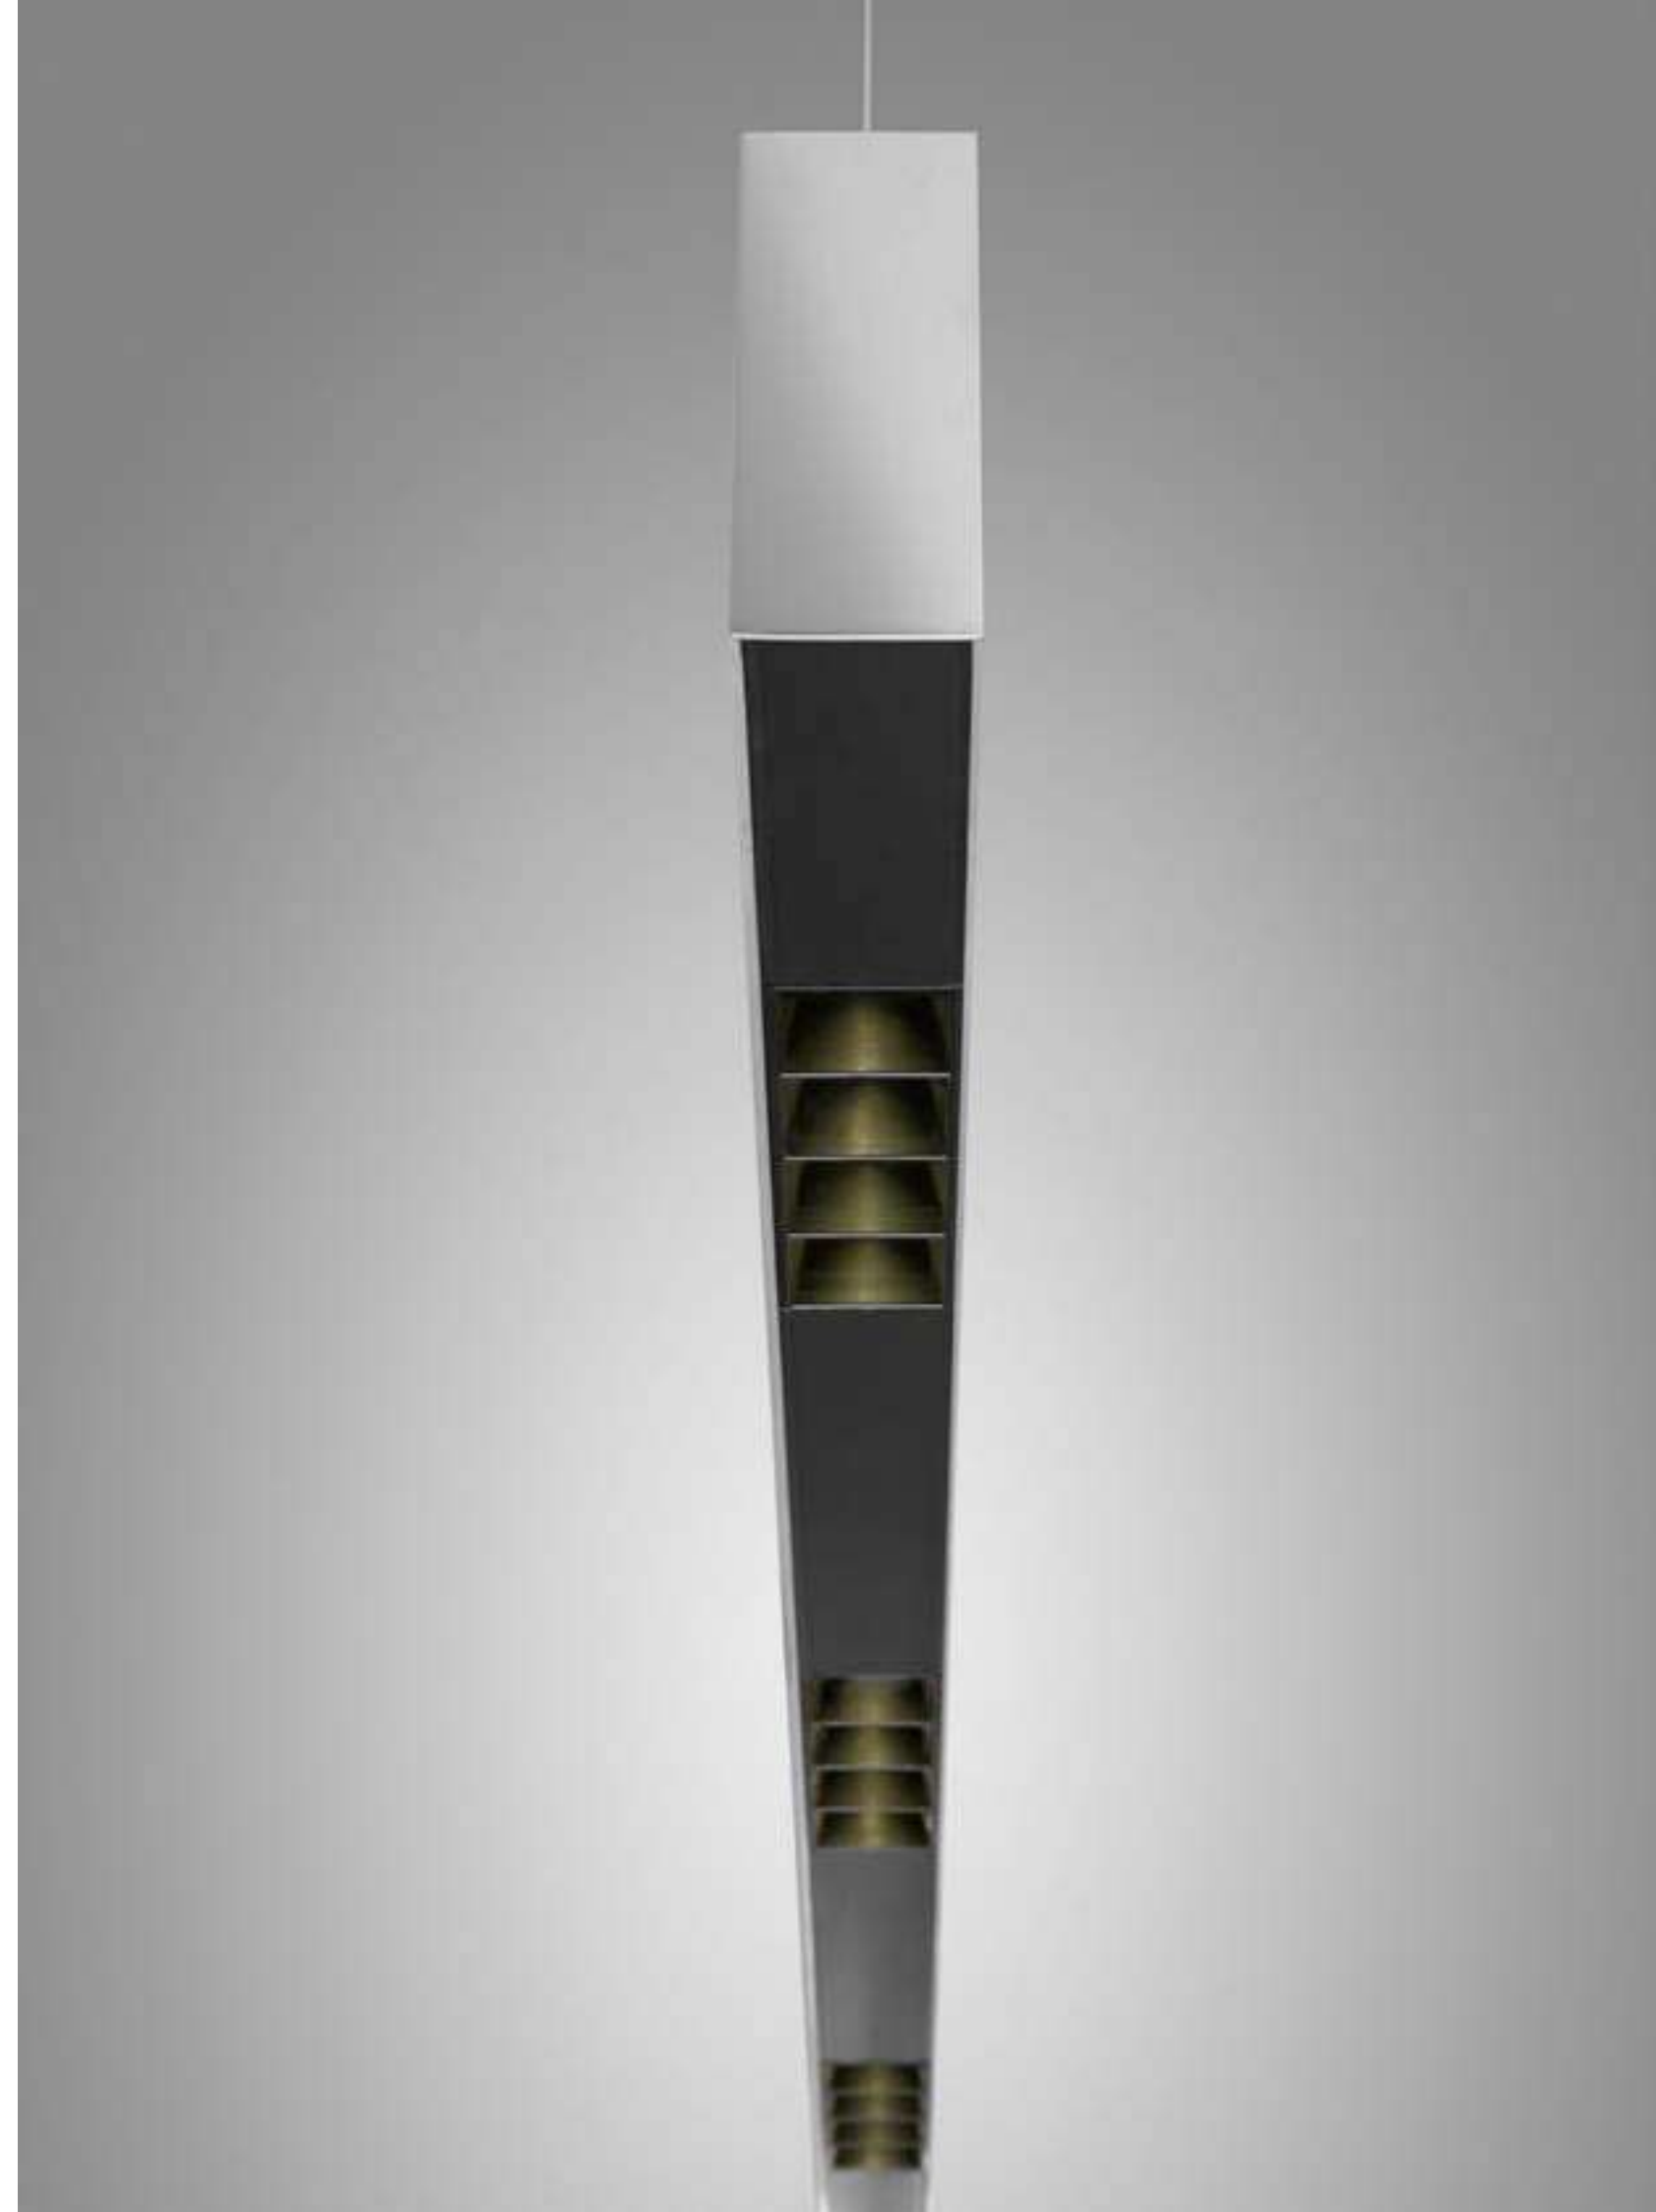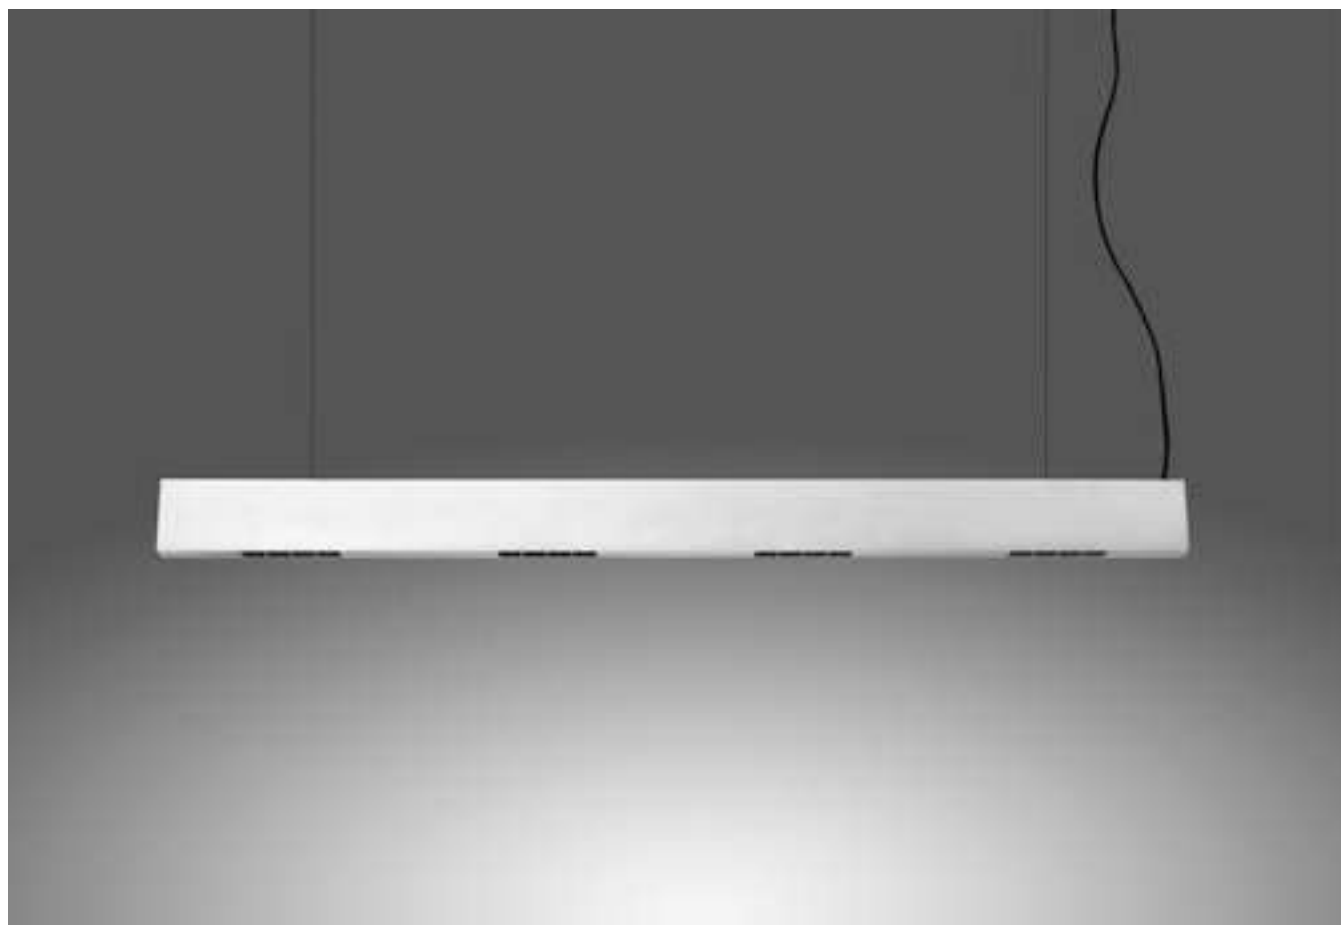


↳ STRUCTURAL MODULE RECESSED


White Black Silver




Trimless		Code
Length	Weight	
1184 mm	1,80 kg	M204800
2368 mm	3,60 kg	M204900

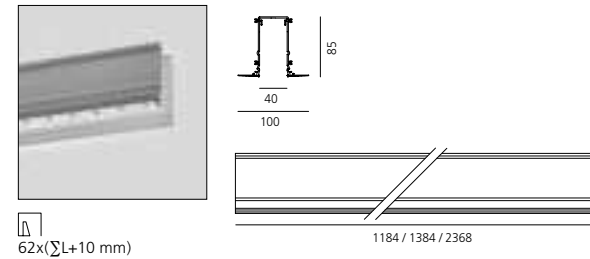

Trim		Code
Length	Weight	
1184 mm	1,80 kg	M2934. 20/10/90
2368 mm	3,60 kg	M2935. 20/10/90
3552 mm		M2936. 20/10/90
4736 mm		M2937. 20/10/90

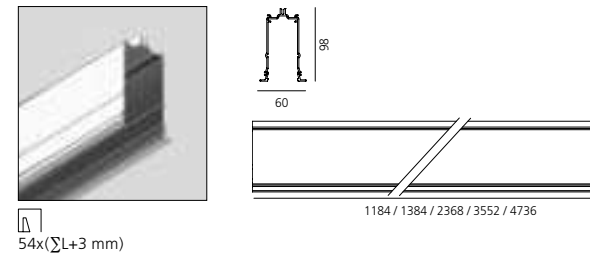


Accessories trimless

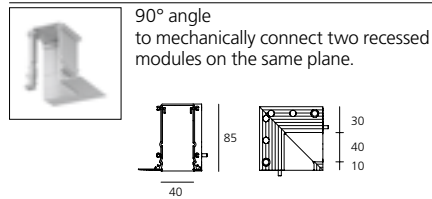

Code
M196600


Accessories trim



Code
M2939. 20/10/90

End caps (set of 2)

M197300



M2938. 20/10/90

End caps (set of 2)


M2940. 20/10/90

↳ STRUCTURAL MODULE SUSPENSION, CEILING, WALL


White Black Silver Gloss anodised




		Code
Length	Weight	
1184 mm	2,30 kg	M2050. 20/10/90
2368 mm	4,60 kg	M2051. 20/10/90
3552 mm	6,90 kg	M2063. 20/10/90
4736 mm	9,20 kg	M1995. 20/10/90

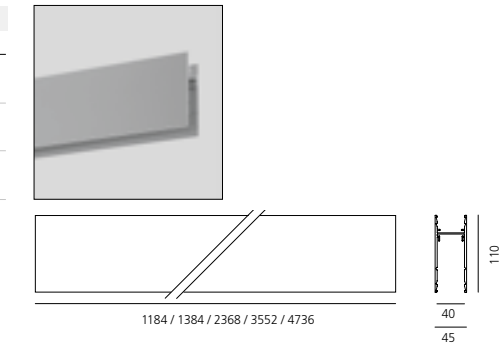

Accessories

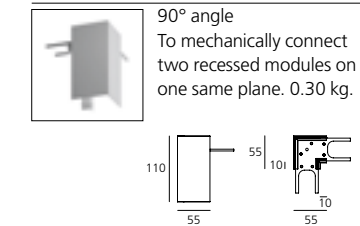


Code
M1968. 20/10
90
60




Code
M189100

Please check on Artemide.com for continuous system installations with 2+ connected modules.

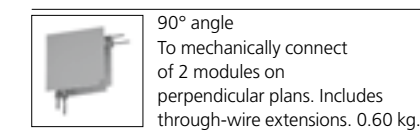


M1967. 20/10
90
60




MV (5x1,5mm2+2x0,5mm2)
To power white LED plates and accent modules.

M189300

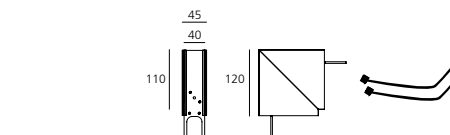

M199300



M199400

End caps (set of 2)

M1888. 20/10
90
60

Length of a single module	no. pieces required for each module
1184 mm	2
2368 mm	2
3552mm	3
4736mm	4

Applicable also for system installations.


Linear connector

M189000

WIRED GEAR PLATES SHARPING LED

White
20

Black
10




MV integrated through-cable.
*Occupies 1 DALI address
**Occupies 2 DALI addresses
Protection screen for indirect cabled LED plate included.

IP20
MacAdam 2SDC
Life L70 (12K)> 72000h
CRI >90

Direct emission

Length	Optic	W	Beam	Flux	CCT	DALI* Code
1184 mm	2x4 optics	25 W	F 20°	1648 lm	3000 K	AE00000
			F 36°	1764 lm	4000 K	AE02000
	3x4 optics	38 W	F 20°	1542 lm	3000 K	AE00100
			F 36°	1651 lm	4000 K	AE02100
			XF 52°	1597 lm	3000 K	AE00200
			XF 52°	1709 lm	4000 K	AE02200
2368 mm	4x4 optics	50 W	F 20°	2473 lm	3000 K	AE10000
			F 36°	2646 lm	4000 K	AE12000
	6x4 optics	80 W	F 20°	2314 lm	3000 K	AE10100
			F 36°	2476 lm	4000 K	AE12100
			XF 52°	2396 lm	3000 K	AE10200
			XF 52°	2564 lm	4000 K	AE12200
2368 mm	4x4 optics	50 W	F 20°	3297 lm	3000 K	AE20000
			F 36°	3528 lm	4000 K	AE22000
	6x4 optics	80 W	F 20°	3085 lm	3000 K	AE20100
			F 36°	3301 lm	4000 K	AE22100
			XF 52°	3195 lm	3000 K	AE20200
			XF 52°	3419 lm	4000 K	AE22200
2368 mm	4x4 optics	50 W	F 20°	4945 lm	3000 K	AE30000
			F 36°	5292 lm	4000 K	AE32000
	6x4 optics	80 W	F 20°	4627 lm	3000 K	AE30100
			F 36°	4952 lm	4000 K	AE32100
			XF 52°	4792 lm	3000 K	AE30200
			XF 52°	5128 lm	4000 K	AE32200

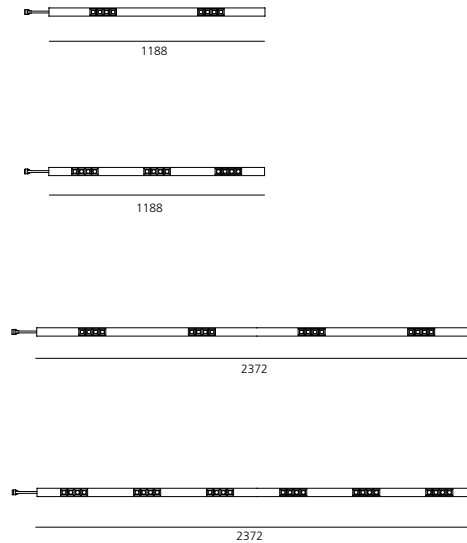

Direct emission + indirect

Length	Optic	W	Beam	Flux	CCT	DALI** Code
1184 mm	2x4 optics	53 W	F 20°	4124 lm	3000 K	AE05000
			F 36°	4356 lm	4000 K	AE07000
	3x4 optics	64 W	F 20°	4018 lm	3000 K	AE05100
			F 36°	4243 lm	4000 K	AE07100
			XF 52°	4073 lm	3000 K	AE05200
			XF 52°	4301 lm	4000 K	AE07200
2368 mm	4x4 optics	104 W	F 20°	4948 lm	3000 K	AE15000
			F 36°	5238 lm	4000 K	AE17000
	6x4 optics	134 W	F 20°	4789 lm	3000 K	AE15100
			F 36°	5068 lm	4000 K	AE17100
			XF 52°	4871 lm	3000 K	AE15200
			XF 52°	5156 lm	4000 K	AE17200
2368 mm	4x4 optics	104 W	F 20°	8248 lm	3000 K	AE25000
			F 36°	8712 lm	4000 K	AE27000
	6x4 optics	134 W	F 20°	8036 lm	3000 K	AE25100
			F 36°	8485 lm	4000 K	AE27100
			XF 52°	8146 lm	3000 K	AE25200
			XF 52°	8603 lm	4000 K	AE27200
2368 mm	4x4 optics	104 W	F 20°	9896 lm	3000 K	AE35000
			F 36°	10476 lm	4000 K	AE37000
	6x4 optics	134 W	F 20°	9578 lm	3000 K	AE35100
			F 36°	10136 lm	4000 K	AE37100
			XF 52°	9743 lm	3000 K	AE35200
			XF 52°	10312 lm	4000 K	AE37200

Screen

Length	Optic	Code
1184 mm	2x4 optics	AE400. 01/04
2368 mm	3x4 optics	AE410. 01/04
	4x4 optics	AE420. 01/04
	6x4 optics	AE430. 01/04
Angle 45°		AE440. 01/04



↪ ACCESSORIES

Power supply/light management system



Electronic power supply
IP67. Input voltage range:
90-264VAC / 47-63 VDC.
Output voltage: 48 VDC. Protection against
overcurrent, overvoltage, short-circuit and
overtemperature, with automatic restart.

100 W

For voltage up to a total 90 W.
220x68x38 mm.

240 W

For voltage up to a total 225 W.
244x68x39 mm.

320 W

For voltage up to a total 300 W.
252x90x44 mm.


Code

M075000

M075100

M076100

Closure screens for 90° angles






Junction to be fitted
to the module on the same plane
Compatible with the junction
for the same plane.

For continuity between LED diffused
emission modules.

For continuity between LED emission
modules and spot modules.

For continuity between wall-washer LED
emission modules.



Code

M198100

M198000



2-plane joint

To be clipped to the module.

Compatible with connectors for
2 modules on perpendicular planes.

For continuity between LED diffused
emission modules.

For continuity between LED emission
modules and spot modules.


For continuity between wall-washer LED
emission modules.



M198500

M198400

Electrical components



Supplementary through-wiring (optional).
To be used in mixed configuration with MV
pre-cabled gear trays.

MV 1184 mm

MV 2368 mm

Code

M198700

M198900



Supply Kit

Allows for connection of the mains
to the first pre-wired gear plate
of the initial module. To be used only with
recessed and surface installation.

MV (7xmax 1,5 mm²)

To power white LED plates and accent
modules.

M073240




Smart Office

Carlotta de Bevilacqua

↳ 2016



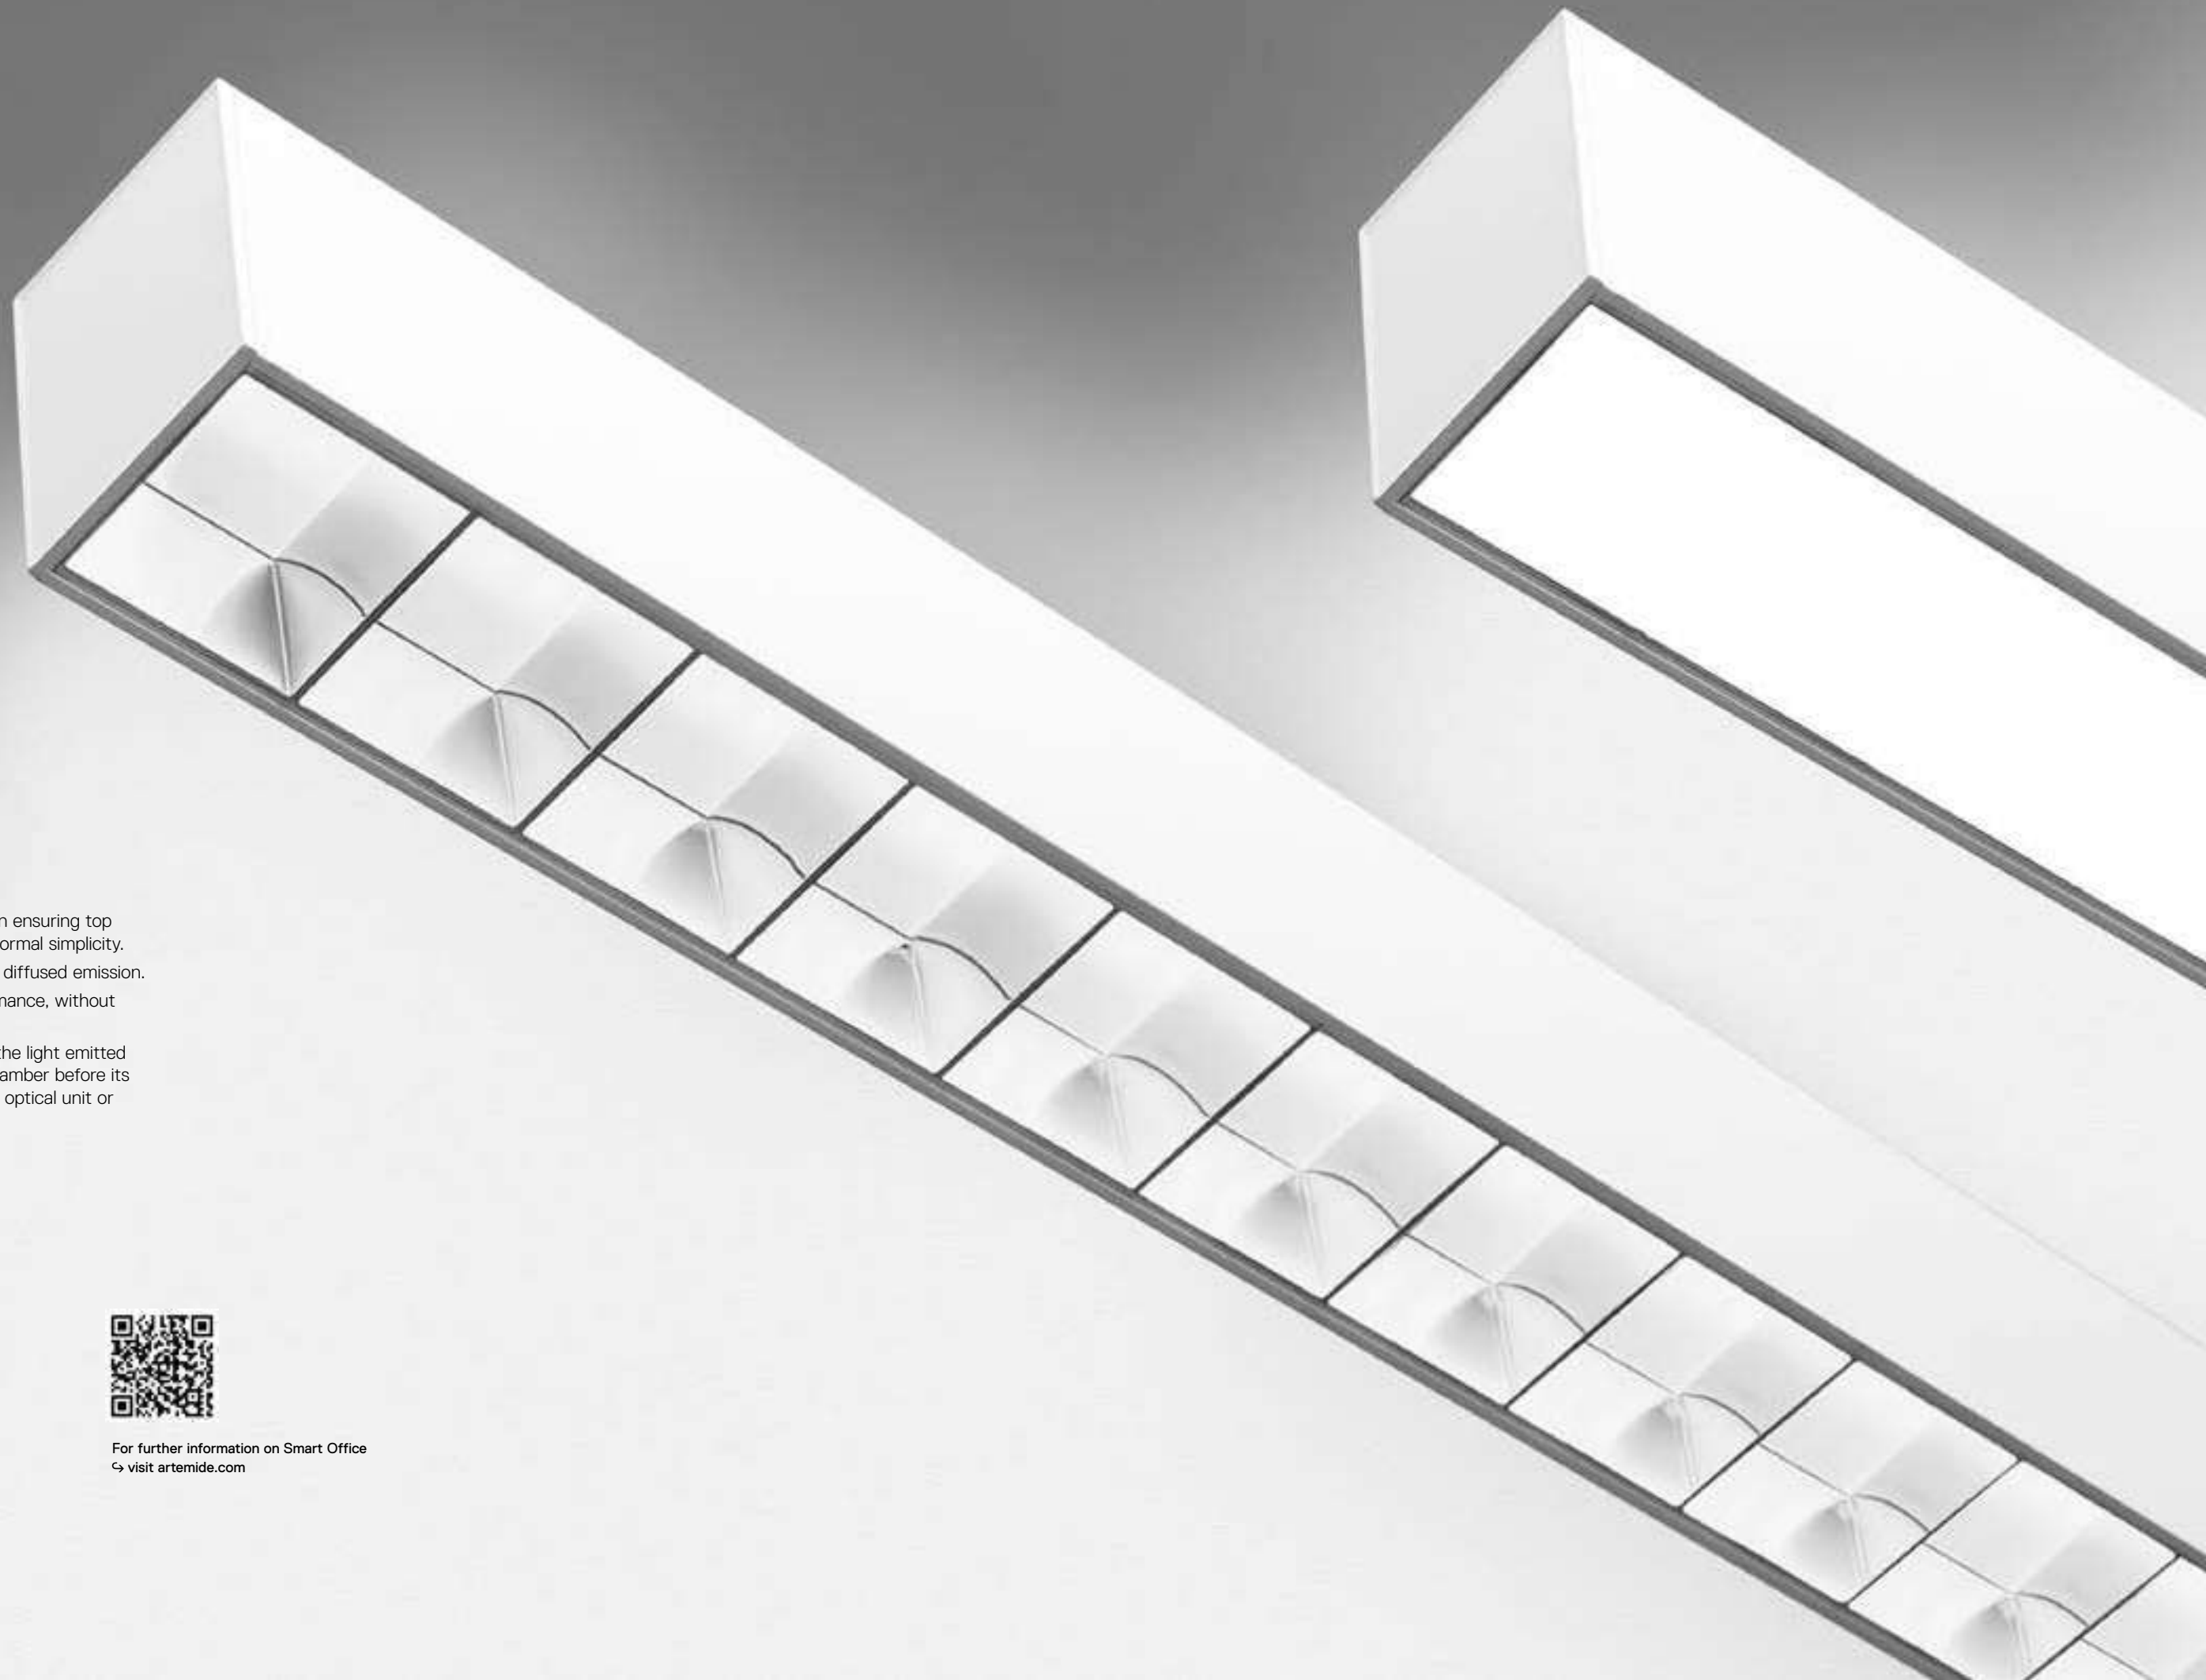

Dedicated office suspension ensuring top performance with utmost formal simplicity.
Available with controlled or diffused emission.
Highly uniform light performance, without multiple shadows or spots.
Innovative optical system: the light emitted is controlled by a mixing chamber before its emission through a lamellar optical unit or diffuser.
Two lengths available.



**Artemide
App**
↪ on request



For further information on Smart Office
↪ visit artemide.com


↪ SMART OFFICE - DIFFUSED EMISSION

White 01	Black 04	XF	Uses 1 DALI address	MacAdam 3SDCM Life L70 (6K) 50000h CRI=90 UGR <19	IP20
-------------	-------------	----	---------------------	--	------

Direct emission + indirect					
Length	W	CRI	Weight	Flux	CCT
1129 mm	37 W	=80	16,00 kg	3619 lm	3000 K
				3814 lm	4000 K


Undimmable	
Code	
AG200. 01/04	
AG201. 01/04	

Dimmable DALI	
Code	
AG225. 01/04	
AG226. 01/04	

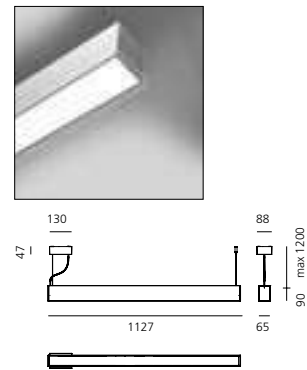

Direct emission + indirect					
Length	W	CRI	Weight	Flux	CCT
2249 mm	81 W	=80	16,00 kg	7239 lm	3000 K
				7628 lm	4000 K

Undimmable	
Code	
AG250. 01/04	
AG251. 01/04	

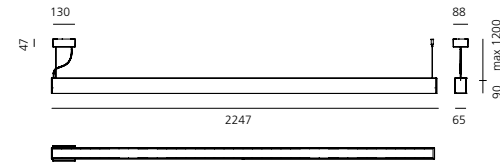

Direct emission + indirect					
Length	W	CRI	Weight	Flux	CCT
2249 mm	76 W	=80	16,00 kg	7239 lm	3000 K
				7628 lm	4000 K


Dimmable DALI	
Code	
AG275. 01/04	
AG276. 01/04	

TUNABLE WHITE



Direct emission + indirect				
Length	W	Weight	CCT	
1129 mm	37 W	16,00 kg	2700K - 5700K	

Dimmable DALI	
Code	
AG290. 01/04	

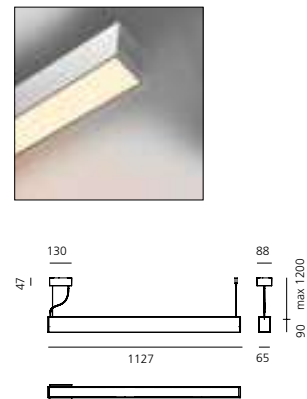


↪ SMART OFFICE - CONTROLLED EMISSION

White 01	Black 04	XF	Uses 1 DALI address	MacAdam 3SDCM Life L70 (6K) 50000h CRI=90 UGR <19	IP20
-------------	-------------	----	---------------------	--	------

Direct emission + indirect					
Length	W	CRI	Weight	Flux	CCT
1129 mm	37 W	=80	16,00 kg	4331 lm	3000 K
				4564 lm	4000 K


Undimmable	
Code	
AG000. 01/04	
AG001. 01/04	

Dimmable DALI	
Code	
AG025. 01/04	
AG026. 01/04	

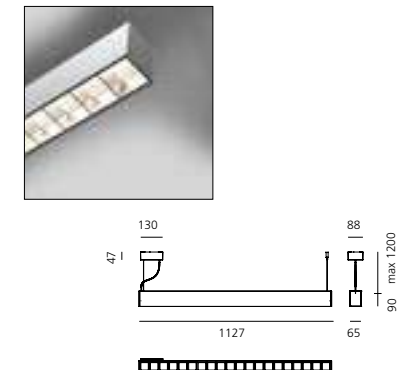

Direct emission + indirect					
Length	W	CRI	Weight	Flux	CCT
2249 mm	81 W	=80	16,00 kg	8662 lm	3000 K
				9128 lm	4000 K

Undimmable	
Code	
AG050. 01/04	
AG051. 01/04	

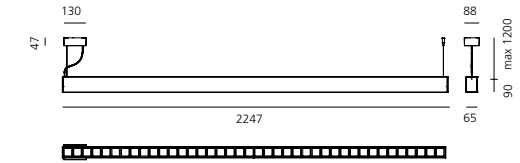

Direct emission + indirect					
Length	W	CRI	Weight	Flux	CCT
2249 mm	76 W	=80	16,00 kg	8662 lm	3000 K
				9128 lm	4000 K


Dimmable DALI	
Code	
AG075. 01/04	
AG076. 01/04	

TUNABLE WHITE



Direct emission + indirect				
Length	W	Weight	CCT	
1129 mm	37 W	16,00 kg	2700K - 5700K	

Dimmable DALI	
Code	
AG090. 01/04	

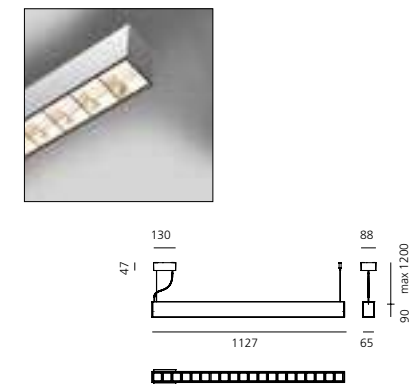



Series Y

Gensler
↳ 2017



Artemide
App
↳ on request



For further information on Series Y
↳ visit artemide.com





Series Y optics

Direct emission



Diffused emission



35W
2940 lm
Undimmable

Controlled emission



35W
2559 lm
Undimmable

Direct + indirect emission



Diffused + batwing emission



55W
4742 lm
Dimmable DALI separately

Controlled + Batwing emission



55W
4361 lm
Dimmable DALI separately



Series Y

Batwing indirect emission



Maximum flexibility of composition

Horizontal rotation modules respecting a minimum of 75°

Controlled emission


Diffused emission

Free vertical tilt up to 30° upwards or 30° downwards

Horizontal and vertical freedom to play with


→ ROTATION ON HORIZONTAL PLANE

During the installation it is possible to freely choose the position of each single module, respecting a minimum angle between two modules of 75°.

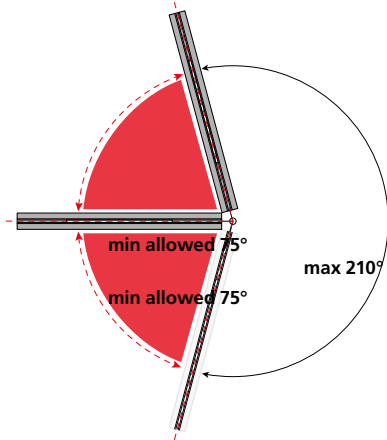

→ TILT ON VERTICAL PLANE

Each module can be easily tilted (upward or downward) up to 30° from the horizontal plane.

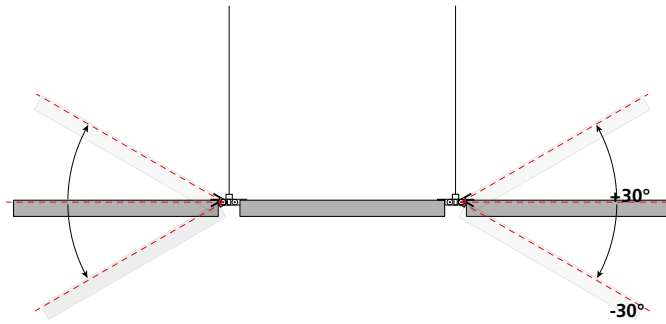


This two movements (rotation and tilting) can be mixed up in infinite possibilities to best adapt to space requirements.

→ POSSIBLE MULTIPLE CONFIGURATIONS UP TO 4 MODULES


POWERED JOINT AND SUSPENSION CABLE



X 2 MODULES



X 3 MODULES



X 4 MODULES

MECHANICAL JOINT AND SUSPENSION CABLE



X 2 MODULES




X 3 MODULES




X 4 MODULES

Series Y joints

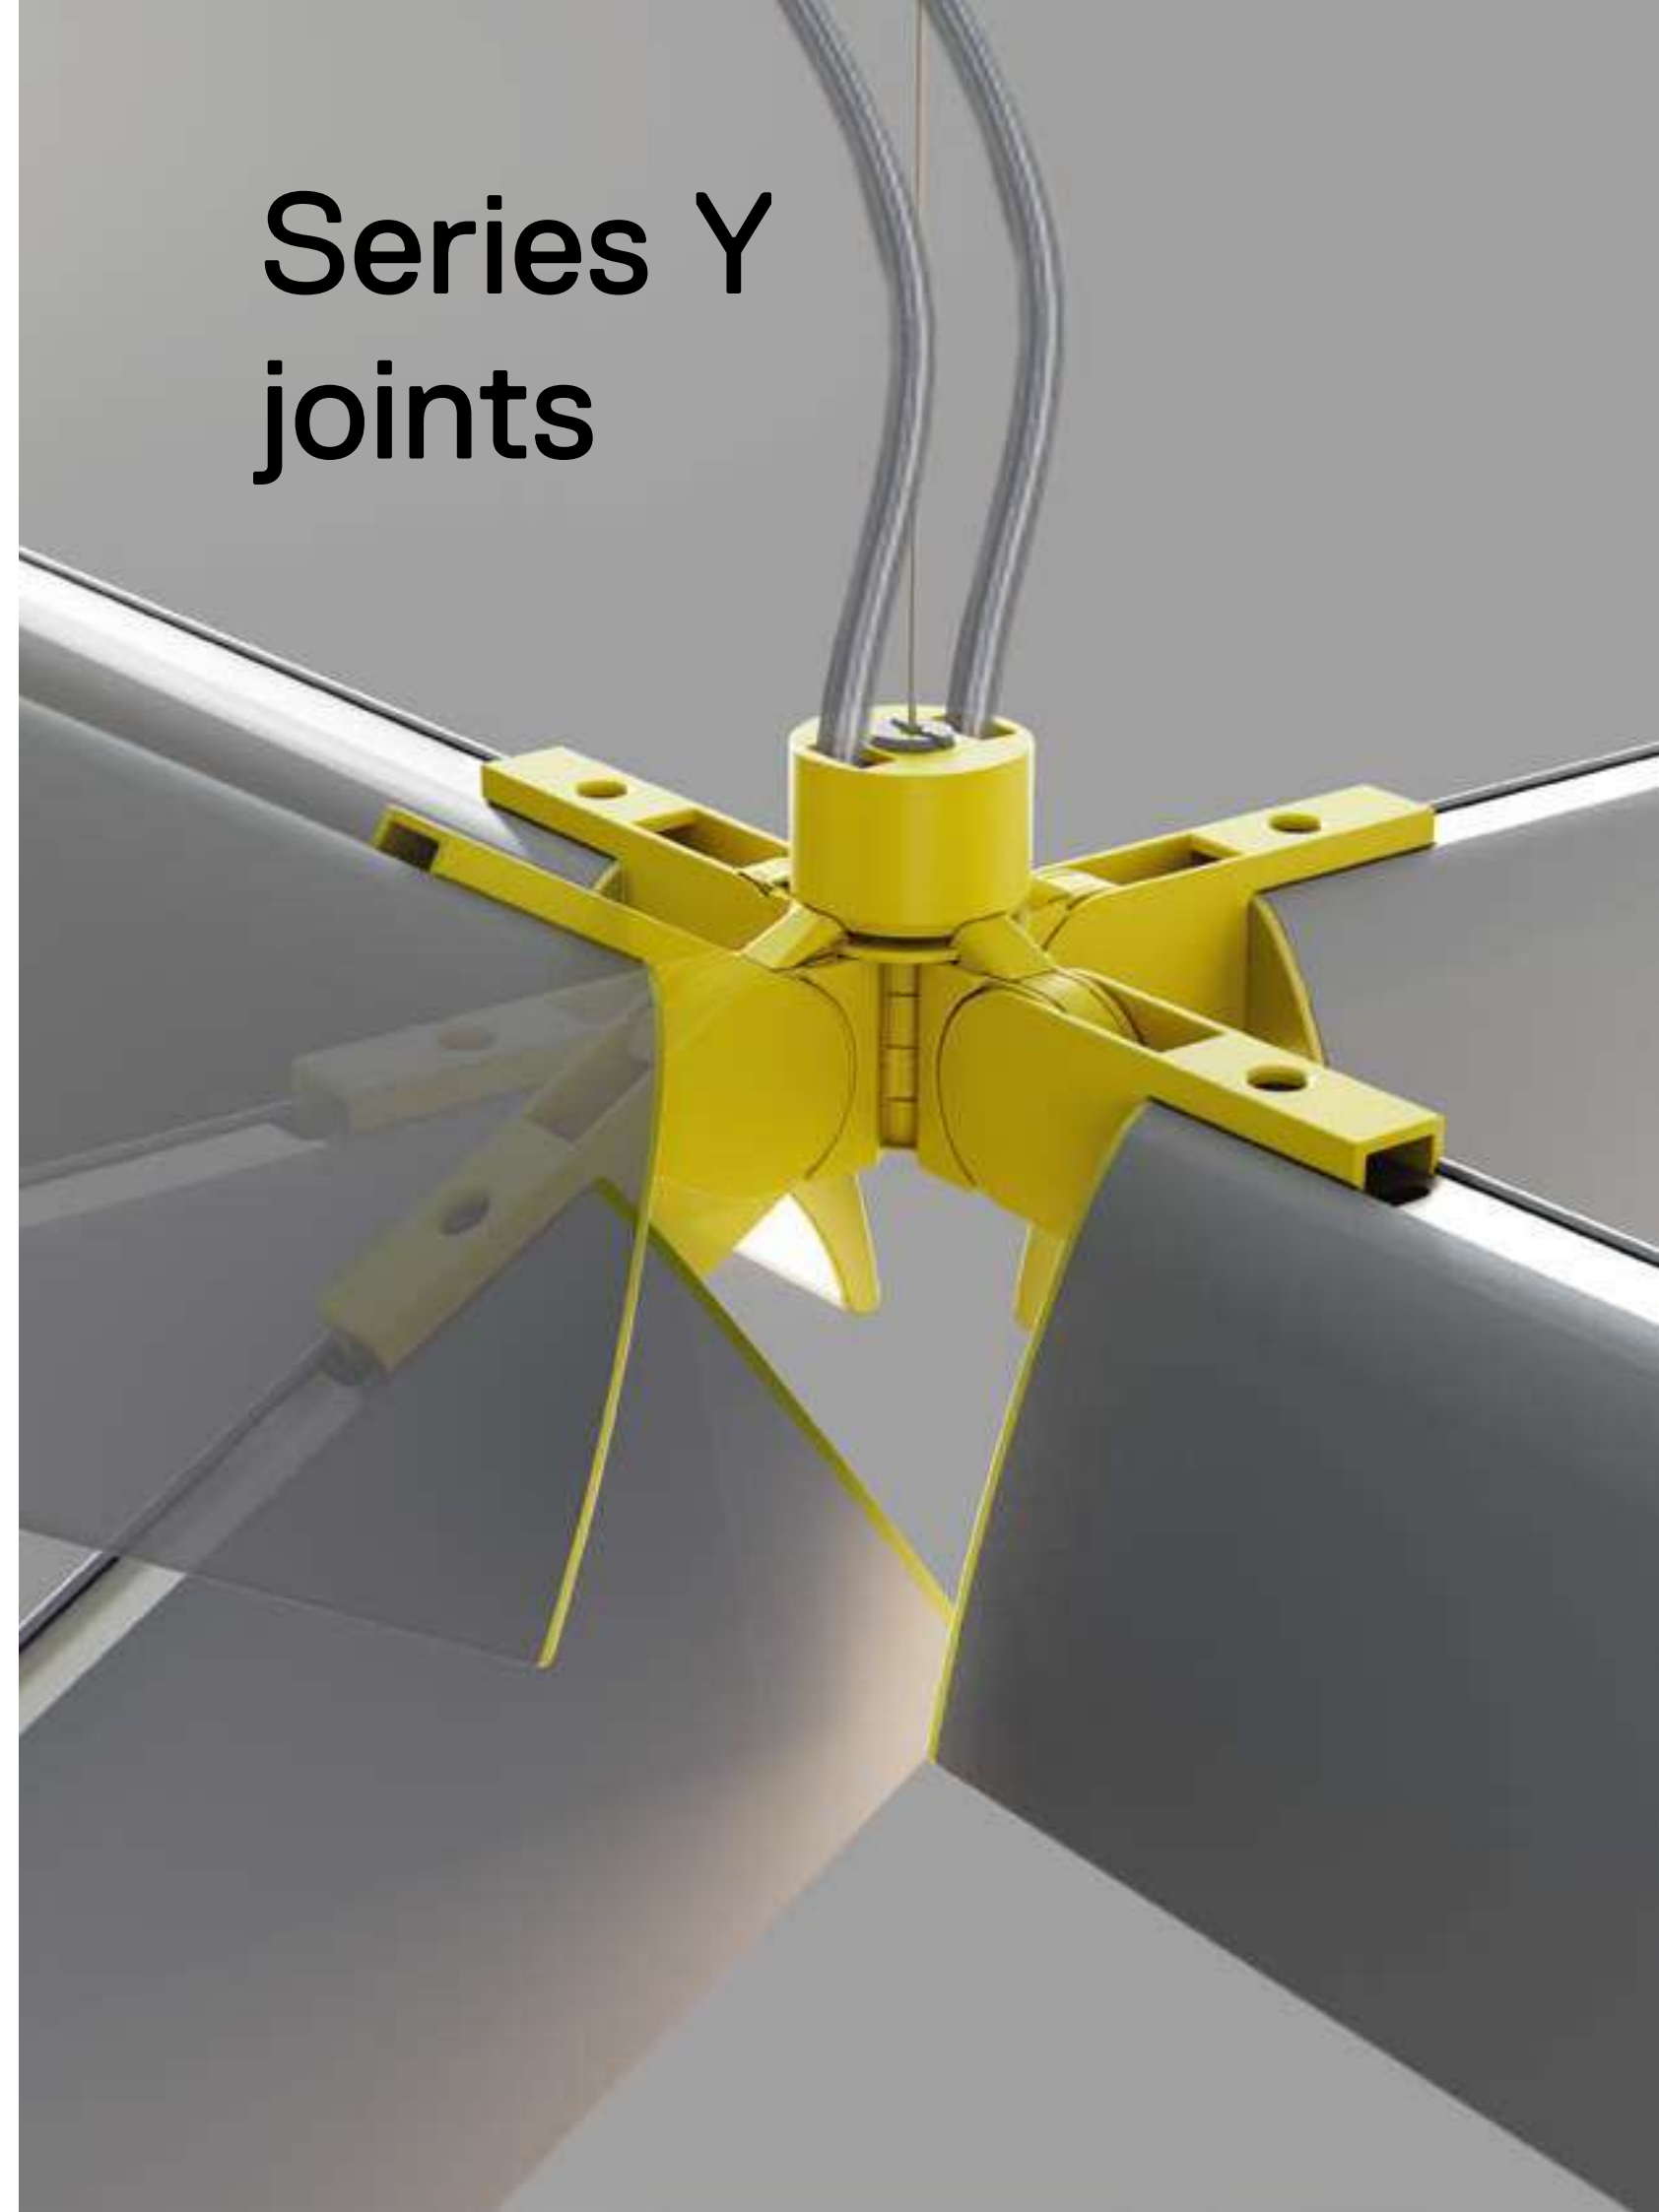

Series Y linear configuration


END CAP



TERMINAL SUSPENSION KIT



INTERMEDIATE SUSPENSION KIT




CEILING ROSE




○ Small 416x99x65 mm
x1, x2, x3, x4 modules
Undimmable
x1, x2 modules
Dimmable DALI

○ Large 416x139x65 mm
x3, x4 modules
Dimmable DALI

→ 1 MODULE

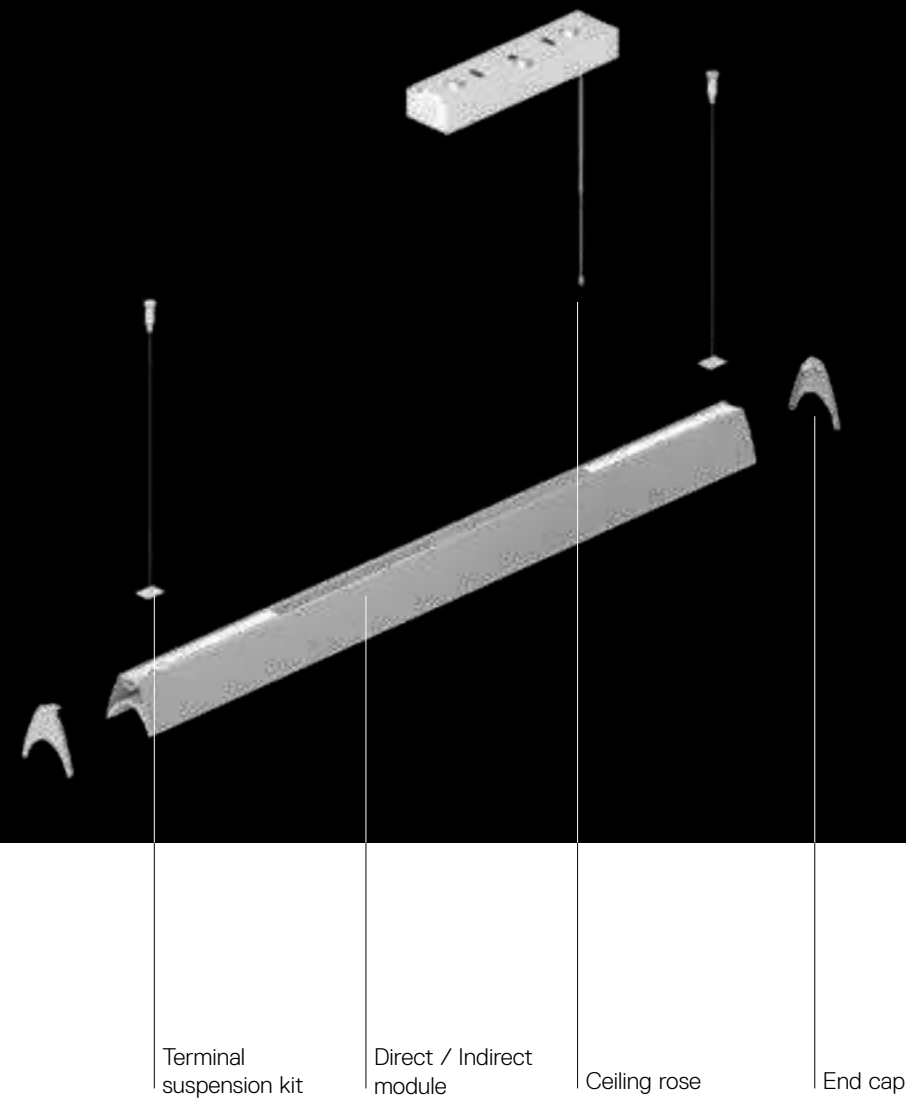


→ MORE THAN 2 MODULES

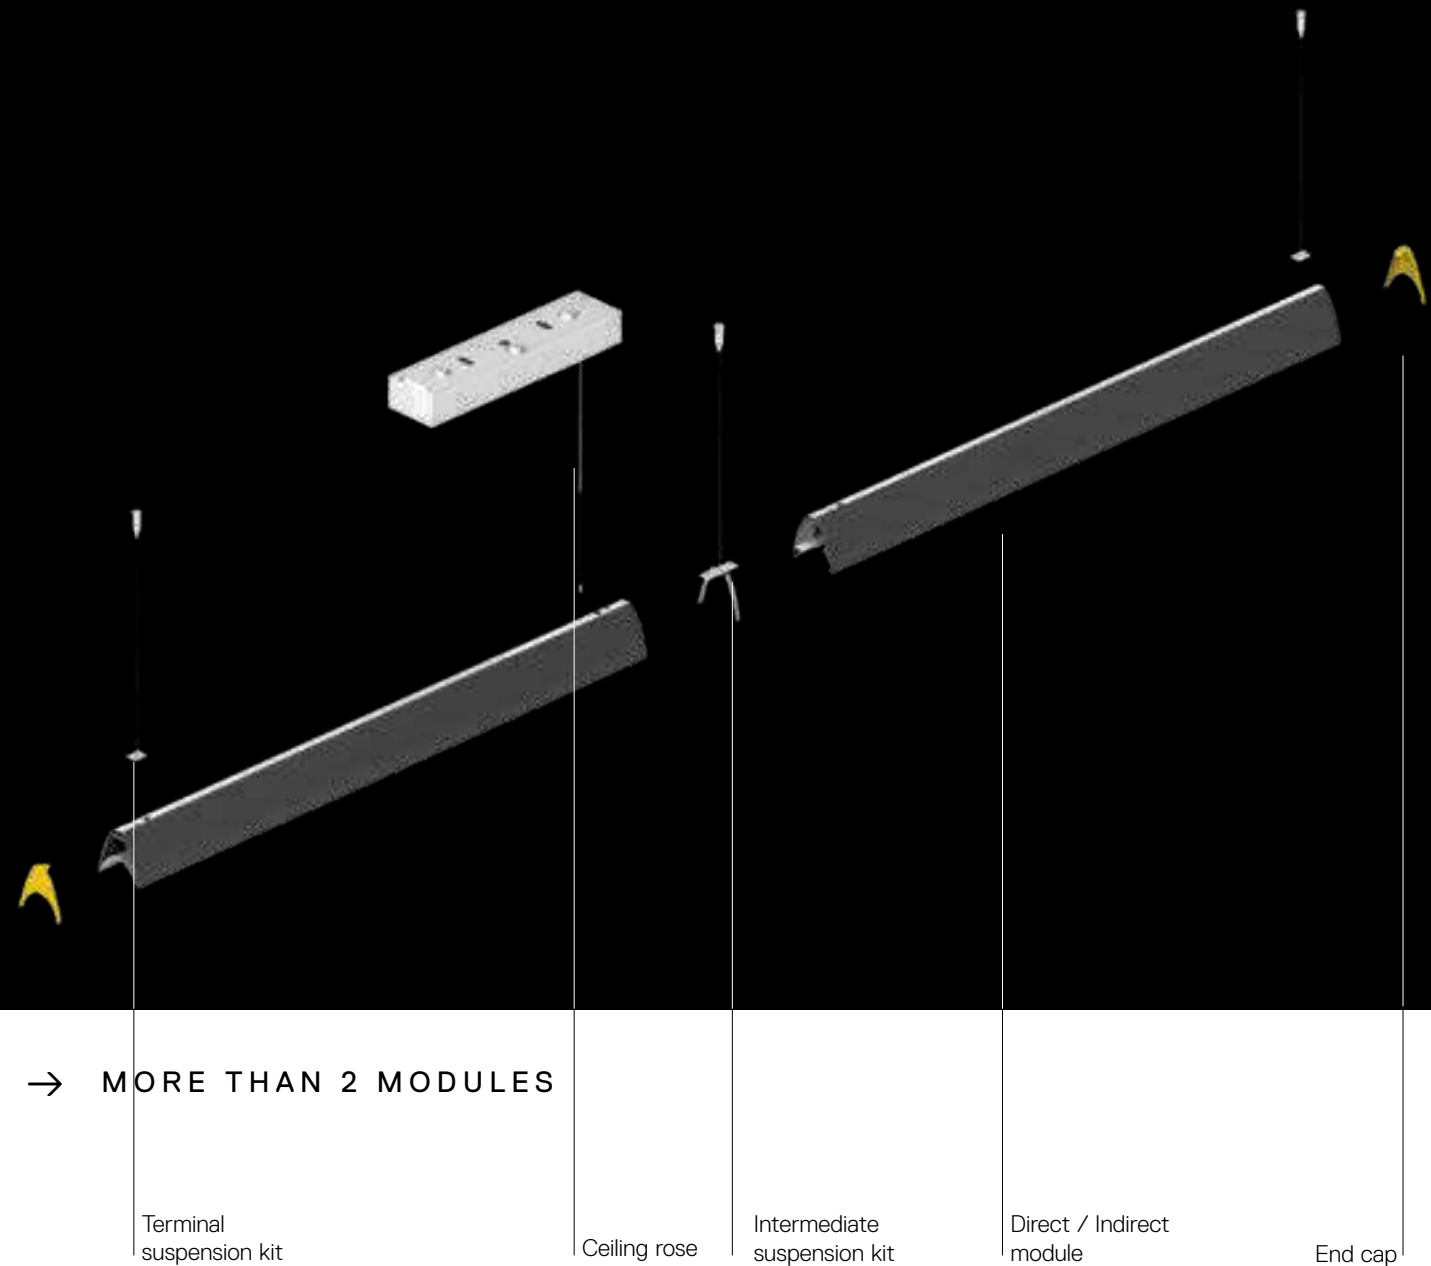


Series Y star configuration

JOINT POWERED



END CAP



JOINT END CAP





TERMINAL
SUSPENSION KIT



CEILING ROSE



- Small 416x99x65 mm
x1, x2, x3, x4 modules
Undimmable
x1, x2 modules
Dimmable DALI
- Large 416x139x65 mm
x3, x4 modules
Dimmable DALI

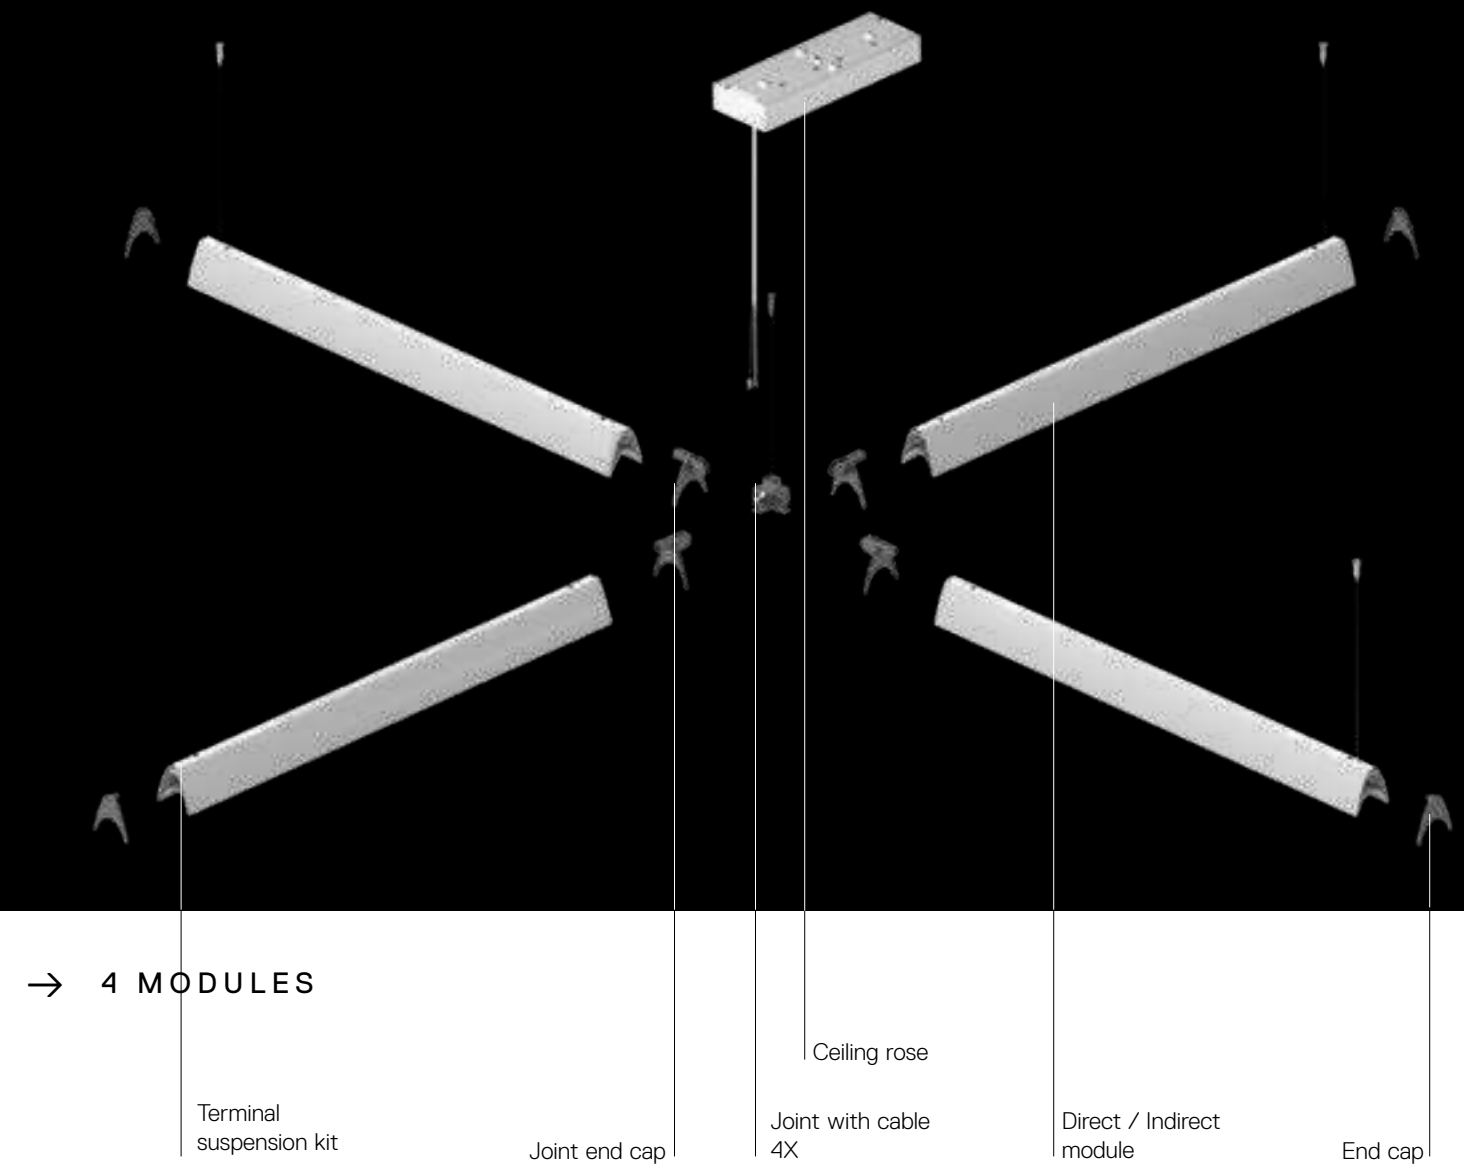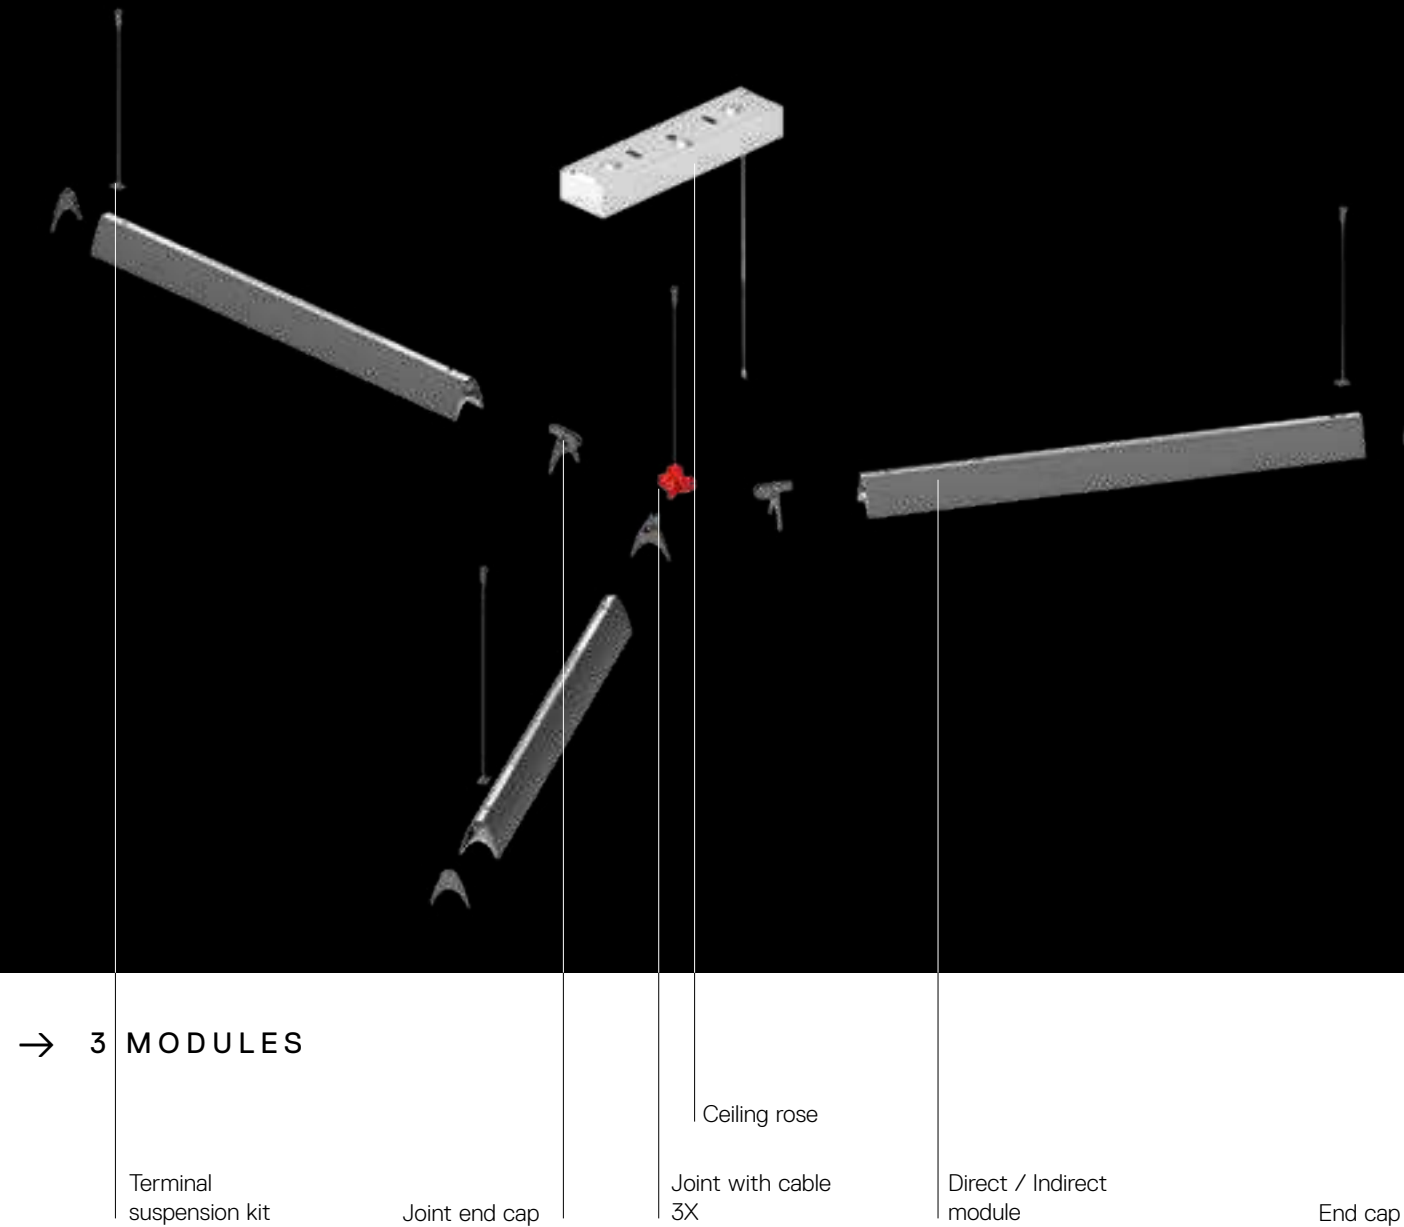

Series Y mixed configuration


MECHANICAL JOINT



JOINT WITH CABLE



END CAP



JOINT END CAP



TERMINAL
SUSPENSION KIT



CEILING ROSE



○ Small 416x99x65 mm
x1, x2, x3, x4 modules
Undimmable
x1, x2 modules
Dimmable DALI

○ Large 416x139x65 mm
x3, x4 modules
Dimmable DALI



→ 3+2 MODULES

Terminal
suspension kit

Ceiling rose

Intermediate
suspension kit

Direct / Indirect
module

Joint end cap

Mechanical joint
2X

Joint with cable
2X

End cap

↪ SERIES Y - DIRECT EMISSION UNDIMMABLE


White Black Silver
 01 04 05

MacAdam 3SDCM
 Life L70 (6K) 50000h
 CRI = 90

IP20


DIFFUSED EMISSION

Length	W	CRI	Flux	CCT	Undimmable Code
1120mm	35 W	90	2940 lm	3000K	AY000. 01/04/05
			3095 lm	4000K	AY005. 01/04/05



CONTROLLED EMISSION

Length	W	Flux	CCT	Undimmable Code
1120mm	35 W	2559 lm	3000K	AY010. 01/04/05
		2694 lm	4000K	AY015. 01/04/05




Ceiling rose

Ceiling rose	Undimmable Code
Rose x 1 module	AY80101
Rose x 2 modules	AY80201
Rose x 3 modules - linear configuration	AY80301
Rose x 3 modules - star configuration	AY80401
Rose x 4 modules - linear configuration	AY80501
Rose x 4 modules - star configuration	AY80601




Small Undimmable rose
 Ceiling rose suitable for all undimmable modules configurations.

LINEAR CONFIGURATION

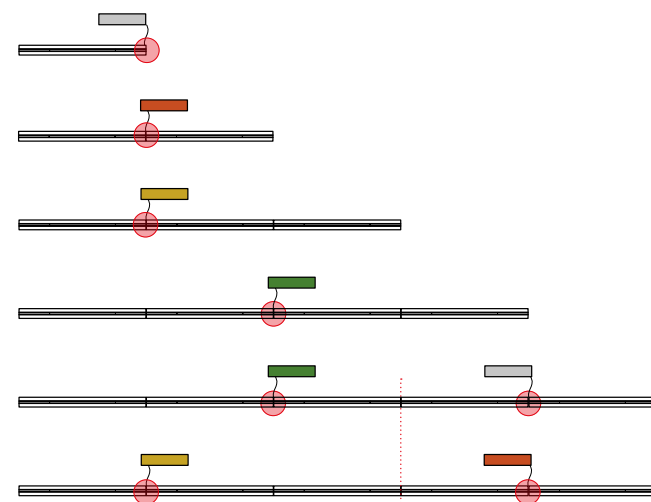


No electrical connection between modules

STAR CONFIGURATION

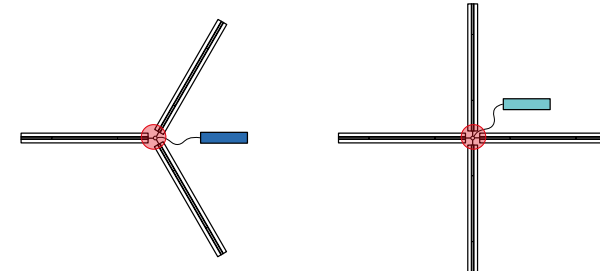

MIXED CONFIGURATION

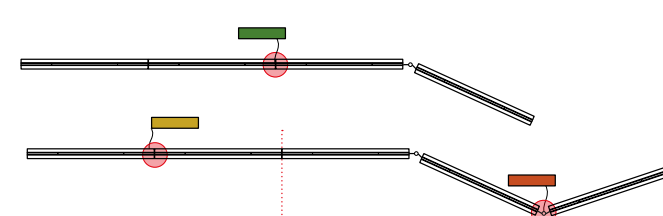

No electrical connection between modules

↪ SERIES Y - DIRECT + INDIRECT EMISSION DIMMABLE


White Black Silver
 01 04 05

MacAdam 3SDCM
 Life L70 (6K) 50000h
 CRI = 90

IP20


DIFFUSED DIRECT EMISSION + BATWING INDIRECT EMISSION

Length	W	Flux	CCT	Dimmable DALI Code
1120mm	35 W direct 20 W indirect	2940 lm direct 1802 lm indirect	3000K	AY050. 01/04/05
		3095 lm direct 1897 lm indirect	4000K	AY055. 01/04/05




CONTROLLED DIRECT EMISSION + BATWING INDIRECT EMISSION

Length	W	Flux	CCT	Dimmable DALI Code
1120mm	35 W direct 20 W indirect	2559 lm direct 1802 lm indirect	3000K	AY060. 01/04/05
		2694 lm direct 1897 lm indirect	4000K	AY065. 01/04/05



Ceiling rose


Ceiling rose	Dimmable DALI Code
Rose x 1 module	AY81101
Rose x 2 modules	AY81201
Rose x 3 modules - linear configuration	AY81301
Rose x 3 modules - star configuration	AY81401
Rose x 4 modules - linear configuration	AY81501
Rose x 4 modules - star configuration	AY81601



Small Dimmable rose
 Ceiling rose suitable for 1 or 2 dimmable modules configurations.


Large Dimmable rose
 Ceiling rose suitable for 3 or 4 dimmable modules configurations.

LINEAR CONFIGURATION

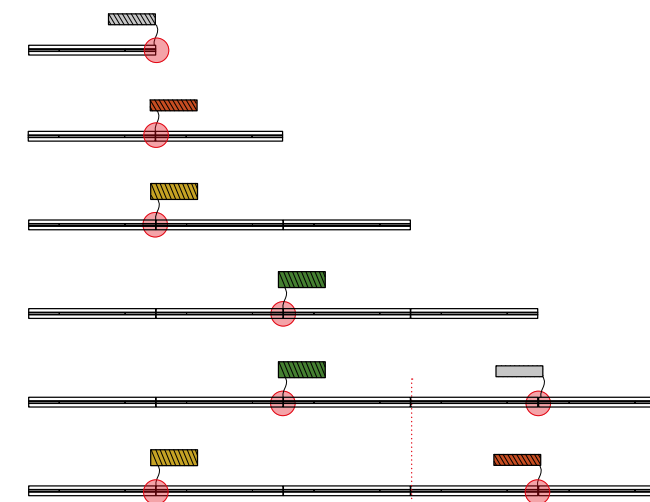


No electrical connection between modules

STAR CONFIGURATION

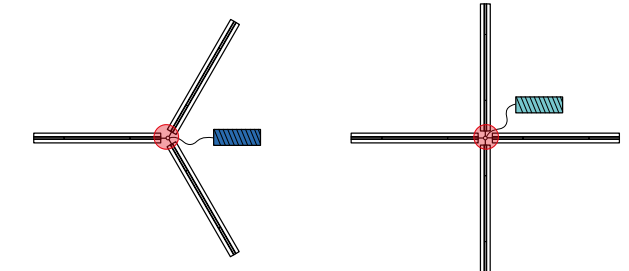


MIXED CONFIGURATION

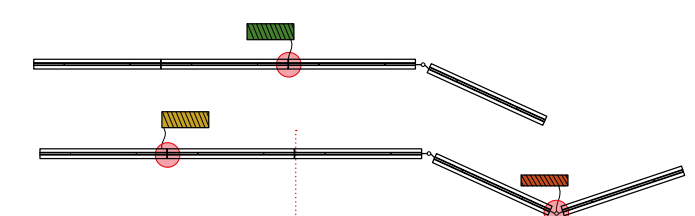


No electrical connection between modules

↔ SERIES Y - JOINT

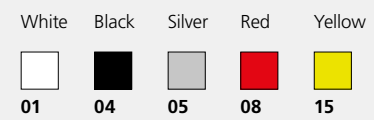


Accessories

	Code
Terminal suspension kit	AY50000
Intermediate suspension kit	AY51000
End cap	AY600. 01/04 05/08/15
Joint End cap	AY610. 01/04 05/08/15




Powered joint

	Code
x 2 modules + suspension cable	AY700. 01/04 05/08/15
x 3 modules + suspension cable	AY710. 01/04 05/08/15
x 4 modules + suspension cable	AY720. 01/04 05/08/15



Meccanical joint

	Code
x 2 modules + suspension cable	AY730. 01/04 05/08/15
x 3 modules + suspension cable	AY740. 01/04 AY750. 05/08/15
x 4 modules + suspension cable	AY760. 01/04 05/08/15





Calipso


Neil Poulton

↪ 2017






Calipso Linear System suspension

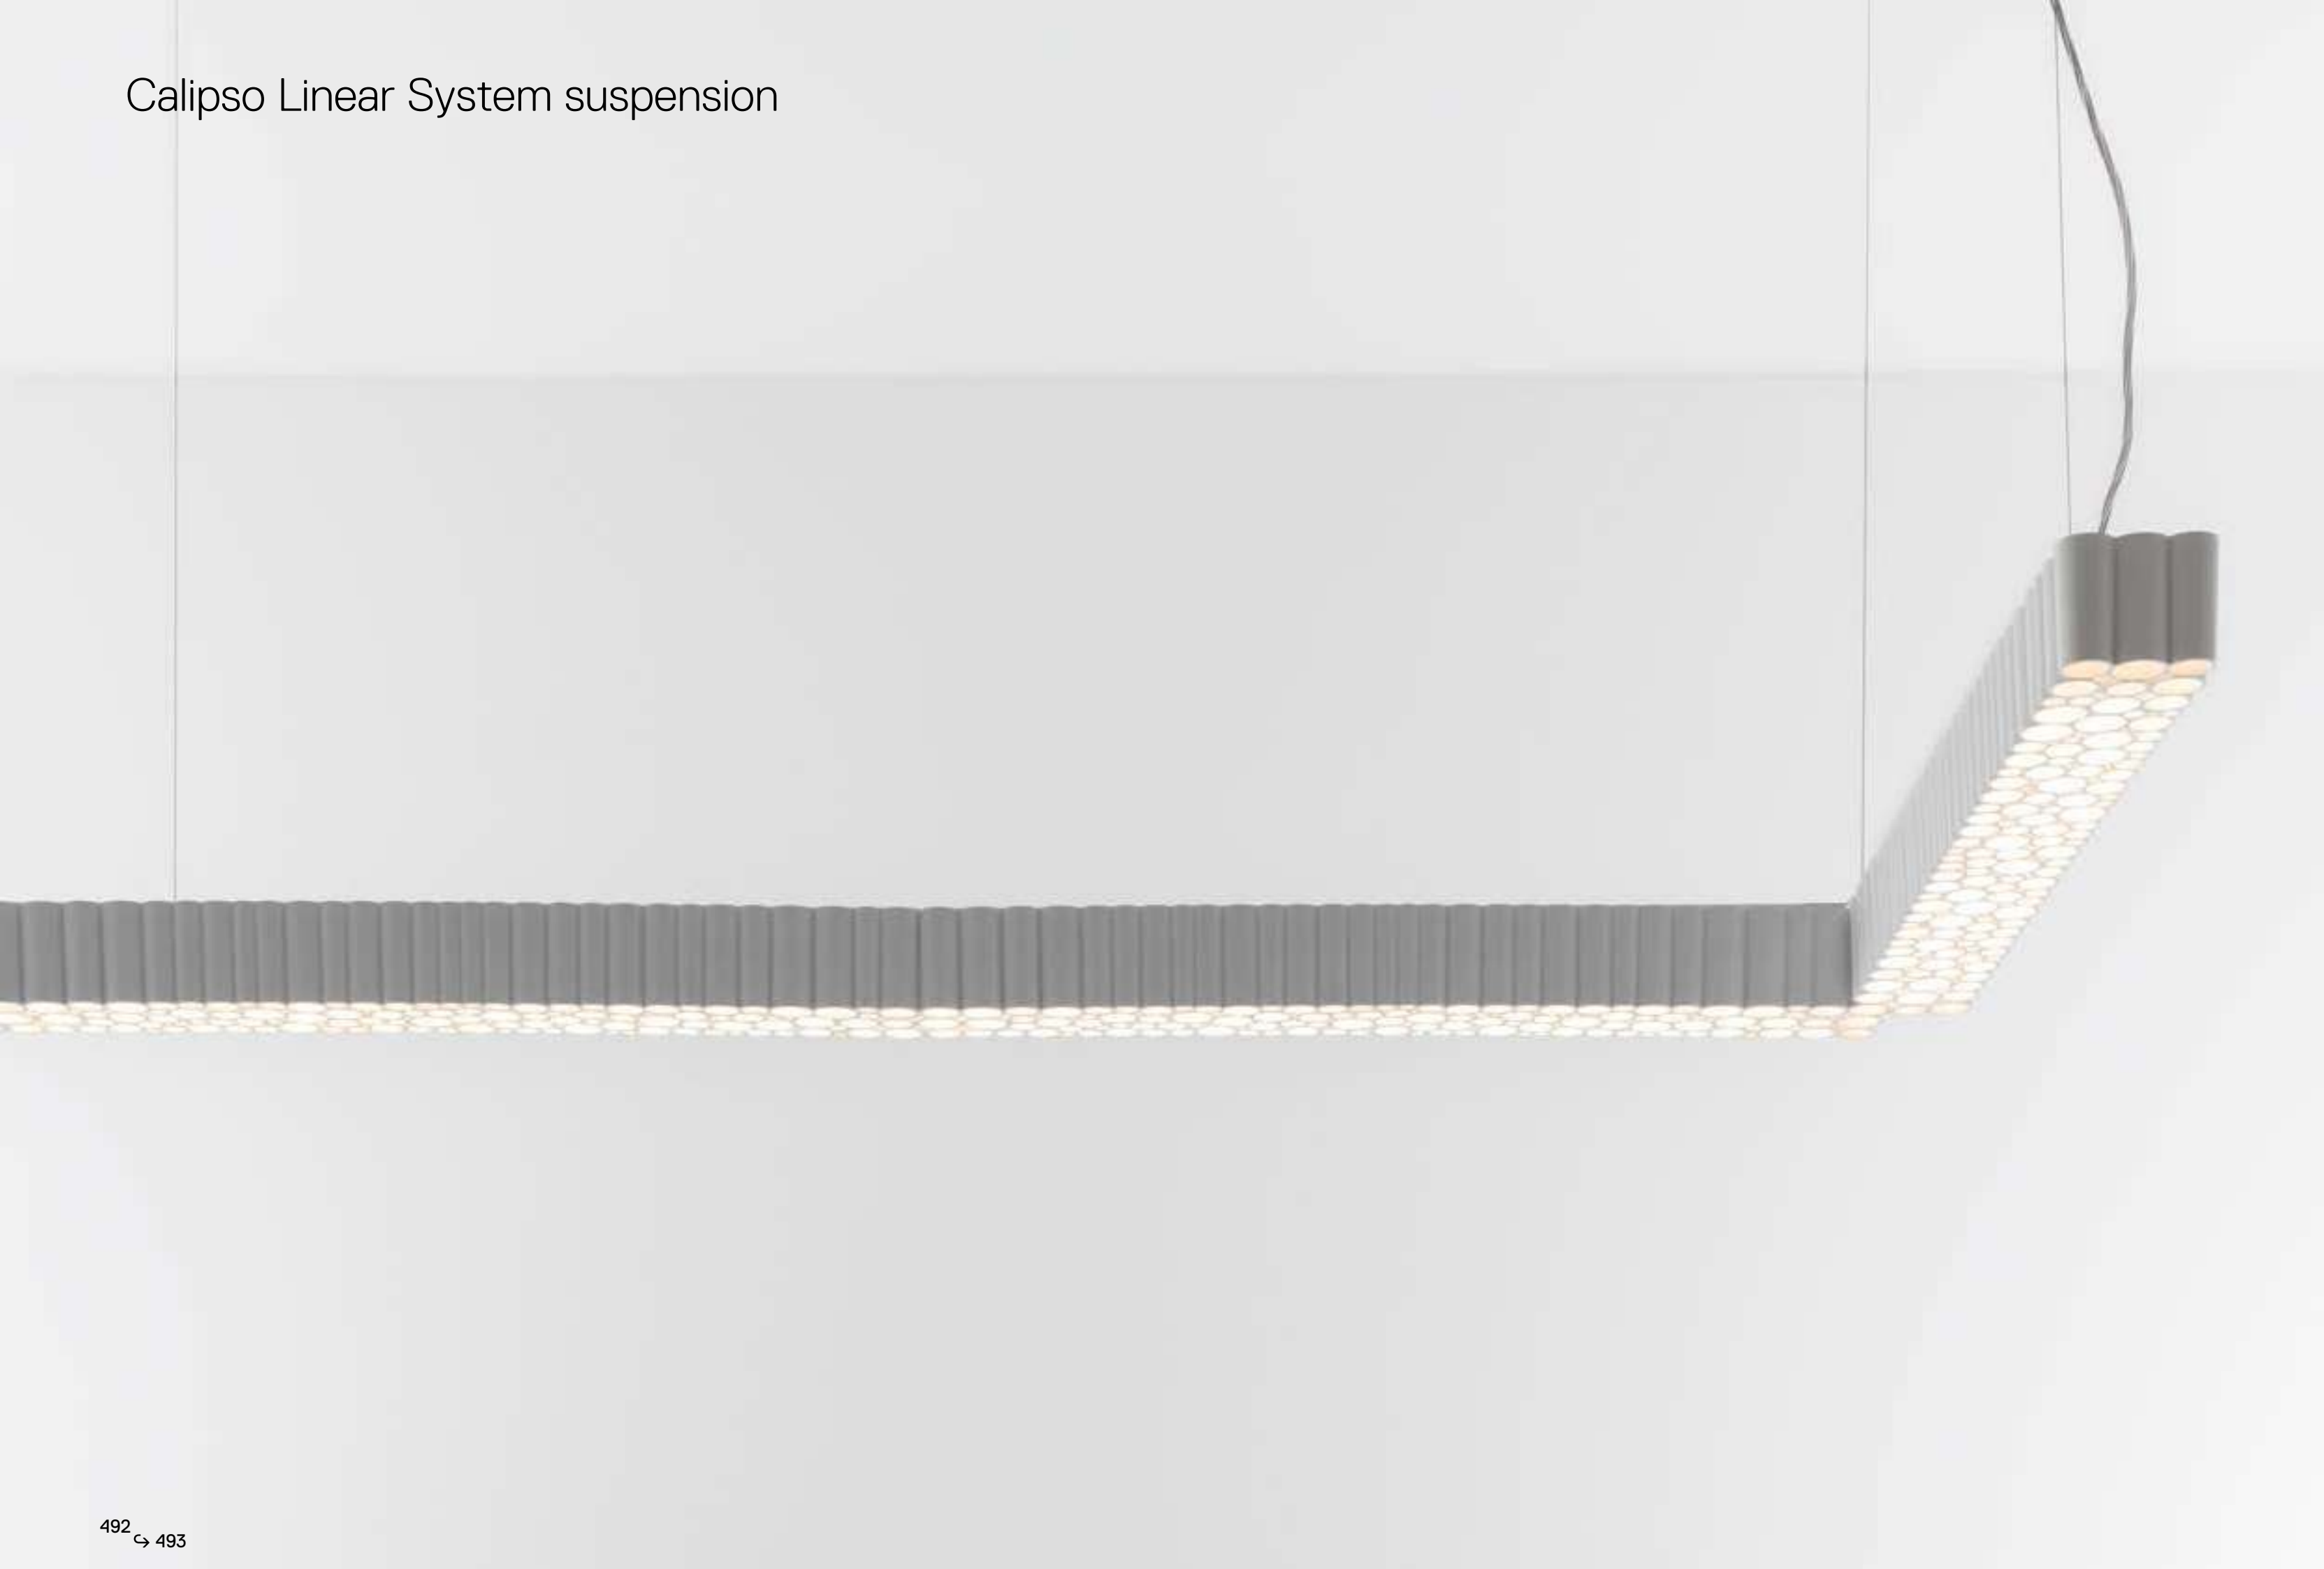



Calipso suspension - wall / ceiling

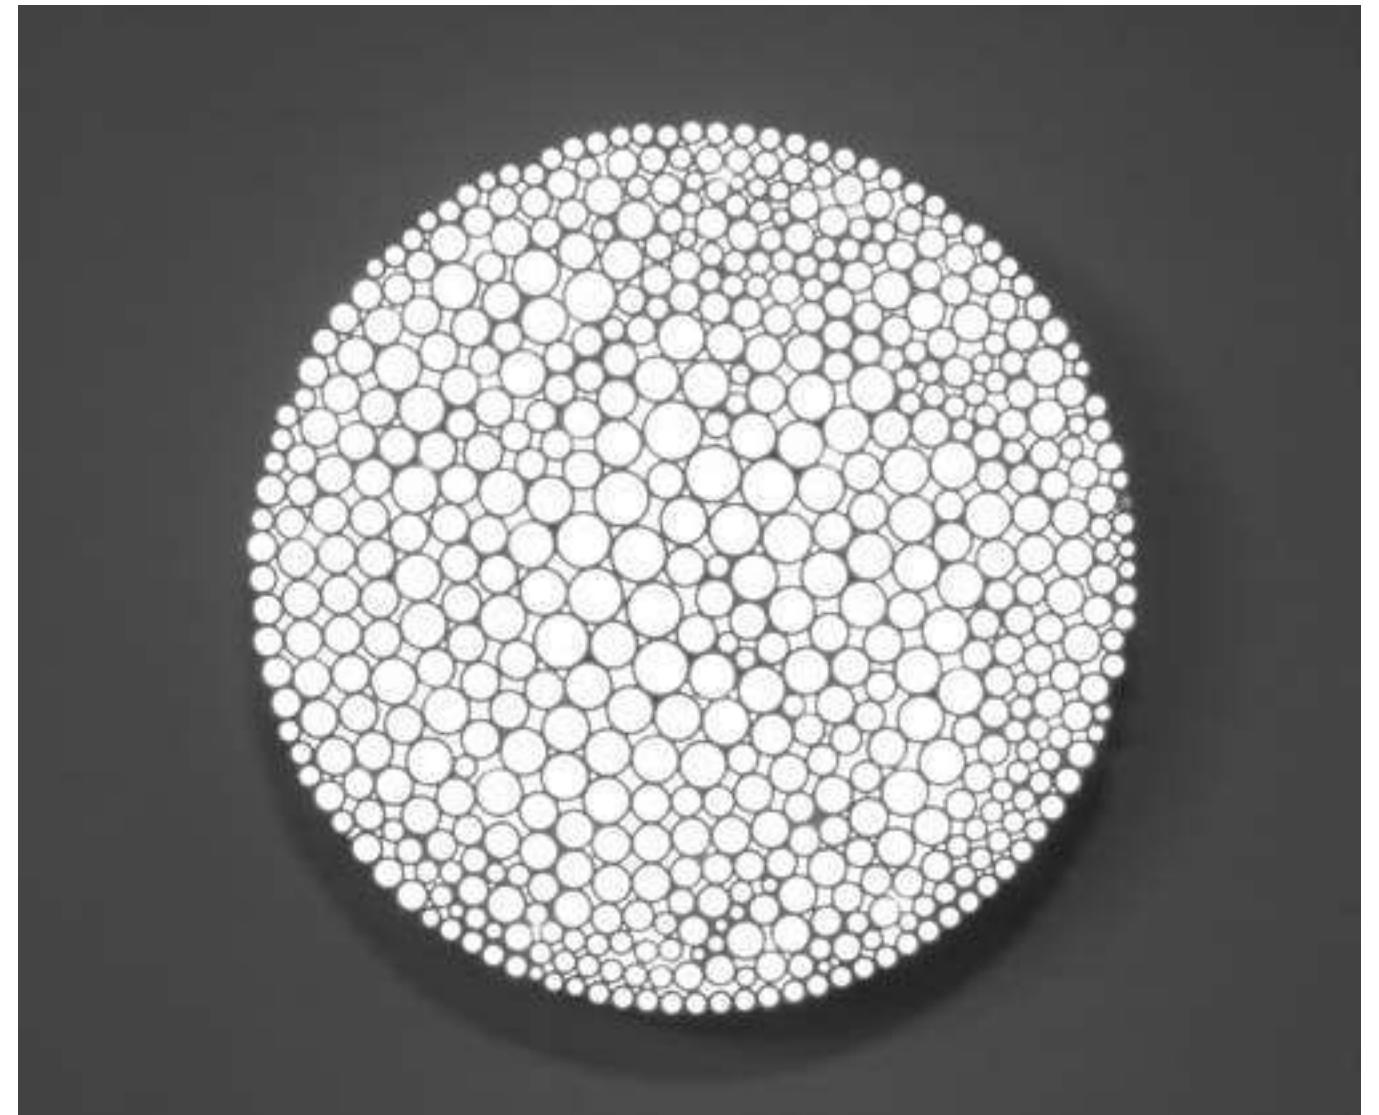

Calipso typologies

STAND ALONE - CEILING



LINEAR L=1200 MM



XF
(>45°)
46 W
2640 lm



LINEAR L=1800 MM



XF
(>45°)
69 W
3960 lm

STAND ALONE - SUSPENSION



LINEAR L=1200 MM



XF
(>45°)
46 W
2640 lm



LINEAR L=1800 MM



XF
(>45°)
69 W
3960 lm

WALL - CEILING



XF
(>45°)
55 W
2884 lm

SUSPENSION



XF
(>45°)
55 W
2884 lm

The fractal shape of the small circles works as an optical grid and defines a comfort emission.

Round version is available in one diameter (526mm), suspension and ceiling / wall.

Linear version are available in two lengths (1200 and 1800 mm), suspension and ceiling.

System version available in three lengths (600, 1200 and 1800 mm) suspension and ceiling. Can be composed in line or with 90° right or left angles.

Materials: matt white technopolymer body and aluminum structure.



For further information on Calipso
↪ visit artemide.com

SYSTEM - SUSPENSION - CEILING



LINEAR SYSTEM L=600 MM



XF
(>45°)
23 W
1320 lm



LINEAR SYSTEM L=1200 MM



XF
(>45°)
46 W
2640 lm






LINEAR SYSTEM L=1800 MM




XF
(>45°)
69 W
3960 lm

↪ CALIPSO

White 	XF 	The APP driver can not be controlled by DALI dimming system and viceversa.	MacAdam 3SDCM Life L70 (10K)>35500h CRI =90	IP20 
--	---	--	---	---


CALIPSO WALL - CEILING

W	Beam	Flux	CCT	PUSH Code	PUSH & APP Code
55 W	XF	2884 lm	2700K 3000K	0210W10A 0210010A	0210W10APP 0210010APP

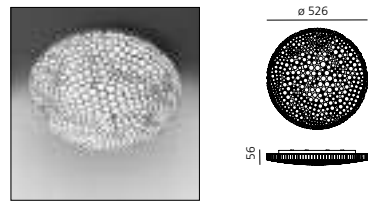


CALIPSO SUSPENSION

W	Beam	Flux	CCT	PUSH Code	PUSH & APP Code
55 W	XF	2884 lm	2700K 3000K	0213W10A 0213010A	0213W10APP 0213010APP

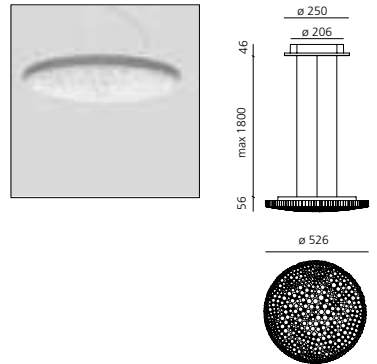



CALIPSO LINEAR STAND ALONE CEILING

Lenght	W	Beam	Flux	CCT	PUSH/DALI Code
1210 mm	43 W	XF	2985 lm	3000K	0220010A
1790 mm	63 W	XF	4477 lm	3000K	0221010A

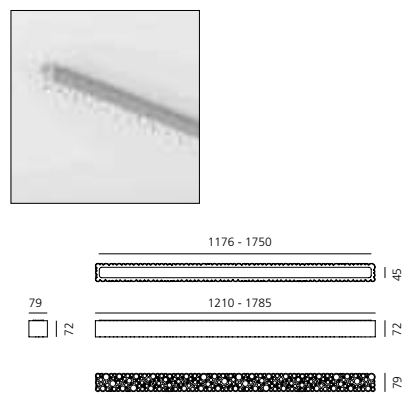


CALIPSO LINEAR STAND ALONE SUSPENSION

Lenght	W	Beam	Flux	CCT	PUSH/DALI Code
1210 mm	43 W	XF	2985 lm	3000K	0223010A
1790 mm	63 W	XF	4477 lm	3000K	0224010A

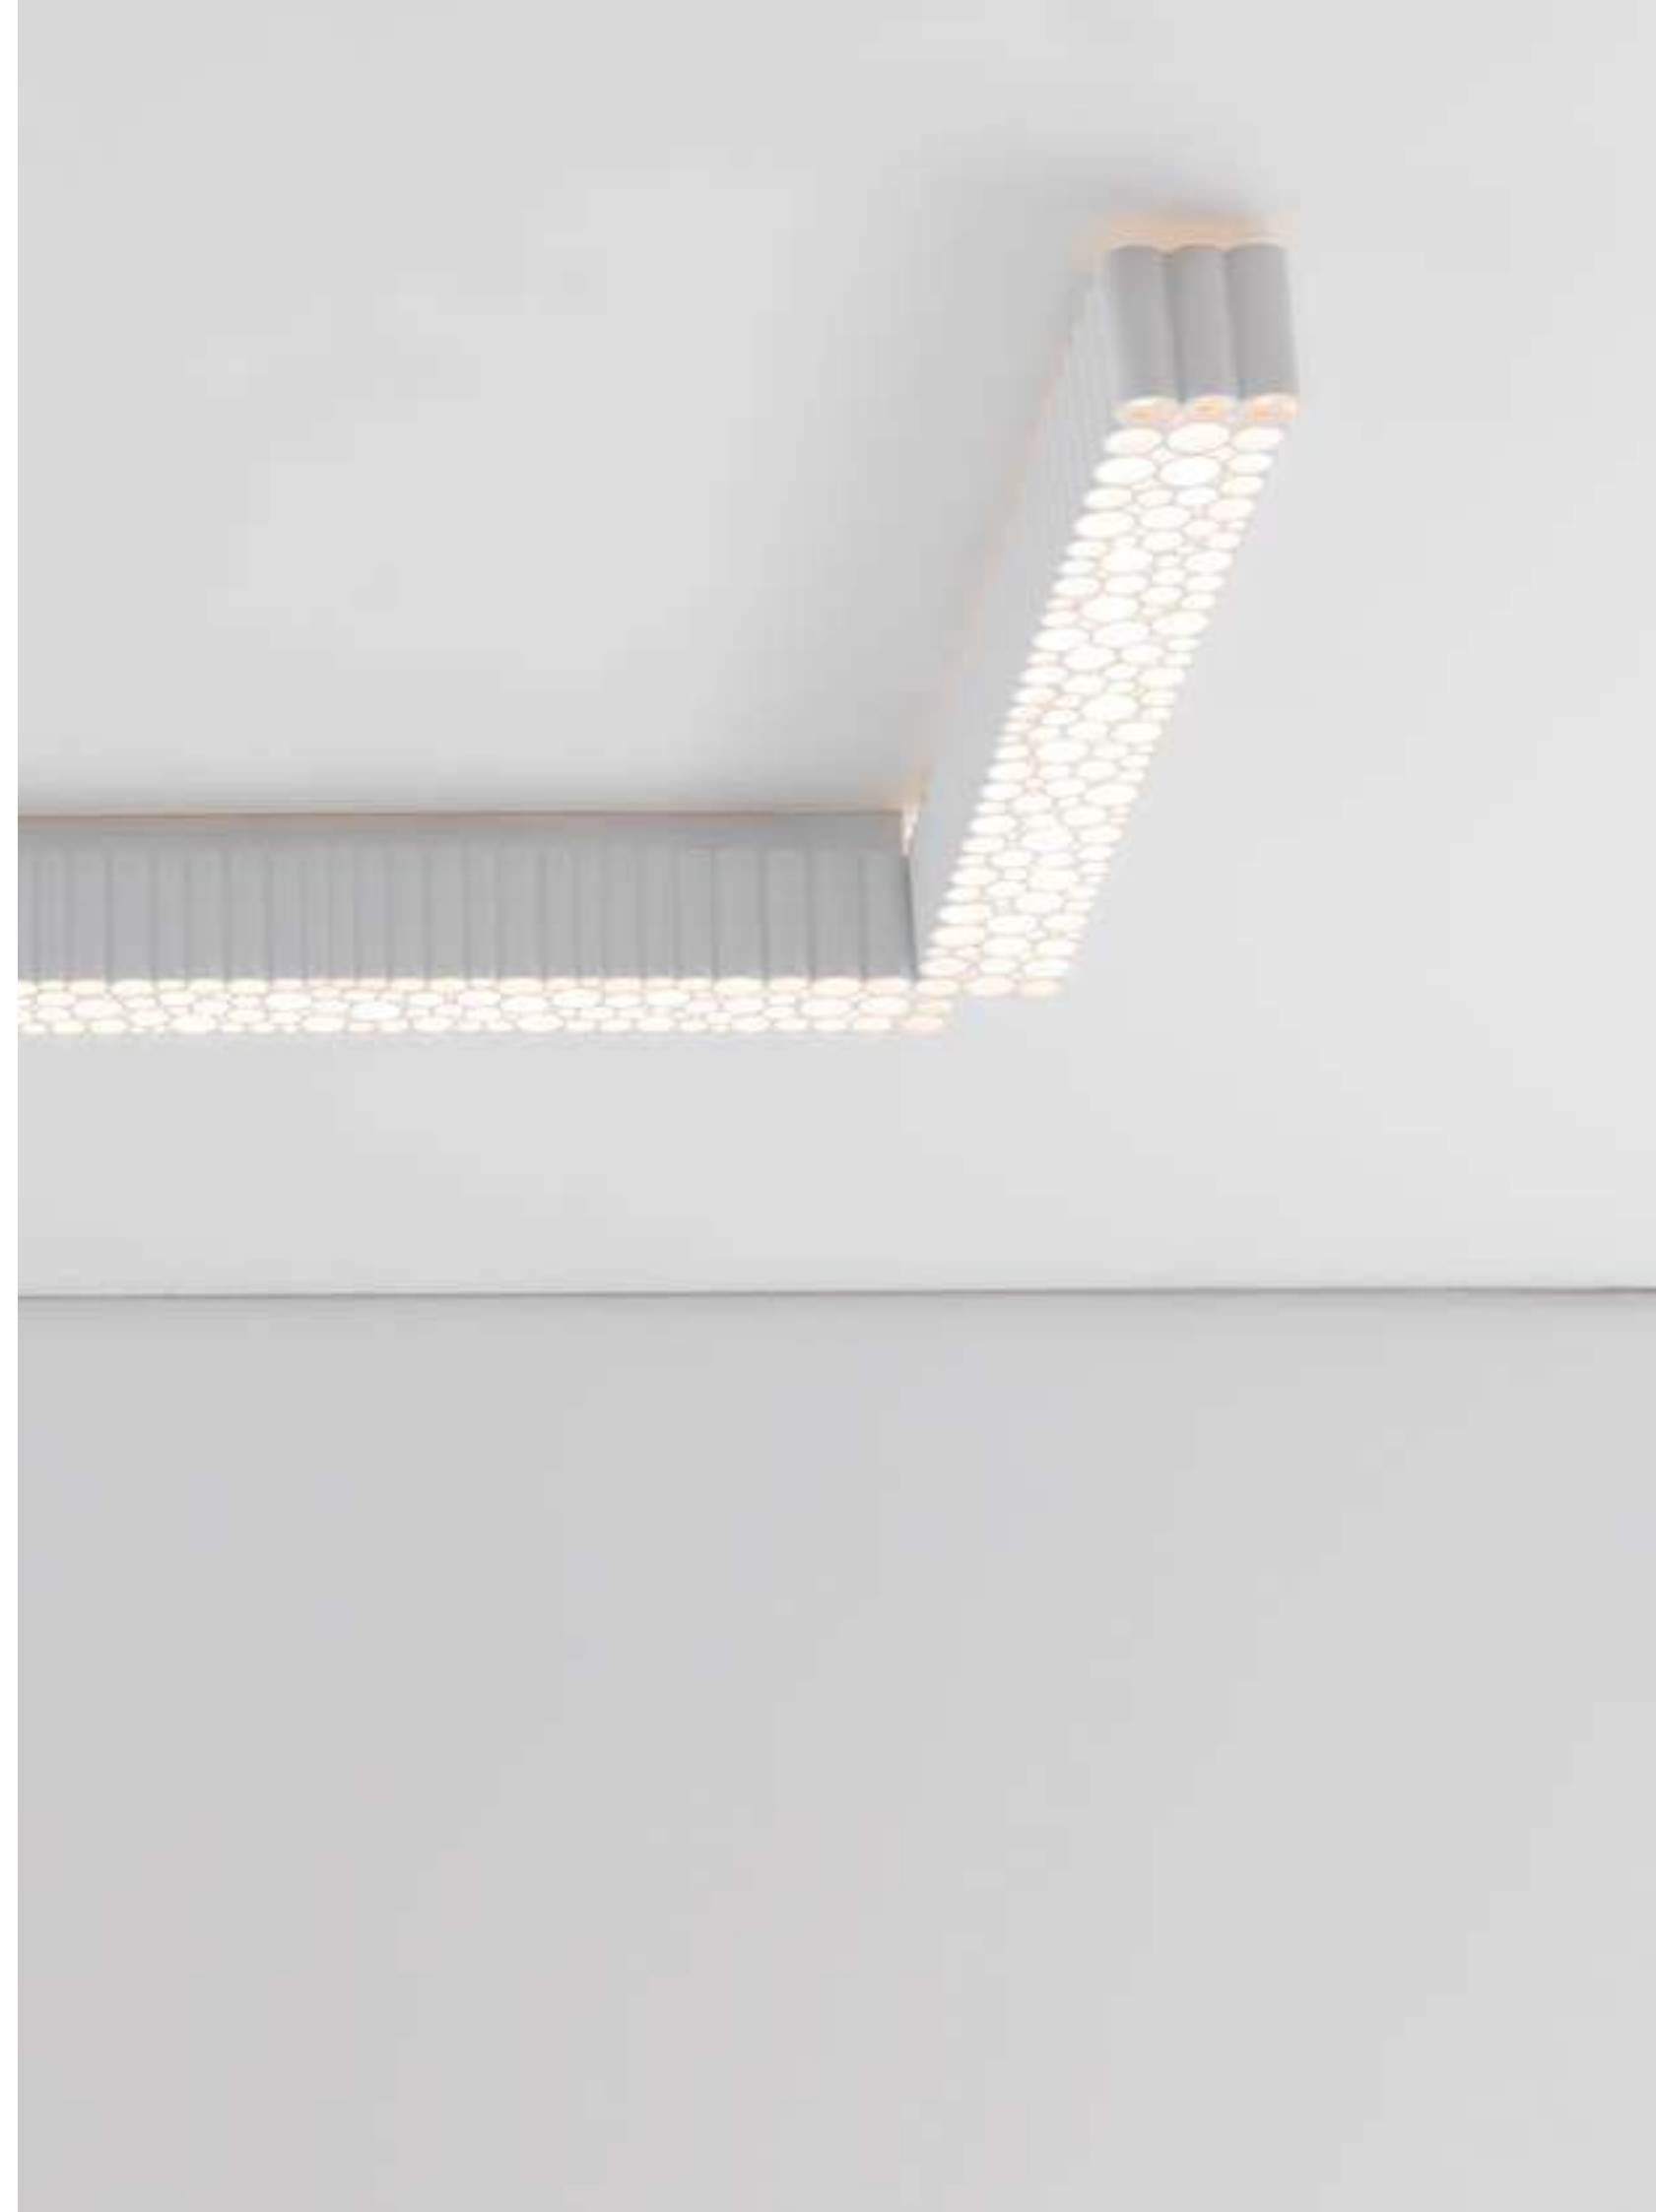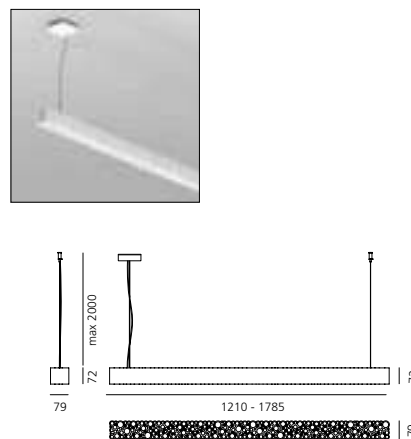


Calipso

↳ linear system

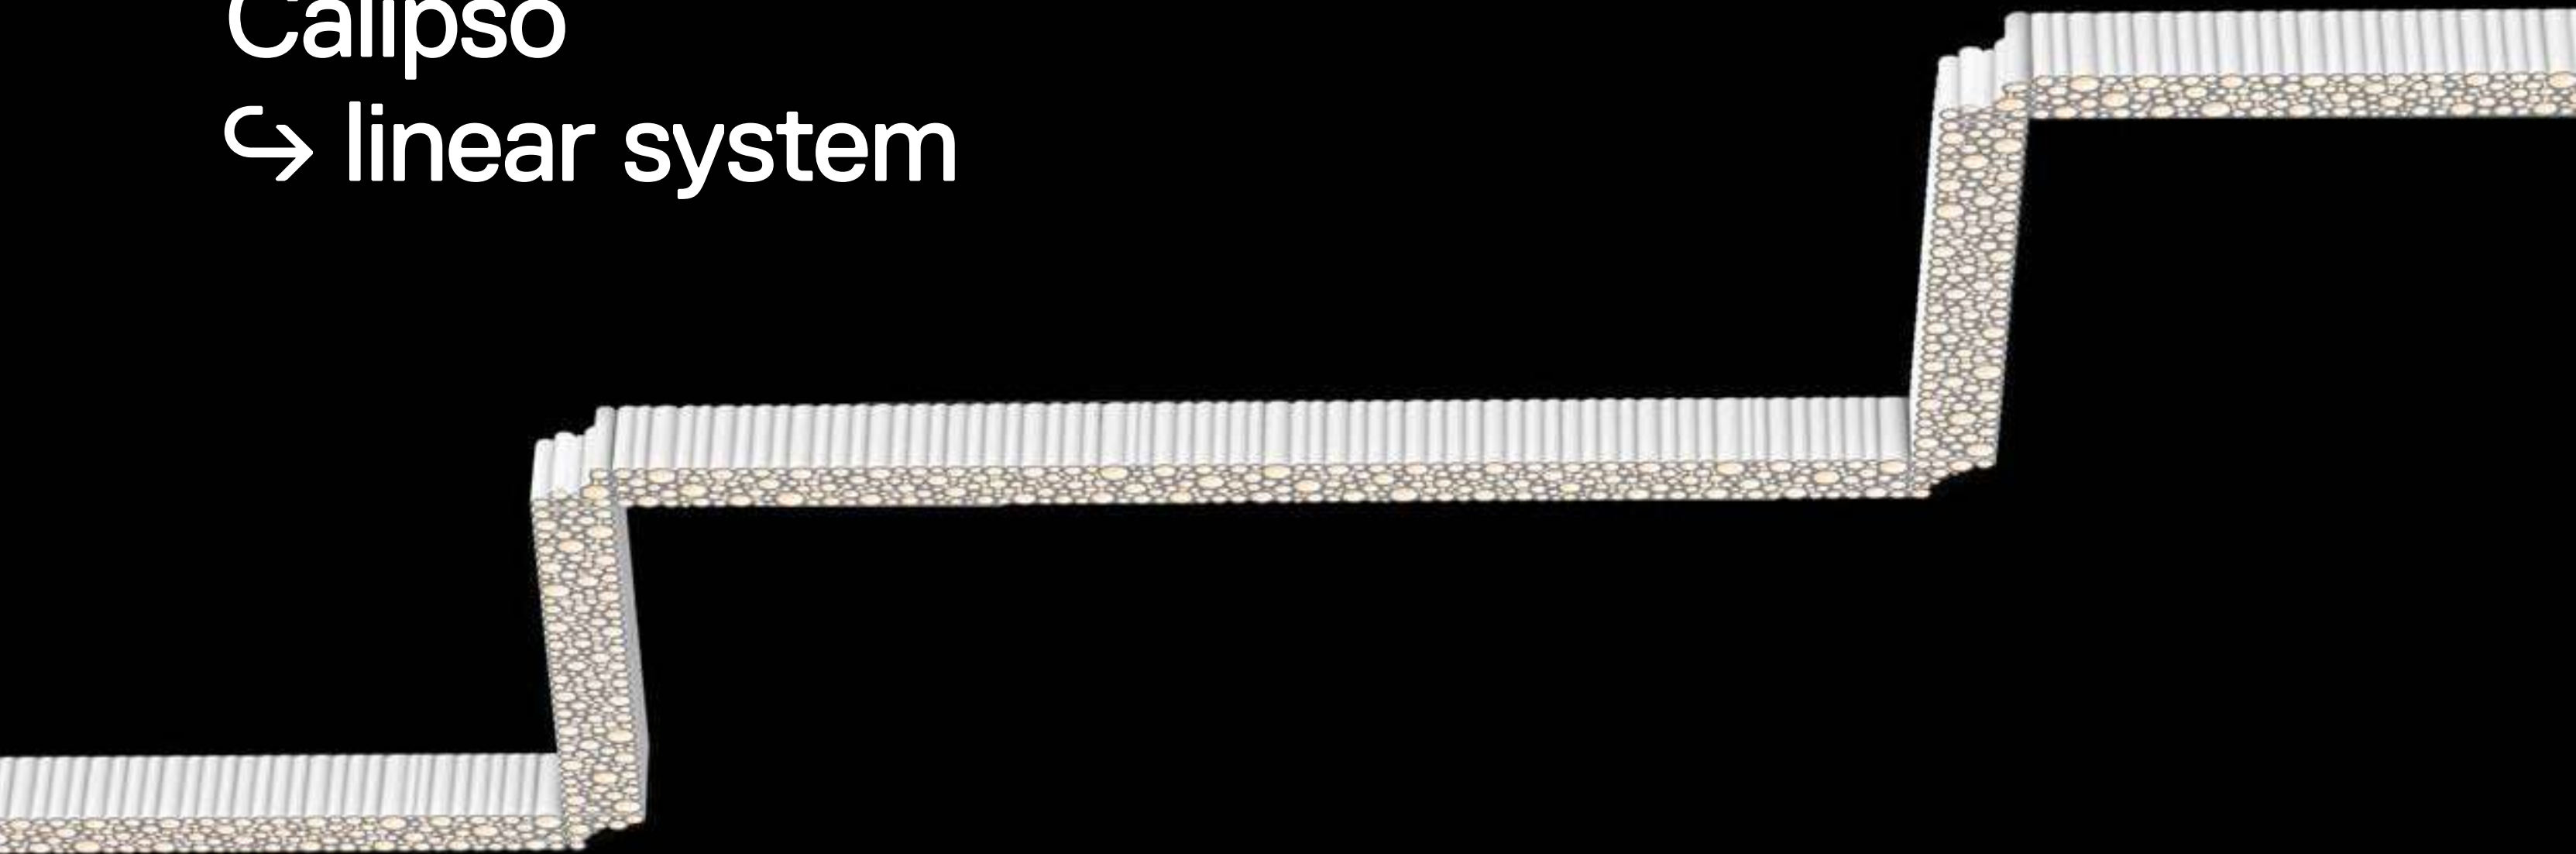

↪ CALIPSO LINEAR SYSTEM / CONFIGURATIONS

In APP configurations must be only one App master module others must be DALI

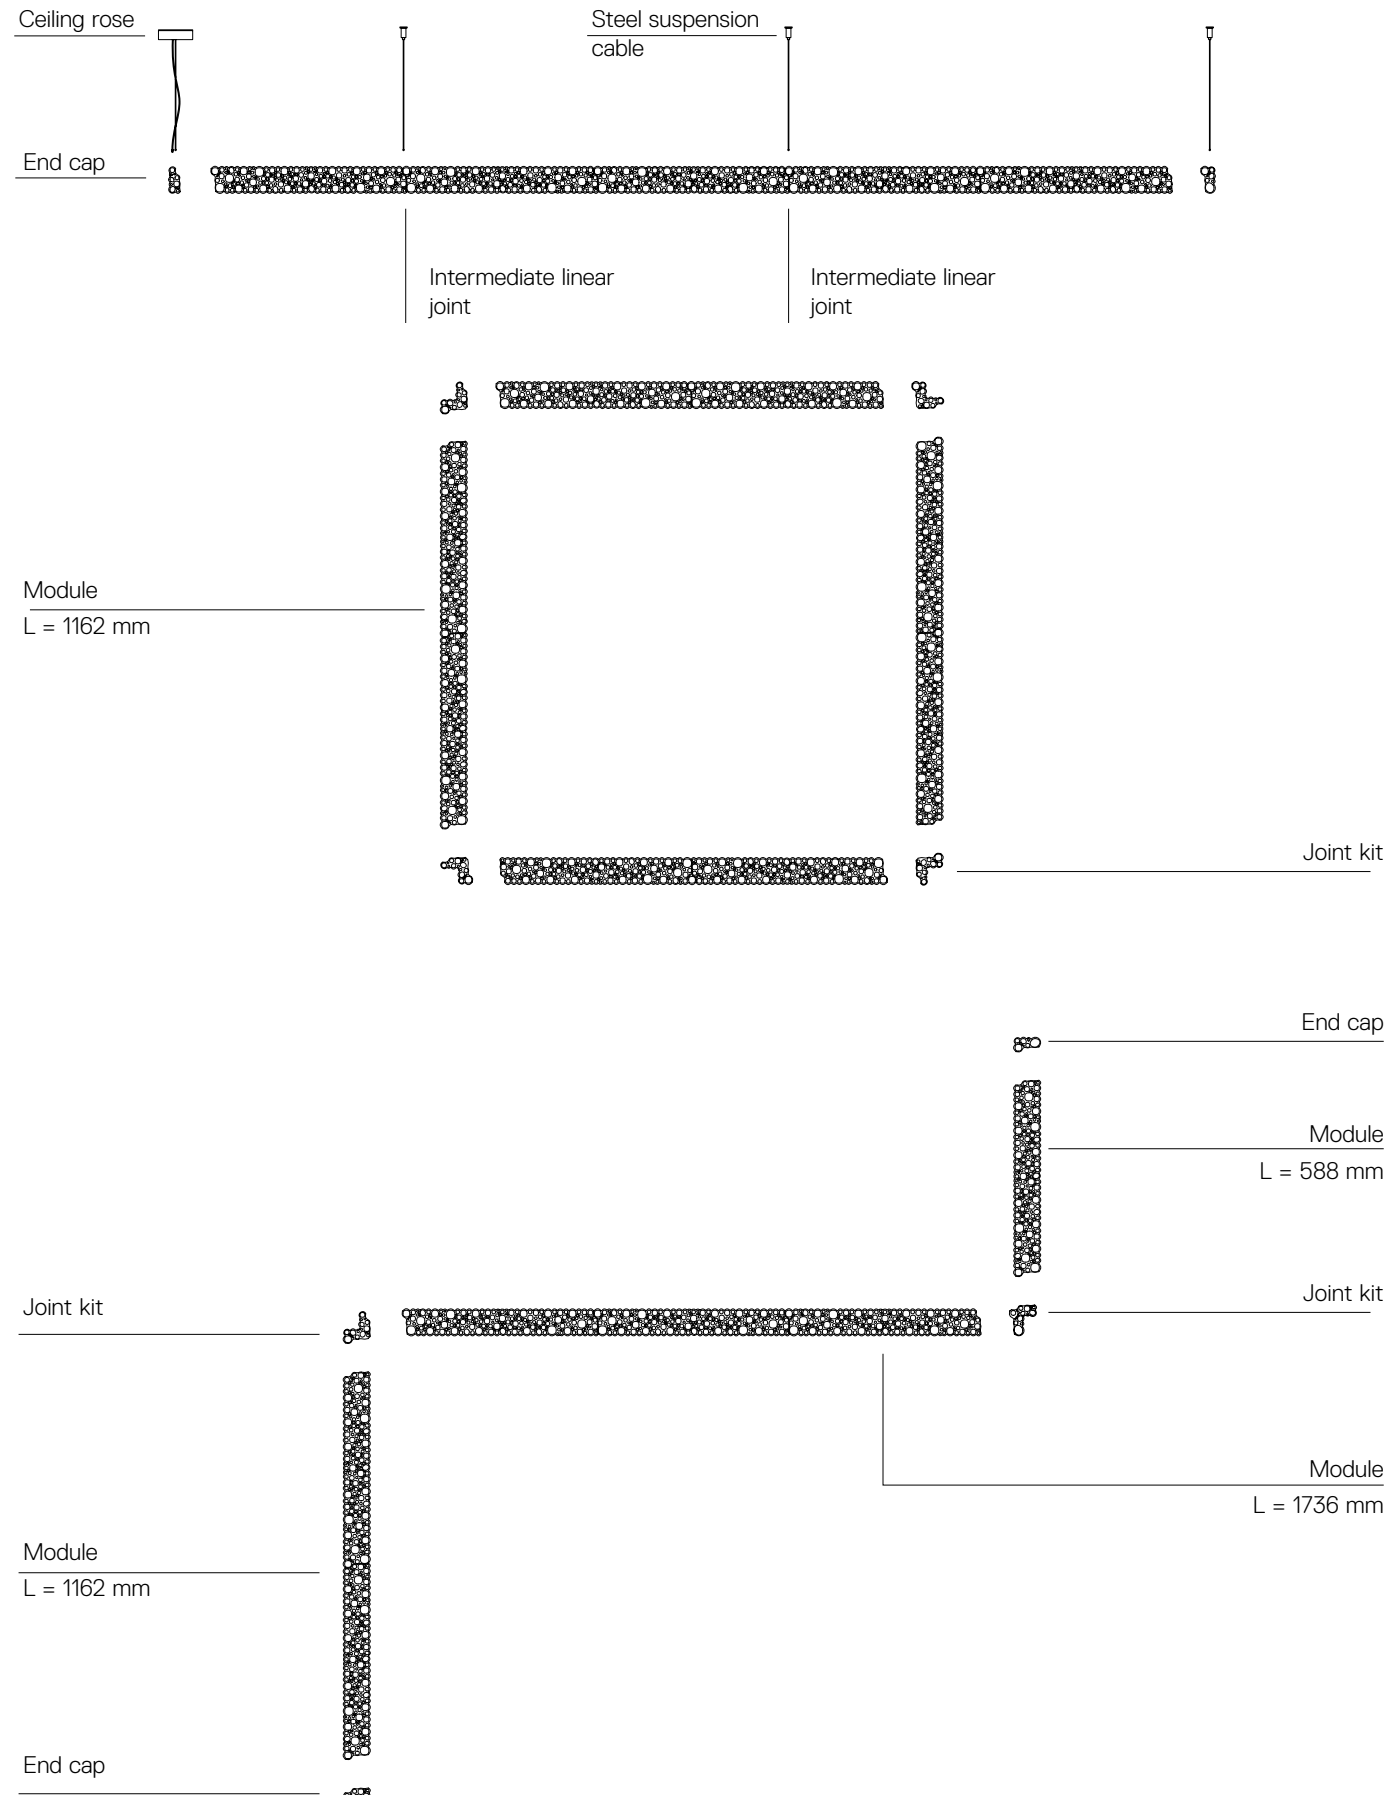


↪ CALIPSO LINEAR SYSTEM

White 	XF 	The APP driver can not be controlled by DALI dimming system and viceversa. In APP configurations must be only one App master module others must be DALI	MacAdam 3SDCM Life L70 (10K)=50000h CRI =90	IP20
-----------	--------	--	---	----------


SUSPENSION

Modules					PUSH/DALI	APP
Lenght	W	Beam	Flux	CCT	Code	Code
588 mm	22 W	XF	1492 lm	3000K	2013010A	
1210 mm	43 W	XF	2985 lm	3000K	2014010A	2014010APP
1785 mm	63 W	XF	4477 lm	3000K	2015010A	2015010APP




Accessories - suspension

		Code
	End caps kit (2 pcs)	2022010A
	Joint 90° kit (dx/sx)	2023010A
	Intermediate linear joint	2021010A
	Connection cable To be only used when the power kit is not in the end caps	2024010A
	Power kit for suspension modules 1 steel suspension cable + 1 alimentation cable	2020010A
	Steel suspension cable Length 1,5 meters	2266010A



CEILING

Modules					PUSH/DALI	APP
Lenght	W	Beam	Flux	CCT	Code	Code
588 mm	22 W	XF	1492 lm	3000K	2010010A	
1210 mm	43 W	XF	2985 lm	3000K	2011010A	2011010APP
1785 mm	63 W	XF	4477 lm	3000K	2012010A	2012010APP



Accessories - ceiling

		Code
	End cap kit (2 pcs)	2026010A
	Joint 90° kit (dx/sx)	2027010A
	Intermediate linear joint	2025010A



Grafa System

Wilmotte&Industries

↔ 2014



**Artemide
App**

↔ on request



For further information on Grafa
↔ visit artemide.com

Modular system with direct emission and indirect with LED high efficiency.

Installation with suspension.

Single mounting, in continuous line by angle (90°), free composition.

Dimmable electronic power supply DALI.

Materials: structure in extruded aluminum anodised matte, top screen with anti-dust polycarbonate, staples in 6 different tones.


Quick adjustment steel suspension cables.

Complies with EN62471, EN60598-1 and other specific standards.



Grafa System typologies

Grafa System driver

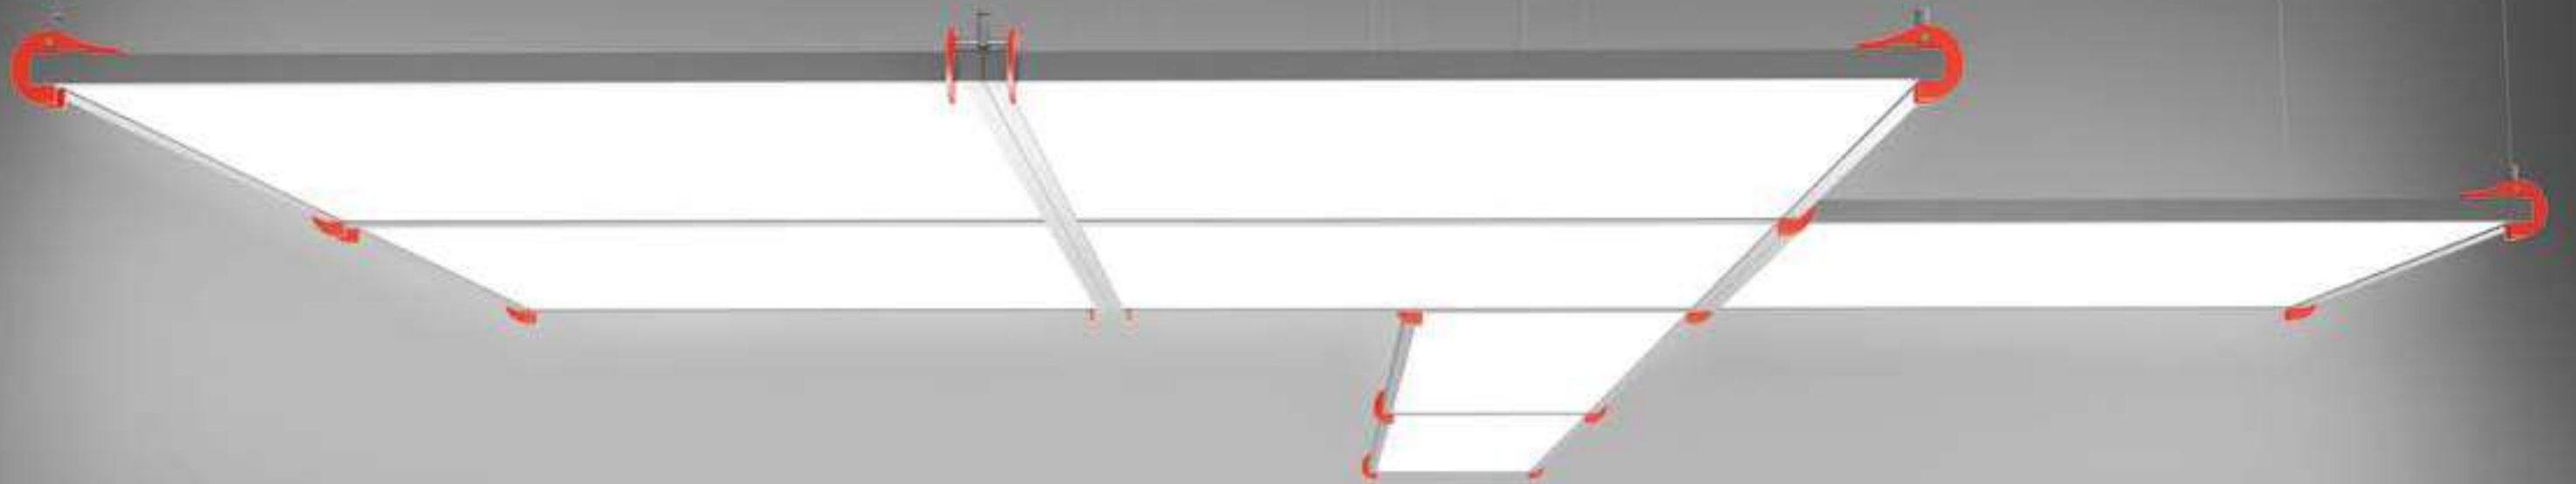

SYSTEM MODULES

Module
1200x300
single




Module
1200x300
modular




Module
600x600
single



Module
600x600
modular linear



Module
600x600
modular angular



SUSPENDED ACCESSORIES

Single Clip



Angular Brackets

Double Clip




Mixed Modules Brackets

Angular Clip




DRIVER LINKS


Kit driver 1X - end links
2 possible positions A-B




Kit driver 2X - central links
3 possible positions A-B-C

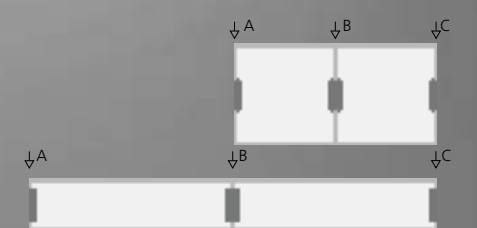





Kit 3X central links
2 possible positions A-B

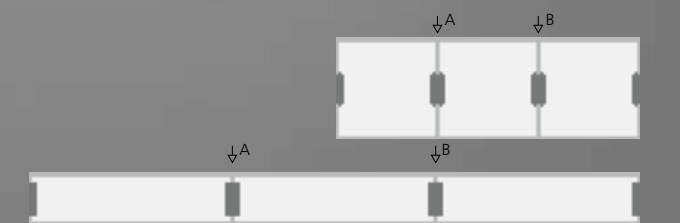

Kit 4X central links
one possible position A

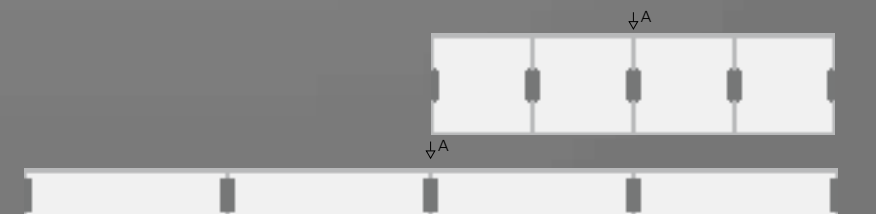

Grafa System configuration

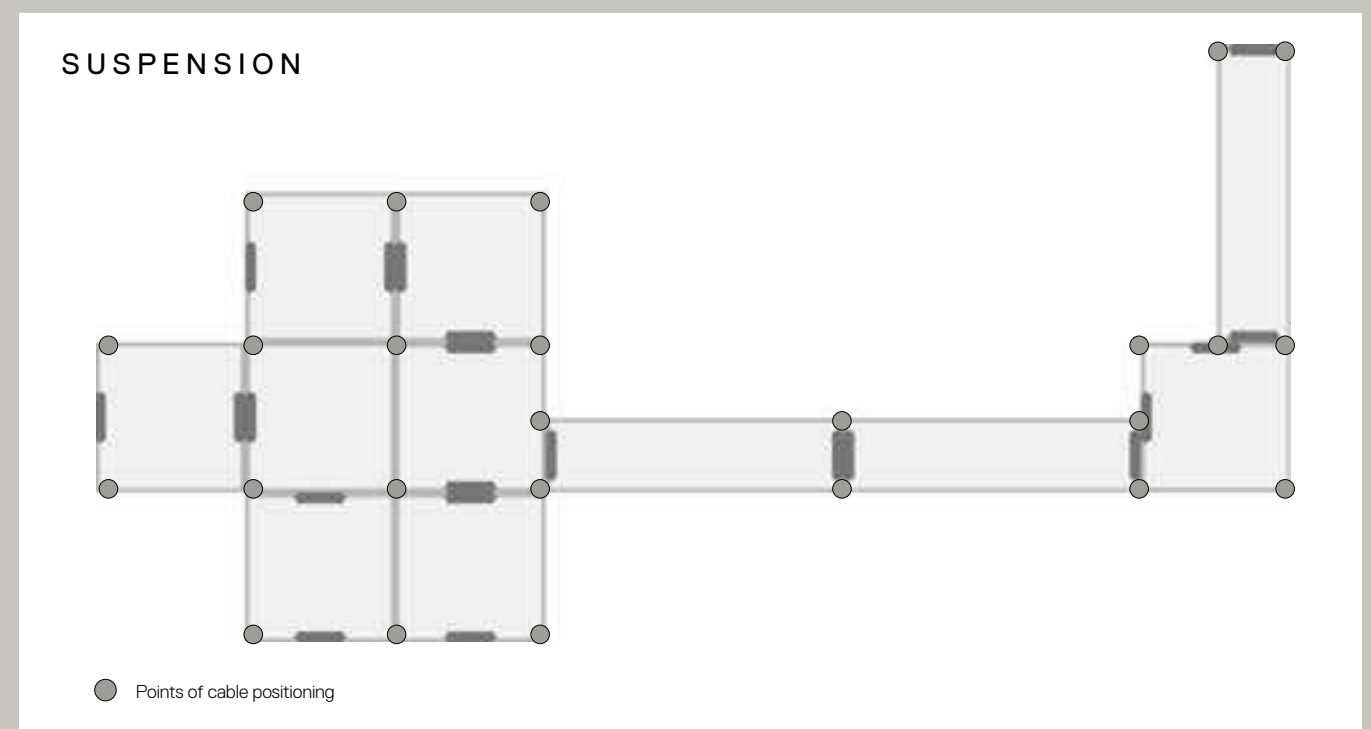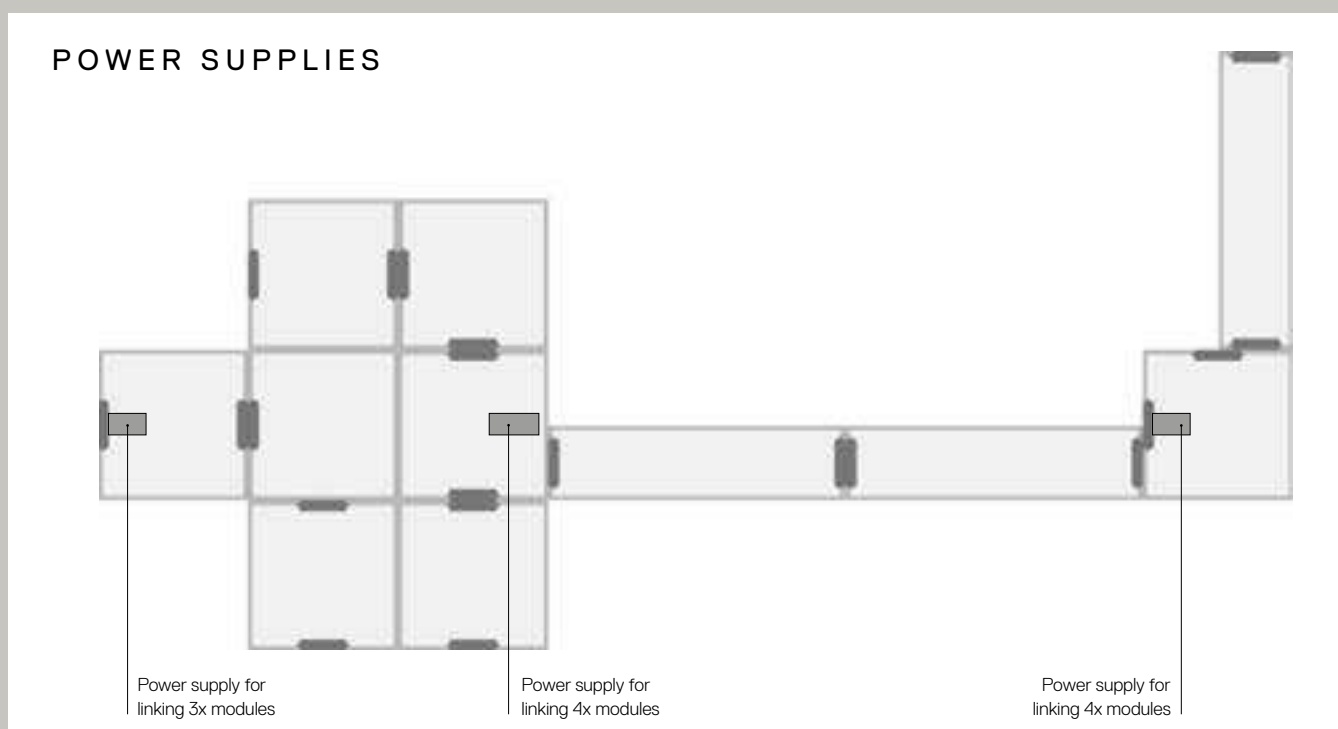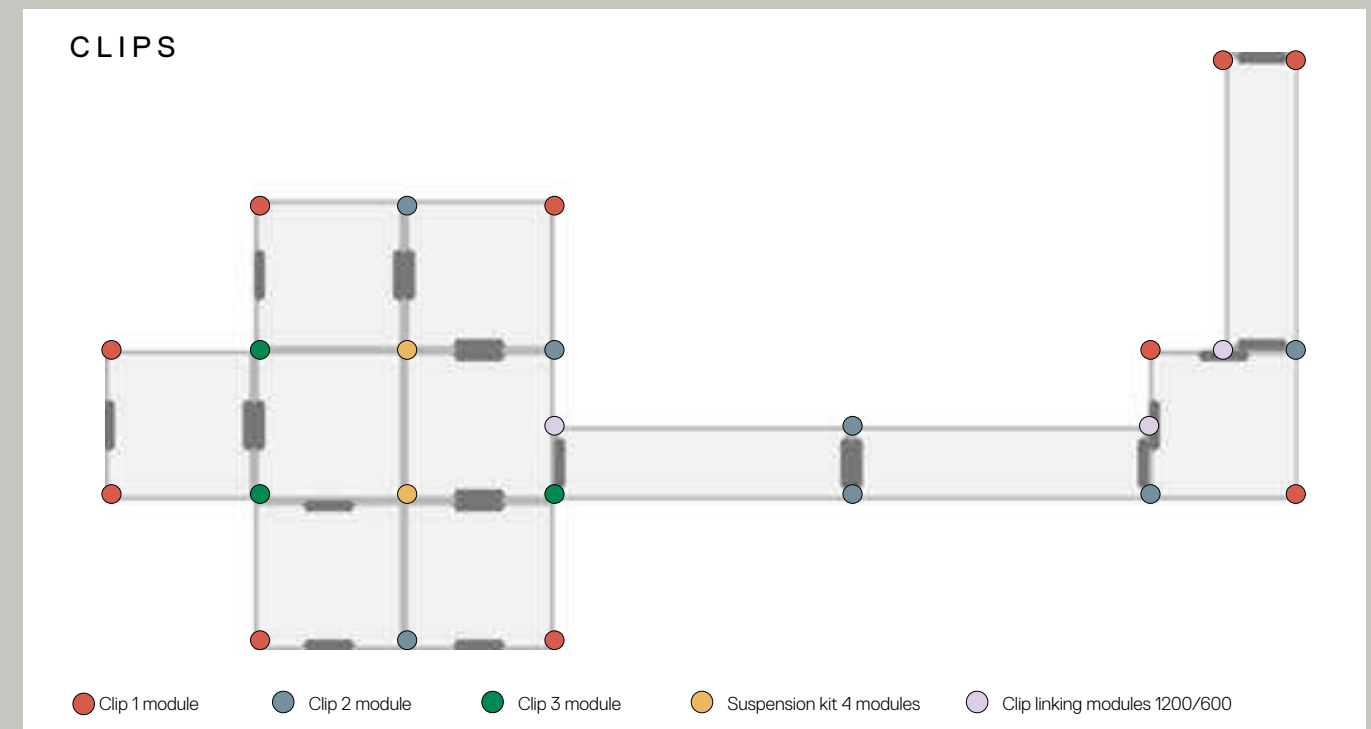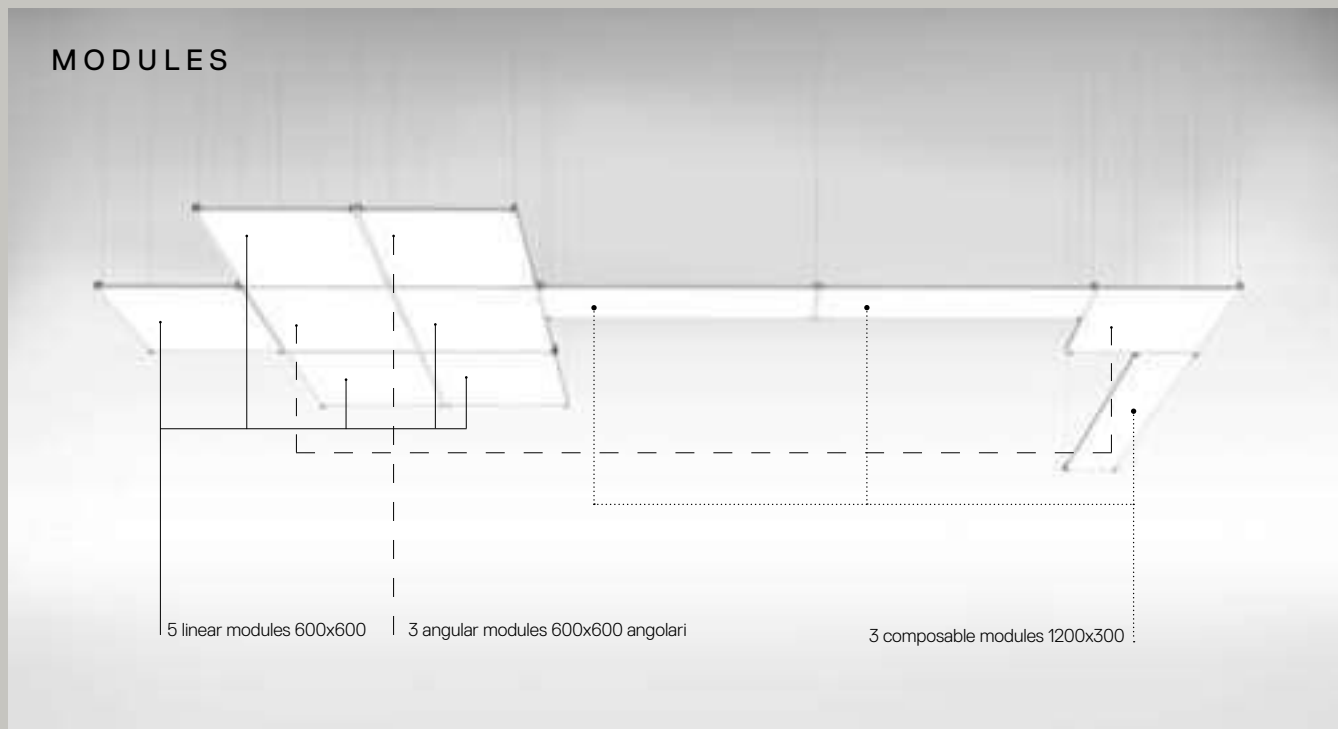


Silver XF Clips supplied separately. Driver SELV supplied separately. MacAdam 2SDCM Life L70 (6K) 50000h UGR < 19 CRI =80 (typ.) IP20

Structural Module 600x600

Cables	W	Weight	BeamFlux	CCT
linear	39 W	4,00 kg	XF 3400 lm	3000 K
				3886 lm 4000 K
angular	39 W		XF 3400 lm	3000 K
				3886 lm 4000 K


Code
M3003W61
M3003N61
M3004W61
M3004N61

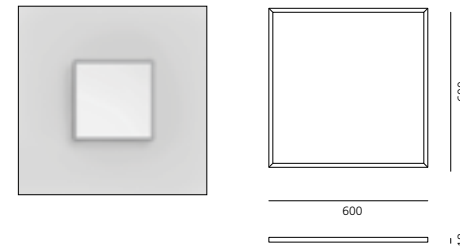

Structural Module 1200x300

W	Weight	Beam	Flux	CCT
39 W	4,00 kg	XF	3207 lm	3000 K
			3665 lm	4000 K

Code
M3001W61
M3001N61

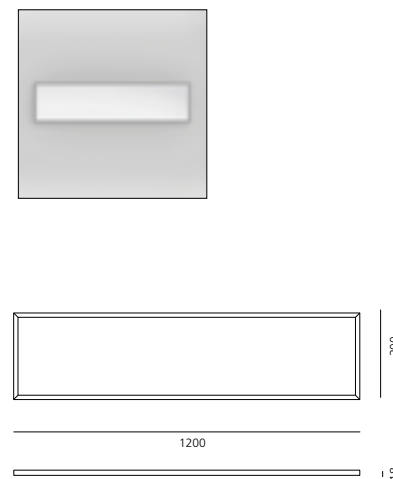

White Black Blue Green Grey Red

20 10 30 50 00 40

Clips


Clips	Color	Code
1 Clips suspension for singular module 600x600 or 1200x300	○	M3010.20
	●	M3010.30
	●	M3010.50
	●	M3010.00
	●	M3010.10
	●	M3010.40
1 Clips suspension and connection for 2 modules on the same line 600x600 or 1200x300	○	M3011.20
	●	M3011.30
	●	M3011.50
	●	M3011.00
	●	M3011.10
	●	M3011.40
1 Clips suspension and connection for 3 modules at 90° 600x600	○	M3012.20
	●	M3012.30
	●	M3012.50
	●	M3012.00
	●	M3012.10
	●	M3012.40
1 Suspension kit and central connection for 4 modules 600x600	○	M3013.20
	●	M3013.30
	●	M3013.50
	●	M3013.00
	●	M3013.10
	●	M3013.40
1 Clips suspension and connection with modules 1200x300 or 600x600	○	M3014.20
	●	M3014.30
	●	M3014.50
	●	M3014.00
	●	M3014.10
	●	M3014.40

Driver

Driver	Dimmable DALI Code
Rose x 1 module 1 power cable – max. length 1500 mm Occupies 1 DALI address	End M300591
Rose x 2 modules 1 power cable – max. length 1500 mm 1 connection cable 1 power connection cover Occupies 1 DALI address	End and Central M300691
Rose x 3 modules 2 power cables – max. length 1500 mm 1 connection cable 1 power connection cover Occupies 2 DALI addresses	Central M300791
Rose x 4 modules 2 power cables – max. length 1500 mm 2 connection cables 2 power connection covers Occupies 2 DALI addresses	Central M300891
Recess kit for roses 1/2/3/4 modules 105 x 450 mm	M300900

Grafa

↪ Stand-alone

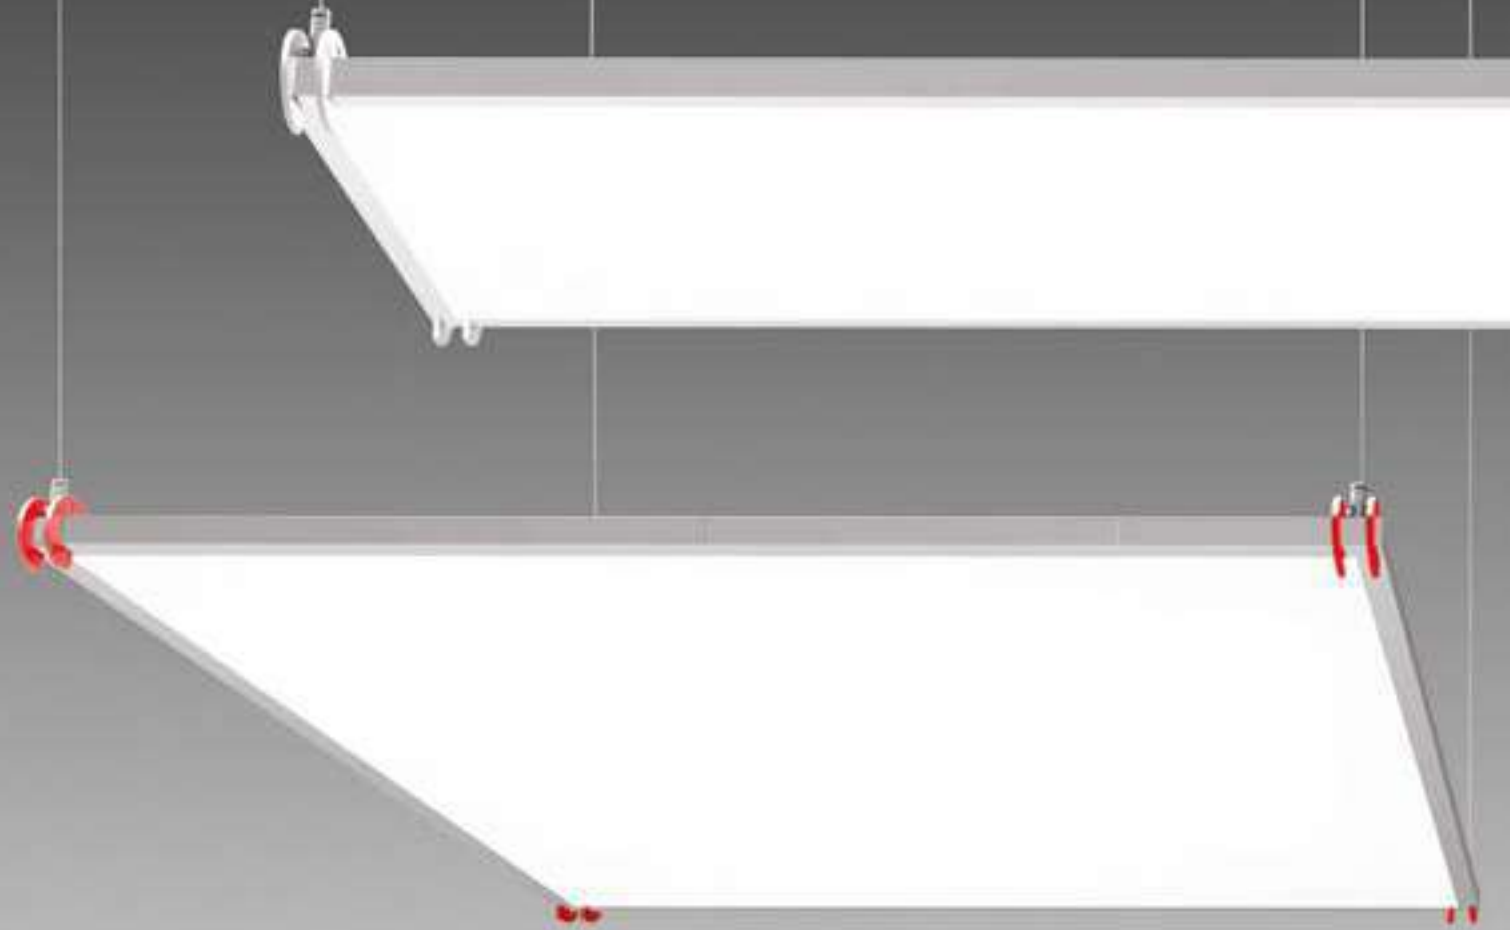

↪ GRAFA STAND-ALONE




Silver	XF	White	Black	Blue	Green	Grey	Red	MacAdam 2SDCM	IP20
								Life L70 (6K) 50000h	
		20	10	30	50	00	40	UGR < 19	
								Clips supplied separately..	
								220/240Vac 50/60Hz electronic ballast included.	
								Occupies 1 DALI destination.	

Structural module 600x600 Stand-Alone

W	CRI	Weight	Beam	Flux	CCT
39 W	=80 (typ.)	4,00 kg	XF	3400 lm	3000 K
				3886 lm	4000 K

DALI+SwitchDim

Code
M3002W61
M3002N61





Structural module 1200x300 Stand-Alone


W	CRI	Weight	Beam	Flux	CCT
53 W	=80 (typ.)	4,00 kg	XF	5766 lm	3000 K
				6589 lm	4000 K

DALI+SwitchDim



Code
M3000W61
M3000N61

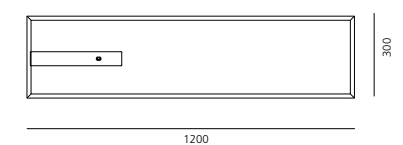

Clips

	Color	Code
 4 Clips singular module		M3016.20
		M3016.30
		M3016.50
		M3016.00
		M3016.10
		M3016.40

Recess kit for roses 1/2/3/4 modules

 140x240	 105 x 200 mm	M3015.00
---	--	-----------------

Pad System

Carlotta de Bevilacqua

↪ 2012

Modular system with direct emission and indirect with LED high efficiency.
Ultra thin profile
Edge Backlighting Technology
Installation with suspension.
Single mounting, in continuous line by angle (90°), free composition.
Dimmable electronic power supply DALI-SwitchDim.
Materials: structure in extruded aluminum.
Suspension cables in steel with quick adjustment.
Complies with EN62471, EN60598-1 and other specific standards.




For further information on Pad System
↪ visit artemide.com





**Artemide
App**
↪ on request

Pad System configuration

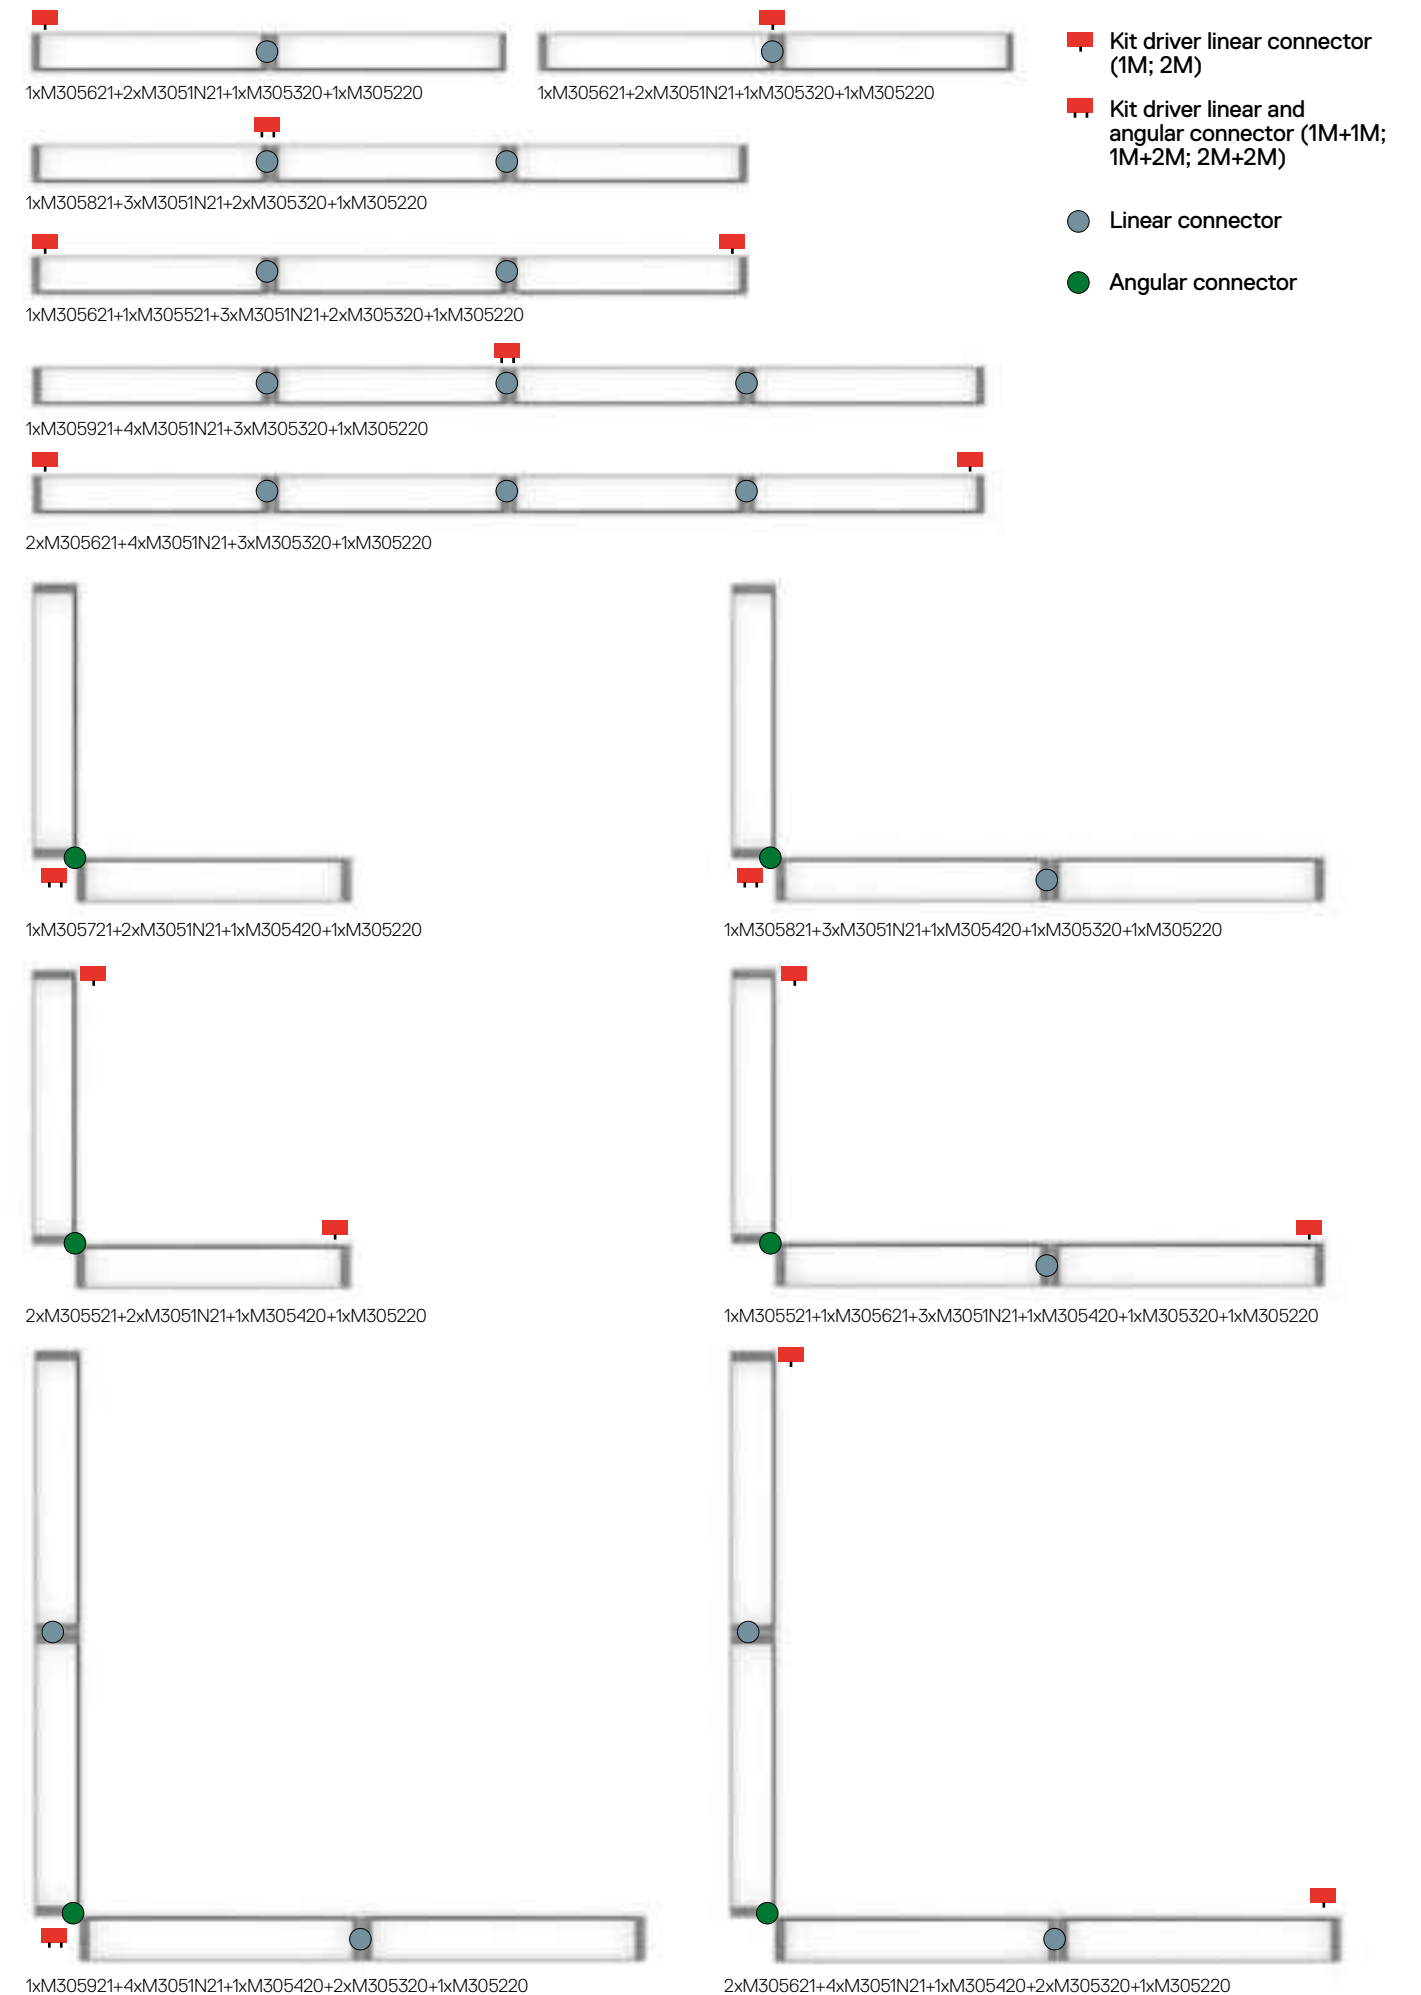


↪ PAD SYSTEM

White	XF	MacAdam 2SDCM IP20 Life L70 (6K) 50000h UGR <19 CRI =80
		




PAD SYSTEM

W	Weight	Beam	Flux	CCT	Code
39 W	4,03 kg	XF	3062 lm 3499 lm	3000 K 4000 K	M3051W21 M3051N21


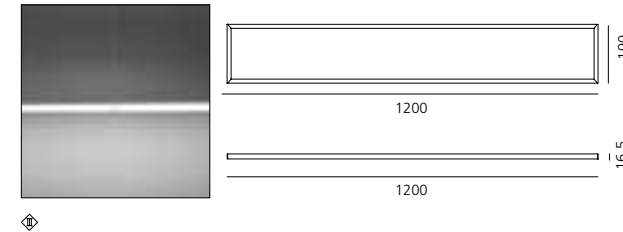




Driver SELV supplied separately.



Accessories

	Code
 End cap + suspension kit	M305220
 Linear joint +2 suspension kit	M305320
 90° shaped connector +2 suspension kit	M305420


Accessories


	Code
 Kit driver linear connector 1M Occupies 1 DALI address.	M305521
 Kit driver linear connector 2M Occupies 1 DALI addresses.	M305621
 Kit driver linear and angular connector 1M+1M Occupies 1 DALI addresses.	M305721
 Kit driver linear and angular connector 1M+2M Occupies 2 DALI addresses.	M305821
 Kit driver linear and angular connector 2M+2M Occupies 2 DALI addresses.	M305921
 Recess kit for roses 1/2/3/4 modules 105 x 450 mm	M300900


PAD SYSTEM STAND-ALONE

W	Weight	Beam	Flux	CCT	DALI - SwitchDim Code
53 W	4,03 kg	XF	5569 lm 6365 lm	3000 K 4000 K	M3050W21 M3050N21

UGR<19
220/240Vac 50/60Hz electronic ballast included.

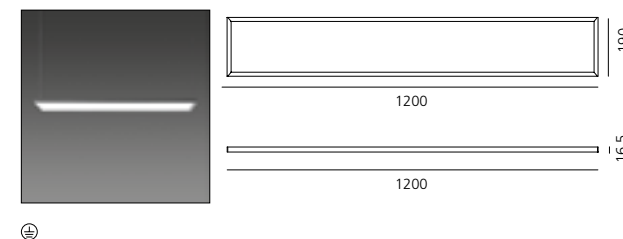

	Code
 Recess kit for roses 105 x 200 mm	M301500

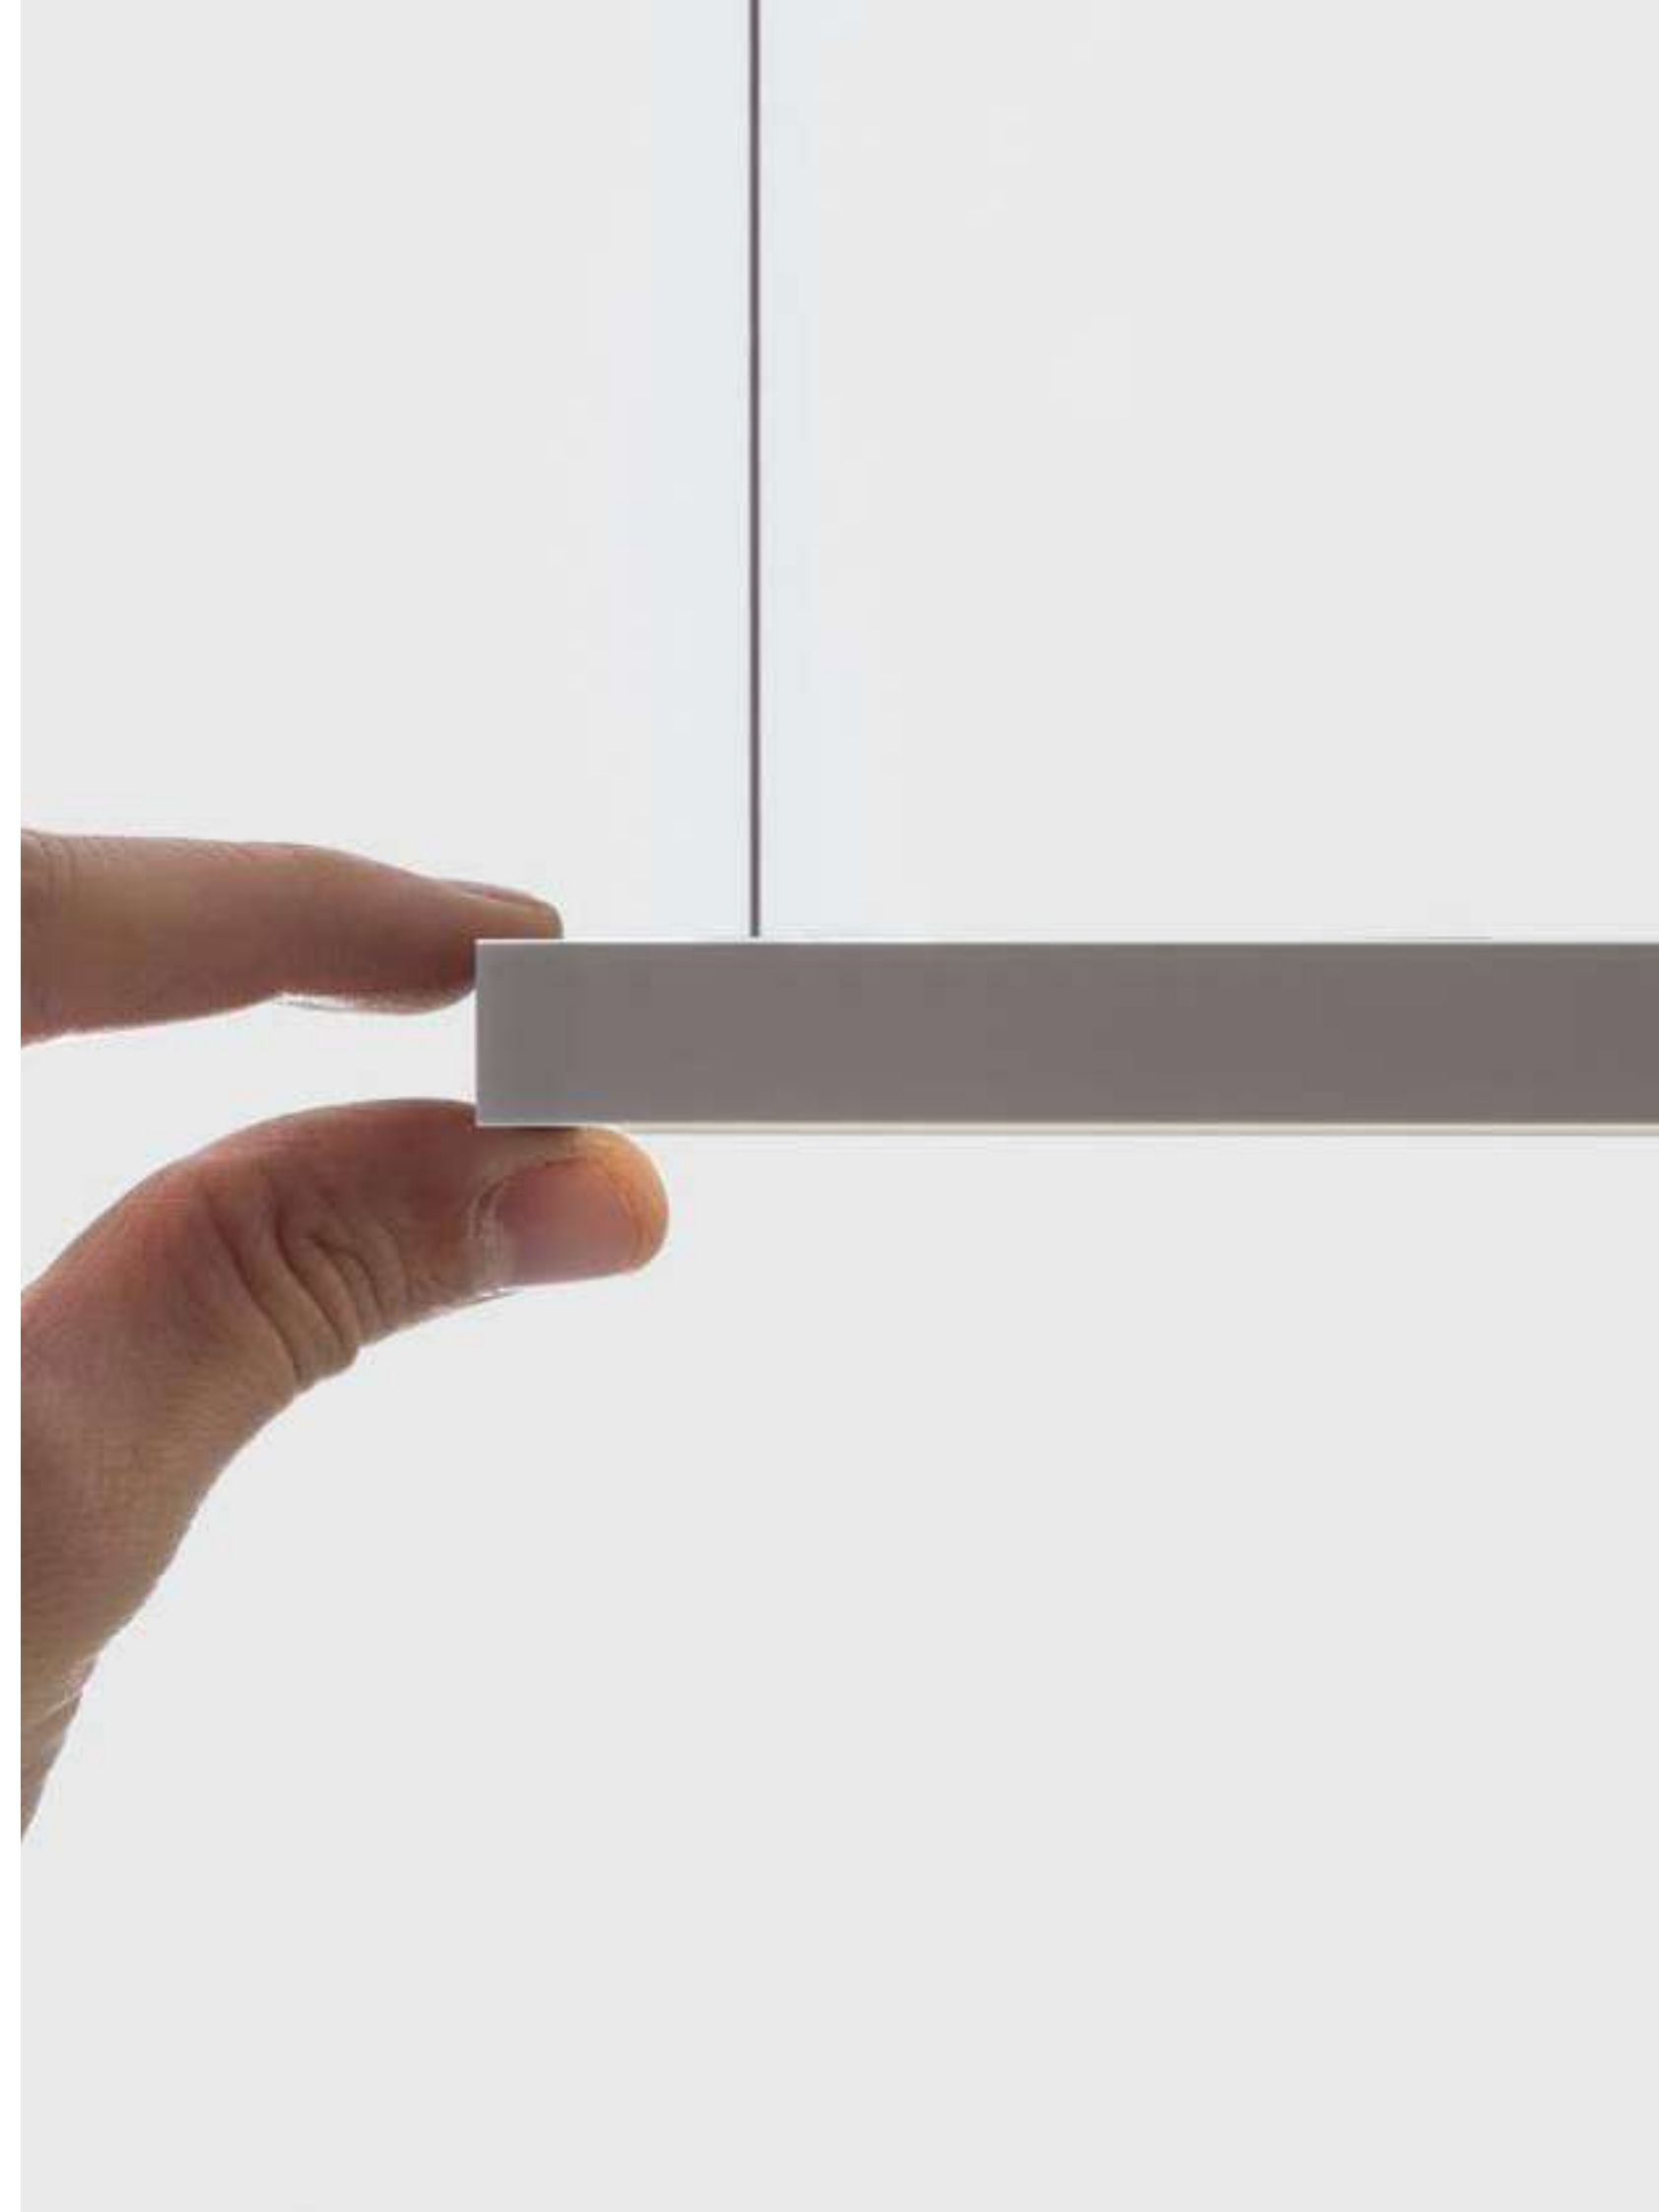



Uglare 19

↪ 2015

Uglare is 600x600 and 300x1200 recessed ceiling light, suited to illuminate working areas with video-terminals.

Its strong steel and aluminium mechanical construction and high performance (over 100lm/W for the 4000K version), as well as the possibility to adjust the luminous flow, make this appliance ideal to illuminate work areas that require minimum incidence in terms of actual and perceived volumes of lighting systems.



Artemide App
↪ on request

↪ UGLARE 19

Glossy white



20

XF



220/240Vac 50/60Hz electronic ballast included.

MacAdam 4SDCM
Life L70 (10K) 50000h
UGR <19
CRI =80


IP40
650°
IK10

600x600

W	Weight	Beam	Flux	CCT
35 W	3,90 kg	XF	3132 lm 3257 lm	3000 K 4000 K

Dimmable 1:10V

Code
M032500
M032600






300x1200

W	Weight	Beam	Flux	CCT
35 W	3,90 kg	XF	3117 lm 3304 lm	3000 K 4000 K

Dimmable 1:10V

Code
M031500
M031600

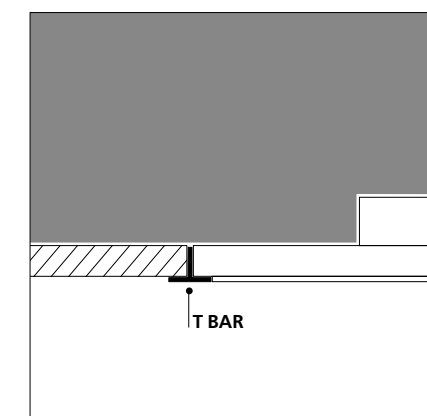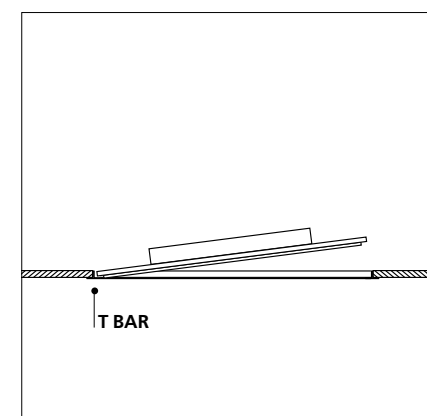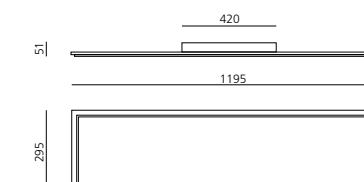

Installation with luminaire incorporated into the 600 modular ceiling structure.



For further information on Uglare19
↪ visit artemide.com

Chocolate floor

a.g.Licht
↪ 2013

Luminous flux distribution: Version 1 desk – 800x1600mm: Total flux produced consists of 35% direct emission and 65% indirect emission.

Version 2 desk – 1600x1600mm: Total flux produced consists of 50% direct emission and 50% indirect emission.

Two options of light management: dimmable with manual independent control of direct and indirect emission, or Interactive DALI system offering automatic control of illumination on the working plane. A single button allows you to set the desired light with Interactive DALI option.

2 colours: brown and white.

Materials: head and stem in polished aluminium, base in polished aluminium, optics in metallized plastic, diffuser in clear polycarbonate.

Compliant with standard EN60598-1 and other specific regulations.



For further information on Chocolate
↪ visit artemide.com





Chocolate terra LED 1-desk




Chocolate terra LED 2-desks



The innovative optic system, specifically made with 108 micro-reflectors, allows a dazzle-free, controlled and concentrated light emission for single workspaces (800x1600mm, 1-desk version) or double workspaces (1600x1600mm, 2-desks version).

The aluminium profile works as heat sink to dissipate heat. Driver and components are located in the central compartment. The 4 LEDs located in each corner are protected by an integral anti-dust screen.

↪ CHOCOLATE TERRA LED



MacAdam 4SDCM direct
MacAdam 3SDCM indirect
Life L70 (6K) 36300h direct
Life L70 (6K) 50000h indirect
CRI= 80


IP20

1 DESK


W	Weight	Flux	CCT	Dimmable Code	Interactive DALI Code
51 W indirect	14 kg	3771 lm	3000 K	M0362. 1/2 .1	M0362. 1/2 .6
30 W direct		1614 lm	4000 K	M0363. 1/2 .1	M0363. 1/2 .6
		4036 lm			
		1727 lm			




Direct emission




Indirect emission



Double emission




• UGR < 19 transversely to a table




2 DESKS

W	Weight	Flux	CCT	Dimmable Code	Interactive DALI Code
50 W indirect	14 kg	3680 lm	3000 K	M0364. 1/2 .1	M0364. 1/2 .6
45 W direct		2984 lm	4000 K	M0365. 1/2 .1	M0365. 1/2 .6
		3938 lm			
		3193 lm			


Direct emission



Indirect emission



Double emission




• UGR < 19 transversely to a table

ECO COMFORT

One power	W	Weight	Flux	CCT	Undimmable Code	Dimmable Code	Interactive DALI Code
26 W indirect	14 kg	4120 lm	3000 K	M0366W.1/2 .0	M0366W. 1/2 .1	M0366W. 1/2 .6	
51 W direct		3399 lm	4000 K	M0366N. 1/2 .0	M0366N. 1/2 .1	M0366N. 1/2 .6	
		4339 lm					
		3580 lm					



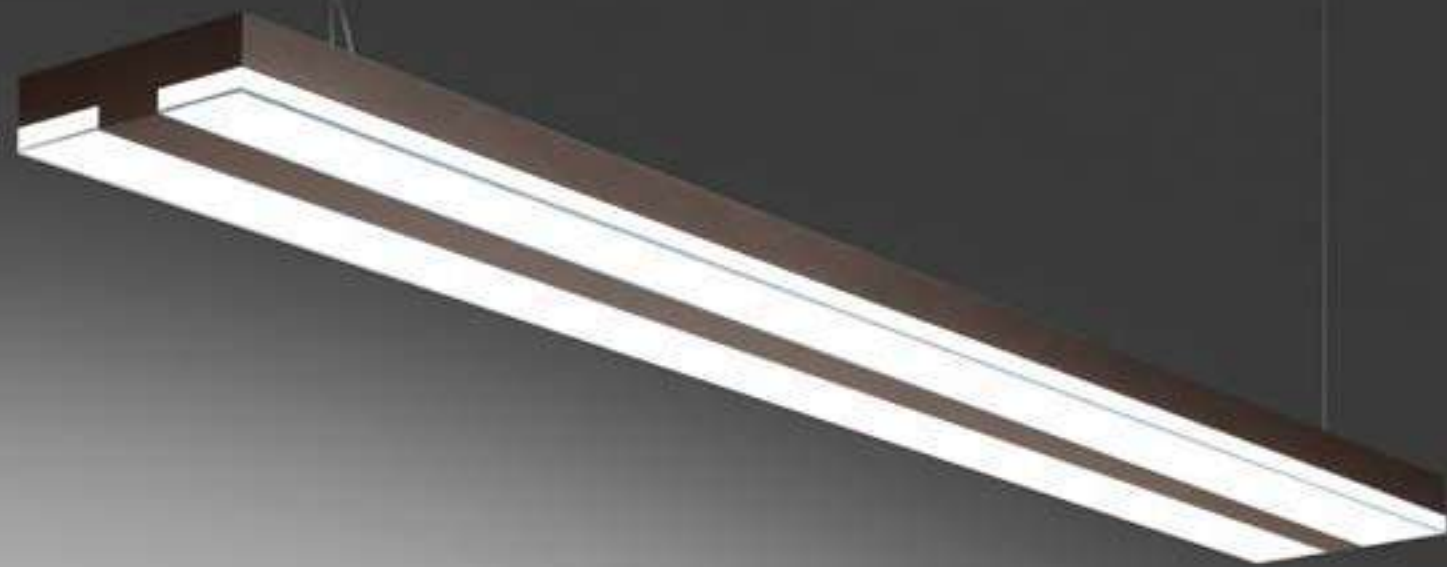

Chocolate suspension

a.g. Licht
↪ 2009



Chocolate wall

a.g. Licht
↪ 2008


White 2 Brown 1 XF

220/240Vac 50/60Hz electronic ballast included.

MacAdam 4SDCM
Life L70 (6K) 50000h indirect
CRI= 80

IP20
⊕
850°

W	Weight	Flux	CCT	Undimmable Code	DALI dimmable Code
63 W	4,6Kg	3868 lm	3000 K	M1136. 1/2 .0	M1136. 1/2 .1
		4136 lm	4000 K	M1137. 1/2 .0	M1137. 1/2 .1

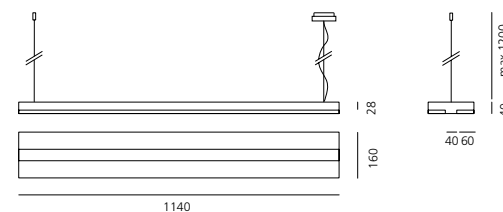

White 2 Brown 1 XF


220/240Vac 50/60Hz electronic ballast included.

MacAdam 4SDCM
Life L70 (6K) 50000h indirect
CRI= 80

IP20
⊕
850°

W	Weight	Flux	CCT	Undimmable Code
L 585 16 W	1,9Kg	1210 lm	3000 K	M1124. 1/2 .0
			4000 K	M1125. 1/2 .0

W	Weight	Flux	CCT	Undimmable Code
L 1145 31 W	3,7Kg	2262 lm	3000 K	M1126. 1/2 .0
		2420 lm	4000 K	M1127. 1/2 .0



Artemide
App
↪ on request



Artemide
App
↪ on request




Surf System

Neil Poulton


↪ 1998

Surf System configuration

SURF SYSTEM SUSPENSION

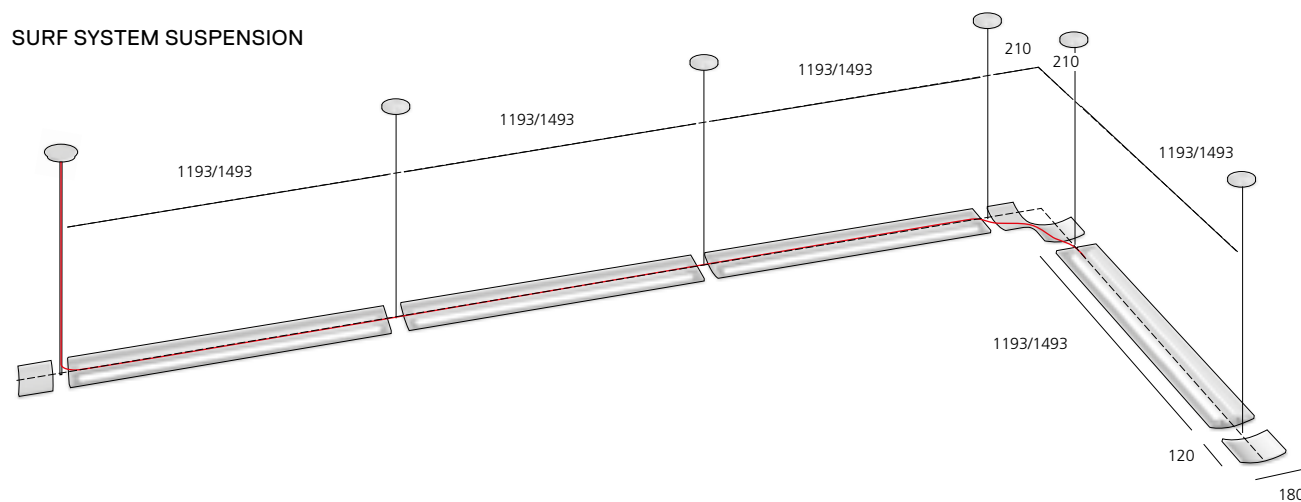

SURF SYSTEM WALL

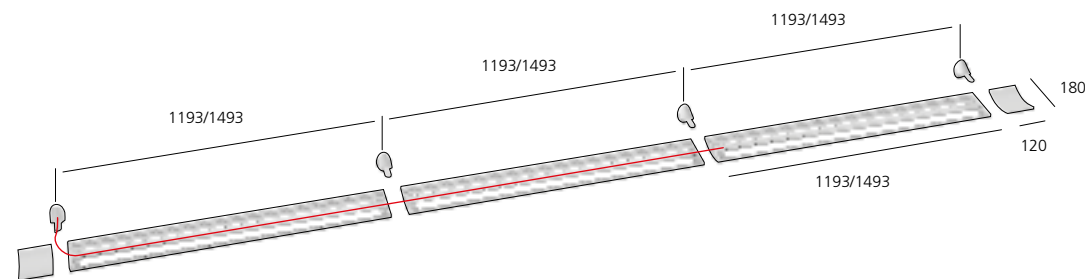

High-performing LED with indirect emission.
 Ceiling-mounted or suspended.
 Single installation, in line or angled
 (L-shaped / 90°, 2-ways, 3-ways, 4-ways).
 Non-dimmable electronic power supply,
 DALI dimmable or interactive DALI system,
 combining presence detector and daylight sensor.

Materials: white painted extruded aluminium body, extruded polycarbonate dust-protective screen.
 'Quick'-adjustable steel suspension cables.
 Compliant to standard EN62471, EN60598-1
 and other specific regulations.





For further information on Surf System
 ↪ visit artemide.com




Artemide
 App
 ↪ on request












↪ SURF SYSTEM

White 	XF 	220/240Vac 50/60Hz electronic ballast included.	MacAdam 3SDCM Life L90 (20K)=50000h CRI=80	IP20 ⊕ 960°
--	---	---	--	-------------------

W	Length	Weight	Flux	CCT	Undimmable Code	Dimmable DALI Code
53 W	1193 mm	5,10 kg	6223 lm	3000 K	BD00001	BD01001
			6544 lm	4000 K	BD00101	BD01101



Accessories

	Code		Code
 End cap 120x180 mm 0,70 kg	M090220	 Wall fixing without power supply 55x90 mm protusion 50 mm	M090820
 L-shaped connector 300x300 mm 1,50 kg	M090320	 Wall fixing with power supply (3/5 poles) 55x90 mm protusion 50 mm	M090920
 3-way connector 421x300 mm 2,30 kg	M090420		
 4-way connector 421x421 mm 3,00 kg	M090520		
 Steel suspension cable ceiling plate ø100 mm	M090620		
 3 core suspension cable (3x1,5 mm ²) ceiling plate ø100 mm L 1100 mm	M090720		
 5 core suspension cable (3x1,5 mm ² +2x0,5 mm ²) ceiling plate ø100 mm L 1100 mm	M091820		



Surf Wall



Neil Poulton
↪ 1998



High-performing LED wall-mounted light fitting.
More than 3400 lm flux installed.
High efficiency: more than 70 lumen per watt.
Materials: body in white painted aluminium.
Non-dimmable electronic power supply
or dimmable DALI options.
Compliant to standard EN62471, EN60598-1
and other specific regulations.




For further information on Surf Wall
↪ visit artemide.com

White 	XF 	220/240Vac 50/60Hz electronic ballast included.	MacAdam 3SDCM Life L70 (6K)> 50000h CRI=80 (typ.)	IP20 ⊕ 960°
--	---	---	---	-------------------

SURF WALL 300

W	Weight	Beam	Flux	CCT	Undimmable Code	DALI Code
35 W	1,40 kg	XF	2930 lm	3000 K	M060120	M060121
			3078 lm	4000 K	M060220	M060221



LED retrofit (R7s)				Code
W	Weight	Beam	Color	Code
max 300 W R7s	1,00 kg	XF	○	M060955



Acoustic ↪ Collection



Eggboard

Giacobone & Roj - Progetto CMR
↳ 2014



For further information on Eggboard
↳ visit artemide.com







Eggboard typologies



Artemide App

SUSPENSION



EGGBOARD MATRIX
1600X800



EGGBOARD ACOUSTIC
1600X800



EGGBOARD MATRIX
800X800



EGGBOARD ACOUSTIC
800X800

SUSPENSION



EGGBOARD BAFFLE
1600X400



EGGBOARD BAFFLE
800X400



EGGBOARD DIFFUSED
1600X400



EGGBOARD ACOUSTIC
1600X400
1600X800

WALL / CEILING




EGGBOARD 1600 X 800

Acoustic panel without light emission
(optional backlighting modules to be ordered separately)




EGGBOARD 1600 X 400

Acoustic panel without light emission
(optional backlighting modules to be ordered separately)



EGGBOARD 800 X 800

Acoustic panel without light emission
(optional backlighting modules to be ordered separately)



EGGBOARD 800 X 400

Acoustic panel without light emission
(optional backlighting modules to be ordered separately)

CEILING




EGGBOARD BAFFLE
1600X400




EGGBOARD BAFFLE
800X400



EGGBOARD DIFFUSED
1600X400

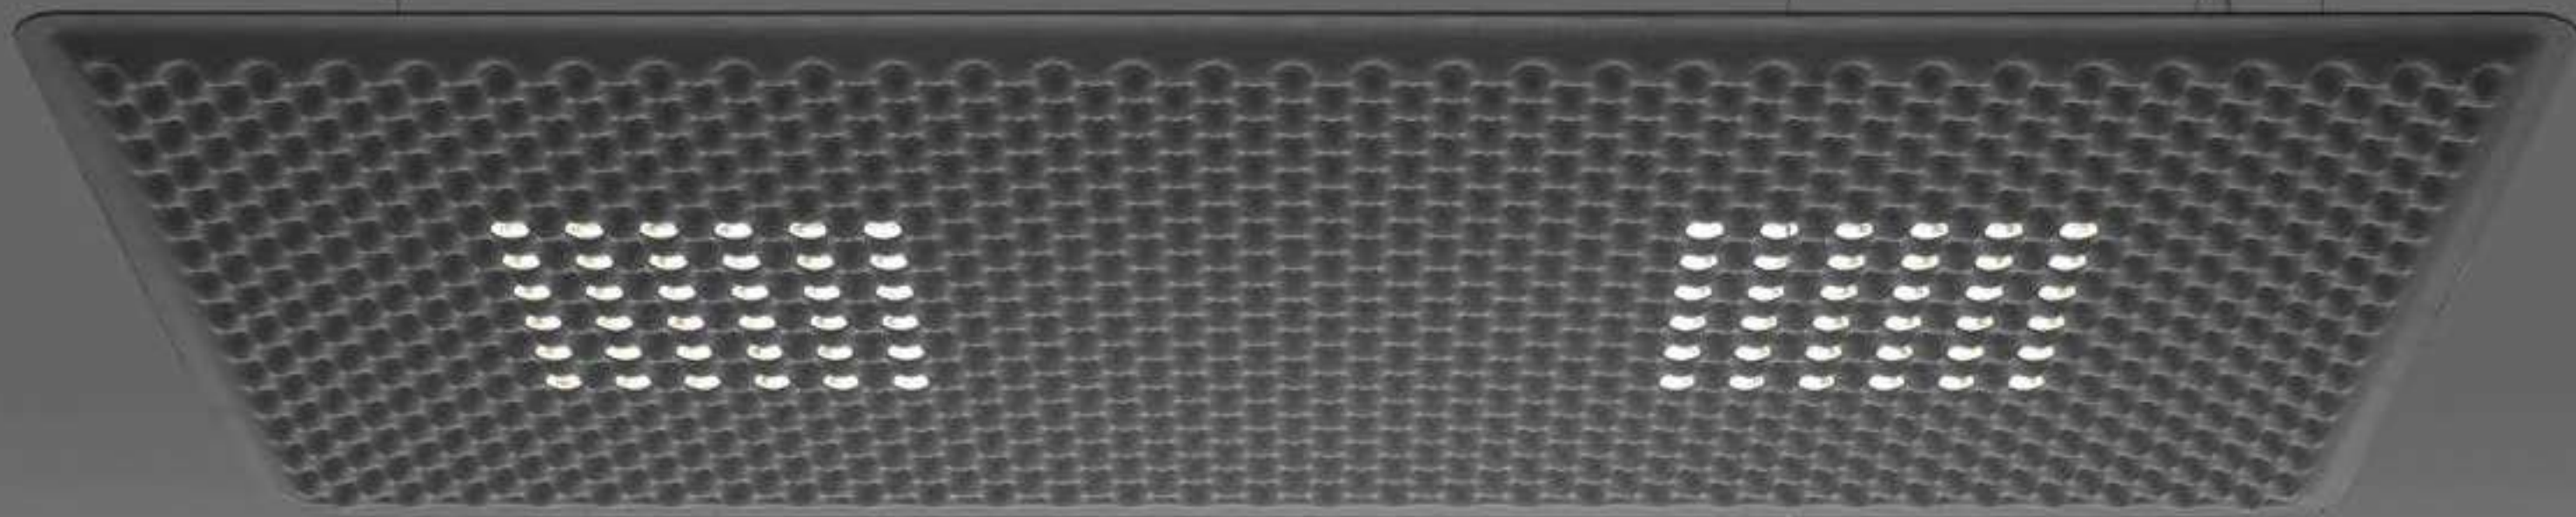

Eggboard ↪ Matrix

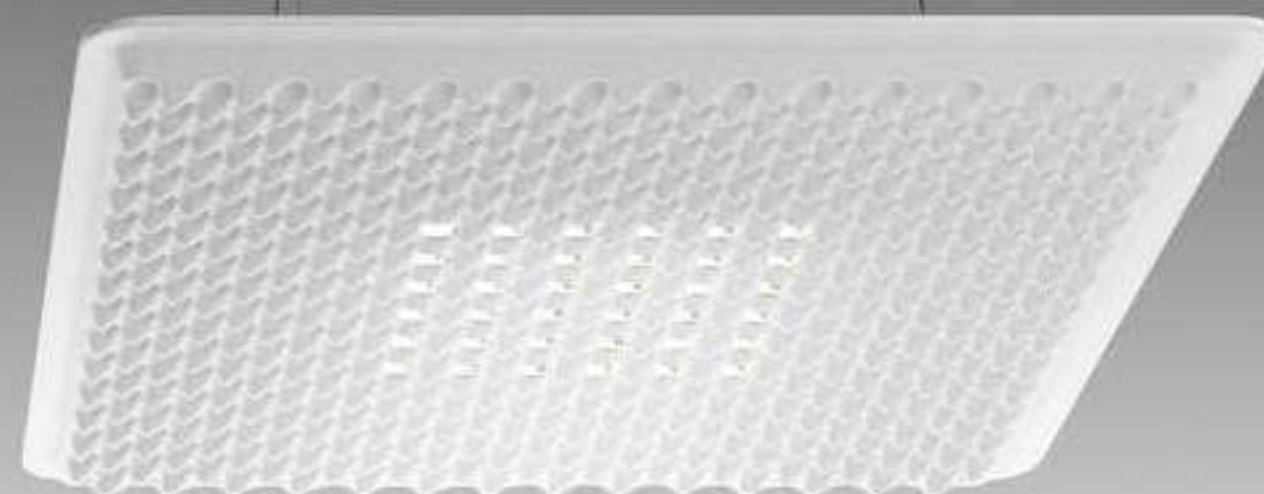

Suspension appliance with sound-absorbing properties ensured by an unusual sinusoidal cross-section design of the lower surface and the use of a sound-absorbing material.

Acoustic efficiency is ensured within a limited space by positioning at approximately one metre above the head of the speaker and listener.

Direct emission: a board with a high number of low-voltage LEDs ensures maximum lighting comfort.



Reflectors can be rotated for use on single or counterposed double desk.

Complies with the norms on office activities that involve the use of video-terminals (UGR<19).



Available in 3 colours (white, grey, green) and 2 different sizes (1600X800mm - 800X800mm).

↳ EGGBOARD MATRIX 1 DESK


↳ EGGBOARD MATRIX 2 DESK

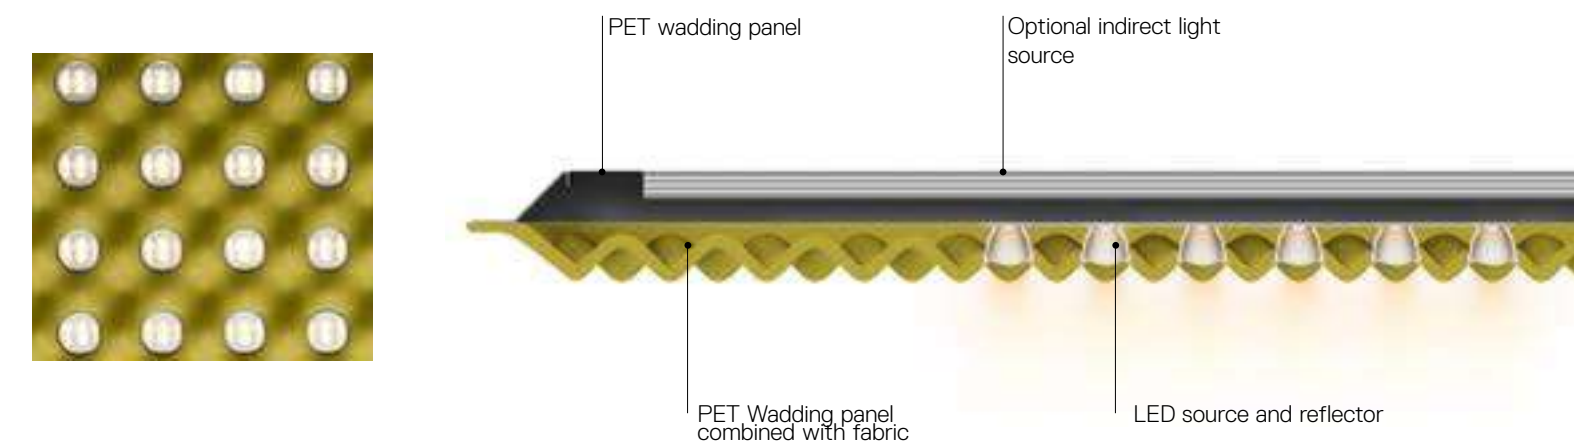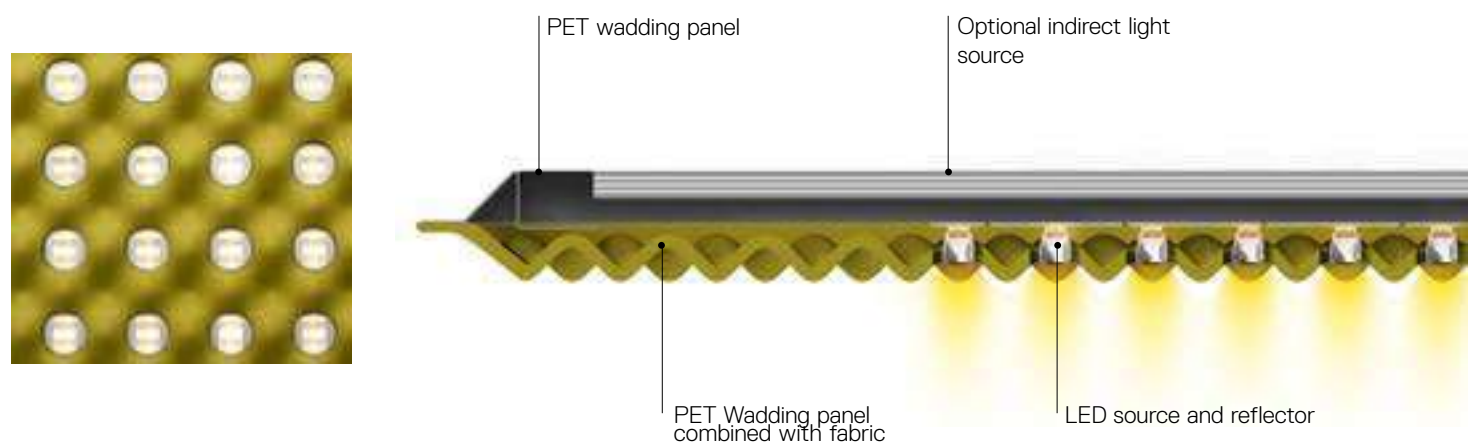


Rotating the elliptic-beam reflector along the Y axis allows to use the product to illuminate one workstation.
UGR < 12

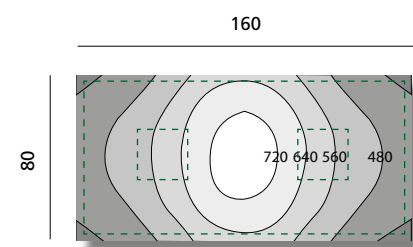

Rotating the elliptic-beam reflector along the X axis allows to use the product to illuminate two workstations.
UGR < 17

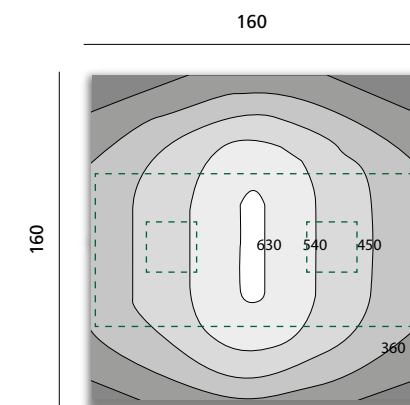

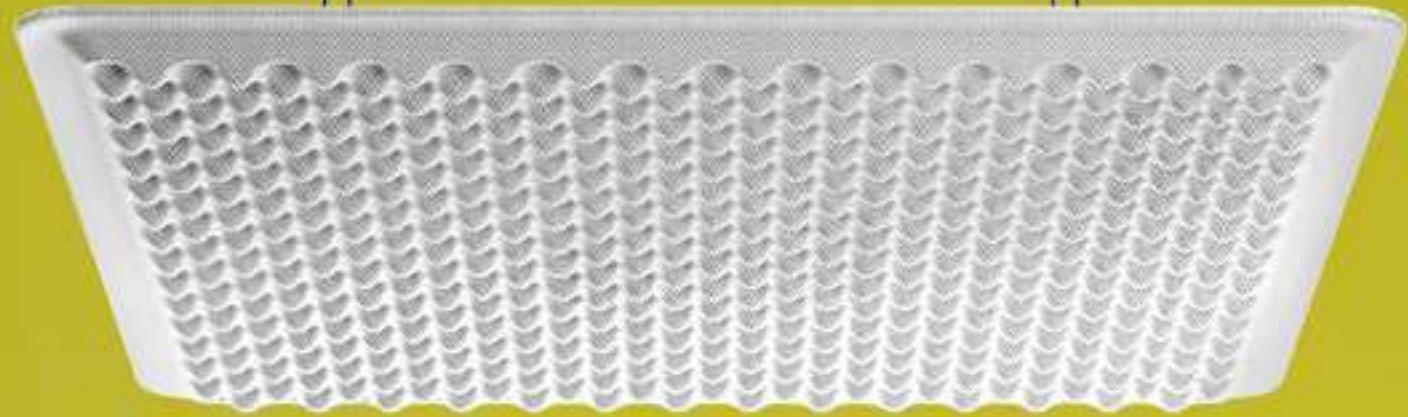


↳ EGGBOARD ACOUSTIC PANEL

The sound-absorbing material acts by reducing the reverberation time (i.e. the time required to reduce any noise inside the room by 60 db, so as to ensure that any echoes due to reflections on the walls are inaudible).

The frequency of human voice typically ranges from 1 to 4 kHz.



The use of materials capable to reduce these frequencies allows better understanding of speech and prevents the need to talk loudly to cover the background noise.

The sound-absorbing appliance should be located 400-600 mm off the ceiling to ensure optimal operation.

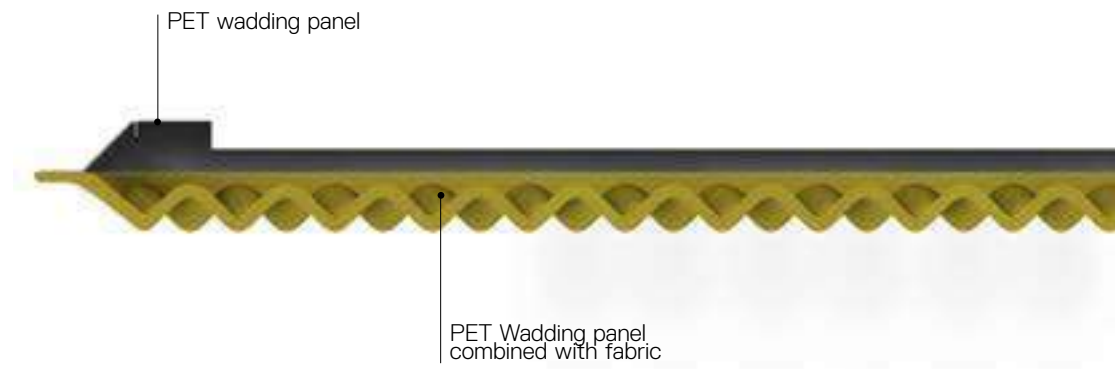



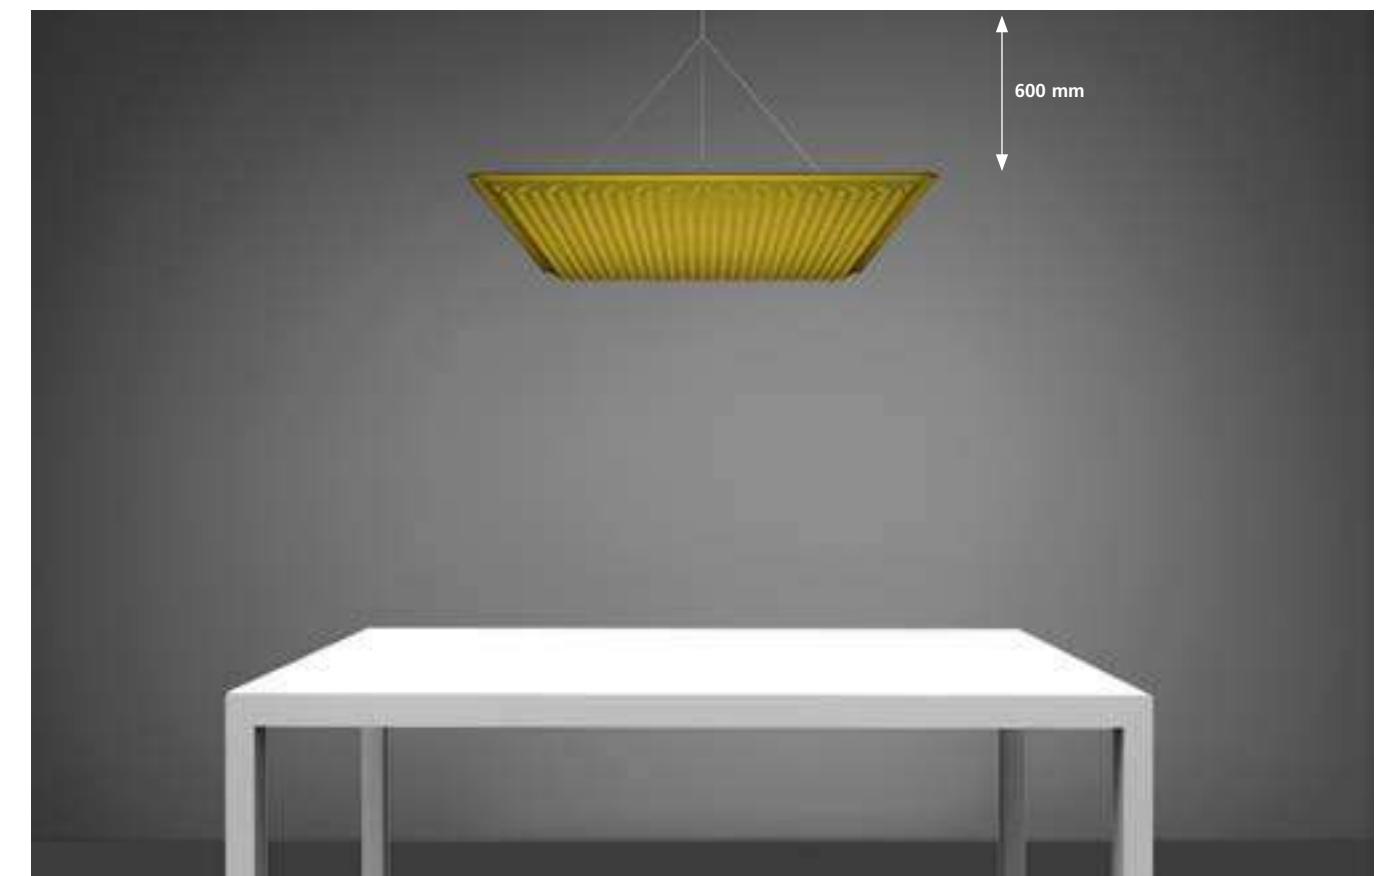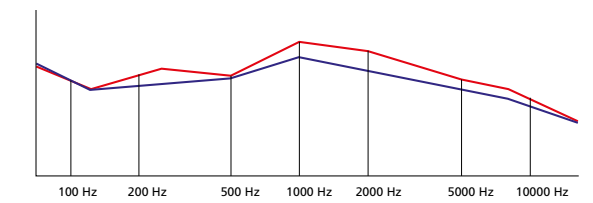

— No sound-absorbing material

— Noise reduction with Eggboard installed 60 cm off the ceiling




EGGBOARD MATRIX

White cream  2.	Grey  9.	Green  5.	XF 	220/240Vac 50/60Hz electronic ballast included.	MacAdam 3SDCM Direct: Life L90 (10K)>60000h CRI =90 Indirect: Life L80 (10K)>55000h CRI =80	IP20 ⊕ UGR<19
--	---	--	---	---	---	---------------------

1600x800


Direct				
W	Weight	Beam	Flux	CCT
31 W	16,5 kg	XF	2402 lm	3000 K
			2488 lm	4000 K

Dimmable DALI	
Code	
M3100W.	2/9/5 .1
M3100N.	2/9/5 .1

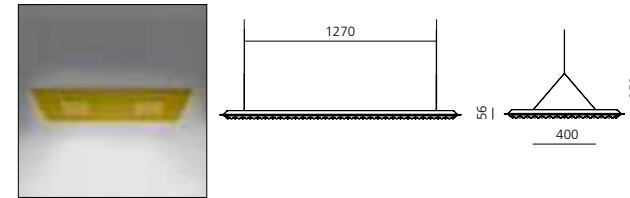


Direct + Indirect				
W	Weight	Beam	Flux	CCT
31 W direct	17,68 kg	XF	2402 lm direct	3000 K
44 W indirect			4030 lm indirect	
			2488 lm direct	4000 K
			4234 lm indirect	

Dimmable DALI	
Code	
M3101W.	2/9/5 .1
M3101N.	2/9/5 .1

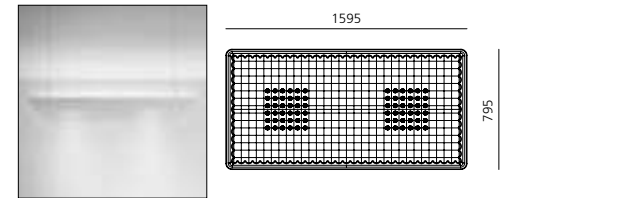

Without light	
Weight	
10 kg	


Code	
M3108.	2/9/5 .0

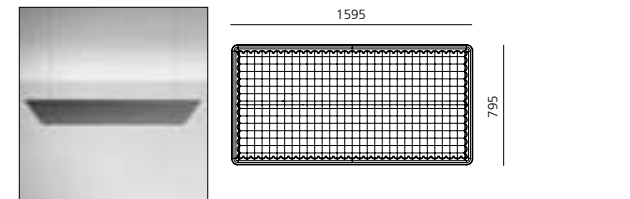

800x800


Direct				
W	Weight	Beam	Flux	CCT
16 W	9,20 kg	XF	1200 lm	3000 K
			1244 lm	4000 K

Dimmable DALI	
Code	
M3102W.	2/9/5 .1
M3102N.	2/9/5 .1

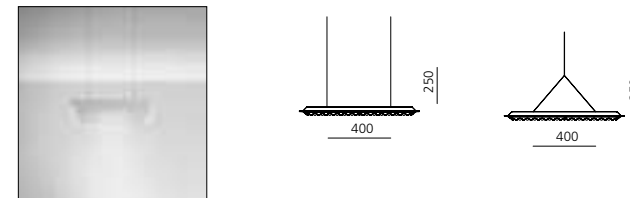



Direct + Indirect				
W	Weight	Beam	Flux	CCT
16 W direct	9,70 kg	XF	1200 lm direct	3000 K
23 W indirect			2015 lm indirect	
			1244 lm direct	4000 K
			2117 lm indirect	

Dimmable DALI	
Code	
M3103W.	2/9/5 .1
M3103N.	2/9/5 .1

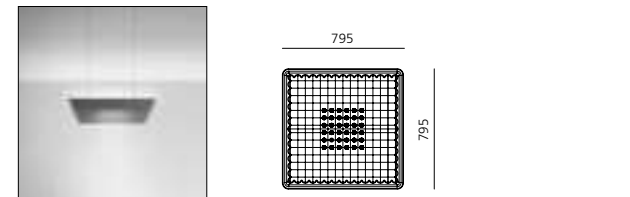

Without light	
Weight	
5 kg	

Code	
M3109.	2/9/5 .0

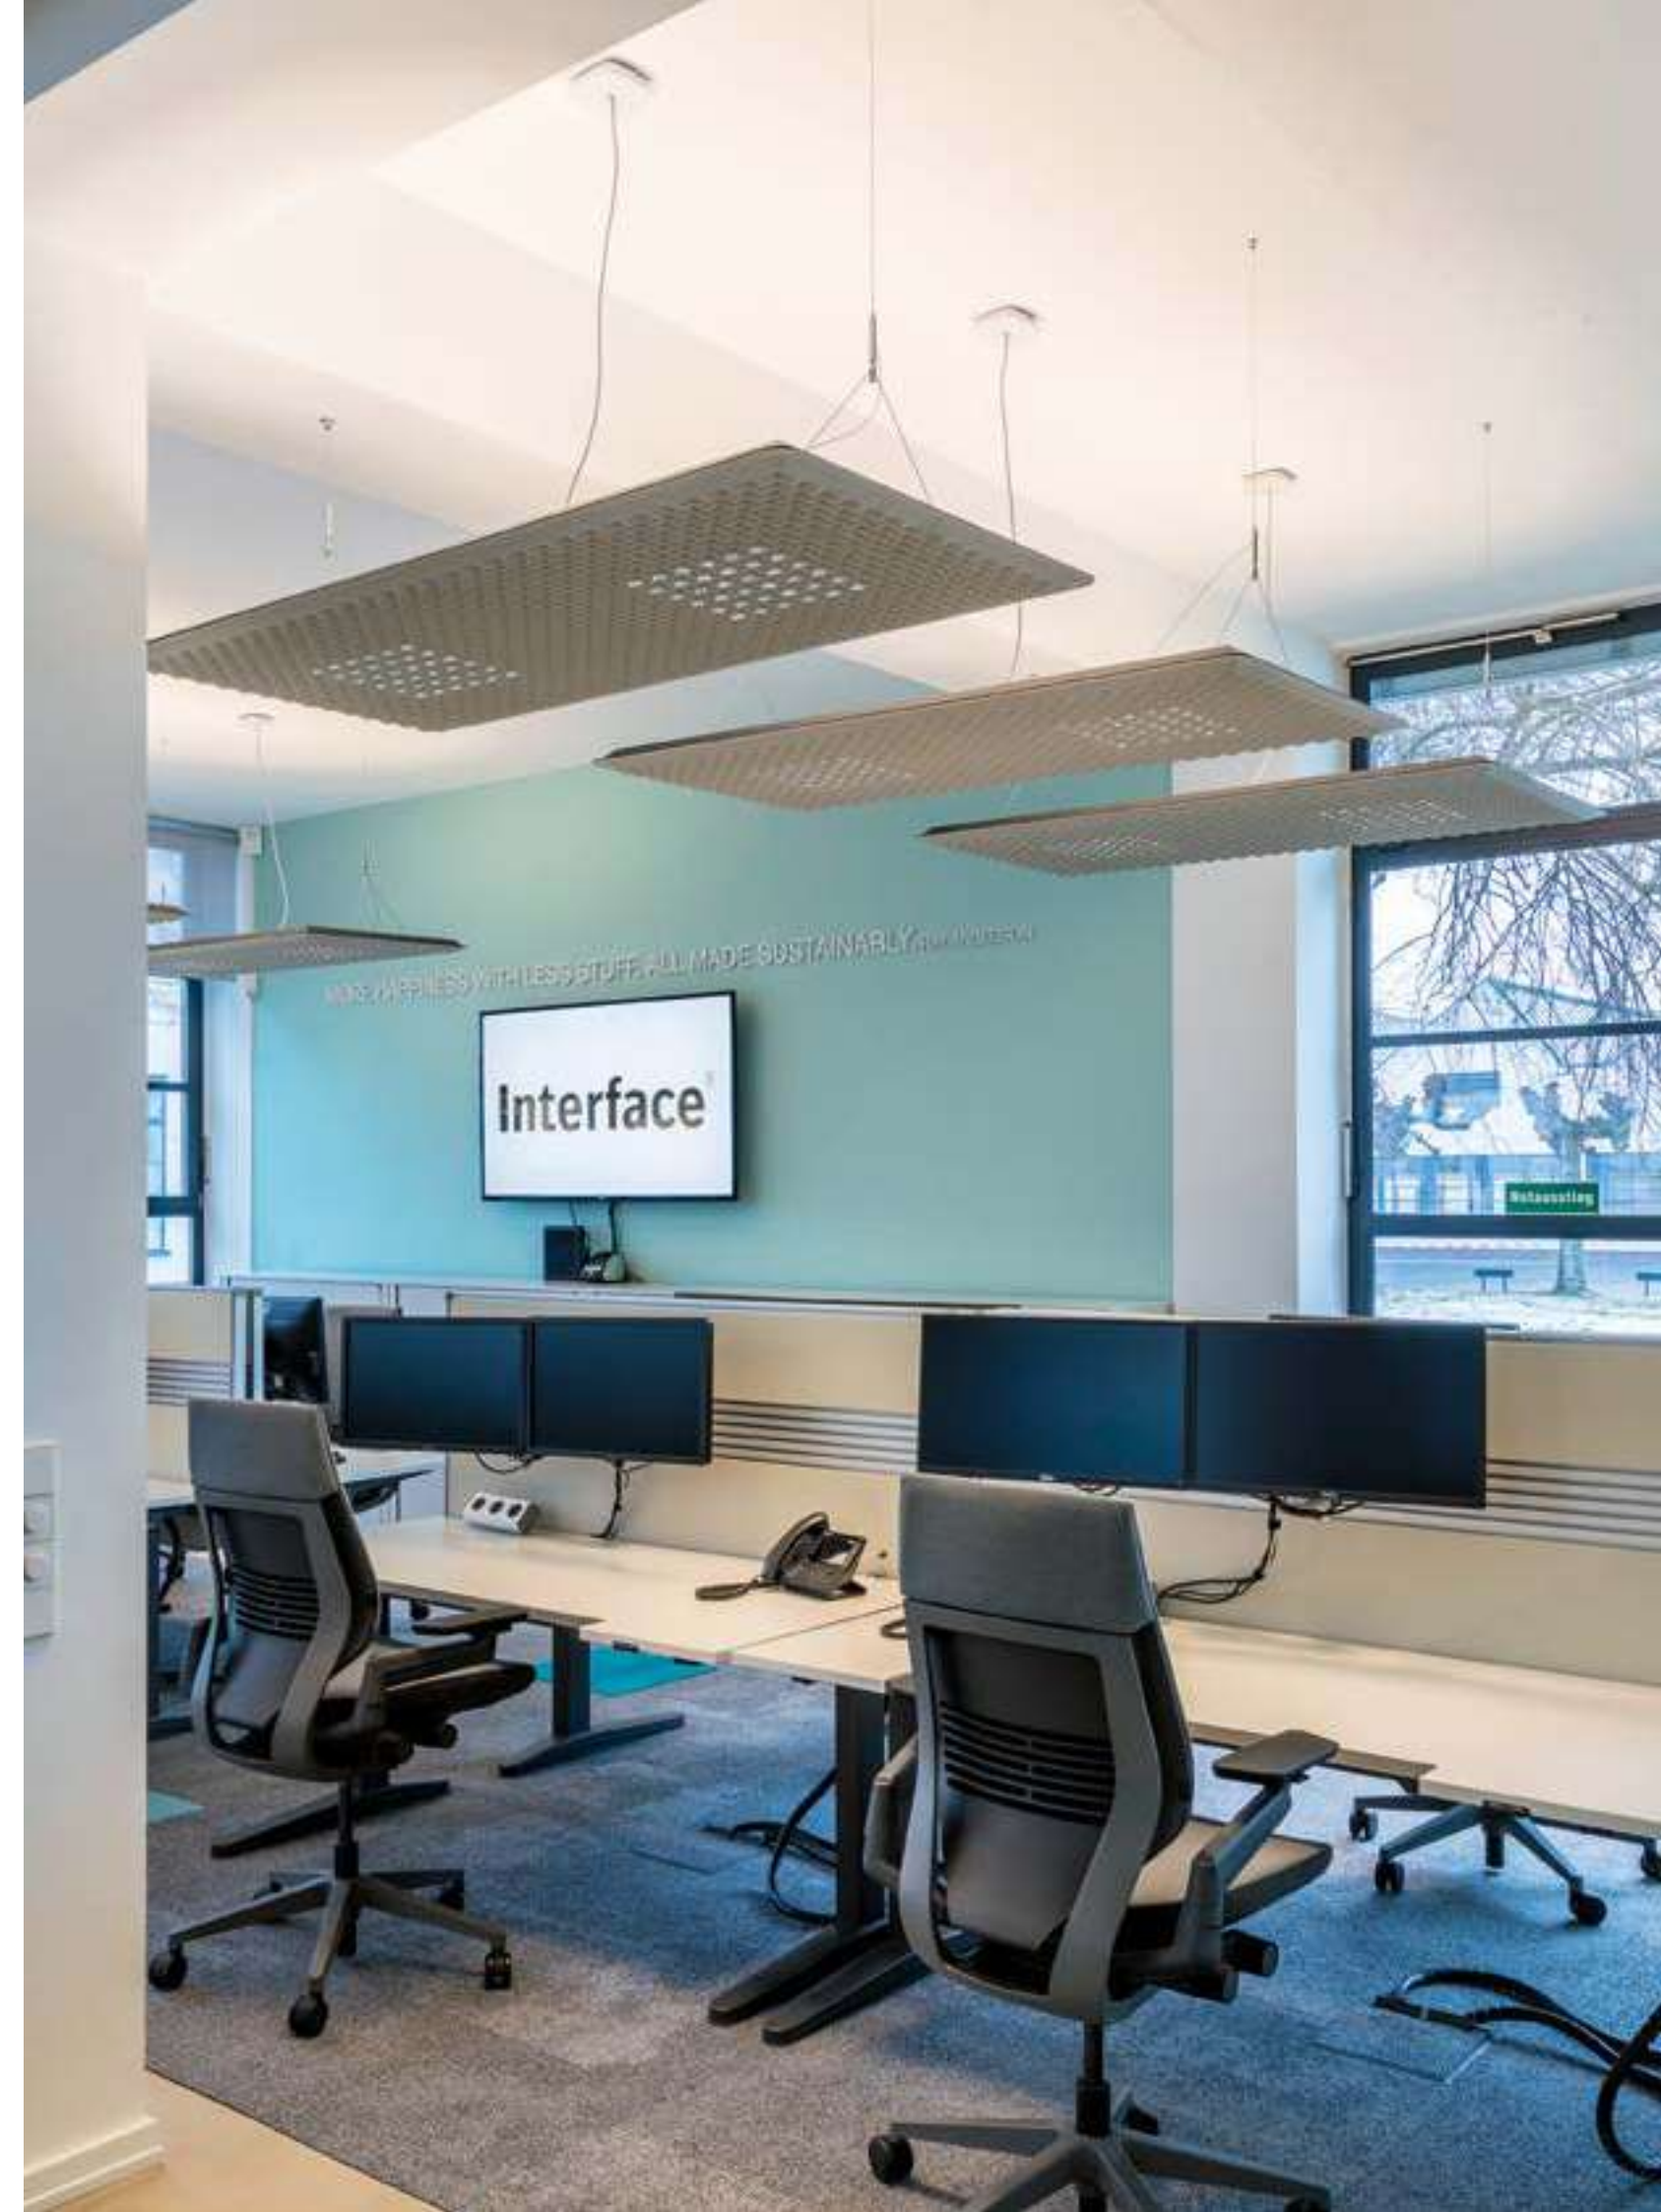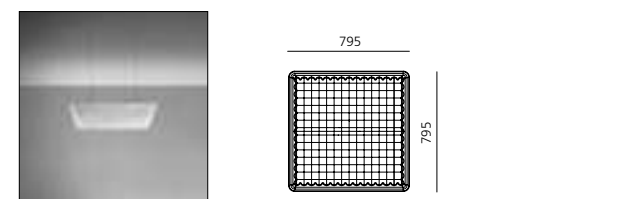



Eggboard
↪ Baffle




EGGBOARD BAFFLE

White cream 21	Grey 91	Green 51	XF	220/240Vac 50/60Hz electronic ballast included. For the suspension version, order the ceiling rose or the APP kit separately. For the ceiling version, order only the APP kit separately.	MacAdam 3SDCM Direct: Life L90 (10K)>60000h CRI =90 Indirect: Life L80 (10K)>55000h CRI =80	IP20 ⊕ UGR<19
-------------------	------------	-------------	----	---	---	---------------------

1600x400 SUSPENSION / CEILING

Direct				
W	Emission	Beam	Flux	CCT
20 W	sharp	XF	1468 lm	3000 K
			1521 lm	4000 K

Dimmable DALI	
Code	
AZ212.	21/91/51
AZ214.	21/91/51

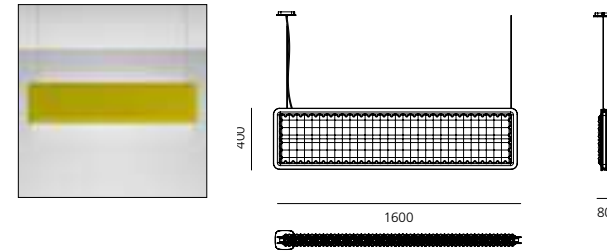

1600x400 SUSPENSION


Direct + Indirect				
W	Emission	Beam	Flux	CCT
20 W	direct sharp	XF	1468 lm direct	3000 K
41 W	indirect diffused		4927 lm indirect	
			1521 lm direct	4000 K
			5147 lm indirect	

Dimmable DALI	
Code	
AZ222.	21/91/51
AZ224.	21/91/51

800x400 SUSPENSION / CEILING

Direct				
W	Emission	Beam	Flux	CCT
9 W	sharp	XF	667 lm	3000 K
			691 lm	4000 K

Dimmable DALI	
Code	
AZ112.	21/91/51
AZ114.	21/91/51

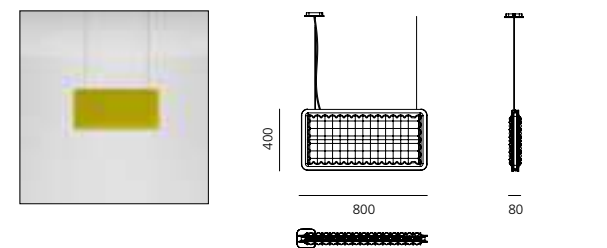

800x400 SUSPENSION


Direct + Indirect				
W	Emission	Beam	Flux	CCT
9 W	direct sharp	XF	667 lm direct	3000 K
17 W	indirect diffused		1971 lm indirect	
			691 lm direct	4000 K
			2059 lm indirect	

Dimmable DALI	
Code	
AZ122.	21/91/51
AZ124.	21/91/51

1600x400 SUSPENSION / CEILING DIFFUSED

Direct				
W	Emission	Beam	Flux	CCT
41 W	diffused	XF	2715 lm	3000 K
			2837 lm	4000 K

Dimmable DALI	
Code	
AZ232.	21/91/51
AZ234.	21/91/51

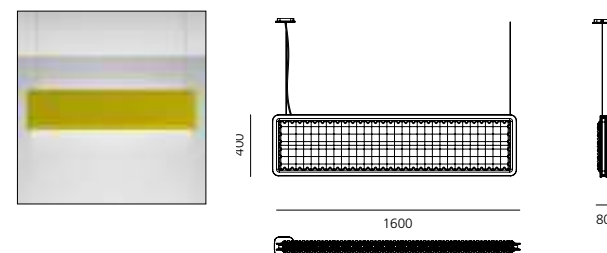

1600x400 SUSPENSION DIFFUSED

Direct + Indirect				
W	Emission	Beam	Flux	CCT
41 W	direct diffused	XF	2715 lm direct	3000 K
41 W	indirect diffused		4927 lm indirect	
			2837 lm direct	4000 K
			5147 lm indirect	

Dimmable DALI	
Code	
AZ242.	21/91/51
AZ244.	21/91/51

Accessories

Canopy + 1 power cable L 210, dimmable DALI only for suspension
APP power supply kit for suspension + 1 power cable L 210
BLL DALI interface for APP


Code	
AZ92000	
AZ92100	
AZ92200	

EGGBOARD ACOUSTIC PANEL / BAFFLE / BACKLIGHT

White cream 21	Grey 91	Green 51	XF	IP20 ⊕
-------------------	------------	-------------	----	-----------


EGGBOARD BAFFLE SUSPENSION / CEILING

Acoustic panel		Code	
1600 x 800		AZ300.	21/91/51
1600 x 400		AZ200.	21/91/51


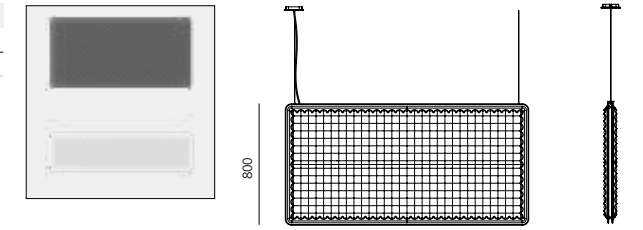


WALL - CEILING


Acoustic panel		Code	
1600 x 800		AZ800.	21/91/51
1600 x 400		AZ700.	21/91/51
800 x 800		AZ600.	21/91/51
800 x 400		AZ500.	21/91/51

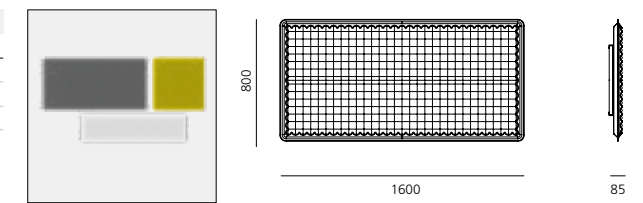

Backlight for acoustic panel							Code	
Side length	W	Beam	Flux	CCT				
1600	32 W	XF	3000 lm	3000 K			AZ90200	
							4000 K	
							AZ90400	
800	16 W	XF	1300 lm	3000 K			AZ90500	
							4000 K	
							AZ90600	
400	9,6 W	XF	500 lm	3000 K			AZ90700	
							4000 K	
							AZ90800	

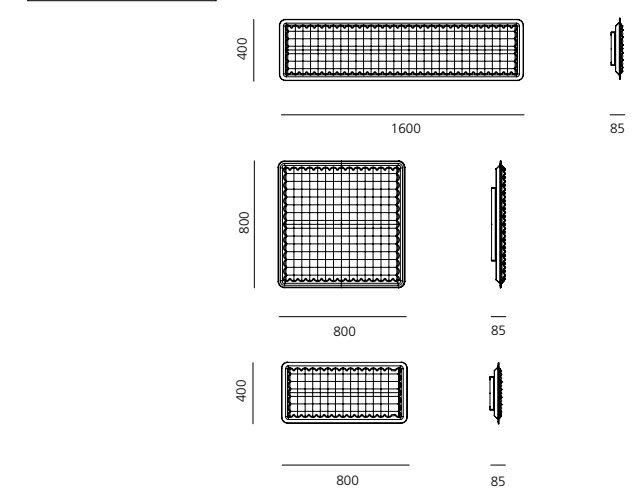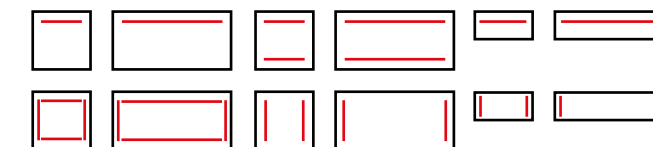

Driver	W	Vin (V)	Vout (V)	L mm	W mm	H mm	W max	Min Wire section mm2	Max wire lenght m	Dimming	Code
CV Selv	30	220-240 Vac	24Vdc	153	41	32	25	1.5	15	no	DV1032
CV Selv	75	220-240 Vac	24Vdc	180	52	30	63	1.5	5	no	DV1009
CV Selv	120	220-240 Vac	24Vdc	300	40	30	102	1.5	3	no	DV1033
Dimmer	NA	24Vdc	24Vdc PWM	80	54	24	max 100	1.5	30	yes	DV1048

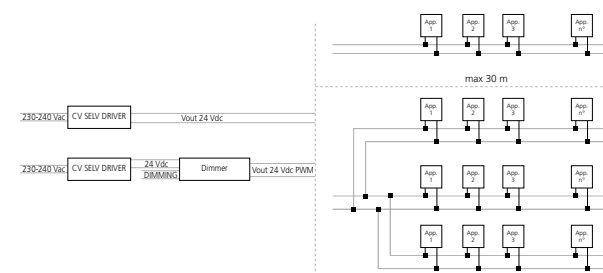

appliances number: see column W max



Silent Field 2.0

Carlotta de Bevilacqua

Laura Pessoni

↪ 2016



For further information on Silent Field 2.0
↪ visit artemide.com



Silent Field 2.0 is an island of light and silence



Suspension appliance with sound absorption properties: the material's characteristics and the appliance's geometry ensure a reduced reverberation time.

The sound absorption effect is optimized for the frequencies of human voice.

The varying densities of the material used for the lower panel promote the absorption of different frequencies.

Both the upper and the lower surface of the appliance feature sound-absorbing properties. Appropriate positioning of the appliance in space is crucial to optimize sound absorption.



Fixed optics detail




Artemide
App

↳ SILENT FIELD 2.0


White 20.	Black 30.	Orange 40.	XF	MacAdam 2SDCM Life L90 (20k)>118000h CRI =90	IP20
--------------	--------------	---------------	----	--	------

Direct emission				PUSH/DALI	PUSH & APP
W	Beam	Flux	CCT	Code	Code
35W	XF	2085 lm	3000K	10140. 20/30/40 .A	10140. 20/30/40 .APP




max. 2000

Direct + indirect emission					PUSH/DALI	PUSH & APP
W	Emission	Beam	Flux	CCT	Code	Code
35W	direct	XF	2085 lm	3000K	10130. 20/30/40 .A	10130. 20/30/40 .APP
40W	indirect	XF	3191 lm	3000K		




Ø1000

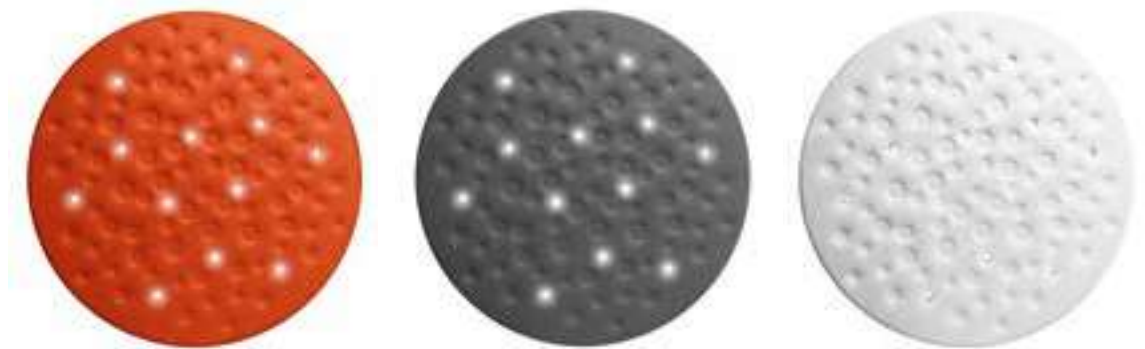

2 SURFACES FOR DIFFERENT ACOUSTIC ABSORPTION

Upper surface with low density to entrap soundwaves reflected from the ceiling

Indirect emission

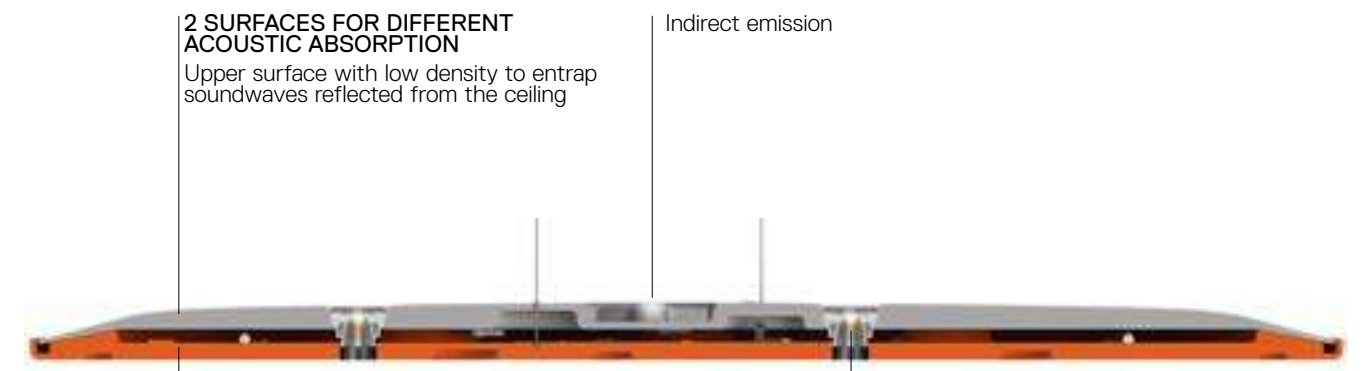

Lower surface with different density to absorb different frequencies

→ PATENT PENDING

High efficiency
Maximum uniformity & no color spots
Total control of the light emission



Nur 1618 Acoustic

Ernesto Gismondi
↪ 2016



For further information on Nur 1618 Acoustic
↪ visit artemide.com





Suspension appliance with sound-absorbing properties: the material's characteristics and the geometry of the dome reduce the reverberation time capturing soundwaves.

The sound-absorption effect is optimized for the frequencies of human voice.

Direct and indirect emission.

Two-colours: white inside optimizes light diffusion.



**Artemide
App**
↪ on request

↪ NUR 1618 ACOUSTIC

Dark grey



XF




CRI =90

IP20




W	Flux	CCT	Code
80 W	6151 lm	3000 K	A243700

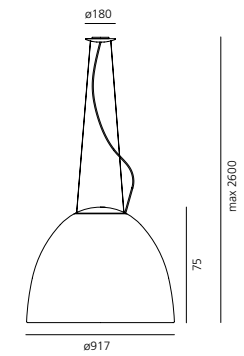

Didactic Room, Biennale di Venezia, 2017

General Lighting

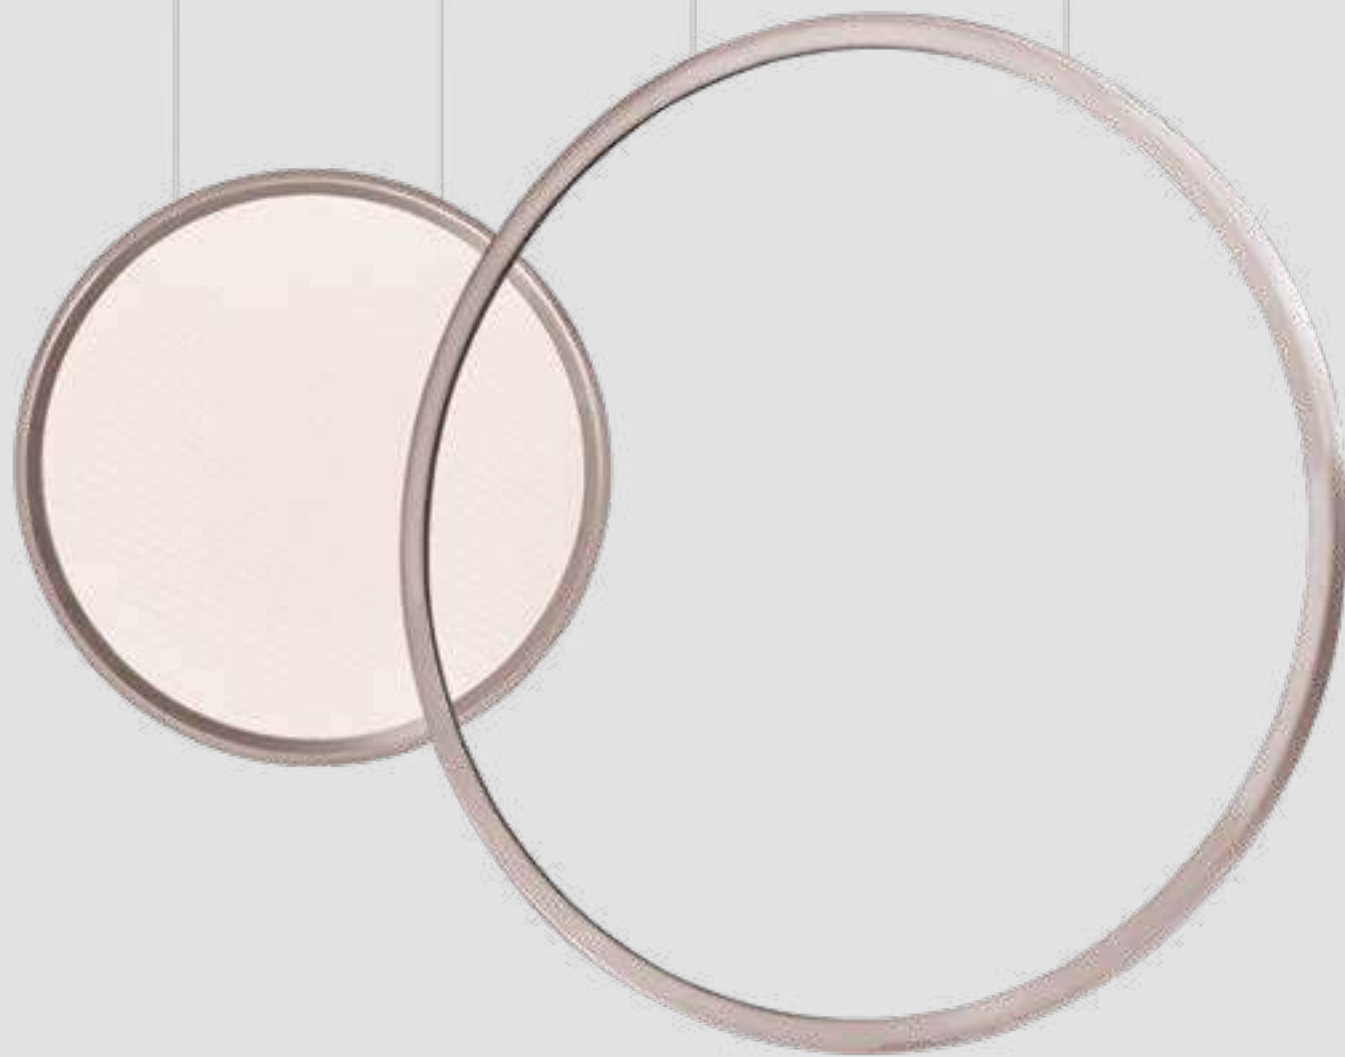

Alphabet of light	_____	580
Discovery	_____	618
Ameluna	_____	638
Tagora	_____	650
Mouette	_____	668

Alphabet of light

BIG
↳ 2016



For further information on Alphabet of Light
↳ visit artemide.com

"Quick brown fox jumps over the lazy dog" Installation at Università Statale di Milano
Micro Design Week 2019
Photo: Saverio Lombardi Vallauri



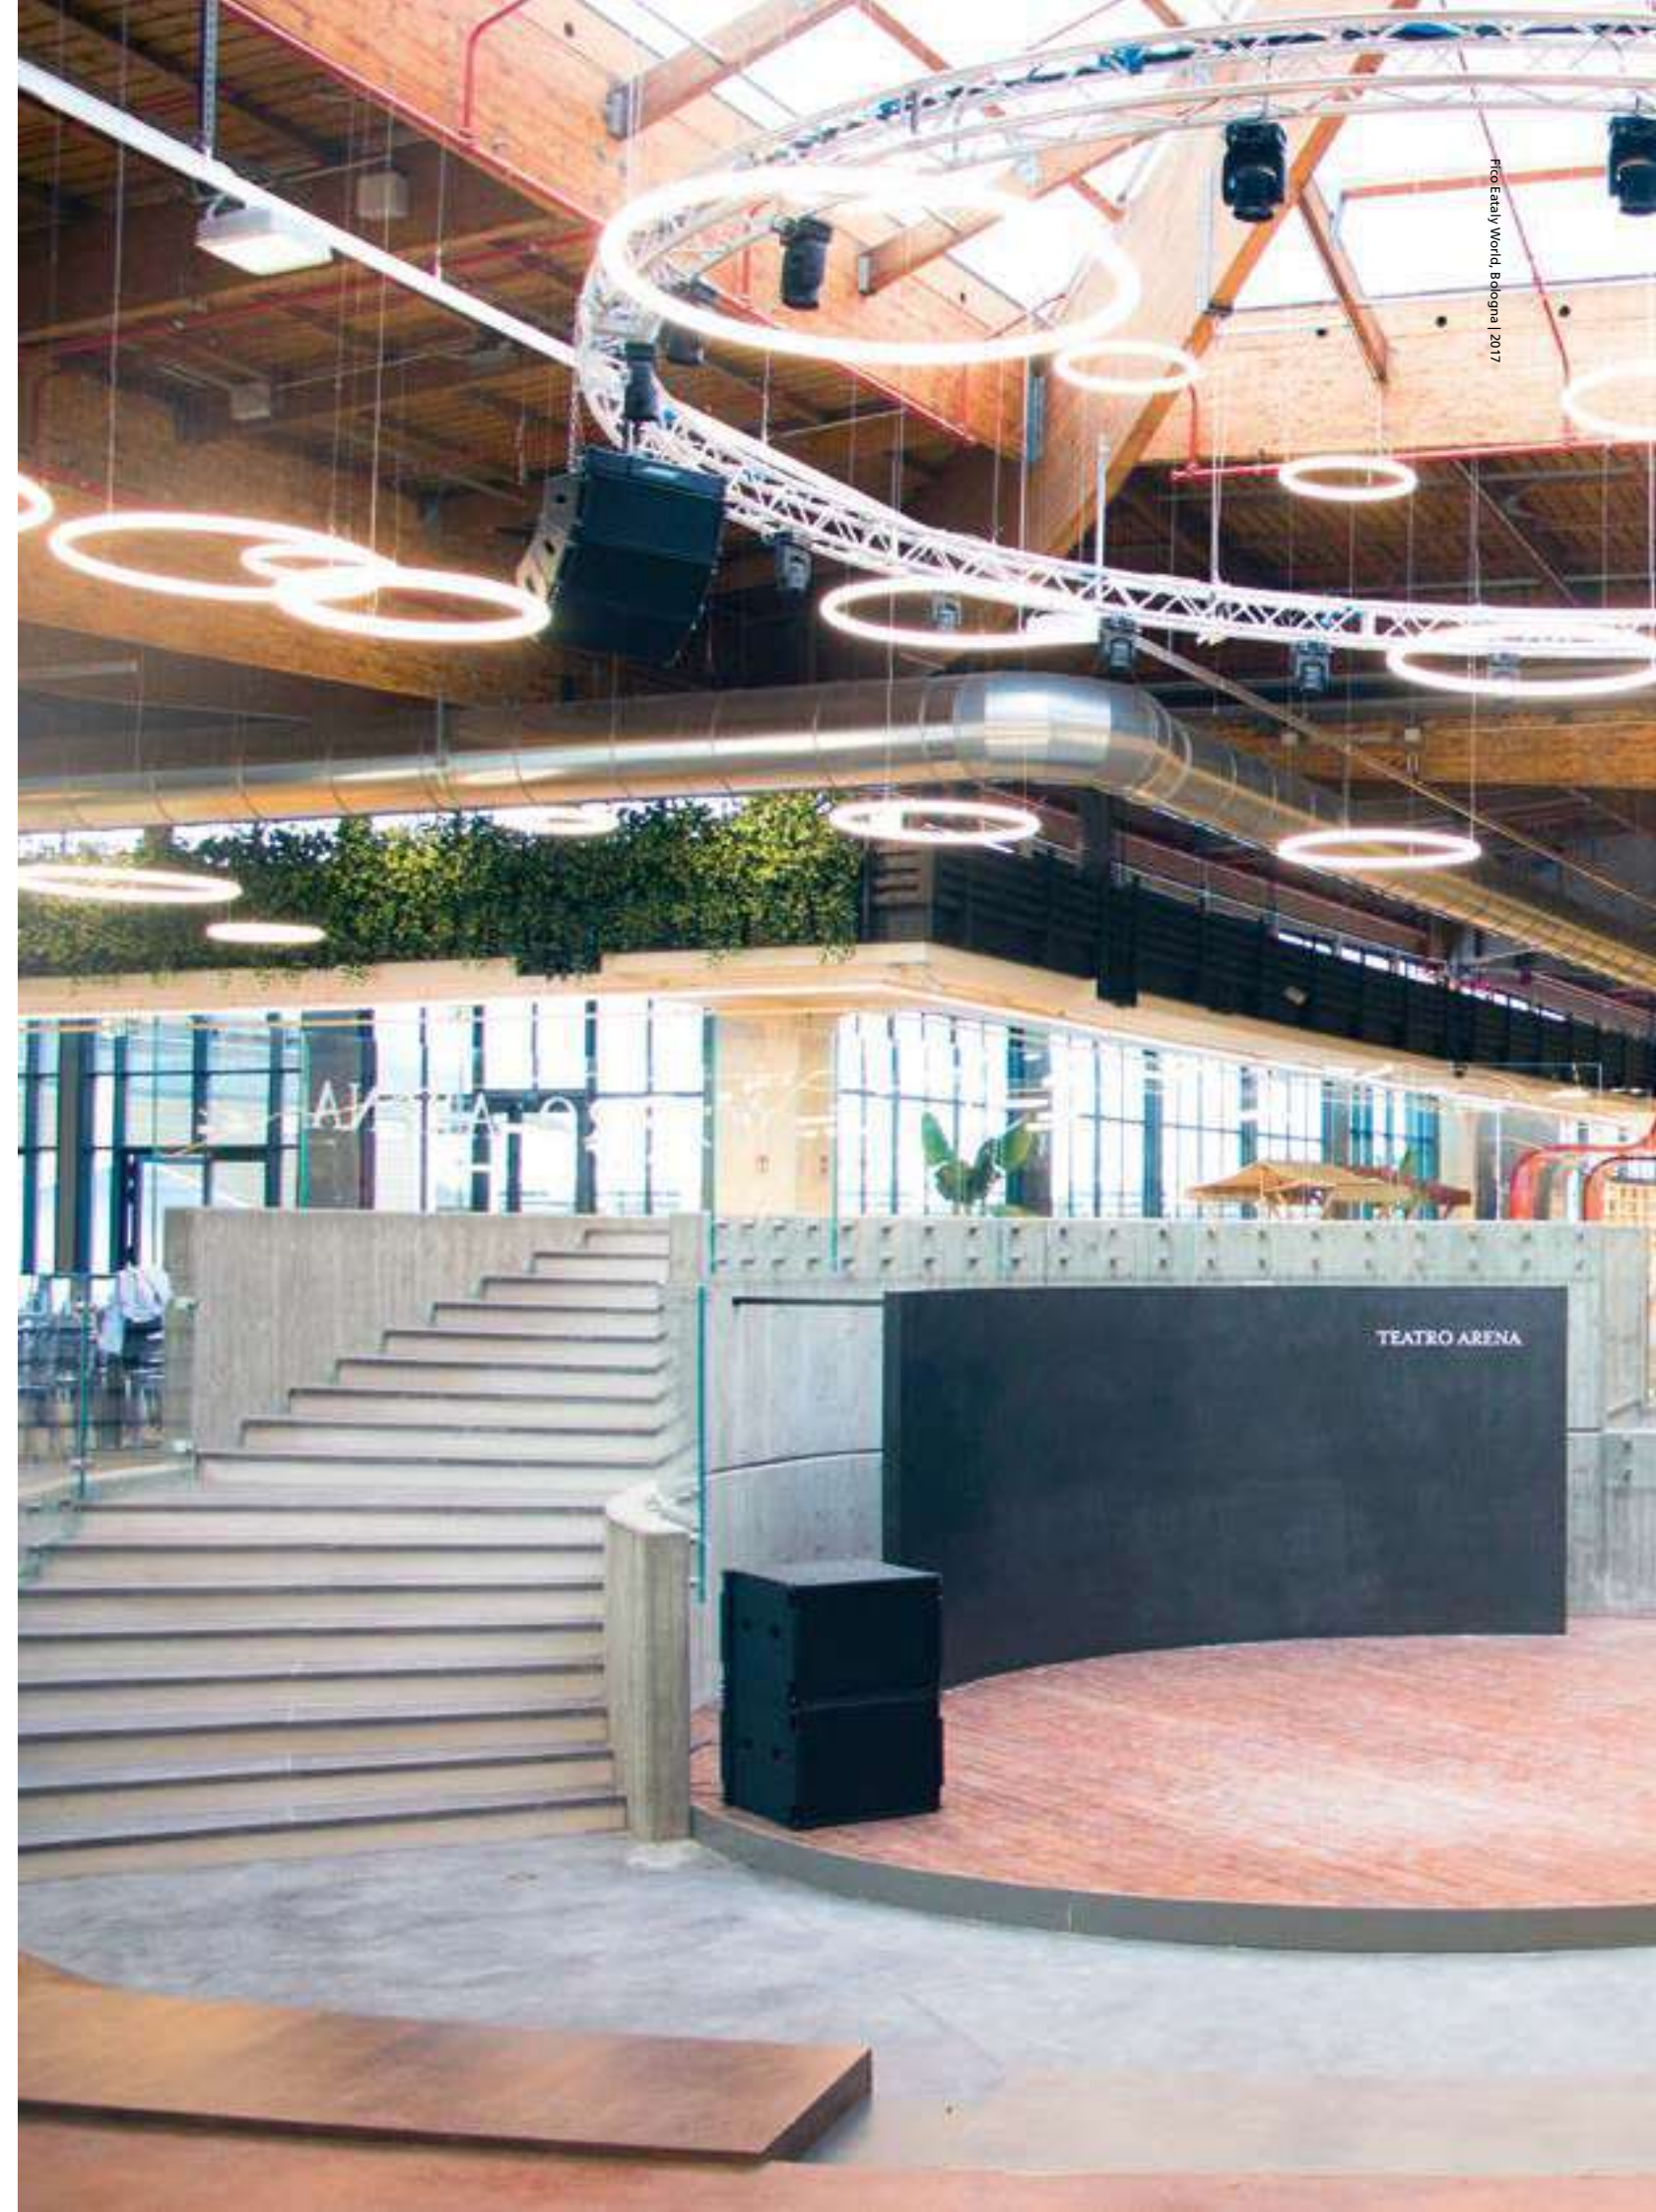


Foto: Estany World, Bologna | 2017



Alphabet of light

↪ Linear-Circular

- Patent pending for optics
- Patent pending for the mechanical and electrical connection



Materials: structure in anodized natural aluminium,
tube in white diffusing PMMA
Linear modules are available in three lengths: L 1200 / 1800 / 2400 mm
Circular modules are available in two diameters:
ø tot 900 / 1550 mm



↪ ALPHABET OF LIGHT - WALL/CEILING


Opal White XF


The APP driver can not be controlled by DALI dimming system and viceversa.

MacAdam 3SDCM
Life L80 (10K) 55000h
CRI = 80


IP20


LINEAR

	W	Flux	CCT	PUSH/DALI Code	PUSH & APP Code	
Linear 120	35 W	3480 lm	3000K	1304000A	1304000APP	
Linear 180	50 W	5226 lm	3000K	1305000A	1305000APP	
Linear 240	63 W	6968 lm	3000K	1308000A	1308000APP	

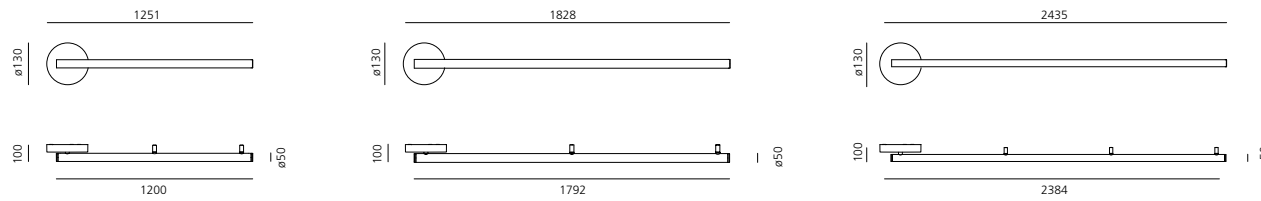

CIRCULAR

	W	Flux	CCT	PUSH/DALI Code	PUSH & APP Code	
Circular ø 90	55 W	6040 lm	3000K	1306000A	1306000APP	
Circular ø155	91W	10740 lm	3000K	1307000A	1307000APP	

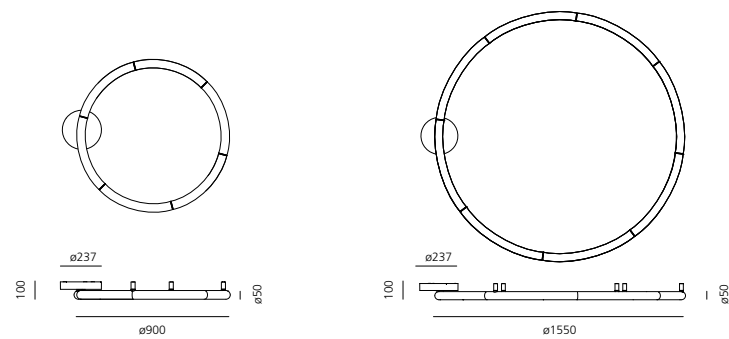

↪ ALPHABET OF LIGHT - WALL/CEILING SEMI-RECESSED


Opal White XF


The APP driver can not be controlled by DALI dimming system and viceversa.

MacAdam 3SDCM
Life L80 (10K) 55000h
CRI = 80


IP20


LINEAR SEMI-RECESSED

	W	Flux	CCT	Code	
Linear 120	29 W	3480 lm	3000K	1425000A	
Linear 180	44 W	5226 lm	3000K	1426000A	
Linear 240	58 W	6968 lm	3000K	1427000A	

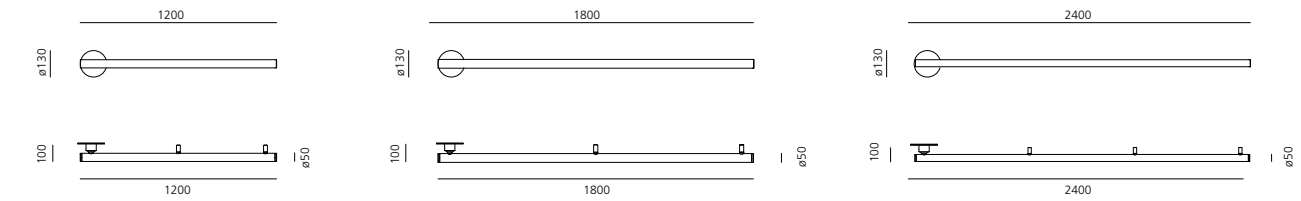

CIRCULAR SEMI-RECESSED

	W	Flux	CCT	Code	
Circular ø 90	50 W	6040 lm	3000K	1428000A	
Circular ø155	86 W	10740 lm	3000K	1429000A	

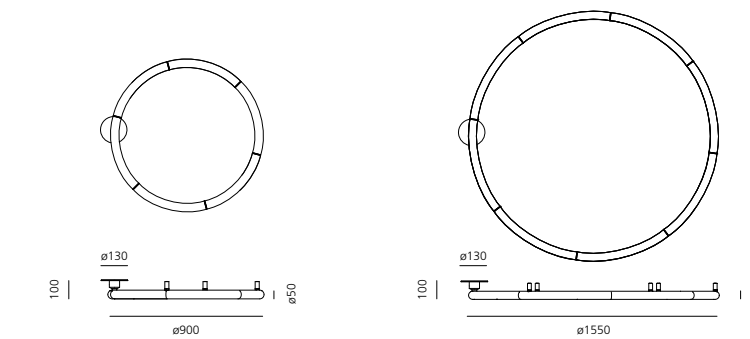

Driver	Vac	L _{mm}	W _{mm}	H _{mm}		Code
CV 30W 24Vdc Selv	220-240	153	41	32	PUSH/DALI	Linear 240/Circular 90 DV1034
CV 75W 24Vdc Selv	220-240	180	52	30	PUSH/DALI	Linear 120/180 DV1035
CV 120W 24Vdc Selv	220-240	153	41	32	PUSH/DALI	Circular 155 DV1036
CV 30W 24Vdc Selv	220-240	153	41	32	PUSH/DALI	Linear 240/Circular 90 DV1034APP
CV 75W 24Vdc Selv	220-240	180	52	30	PUSH & APP	Linear 120-180 DV1035APP
CV 120W 24Vdc Selv	220-240	153	41	32	PUSH & APP	Circular 155 DV1036APP

↪ ALPHABET OF LIGHT - SUSPENSION

Opal White XF




The APP driver can not be controlled by DALI dimming system and viceversa.

MacAdam 3SDCM
Life L80 (10K) 55000h
CRI = 80

IP20


LINEAR

	W	Flux	CCT	PUSH/DALI Code	PUSH & APP Code
Linear 120	35 W	3484 lm	3000K	1204000A	1204000APP
Linear 180	50 W	5226 lm	3000K	1205000A	1205000APP
Linear 240	63 W	6968 lm	3000K	1208000A	1208000APP

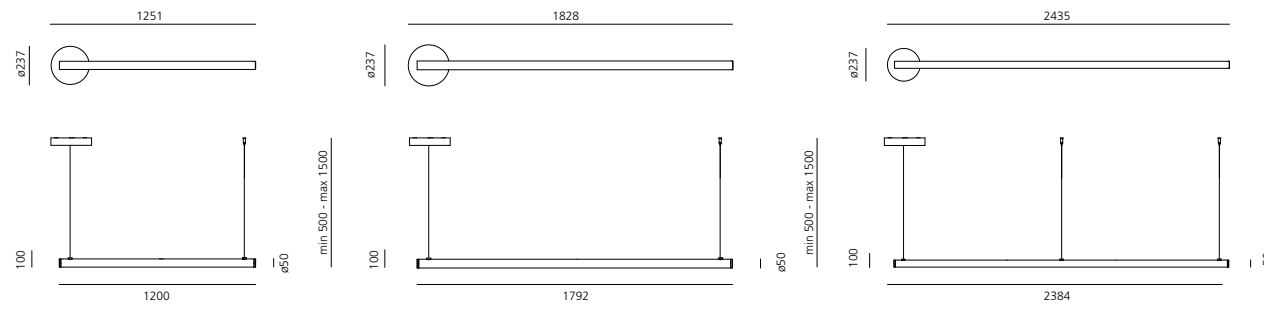

CIRCULAR

	W	Flux	CCT	PUSH/DALI Code	PUSH & APP Code
Circular ø 90	55 W	6040 lm	3000K	1206000A	1206000APP
Circular ø 155	91W	10740 lm	3000K	1207000A	1207000APP

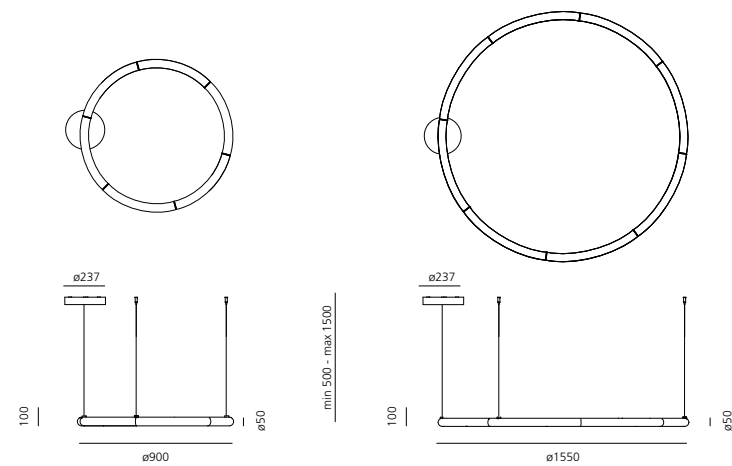



Alphabet of light ↪ System



→ Patent pending for optics
→ Patent pending for the mechanical and electrical connection



Alphabet of light System configuration

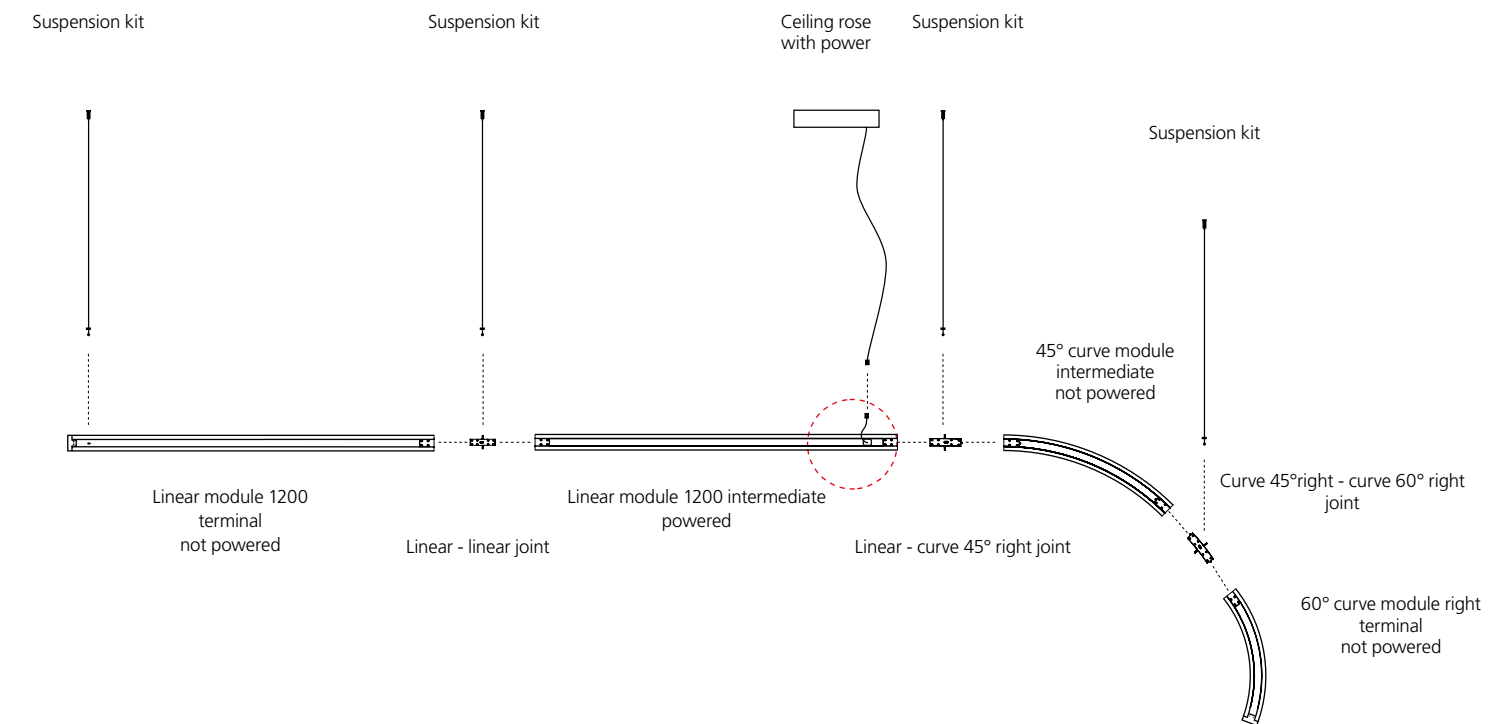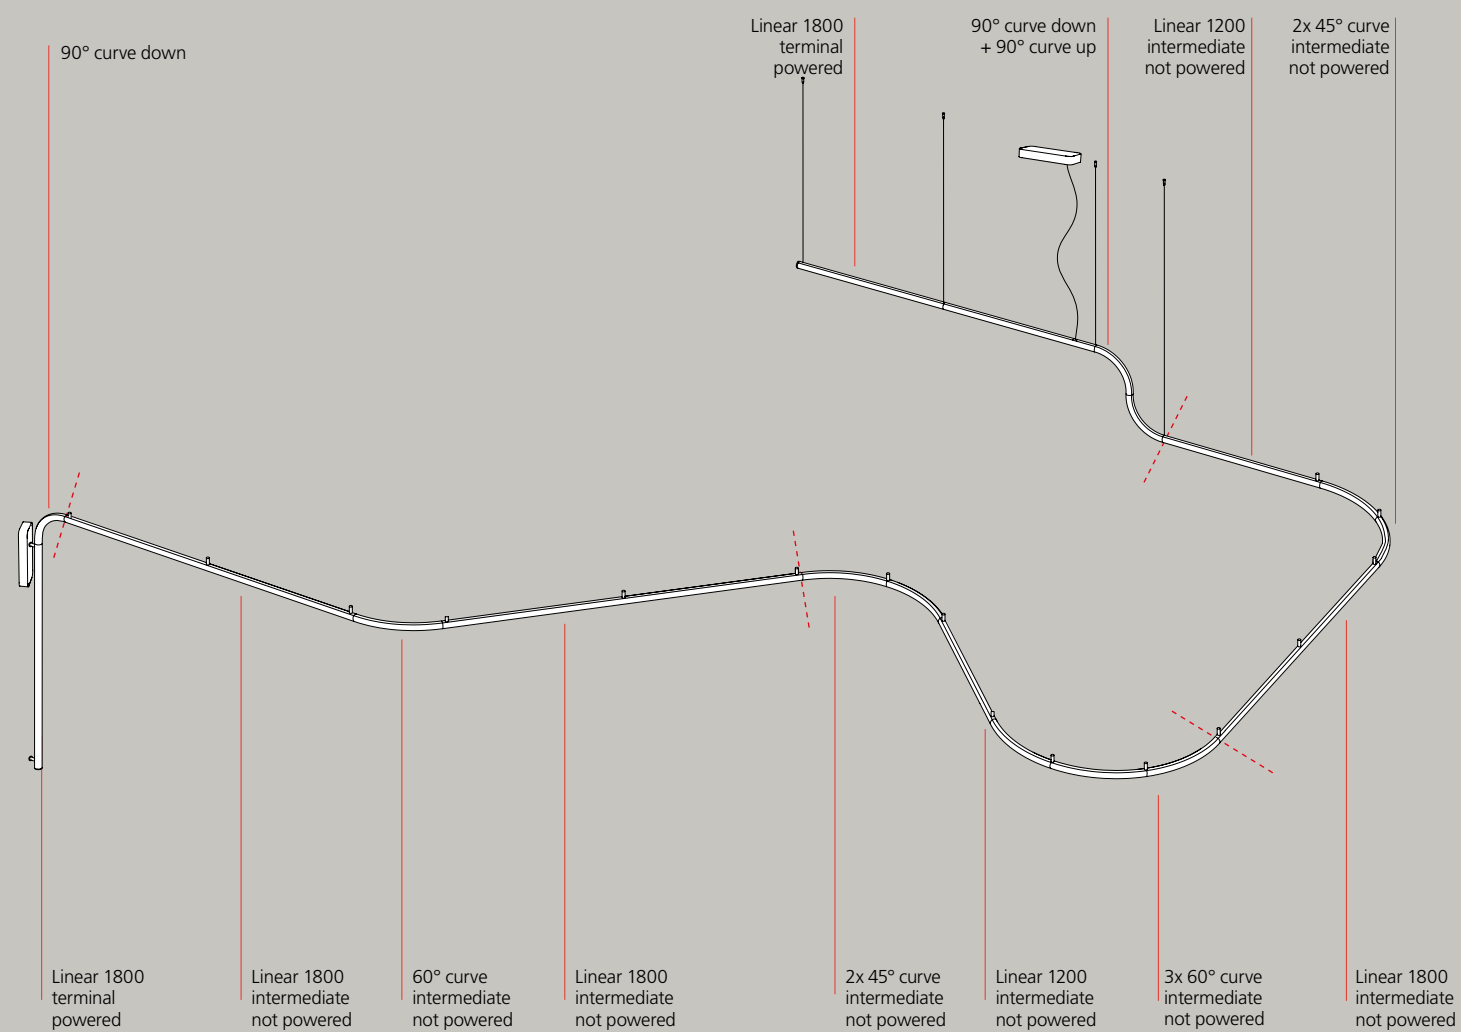

Materials: structure in anodized natural aluminium, tube in white diffusing PMMA

Linear module are available in three lengths: L 600 / 1200 / 1800 mm

Possibility to articulate the configuration on the horizontal plane with 45° and 60° curves and on the vertical plane with 90° curves.


Max 10 m for each power unit (10 m in one direction or 5 m in both directions)

Ceiling rose with power supply for each group.


DALI dimming possible for the entire system or for groups of modules powered by the same driver

Suspension modules


→ LINEAR ELEMENTS

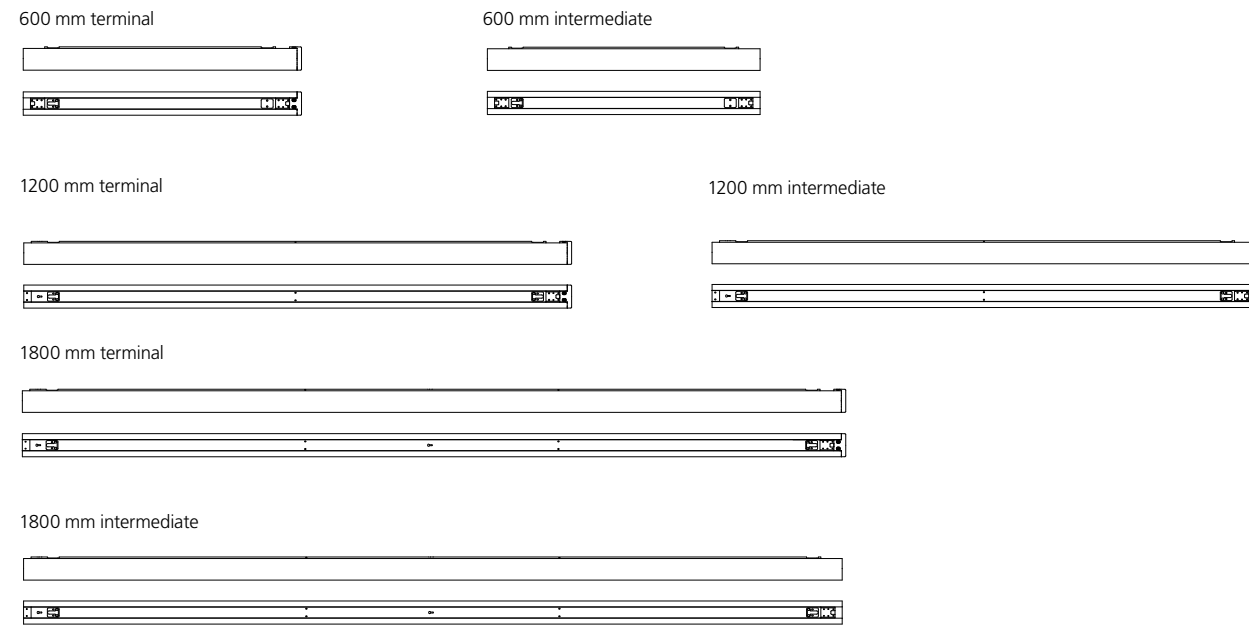

→ CURVED ELEMENTS

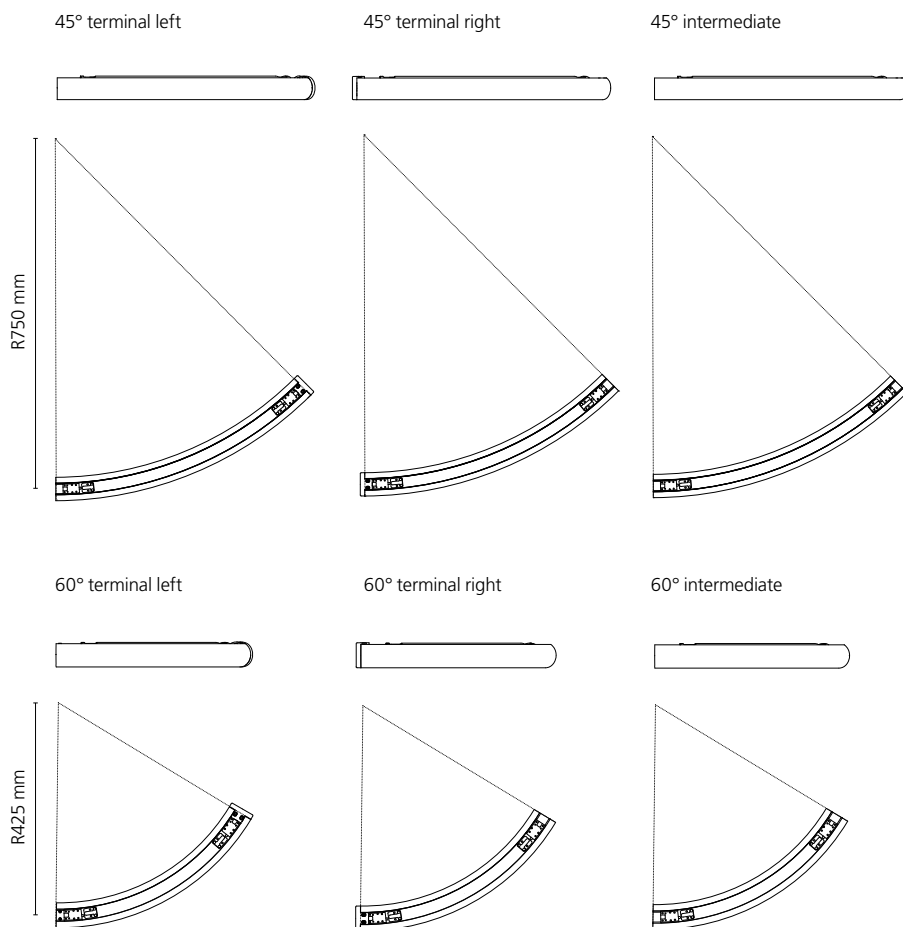

→ VERTICAL ELEMENTS

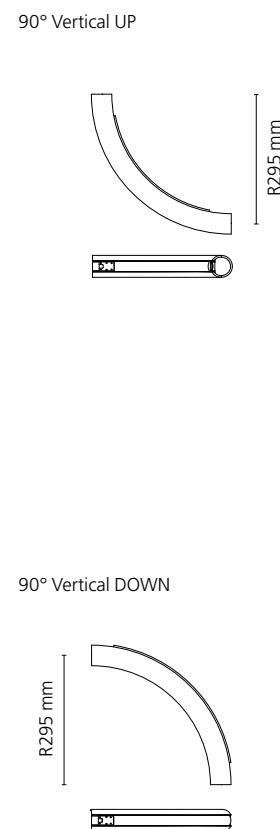

↪ ALPHABET OF LIGHT - SYSTEM

Opal White 	XF 	The APP driver can not be controlled by DALI dimming system and viceversa.	MacAdam 3SDCM Life L80 (12K) 72000h CRI =80	IP20
----------------	--------	--	---	----------

SUSPENSION LINEAR ELEMENTS

Length	W	V	Flux	CCT	Powered	Not powered
					Code	Code
600 mm terminal	11 W	24V	968 lm	3000K	2100010A	2101010A
					2100C10A	2101C10A
600 mm intermediate	11 W	24V	968 lm	3000K	2102010A	2102010A
					2105C10A	2102C10A
1200 mm terminal	22 W	24V	1936 lm	3000K	2104010A	2106010A
					2104C10A	2106C10A
1200 mm intermediate	22 W	24V	1936 lm	3000K	2105010A	2107010A
					2105C10A	2107C10A
1800 mm terminal	33 W	24V	2904 lm	3000K	2108010A	2110010A
					2108C10A	2110C10A
1800 mm intermediate	33 W	24V	2904 lm	3000K	2109010A	2111010A
					2109C10A	2111C10A

SUSPENSION CURVED ELEMENTS

Length	W	V	Flux	CCT	Powered	Not powered
					Code	Code
45° terminal left	8 W	24V	968 lm	3000K	2112010A	2115010A
					2112C10A	2115C10A
45° terminal right	8 W	24V	968 lm	3000K	2113010A	2116010A
					2113C10A	2116C10A
45° intermediate	8 W	24V	968 lm	3000K	2114010A	2117010A
					2114C10A	2117C10A
60° terminal left	8 W	24V	728 lm	3000K	2118010A	2121010A
					2118C10A	2121C10A
60° terminal right	8 W	24V	728 lm	3000K	2119010A	2122010A
					2119C10A	2122C10A
60° intermediate	8 W	24V	728 lm	3000K	2120010A	2123010A
					2120C10A	2123C10A

VERTICAL ELEMENTS

Length	W	V	Flux	CCT	Powered	Not powered
					Code	Code
90° vertical UP	8 W	24V	728 lm	3000K	2124010A	2124010A
					2124C10A	2124C10A
90° vertical DOWN	8 W	24V	728 lm	3000K	2125010A	2125010A
					2125C10A	2125C10A

Accessories

	Joint n°	Code
Linear - linear joint	01	2250010A
Linear - curve 45° right joint	02	2251010A
Linear - curve 45° left joint	03	2252010A
45° curve - 45° curve joint	04	2255010A
Linear - curve 60° right joint	05	2253010A
Linear - curve 60° left joint	06	2254010A
60° curve - 60° curve joint	07	2256010A
60° curve - 45° curve S joint	08	2257010A
45° curve left - 45° curve left S joint	09	2260010A
60° curve left - 60° curve left S joint	10	2259010A
60°/45° curve left - 45°/60° curve right joint	11	2261010A
60°/45° curve right - 45°/60° curve left joint	12	2262010A
90° vertical UP - 90° vertical DOWN S joint	13	2263010A
Lineare - 90° vertical UP joint	14	2264010A
Linear - 90° vertical DOWN joint	15	2265010A
45° curve - 60° curve S joint	16	2258010A
60° curve right - 60° curve right joint	17	2269010A
45° curve right - 45° curve right joint	18	2270010A

Rose

	Code
Rose / power	2267010A
Rose / power APP	2267010APP
Remote rose / power	2272010A
Remote rose / power APP	2272010APP

Suspension accessories

	Code
Suspension kit L=1,50m	2266010A
Suspension kit L=4m	2273010A
Lengthening L=1,25m	2274010A
Lengthening L=2,50m	2275010A

ALPHABET OF LIGHT - SYSTEM

Wall/ceiling modules


Opal White XF

The APP driver can not be controlled by DALI dimming system and viceversa.

MacAdam 3SDCM
Life L80 (12K) 72000h
CRI = 80

IP20

→ LINEAR ELEMENTS

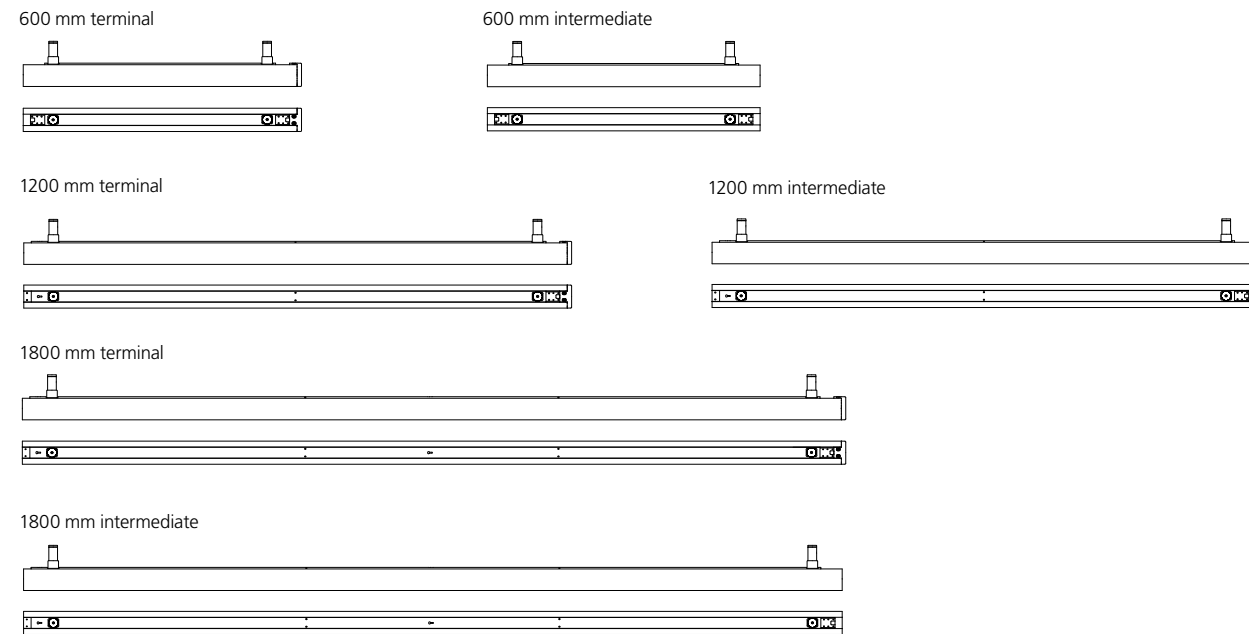

WALL/CEILING LINEAR ELEMENTS

Length	W	V	Flux	CCT	Powered	Semi-recessed powered	Not powered
					Code	Code	Code
600 mm terminal	11 W	24V	968 lm	3000K	2130010A	2160010A	2131010A
					2130C10A	2160C10A	2131C10A
600 mm intermediate	11 W	24V	968 lm	3000K	2130010A	2160010A	2131010A
					2130C10A	2160C10A	2131C10A
1200 mm terminal	22 W	24V	1936 lm	3000K	2134010A	2161010A	2136010A
					2134C10A	2161C10A	2136C10A
1200 mm intermediate	22 W	24V	1936 lm	3000K	2135010A	2162010A	2137010A
					2135C10A	2162C10A	2137C10A
1800 mm terminal	33 W	24V	2904 lm	3000K	2138010A	2163010A	2140010A
					2138C10A	2163C10A	2140C10A
1800 mm intermediate	33 W	24V	2904 lm	3000K	2139010A	2164010A	2141010A
					2139C10A	2164C10A	2141C10A

WALL/CEILING CURVED ELEMENTS

Length	W	V	Flux	CCT	Powered	Semi-recessed powered	Not powered
					Code	Code	Code
45° terminal left	8 W	24V	968 lm	3000K	2142010A	2165010A	2145010A
					2142C10A	2165C10A	2145C10A
45° terminal right	8 W	24V	968 lm	3000K	2143010A	2166010A	2146010A
					2143C10A	2166C10A	2146C10A
45° intermediate	8 W	24V	968 lm	3000K	2144010A	2167010A	2147010A
					2144C10A	2167C10A	2147C10A
60° terminal left	8 W	24V	728 lm	3000K	2148010A	2168010A	2151010A
					2148C10A	2168C10A	2151C10A
60° terminal right	8 W	24V	728 lm	3000K	2149010A	2169010A	2152010A
					2149C10A	2169C10A	2152C10A
60° intermediate	8 W	24V	728 lm	3000K	2150010A	2170010A	2153010A
					2150C10A	2170C10A	2153C10A

VERTICAL ELEMENTS

Length	W	V	Flux	CCT	Not powered	
					Code	Code
90° vertical UP	8 W	24V	728 lm	3000K	2124010A	2125010A
					2124C10A	2125C10A
90° vertical DOWN	8 W	24V	728 lm	3000K	2124010A	2125010A
					2124C10A	2125C10A


Accessories

	Joint n°	Code
Linear - linear joint	01	2250010A
Linear - curve 45° right joint	02	2251010A
Linear - curve 45° left joint	03	2252010A
45° curve - 45° curve joint	04	2255010A
Linear - curve 60° right joint	05	2253010A
Linear - curve 60° left joint	06	2254010A
60° curve - 60° curve joint	07	2256010A
60° curve - 45° curve S joint	08	2257010A
45° curve left - 45° curve left S joint	09	2260010A
60° curve left - 60° curve left S joint	10	2259010A
60°/45° curve left - 45°/60° curve right joint	11	2261010A
60°/45° curve right - 45°/60° curve left joint	12	2262010A
90° vertical UP - 90° vertical DOWN S joint	13	2263010A
Lineare - 90° vertical UP joint	14	2264010A
Linear - 90° vertical DOWN joint	15	2265010A
45° curve - 60° curve S joint	16	2258010A
60° curve right - 60° curve right joint	17	2269010A
45° curve right - 45° curve right joint	18	2270010A


Wall/Ceiling accessories

	Code
Rose / power	2268010A
Rose / power APP	2268010APP
Driver for recessed version (240W, 220-240 VAC, IP67, L240 X W67 X H35, DALI)	2271010A
BLL MODULE for APP management in the recessed version	2271010APP


→ CURVED ELEMENTS

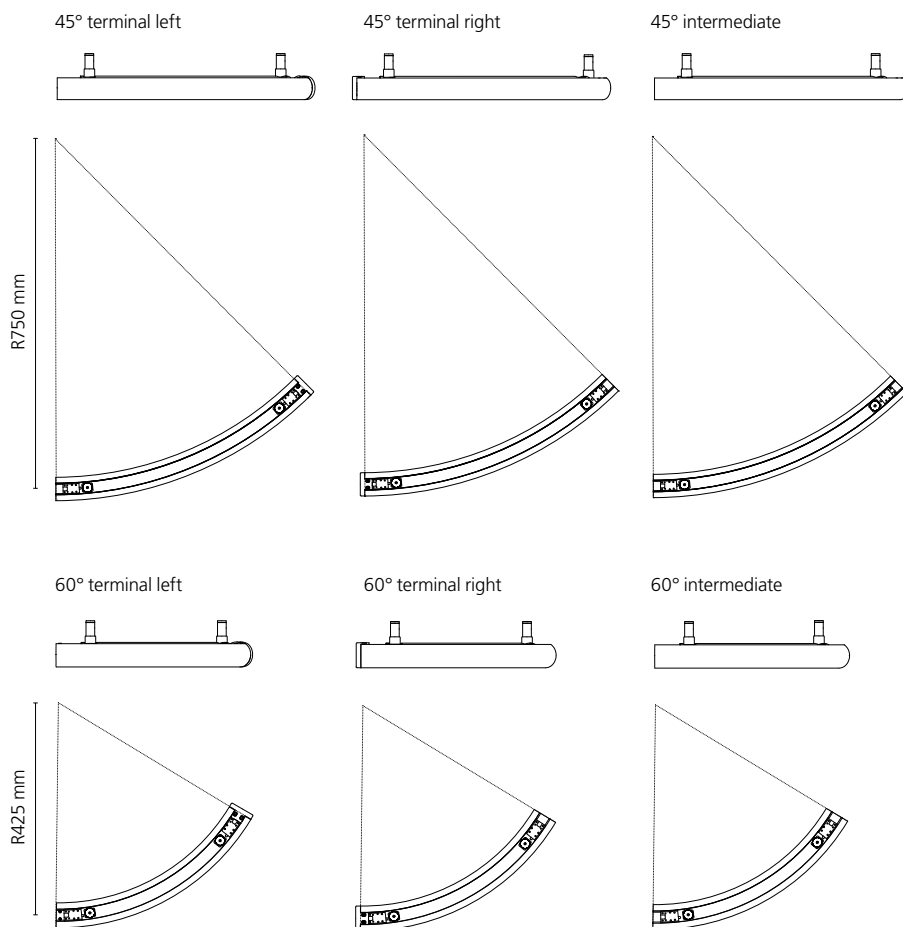


→ VERTICAL ELEMENTS

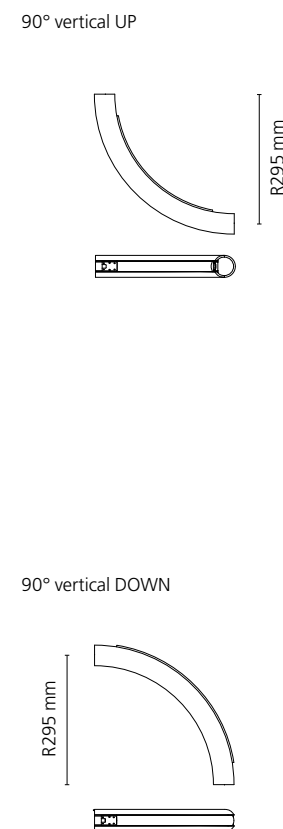


Joints

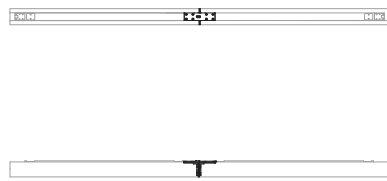


01. Code 2250010A
LINEAR - LINEAR JOINT

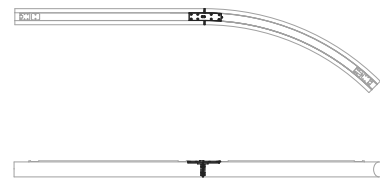


02. Code 2251010A
LINEAR -
CURVE 45° RIGHT JOINT

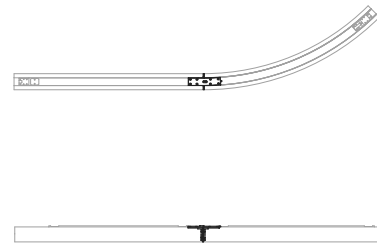


03. Code 2252010A
LINEAR -
CURVE 45° LEFT JOINT




10. Code 2259010A
60° CURVE LEFT -
60° CURVE LEFT S JOINT




11. Code 2261010A
60°/45° CURVE LEFT -
45°/60° CURVE RIGHT JOINT




12. Code 2262010A
60°/45° CURVE RIGHT -
45°/60° CURVE LEFT JOINT

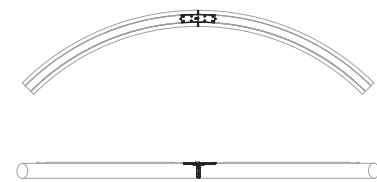


04. Code 2255010A
45° CURVE -
45° CURVE JOINT




05. Code 2253010A
LINEAR -
CURVE 60° RIGHT JOINT




06. Code 2254010A
LINEAR -
CURVE 60° LEFT JOINT




13. Code 2263010A
90° VERTICAL UP -
90° VERTICAL DOWN S JOINT




14. Code 2264010A
LINEAR -
90° VERTICAL UP JOINT




15. Code 2265010A
LINEAR -
90° VERTICAL DOWN JOINT




07. Code 2256010A
60° CURVE -
60° CURVE JOINT




08. Code 2257010A
60° CURVE -
45° CURVE S JOINT

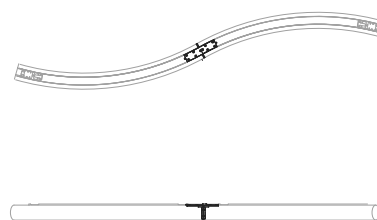


09. Code 2260010A
45° CURVE LEFT -
45° CURVE LEFT S JOINT



16. Code 2258010A
45° CURVE -
60° CURVE S JOINT

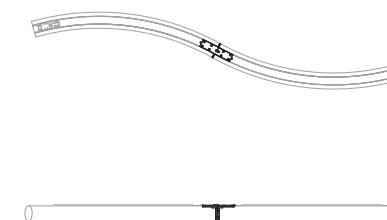

17. Code 2269010A
60° CURVE RIGHT -
60° CURVE RIGHT JOINT



18. Code 227010A
45° CURVE RIGHT -
45° CURVE RIGHT JOINT







Alphabet of light ↪ Letters







Alphabet of light Letters installation

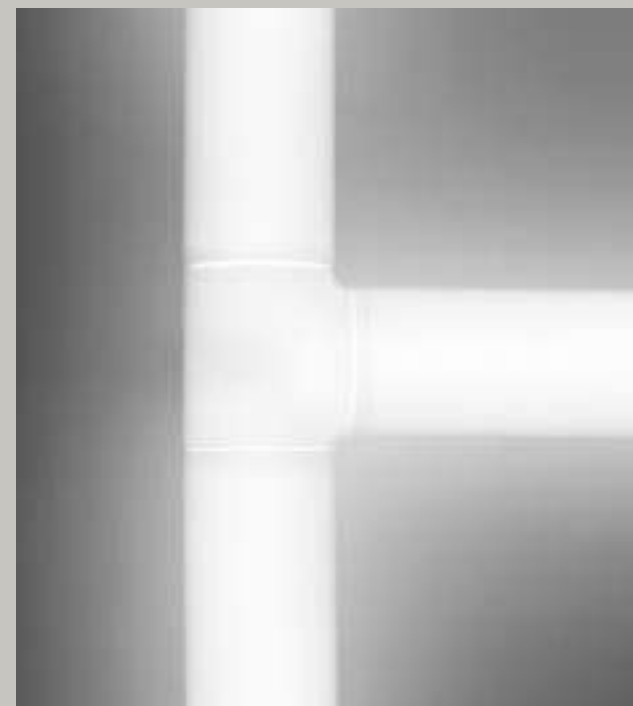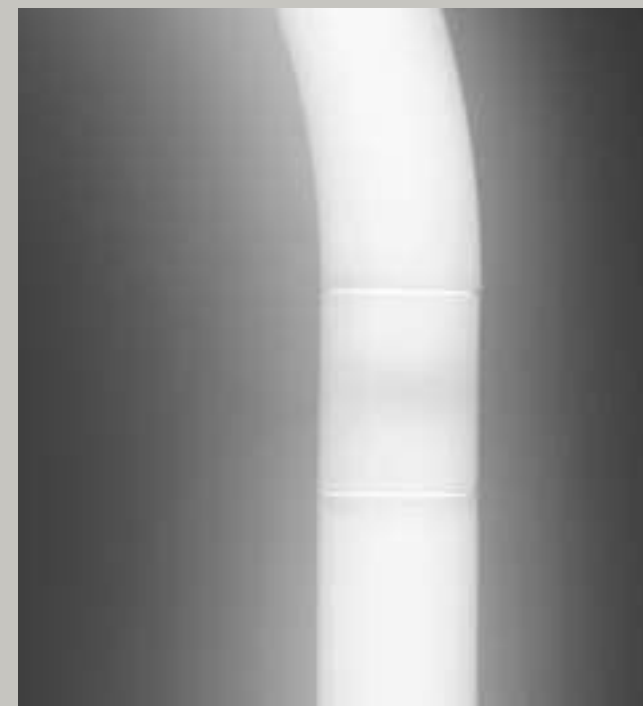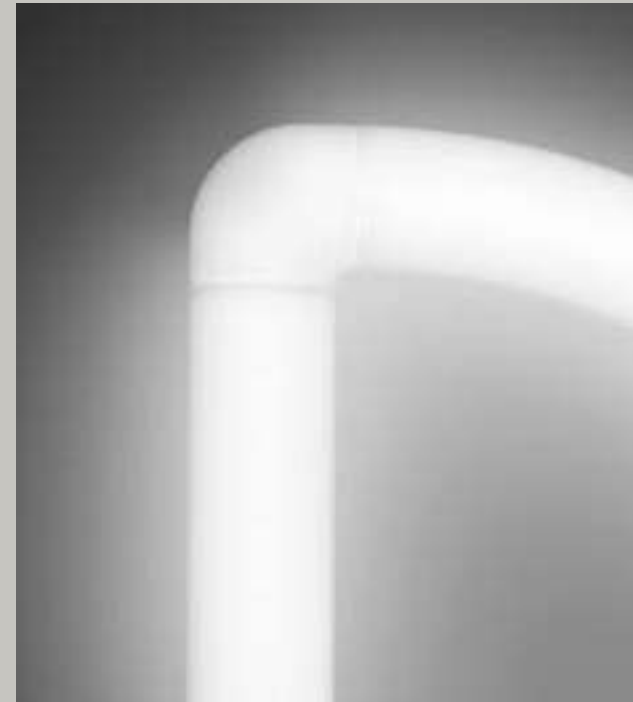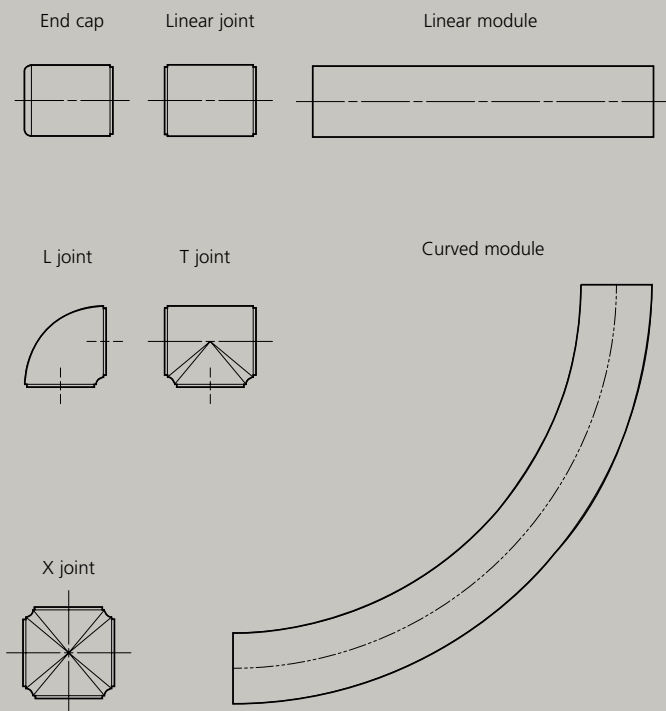


Modules

An entire alphabet composed by 7 elements:
5 joints + 2 constructive modules
with electro mechanical connections

→ MDF SUPPORT INSTALLATION

The letters are provided mounted on MDF panels to allow installation on any kind of wall. Installation requires creating a counter-frame to accommodate the drivers, supplied separately, and the power cables. A configuration software is available to calculate the necessary usable surface, as well as to identify the codes required to implement the desired project.

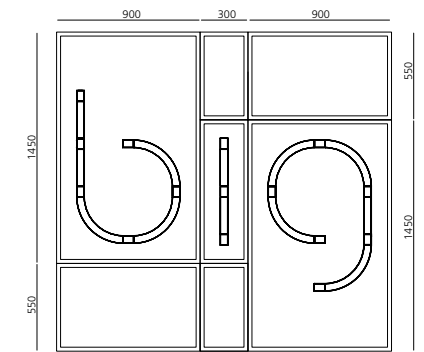

1. Create the supporting frame and provide for power connections for the individual letters.



2. Connect panel b to power source.



3. Fix panel i and connect panel i to power source.



4. Fix panel l and connect panel l to power source.



5. Fix panel g and close using the supplied panels.



6. Complete closing using the supplied panels.



7. Frame ready for finishing.




8. Apply the gauze and plaster flush with the gaps between panels.



9. Final painting.

→ CARDBOARD MOUNTING-SUPPORT INSTALLATION

The letters are provided with a packaging that ensures the right support during the installation process. This type of installation is suitable for existing drywalls that have accessible back space for the housing of drivers (code DV1009) supplied separately and cables (power supply 75 W max - 2 letters or more up to max 85% load).

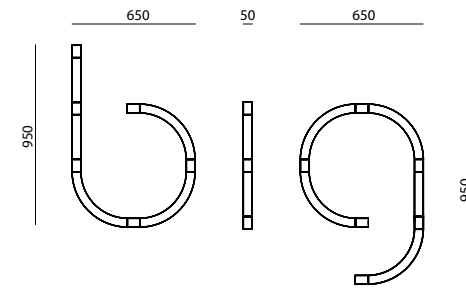

1. Drywall with accessible back space.



2. Use the provided template to drill the holes and paint the drywall.



3. Install wall pins, identify output points and prepare wiring connections.



4. Connection of letter b to first wall output.



5. Attachment of letter b on wall pins.



6. Detail of the wall pins fixing.



7. Detail of the wall pins fixing.



8. Removal of the nylon wrapper.



9. Removal of the cardboard support.



10. Connect letter i to first wall output.



11. Fix letter i on wall pins.



12. Removal of the nylon wrapper.



13. Attachment of letter g to first wall output.



14. Removal of the nylon wrapper.



15. Finished.



↪ ALPHABET OF LIGHT - LETTERS

Opal White XF

Driver supplied separately.

MacAdam 3SDCM
Life L80 (10K) 55000h
CRI = 80

IP20

Uppercase		Size		Dimmable DALI	
Letter	W	Flux	H x L	Letters	+ Support
A	30 W	2300lm	950 x 650	1201A00A	1211A00A
B	31 W	2450lm	950 x 650	1201B00A	1211B00A
C	20 W	1450lm	950 x 650	1201C00A	1211C00A
D	29 W	2300lm	950 x 650	1201D00A	1211D00A
E	26 W	1900lm	950 x 650	1201E00A	1211E00A
F	19 W	1400lm	950 x 650	1201F00A	1211F00A
G	21 W	1050lm	950 x 650	1201G00A	1211G00A
H	27 W	3200lm	950 x 650	1201H00A	1211H00A
I	11 W	750lm	950 x 50	1201I00A	1211I00A
J	21 W	1550lm	950 x 650	1201J00A	1211J00A
K	26 W	1900lm	950 x 650	1201K00A	1211K00A
L	17 W	2450lm	950 x 650	1201L00A	1211L00A
M	38 W	2900lm	950 x 950	1201M00A	1211M00A
N	25 W	1900lm	950 x 650	1201N00A	1211N00A
O	27 W	2100lm	950 x 650	1201O00A	1211O00A
P	27 W	2300lm	950 x 650	1201P00A	1211P00A
Q	31 W	3000lm	950 x 650	1201Q00A	1211Q00A
R	30 W	2300lm	950 x 650	1201R00A	1211R00A
S	23 W	1700lm	950 x 650	1201S00A	1211S00A
T	17 W	2050lm	950 x 650	1201T00A	1211T00A
U	24 W	1800lm	950 x 650	1201U00A	1211U00A
V	25 W	1900lm	950 x 650	1201V00A	1211V00A
W	38 W	1990lm	950 x 950	1201W00A	1211W00A
X	27 W	2000lm	950 x 900	1201X00A	1211X00A
Y	21 W	1550lm	950 x 650	1201Y00A	1211Y00A
Æ	42 W	1800lm	950 x 950	1201Æ00A	1211Æ00A
Ø	36 W	1900lm	950 x 650	1201Ø00A	1211Ø00A
À	35 W	1990lm	950 x 650	1201À00A	1211À00A
Ț	27 W	2000lm	950 x 650	1201Ț00A	1211Ț00A

Numbers		Size		Dimmable DALI	
Letter	W	Flux	H x L	Letters	+ Support
0	27 W	2100lm	950 x 650	1200000A	1210000A
1	23 W	1650lm	950 x 650	1200100A	1210100A
2	28 W	2100lm	950 x 650	1200200A	1210200A
3	24 W	1700lm	950 x 650	1200300A	1210300A
4	23 W	1650lm	950 x 650	1200400A	1210400A
5	29 W	2200lm	950 x 650	1200500A	1210500A
6	25 W	1850lm	950 x 650	1200600A	1210600A
7	19 W	1400lm	950 x 650	1200700A	1210700A
8	33 W	2600lm	950 x 650	1200800A	1210800A
9	25 W	1850lm	950 x 650	1200900A	1210900A

Lowercase		Size		Dimmable DALI	
Letter	W	Flux	H x L	Letters	+ Support
a	20 W	1450lm	650 x 650	1202a00A	1212a00A
b	23 W	1700lm	950 x 650	1202b00A	1212b00A
c	17 W	1200lm	650 x 650	1202c00A	1212c00A
d	23 W	1700lm	950 x 650	1202d00A	1212d00A
e	20 W	1450lm	650 x 650	1202e00A	1212e00A
f	16 W	1150lm	950 x 350	1202f00A	1212f00A
g	25 W	1850lm	950 x 650	1202g00A	1212g00A
h	23 W	1650lm	950 x 650	1202h00A	1212h00A
i	8 W	500lm	650 x 50	1202i00A	1212i00A
j	13 W	900lm	950 x 350	1202j00A	1212j00A
k	23 W	1650lm	950 x 650	1202k00A	1212k00A
l	11 W	750lm	950 x 50	1202l00A	1212l00A
m	29 W	2150lm	650 x 950	1202m00A	1212m00A
n	19 W	1400lm	650 x 650	1202n00A	1212n00A
o	21 W	1600lm	650 x 650	1202o00A	1212o00A
p	23 W	1700lm	950 x 650	1202p00A	1212p00A
q	23 W	1700lm	950 x 650	1202q00A	1212q00A
r	14 W	900lm	650 x 350	1202r00A	1212r00A
s	21 W	1550lm	650 x 650	1202s00A	1212s00A
t	17 W	1150lm	950 x 350	1202t00A	1212t00A
u	19 W	1400lm	650 x 650	1202u00A	1212u00A
v	18 W	1300lm	650 x 650	1202v00A	1212v00A
w	24 W	1800lm	650 x 950	1202w00A	1212w00A
x	15 W	1000lm	650 x 650	1202x00A	1212x00A
y	25 W	1800lm	950 x 650	1202y00A	1212y00A
æ	32 W	2250lm	650 x 950	1202æ00A	1212æ00A
ø	27 W	2100lm	650 x 650	1202ø00A	1212ø00A
ñ	25 W	1850lm	650 x 650	1202ñ00A	1212ñ00A
Ț	24 W	1800lm	650 x 650	1202Ț00A	1212Ț00A

Driver	
Driver	Vac L _{mm} W _{mm} H _{mm} IP N° device Code
75 W	220-240 180 52 30 20 1min-2max Undimmable DV1009

Discovery

Ernesto Gismondi
↪ 2015



red dot design award
2017



For further information on Discovery
↪ visit artemide.com



**Discovery
is visible**

is invisible



Ph. Pierpaolo Ferreri 2014





Discovery wall



Light OFF



Light ON

Discovery typologies

SUSPENSION HORIZONTAL



An ultra-light aluminum profile hosts a LED strip that injects light into a technopolymer surface with microengravings.
The microengravings pattern ensures maximum efficiency and uniformity in direct and indirect emission.
Dimmable devices (push dimmer).
Available as suspension and wall/ceiling Ø 700 mm, as vertical suspension Ø 700-1000-1400 mm.

DISCOVERY



XF
(>45°)
40 W
2857 lm



Artemide
App


SUSPENSION VERTICAL



DISCOVERY VERTICAL Ø700 /
TW / RGBW

DISCOVERY VERTICAL Ø1000 /
TW / RGBW

DISCOVERY VERTICAL Ø1400



XF TW RGBW
(>45°) (>45°) (>45°)
40 W 95 W 46 W
2857 lm 5020 lm 1705 lm



XF TW RGBW
(>45°) (>45°) (>45°)
63 W 136 W 66 W
3195 lm 7171 lm 2440 lm



XF
(>45°)
89 W
4500 lm

WALL



DISCOVERY WALL



XF
(>45°)
40 W
2857 lm



UGR<19

Uniform and diffuse light suitable for workplaces


High-end and innovative technology

Maximum efficiency and uniformity

Perfectly transparent surface

Extracting light

DISCOVERY



The APP driver can not be controlled by DALI dimming system and viceversa.


MacAdam 3SDCM
Life L90 (6K) 50000h
CRI =90

IP20

DISCOVERY WALL

W	Beam	Flux	CCT
40 W	XF	2857 lm	3000K

PUSH Code
199801.10/30/60.A

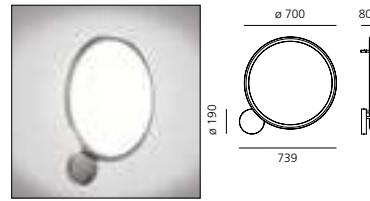


DISCOVERY


W	Beam	Flux	CCT
40 W	XF	2857 lm	3000K

PUSH Code
19991.10/30/60.A

PUSH & APP Code
19991.10/30/60.APP



DISCOVERY VERTICAL



The APP driver can not be controlled by DALI dimming system and viceversa.

MacAdam 3SDCM
Life L90 (6K) 50000h
CRI =90



IP20

DISCOVERY VERTICAL SUSPENSION

Ø	W	Beam	Flux	CCT
700 mm	40 W	XF	2857 lm	3000K
1000 mm	63 W	XF	3195 lm	3000K
1400 mm	89 W	XF	4500 lm	3000K

PUSH/DALI Code
19920.10/30/60.A
19930.10/30/60.A
19940.10/30/60.A

PUSH & APP Code
19920.10/30/60.APP
19930.10/30/60.APP
19940.10/30/60.APP

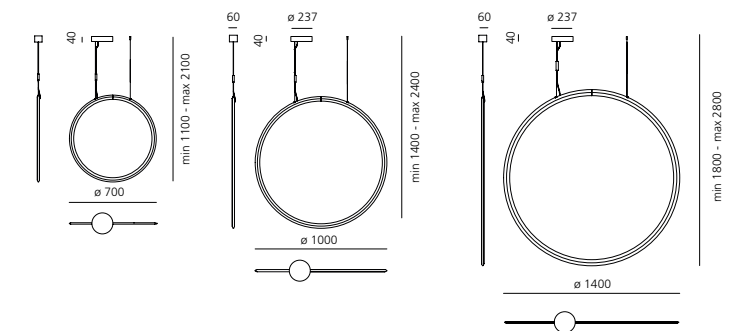

DISCOVERY VERTICAL SUSPENSION TW



Ø	W	Beam	Flux	CCT
700 mm	95 W	XF	5020 lm	2700K-6500K
1000 mm	136 W	XF	7171 lm	2700K-6500K

DALI DT8 Code
19922.10/30/60.A
19932.10/30/60.A

APP Code
19922.10/30/60.APP
19932.10/30/60.APP




DISCOVERY VERTICAL SUSPENSION RGBW

Ø	W	Beam	Flux
700 mm	46 W	XF	RGB 651 lm White 1054 lm
1000 mm	66 W	XF	RGB 930 lm White 1510 lm

DALI Code
19923.10/30/60.A
19933.10/30/60.A

APP Code
19923.10/30/60.APP
19933.10/30/60.APP

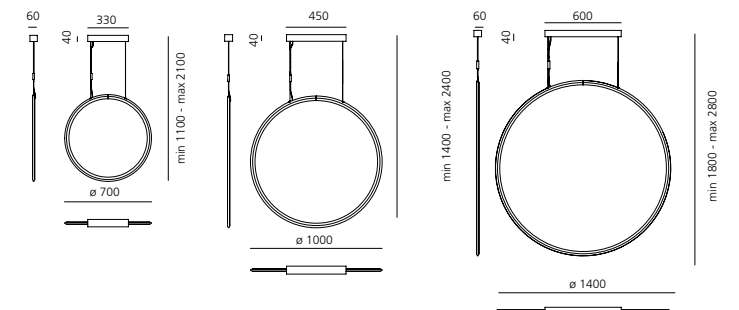

Discovery Space

Ernesto Gismondi

↳ 2019



DISCOVERY SPACE



The APP driver can not be controlled by DALI dimming system and viceversa.

MacAdam 3SDCM
Life L90 (6K) 50000h
CRI =90

IP20

DISCOVERY SPACE SQUARE

W	Beam	Flux	CCT
32 W	XF	2160 lm	3000K

PUSH/DALI
Code
20040.10/30/60.A

PUSH & APP
Code
20040.10/30/60.APP




DISCOVERY SPACE SQUARE TW

W	Beam	Flux	CCT
78 W	XF	4085 lm	2700K-6500K

TW[®]
Artemide Tunable White

DALI DT8
Code
20000.10/30/60.A

APP
Code
20000.10/30/60.APP



DISCOVERY SPACE SQUARE RGBW

W	Beam	Flux
78 W	XF	RGB 592 lm White 960 lm

DALI
Code
20010.10/30/60.A


APP
Code
20010.10/30/60.APP

DISCOVERY SPACE RECTANGULAR

W	Beam	Flux	CCT
53 W	XF	3600 lm	3000K

PUSH/DALI
Code
20050.10/30/60.A

PUSH & APP
Code
20050.10/30/60.APP




DISCOVERY SPACE RECTANGULAR TW

W	Beam	Flux	CCT
130 W	XF	6850 lm	2700K-6500K

TW[®]
Artemide Tunable White

DALI DT8
Code
20020.10/30/60.A

APP
Code
20020.10/30/60.APP




DISCOVERY SPACE RECTANGULAR RGBW

W	Beam	Flux
130 W	XF	RGB 888 lm White 1440 lm


DALI
Code
20030.10/30/60.A

APP
Code
20030.10/30/60.APP

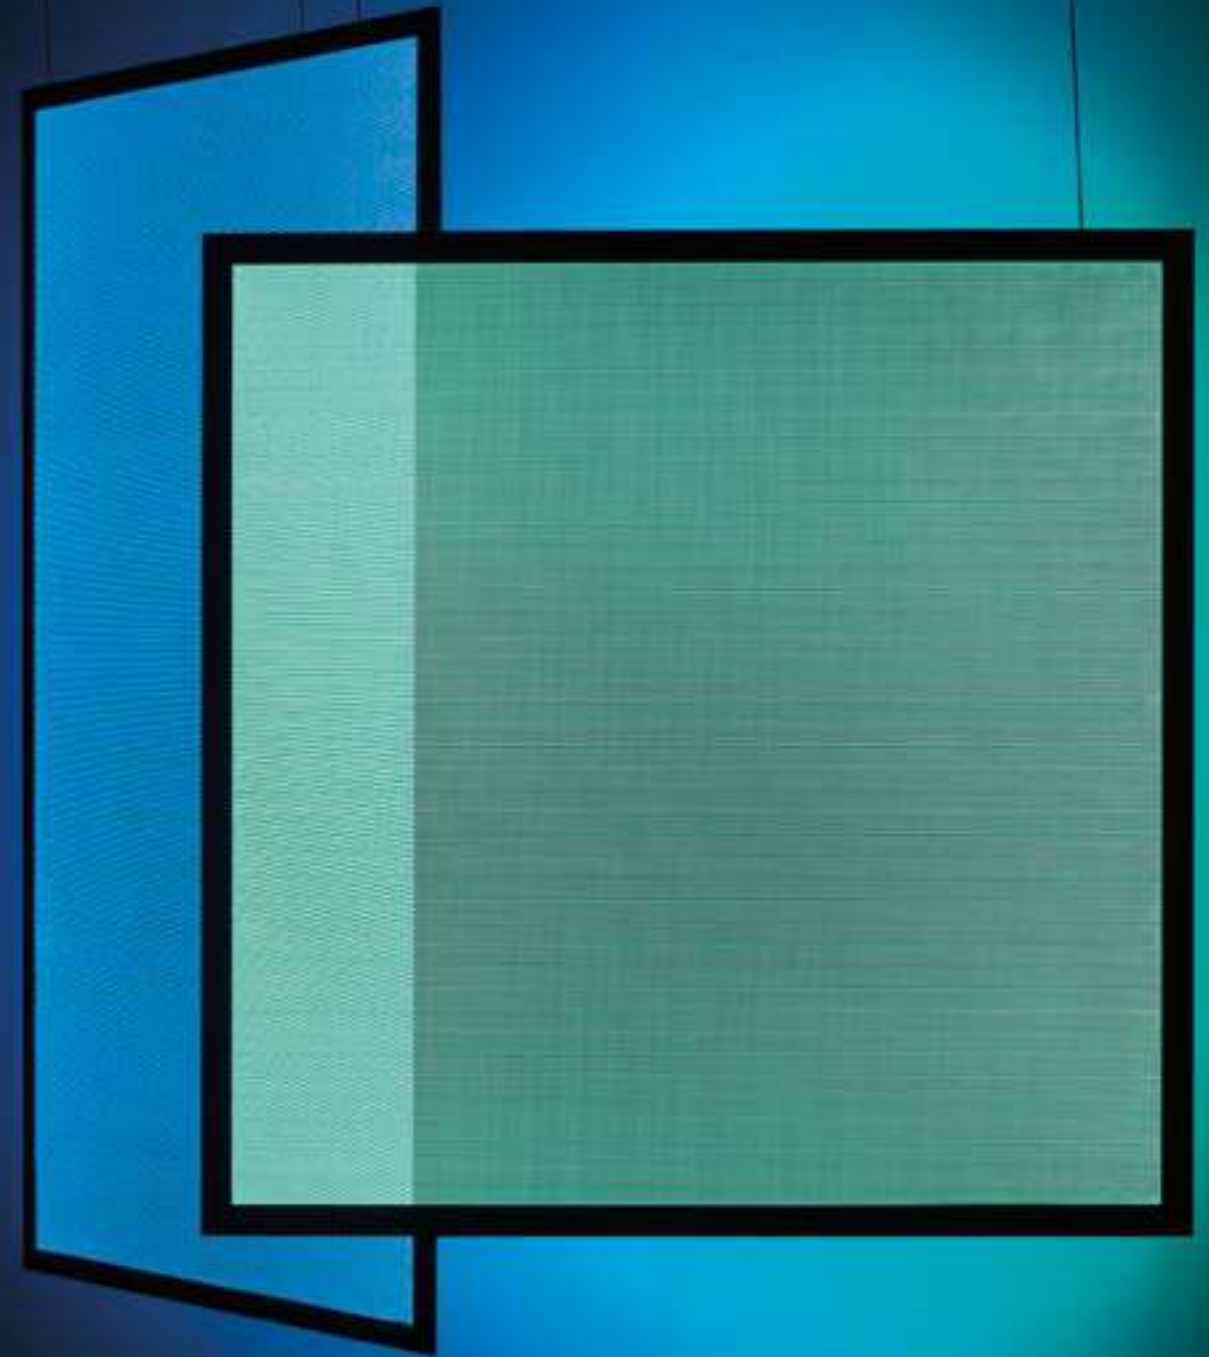

Ameluna

Mercedes-Benz Style
↪ 2016

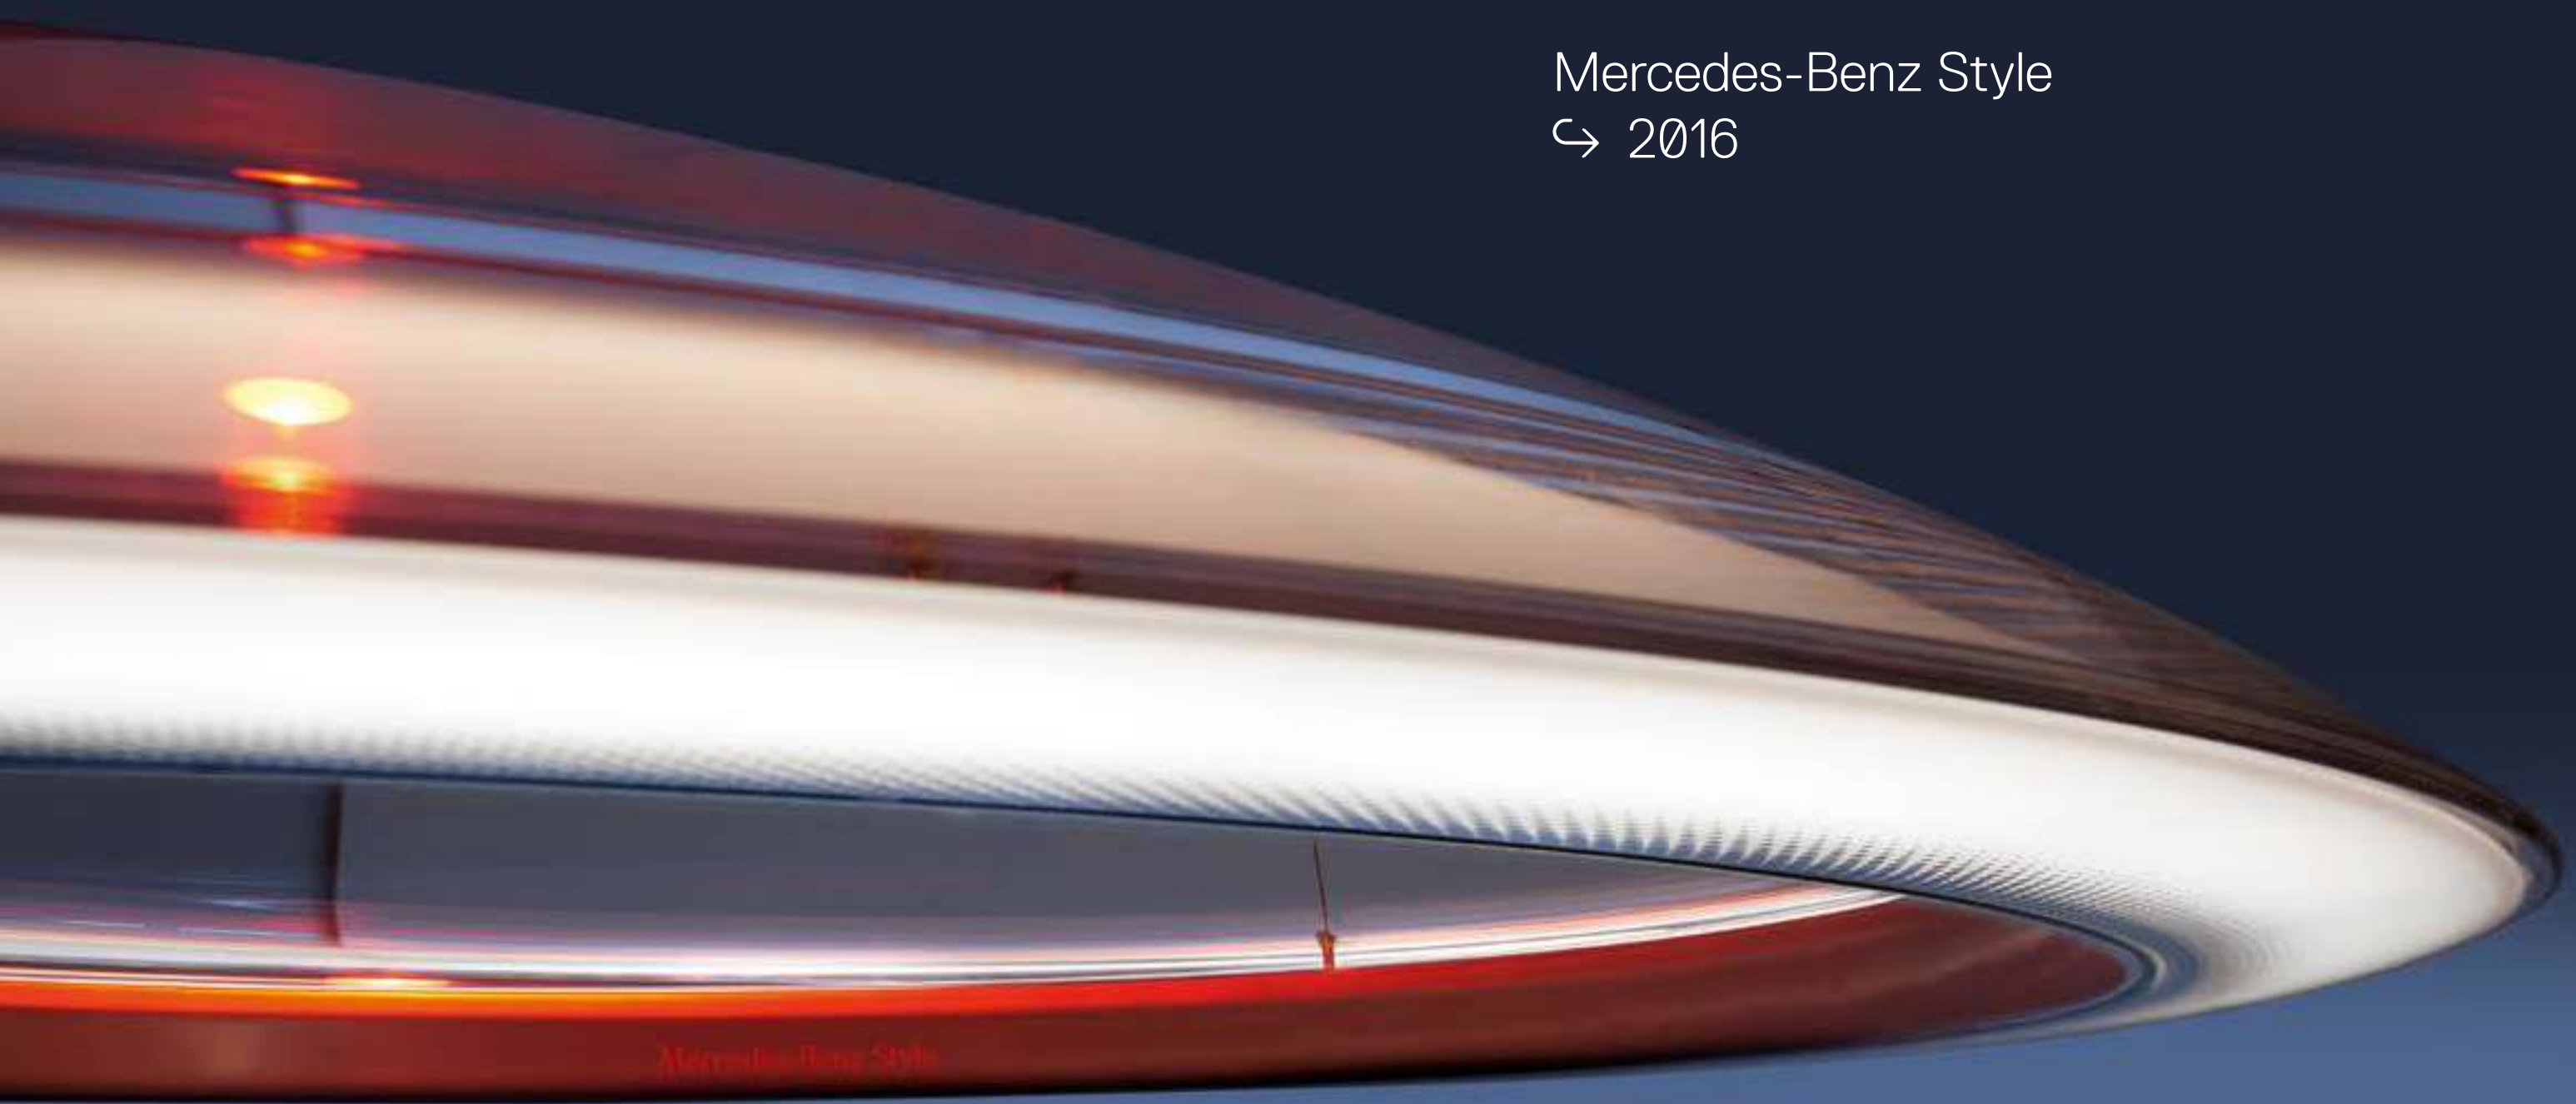

→ Patent pending

"Mercedes-Benz" and the styling of Ameluna are intellectual property of Daimler AG. They are used by Artemide S.p.A under license.

Artemide

Mercedes-Benz Style

A BRIGHT FUTURE



→ Ameluna discloses an innovative optoelectronic system integrated in the transparent frame. An aluminium band, a patent of innovation, which is welded with the optics, supports the led strip. The latter is also hidden behind the lower profile, in order to maintain the purity of the form. The transparent body allows the light to be both direct and partially refracted.



For further information on Ameluna
→ visit artemide.com



Artemide
App

The geometric section and the optical features of the materials give life to a "light box" that ensures perfect control of the emission, despite transparency.

A set of LED sources is installed along the lower profile, on a ring made of a thermo-conductive polymer, an innovative material that allows excellent heat dissipation.

Emission is perfectly designed through careful selection of the materials constituting the "light box". The special reflectance and transmittance properties, combined with a very low absorption coefficient, ensure that the light reflected from the inner surfaces of the section is scattered across the environment in a controlled and mostly direct way.

Ameluna can be controlled with an On/Off switch or using a Push to adjust its luminous intensity.

Ameluna RGB can be controlled using 2 different Push (one for white light and one for the RGB spotlight) and the Ameluna App. Control via push button has always priority over control with the App (when the Push are operated, the commands sent via bluetooth from the smartphone or tablet are ignored)..

Ameluna white



Transparent Body

Reflective Ring

Heat-Sink Ring

Diffusing Ring

Ameluna RGB



Ameluna RGB



↪ AMELUNA

XF





The APP driver can not be controlled by DALI dimming system and viceversa.

MacAdam 3SDCM
Life L70 (6K) 50000h
CRI =90 (typ.)

IP20
⊕
EAC



WHITE

				PUSH/DALI	PUSH & APP
W	Beam	Flux	CCT	Code	Code
41 W	58°	3276 lm	3000 K	1401010A	1401010APP



WHITE + SPOT RGB



W	Beam	Flux	CCT	Code
45 W	58°	3414 lm	RGB APP	1402010APP



Tagora

S. & R. Cornelissen

↪ 2008

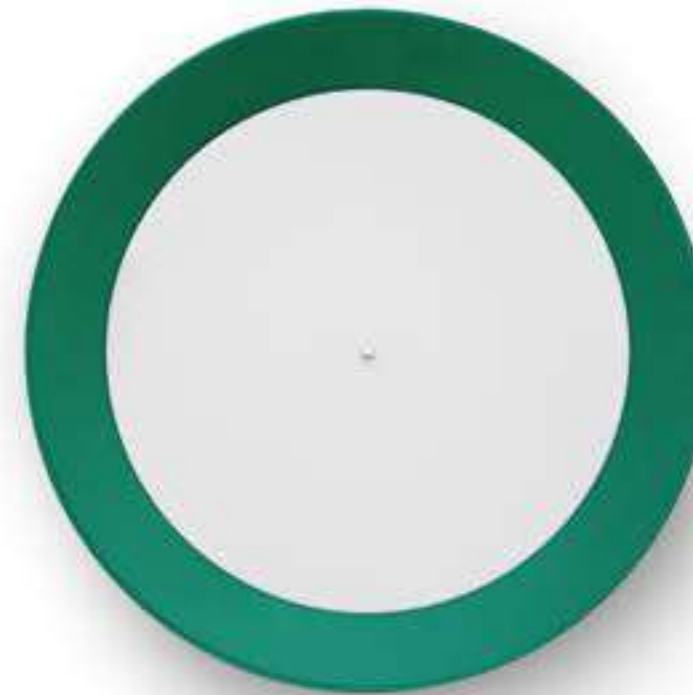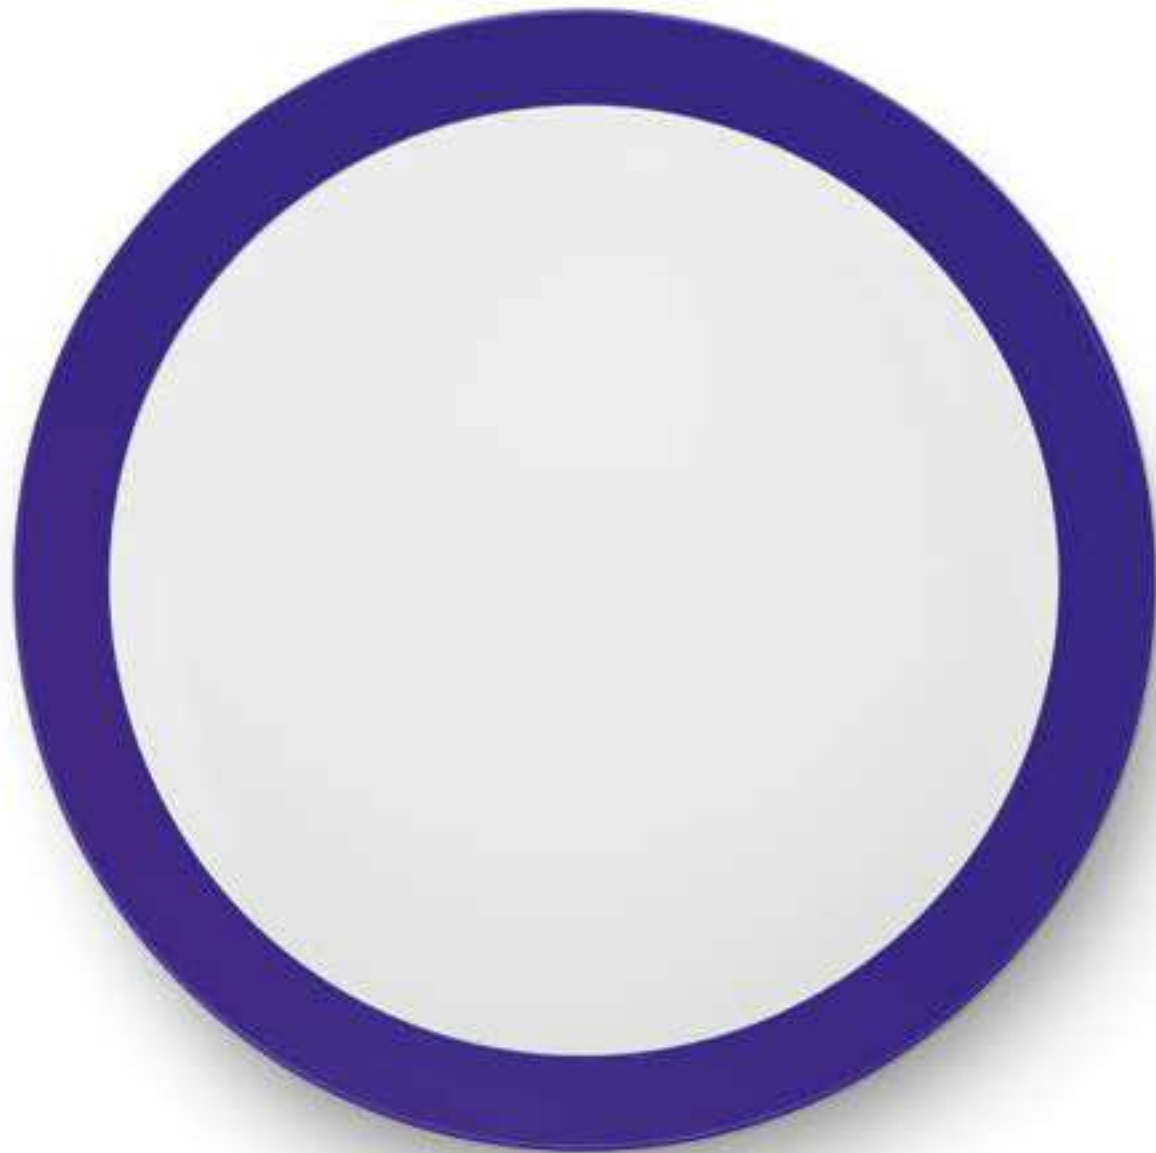

For further information on Tagora
↪ visit artemide.com



**Artemide
App**

↪ on request

Not for Tagora 80 ceiling version

Tagora

↪ recessed



Series of ceiling mounted luminaires available in 4 diameters (80 mm, 270 mm, 570 mm, 970 mm), using high-output LEDs, Retrofit LEDs.

Consists of a trimless recessed frame fitted into the ceiling and an optical unit with an aluminium body painted in a range of colours.

Tagora 80 and 270 offer high-output spot light with aluminium optics.

Tagora 270 LED uses a proprietary system based on a hybrid combined lens and reflector optic. This system helps to create defined narrow beams using high-powered LED modules of large dimensions.

Tagora 570 and 970 cone with a PMMA diffuser, offering a comfortable diffused light, use high-output sources.

Integrated electronic power supply, dimmable or non-dimmable options, depending on the version.

Only ceiling recessed installation allowed.

Compliant with standard EN60598-1 and other specific standards.


↪ TAGORA RECESSED

Orange White Blue Green
F WF XF
IP20
960°

16 **01** **02** **09**
1. 2. 3. 4.

TAGORA RECESSED 80

W	Weight	Beam	Flux	CCT	Code
14 W	0,35 kg	WF 36°	1027 lm	3000 K	AB001. 16/01/09/02
			1059 lm	4000 K	AB004. 16/01/09/02
		WF 44°	1110 lm	3000 K	AB002. 16/01/09/02
			1145 lm	4000 K	AB005. 16/01/09/02
		XF 52°	1015 lm	3000 K	AB003. 16/01/09/02
			1047 lm	4000 K	AB006. 16/01/09/02



∅92

MacAdam 3SDCM
Life L80 (9K) 50000h
CRI=90

Electronic ballast 500mA Selv supplied separately.

Driver	Va	L _{mm}	W _{mm}	H _{mm}	n°device	Code
cc 16W 500mA	220-240	156	52	26	1 max DALI dimmable	M077401

LED (GU10)	Weight	Code
220 V 240 V*	0,35 kg	M0202. 1/2/3/4 .0


*Max 81mm (overall)

TAGORA RECESSED 270

W	Weight	Beam	Flux	CCT	DALI Code
34 W	3,80 kg	F 16°	1804 lm	3000 K	M2504. 1/2/3/4 .1
			1926 lm	4000 K	M2505. 1/2/3/4 .1
		WF 32°	1636 lm	3000 K	M2506. 1/2/3/4 .1
			1744 lm	4000 K	M2507. 1/2/3/4 .1



∅292



MacAdam 1SDCM
Life L70 (6K) 50000h
CRI=90

220/240Vac 50/60Hz electronic ballast included. Dimmable DALI-SwitchDim.
Supply voltage 220-240V. Insulation class II. SELV. IP20.

↪ TAGORA RECESSED

Orange White Blue Green
F WF XF
MacAdam 3SDCM
Life L70 (6K) 50000h
CRI=80
IP20
960°


16 **01** **02** **09**
1. 2. 3. 4.

TAGORA RECESSED 570

W	Weight	Beam	Flux	CCT	DALI-SwitchDim Code
58 W	6,35 kg	XF	3593 lm	3000 K	M2502. 1/2/3/4 .1
			3820 lm	4000 K	M2503. 1/2/3/4 .1




∅606

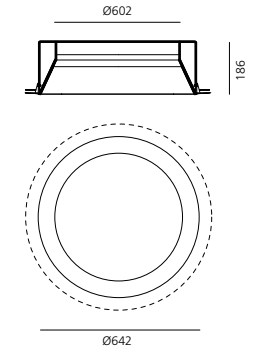


220/240Vac 50/60Hz electronic ballast included. Dimmable DALI-SwitchDim.
Supply voltage 220-240V. Insulation class II. SELV. IP20.

TAGORA RECESSED 970

W	Weight	Beam	Flux	CCT	DALI-SwitchDim Code
84 W	21 kg	XF	6425 lm	3000 K	M2500. 1/2/3/4 .1
			6914 lm	4000 K	M2501. 1/2/3/4 .1



∅1002

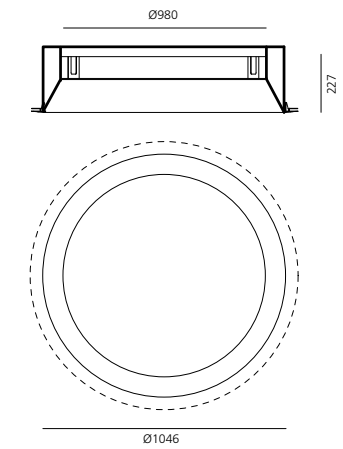

220/240Vac 50/60Hz electronic ballast included. Dimmable DALI-SwitchDim.
Supply voltage 220-240V. Insulation class II. SELV. IP20.



Tagora ↪ ceiling



Series of ceiling mounted luminaires available in 4 diameters (80 mm, 270 mm, 570 mm, 970 mm), using high-output LEDs, Retrofit LEDs.

Aluminium body available in different two-coloured versions: beige/white, grey/white, black/orange, black/vert and black/blue.

Tagora 80 and 270 offer high-output spot light with aluminium optics.

Tagora 270 LED uses a proprietary system based on a hybrid combined lens and reflector optic. This system helps to create defined narrow beams using high-powered LED modules of large dimensions.

Tagora 570 and 970 come with a PMMA diffuser, offering a comfortable diffused light. LED versions use high-output sources.

Integrated electronic power supply, dimmable or non-dimmable options, depending on the version.

Only ceiling mounted installation allowed.

Compliant with standard EN60598-1 and other specific standards.


↳ TAGORA CEILING

Orange Black	Beige White	Blue Black	Green Black	Grey White	F	WF	XF	220/240Vac 50/60Hz electronic ballast included.	IP20/ IP40 ⊕ 960°
57	52	58	59	56					
1.	2.	3.	4.	6.					

TAGORA CEILING 80

W	Weight	Beam	Flux	CCT
14 W	1,15 kg	WF 36°	1027 lm	3000 K
			1059 lm	4000 K
		WF 44°	1110 lm	3000 K
			1145 lm	4000 K
		XF 52°	1015 lm	3000 K
			1046 lm	4000 K

Undimmable Code	DALI dimmable Code
AB061. 52/56/57/58/59	AB081. 52/56/57/58/59
AB064. 52/56/57/58/59	AB084. 52/56/57/58/59
AB062. 52/56/57/58/59	AB082. 52/56/57/58/59
AB065. 52/56/57/58/59	AB085. 52/56/57/58/59
AB063. 52/56/57/58/59	AB083. 52/56/57/58/59
AB066. 52/56/57/58/59	AB086. 52/56/57/58/59



MacAdam 3SDCM
Life L80 (9K) 50000h
CRI=90

LED (GU10)	Weight	Code
220 V	0,98 kg	M0189. 1/2/3/4/6 .0
240 V*		

*Max 81mm (overall)


TAGORA CEILING 270

W	Weight	Beam	Flux	CCT
34 W	3,74 kg	F 16°	1804 lm	3000 K
			1926 lm	4000 K
		WF 32°	1636 lm	3000 K
			1744 lm	4000 K

DALI dimmable Code
M2484. 1/2/3/4/6 .1
M2485. 1/2/3/4/6 .1
M2486. 1/2/3/4/6 .1
M2487. 1/2/3/4/6 .1



MacAdam 1SDCM
Life L70 (6K) 50000h
CRI=90

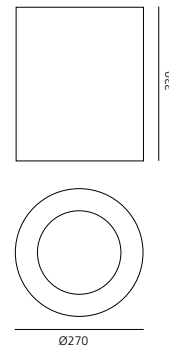


TAGORA CEILING 570

W	Weight	Beam	Flux	CCT
58 W	4,90 kg	XF	3593 lm	3000 K
			3820 lm	4000 K

DALI dimmable Code
M2482. 1/2/3/4/6 .1
M2483. 1/2/3/4/6 .1



IP40
MacAdam 3SDCM
Life L70 (6K) 50000h
CRI=80




TAGORA CEILING 970

W	Weight	Beam	Flux	CCT
84 W	16,24 kg	XF	6425 lm	3000 K
			6915 lm	4000 K

DALI dimmable Code
M2480. 1/2/6 .1 3/4 .1
M2481. 1/2/6 .1 3/4 .1



IP40
MacAdam 3SDCM
Life L70 (6K) 50000h
CRI=80

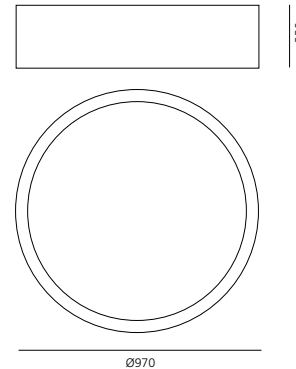

Vodafone Campus - Düsseldorf (Germany)
Arch.: HPP Henrich-Pesching & Partner, Photo: Wilfried Hübner

Tagora

↪ suspension



Series of suspended luminaires available in 4 diameters (80 mm, 270 mm, 570 mm, 970 mm), using high-output LEDs, Retrofit LEDs.

Aluminium body available in different two-coloured versions: beige/white, grey/white, black/orange, black/vert and black/blue.

Steel suspension cables allowing quick adjustment, 2 metre length.

Tagora 80 and 270 offer a high-output spot light with aluminium optics.

Tagora 270 uses a proprietary system based on a hybrid combined lens and reflector optic. This system helps to create defined narrow beams using high-powered LED modules of large dimensions.

Tagora 570 and 970 come with a PMMA diffuser, offering a comfortable diffused light. LED versions use high-output sources.

Integrated electronic power supply, dimmable or non-dimmable options, depending on the version.

Compliant with standard EN60598-1 and other specific standards.

↪ TAGORA SUSPENSION

Orange Black	Beige White	Blue Black	Green Black	Grey White	F	WF	XF	220/240Vac 50/60Hz electronic ballast included.	IP20 960°
57	52	58	59	56					
1.	2.	3.	4.	6.					

TAGORA SUSPENSION 80

W	Weight	Beam	Flux	CCT
14 W	1,15 kg	WF 36°	1027 lm	3000 K
			1059 lm	4000 K
		WF 44°	1111 lm	3000 K
			1145 lm	4000 K
			1015 lm	3000 K
		XF 52°	1047 lm	4000 K

LED (GU10)		Code
W	Weight	
220 V	1,03 kg	M0191. 1/2/3/4/6 .0
240 V*		


*Max 81mm (overall)

Undimmable	
Code	
AB021. 52/56/57/58/59	
AB024. 52/56/57/58/59	
AB022. 52/56/57/58/59	
AB025. 52/56/57/58/59	
AB023. 52/56/57/58/59	
AB026. 52/56/57/58/59	

DALI dimmable	
Code	
AB041. 52/56/57/58/59	
AB044. 52/56/57/58/59	
AB042. 52/56/57/58/59	
AB045. 52/56/57/58/59	
AB043. 52/56/57/58/59	
AB046. 52/56/57/58/59	



MacAdam 3SDCM
Life L80 (9K) 50000h
CRI=90




TAGORA SUSPENSION 270

W	Weight	Beam	Flux	CCT
34 W	4,65 kg	F 16°	1804 lm	3000 K
			1926 lm	4000 K
		WF 32°	1636 lm	3000 K
			1744 lm	4000 K

DALI dimmable	
Code	
M2496. 1/2/3/4/6 .1	
M2497. 1/2/3/4/6 .1	
M2498. 1/2/3/4/6 .1	
M2499. 1/2/3/4/6 .1	



MacAdam 1SDCM
Life L70 (6K) 50000h
CRI=90

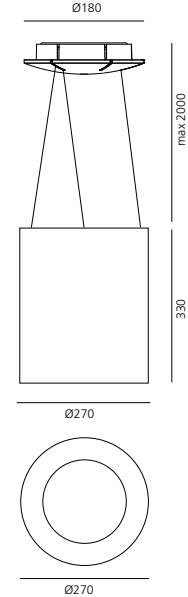

↪ TAGORA SUSPENSION

Orange Black	Beige White	Blue Black	Green Black	Grey White	XF	220/240Vac 50/60Hz electronic ballast included.	IP40 960°
1.	2.	3.	4.	6.			


TAGORA SUSPENSION 570

Direct emission				
W	Weight	Beam	Flux	CCT
58 W	6,45 kg	XF	3593 lm	3000 K
			3820 lm	4000 K

DALI dimmable	
Code	
M2492. 1/2/3/4/6 .1	
M2493. 1/2/3/4/6 .1	



MacAdam 3SDCM
Life L70 (6K) 50000h
CRI=80

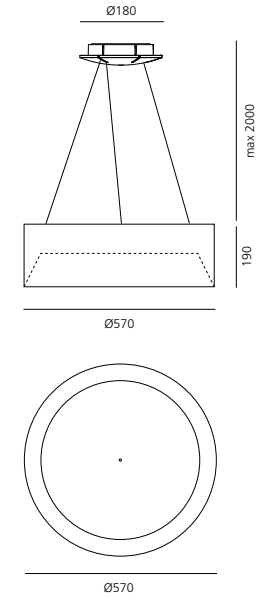

Direct + indirect emission				
W	Weight	Beam	Flux	CCT
72 W	6,62 kg	XF	4675 lm	3000 K
			4944 m	4000 K

DALI dimmable	
Code	
M2402. 1/2/3/4/6 .1	
M2403. 1/2/3/4/6 .1	


TAGORA SUSPENSION 970

Direct emission				
W	Weight	Beam	Flux	CCT
84 W	21 kg	XF	6425 lm	3000 K
			6915 lm	4000 K

DALI dimmable	
Code	
M2488. 1/2/3/4/6 .1	
M2489. 1/2/3/4/6 .1	



MacAdam 3SDCM
Life L70 (6K) 50000h
CRI=80

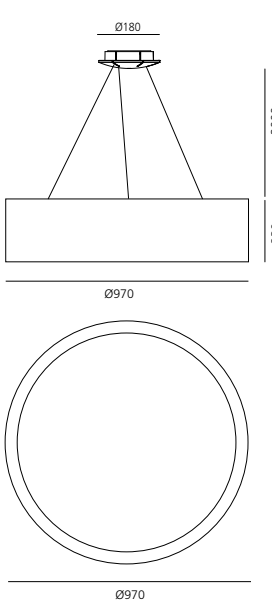

Direct + indirect emission				
W	Weight	Beam	Flux	CCT
95 W	21 kg	XF	7536 lm	3000 K
			7950 m	4000 K

DALI dimmable	
Code	
M2508. 1/2/3/4/6 .1	
M2509. 1/2/3/4/6 .1	





Mouette

Wilmotte & Industries

↪ 2004

Suspension light fitting with diffused emission.

Versions: Mouette symmetric, Mouette asymmetric.

Solid opal diffuser in moulded polypropylene.

Luminous flux distribution:

74% in direct emission,

26% in indirect emission.

DALI dimmable.

The light fitting is equipped with quick-adjustment steel suspension cables, ceiling plate and power cable.

Cable length: Mouette: 2m or 6m,

Mouette mini: 2m.

Complies with standard EN60598-1 and other specific standards.



For further information on Mouette
↪ visit artemide.com



Artemide
App

↪ on request

↳ MOUETTE

Opal white
20


XF

MacAdam 2SDCM
Life L70 (6K) 50000h
CRI = 80

IP20 / IP40
750°



MOUETTE SYMMETRIC

W	Flux	CCT	Weight	Cable length	Undimmable Code	DALI dimmable Code
105 W	13824lm	3000 K	8,50 kg	1900mm	AK00400	AK00300
			8,60 kg	5900mm	AK10400	AK10300

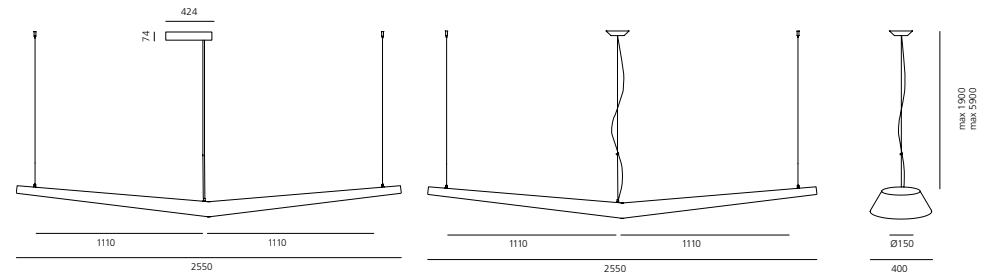


MOUETTE SYMMETRIC

W	Flux	CCT	Weight	Cable length	Undimmable Code	DALI dimmable Code
55 W	6221lm	3000 K	5,40 kg	1900mm	AK00200	AK00100
			5,50 kg	5900mm	AK10200	AK10100

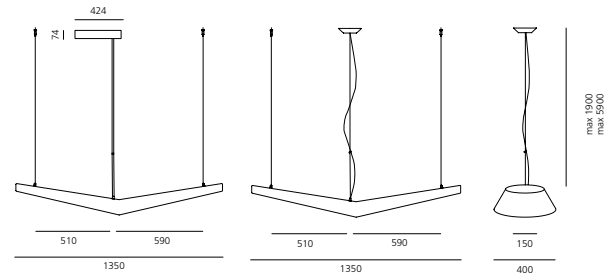

MOUETTE ASYMMETRIC

W	Flux	CCT	Weight	Cable length	Undimmable Code	DALI dimmable Code
80 W	10368lm	3000 K	6,80 kg	1900mm	AK00600	AK00500
			6,90 kg	5900mm	AK10600	AK10500

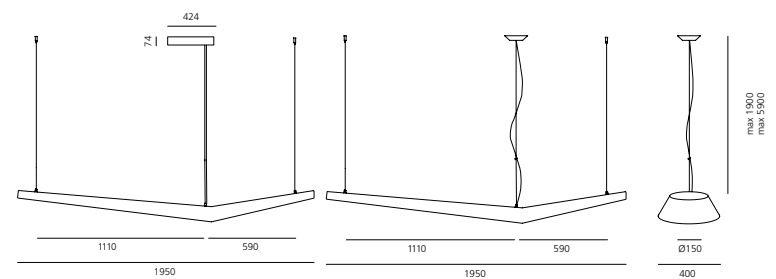





↪ Outdoor

General Lighting Path Lighting



"O" _____	678	
Walking _____	690	
Antarktikós _____		708
Reeds _____	712	
Tetragono _____		720
Ippolito _____	724	
Piroscafo _____		726
Oblique _____	730	
Basolo _____	734	
Cuneo _____	736	
Niki _____	740	
Dioscuri _____		744
Nuda _____	746	
Ciclope _____		754
Chilone _____		760
Granito _____		768
Effetto _____		778
Calumet _____		772
Molla _____	776	
Tolomeo Outdoor _____		788
Tolomeo XXL _____		784



“O”

Elemental
↪ 2018

O
Light without a lamp for public space

The more the planet becomes urban, the more we appreciate the value of natural spaces. The cities with the highest quality of life are those that were visionary enough to keep portions of untouched nature within their footprint and transform them into public spaces. Forest that can become parks, rivers that can become pools, hills that can become viewpoints or beaches that can become promenades measure the capacity of a city to provide the right environment for their citizens.


The problem is that the forces that govern nature and modern urban life, even if guided by good will, tend to pull in opposite directions. If we want to access a hill, we erode its slopes with roads. If we want to prevent a river's flooding, we alter its basin's permeability. If we want to keep a park clean, we invade it with garbage cans. If we want to illuminate it to make it safe, we invade it with posts and cables.

One of the strongest intrusions in the natural order (and yet one of that remains almost unnoticed) is the disappearance of darkness in our cities. In the attempt to make parks safe, we not only invade them with posts and cables, but we alter forever the circadian rhythm that is crucial for the existence of species, both animal and vegetal.

Our project for Artemide is an attempt to reconcile the needs of the natural and the urban environment. Our strategy is twofold: on the one hand is to design a light for the public space that when not in use can be as imperceptible as possible; light without a lamp. On the other hand is to take advantage of different types of sensors so that light appears just when needed; light only on demand.

For such aims we started from the Discovery lamp developed by Artemide: a disc of Polymethyl methacrylate (PMMA), transparent when not in use, but "carved" with some invisible laser insertions in its mass, so that when the LED in the peripheral ring is turned on, the whole mass becomes the light source.

For O we envision a series of discs that interfere as little as possible an existing landscape, but that when activated by people's motion, they illuminate the adjacent space for only a limited amount of time. Darkness and Disappearance will be the contribution of O to nature and public space.

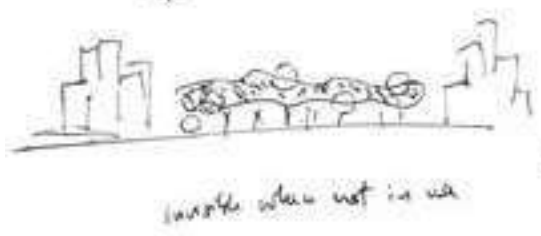






“O” typologies

SUSPENSION



“O” Ø 900



XF
42 W
1595 lm

“O” Ø 450



XF
22 W
859 lm

Extruded and calendered
aluminium ring, silicone diffuser,
die-cast aluminium base



Artemide
App

FLOOR



“O” Ø 900



XF
42 W
1595 lm

“O” Ø 900 INDOOR



XF
42 W
1595 lm

“O” Ø 450



XF
22 W
859 lm

WALL/CEILING



“O” Ø 450






XF
22 W
859 lm




For further information on “O”
↪ visit artemide.com



Black	XF	MacAdam 3SDCM	IP67
		Life L70 (6K)>40000h	
		CRI =90	


“O” SUSPENSION

IP67					IP67
Ø	W	Beam	Flux	CCT	Code
900 mm	42 W	XF	1595 lm	3000K	T072030

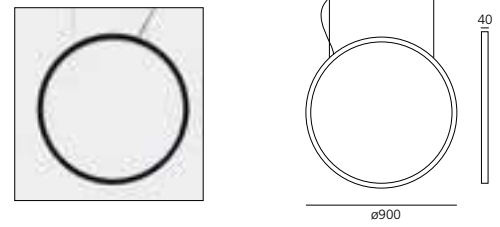

“O” FLOOR

IP67					IP67
Ø	W	Beam	Flux	CCT	Code
900 mm	42 W	XF	1595 lm	3000K	T071030

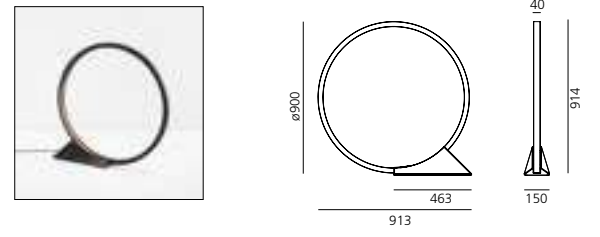


“O” FLOOR INDOOR

IP20					IP20
Ø	W	Beam	Flux	CCT	Code
900 mm	42 W	XF	1595 lm	3000K	T073030
				APP	T073030APP



“O” 45 SUSPENSION

IP67					IP67
Ø	W	Beam	Flux	CCT	Code
450 mm	22 W	XF	859 lm	3000K	T072130

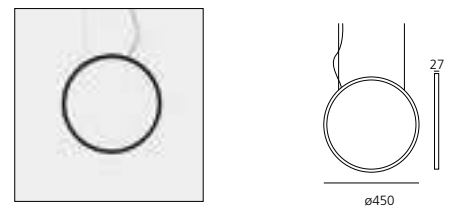

“O” 45 FLOOR / WALL / CEILING

IP67					IP67
Ø	W	Beam	Flux	CCT	Code
450 mm	22 W	XF	859 lm	3000K	T071130

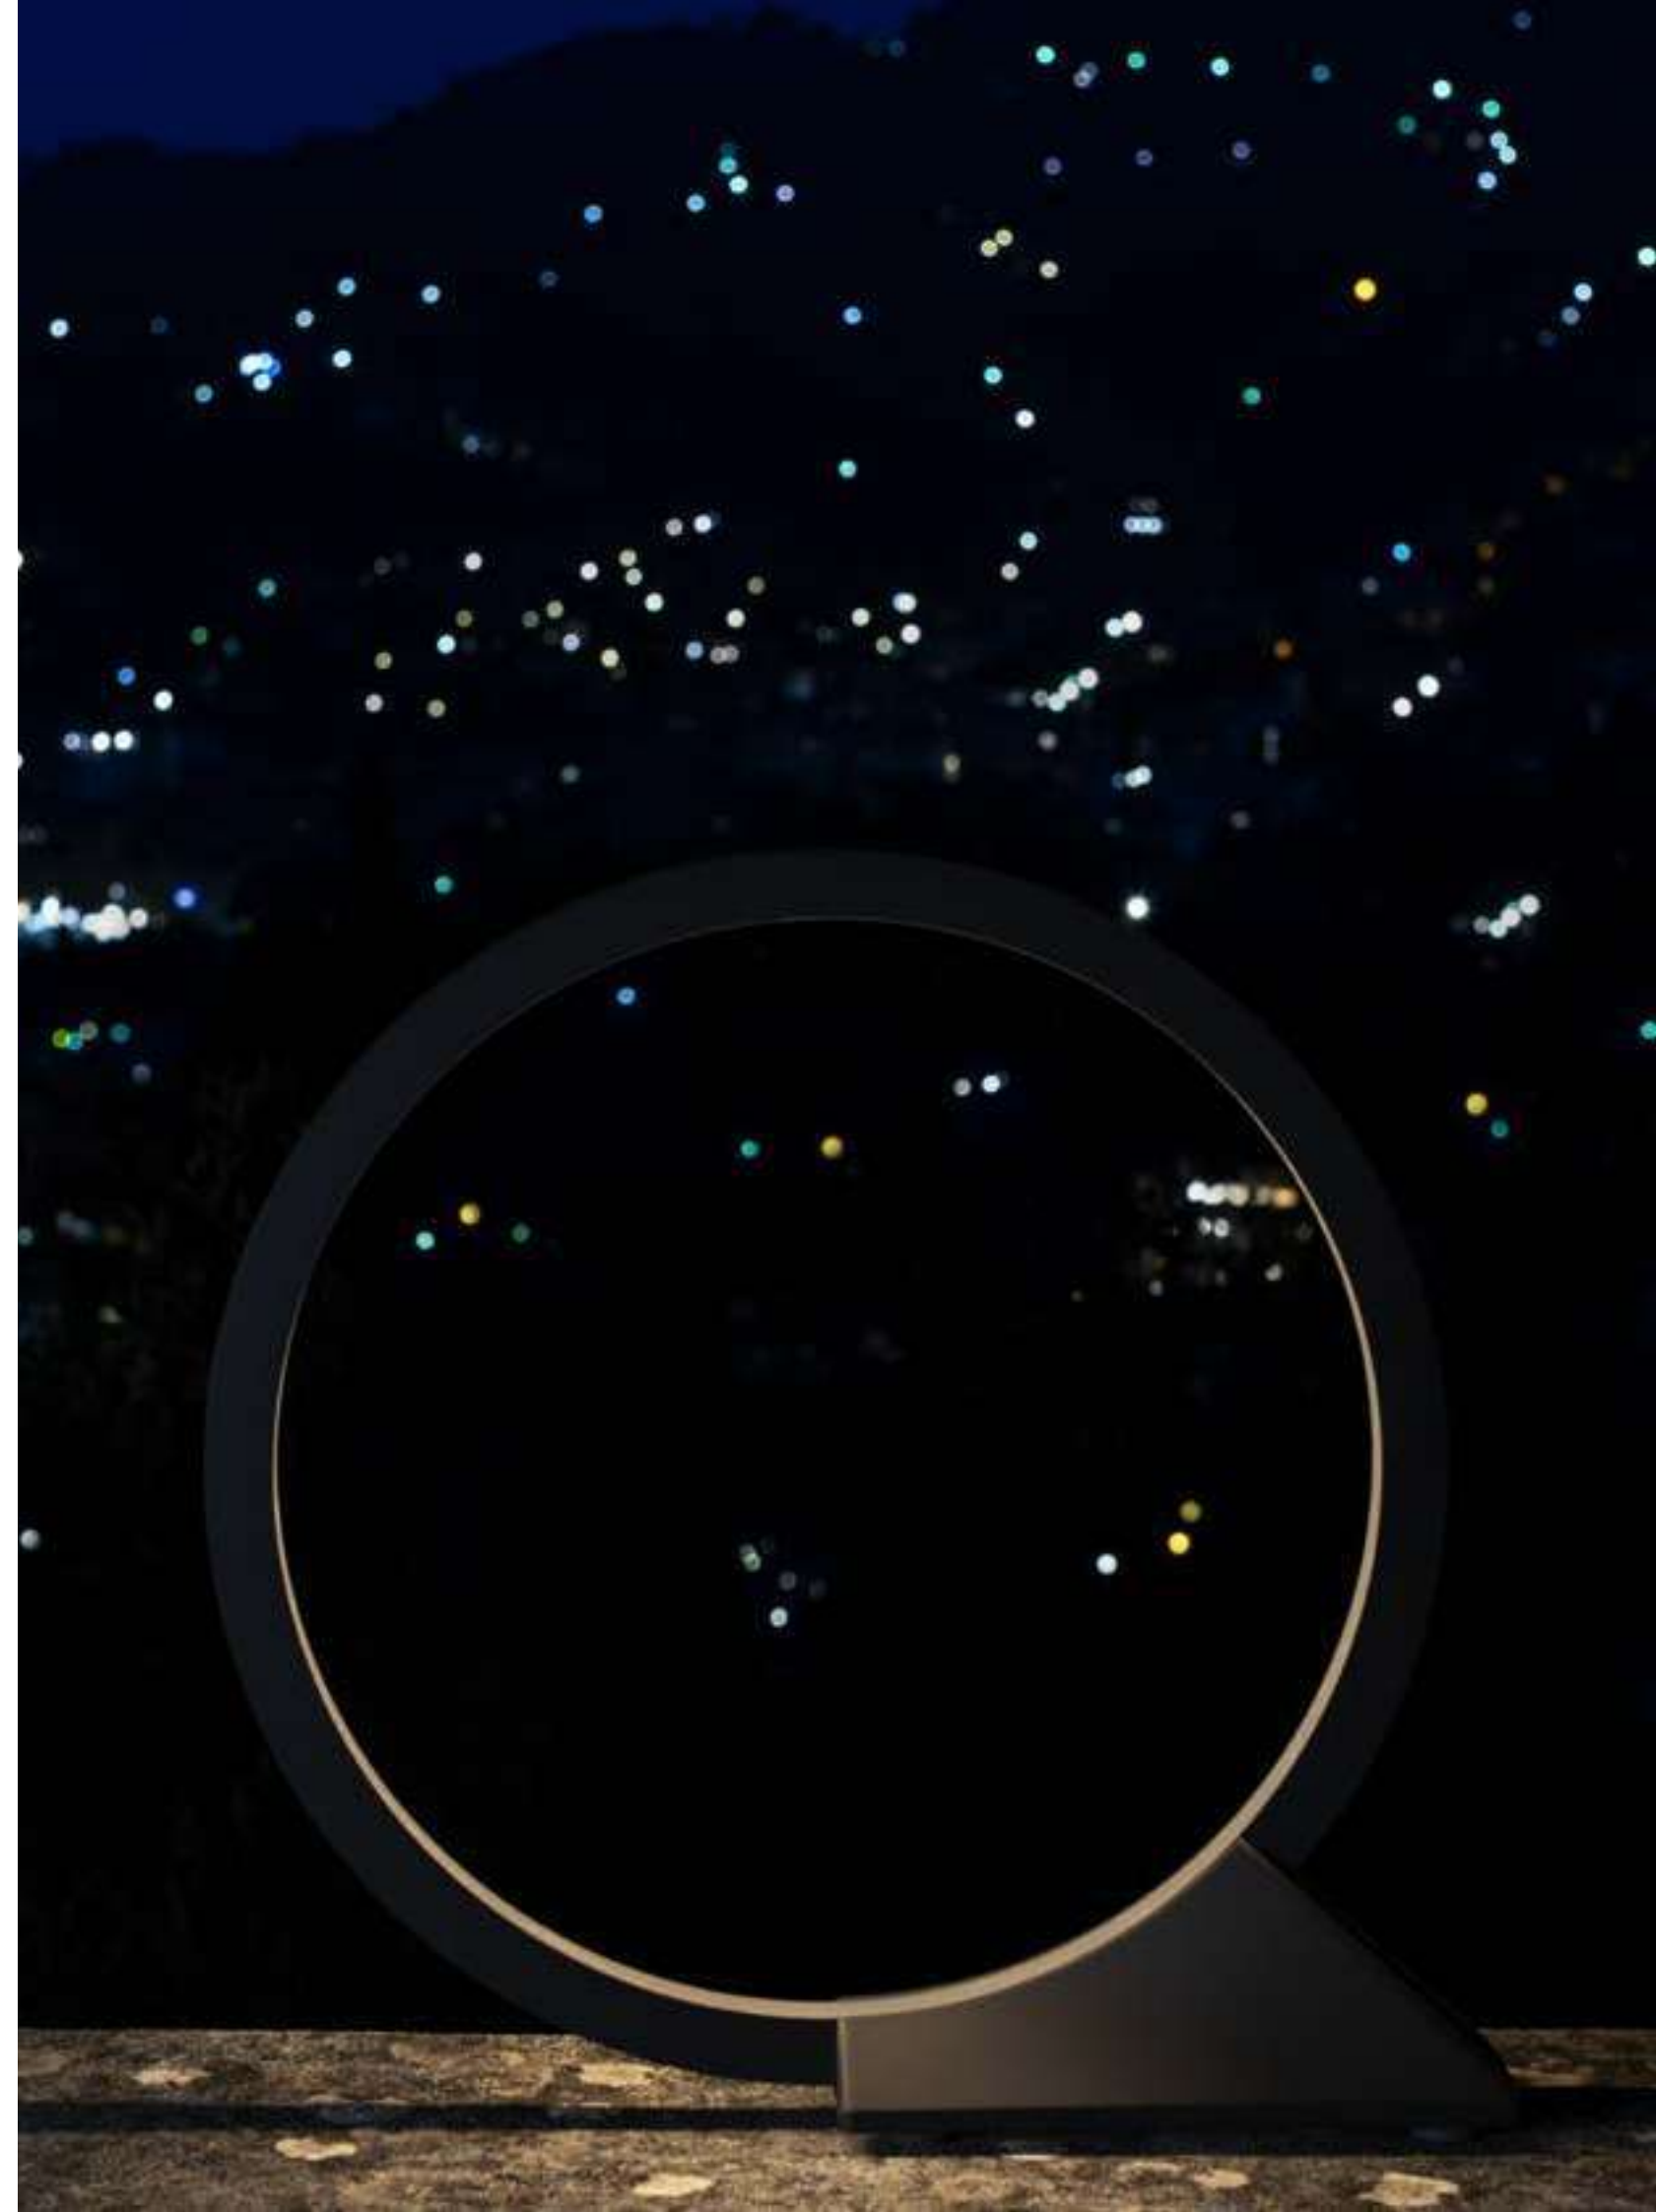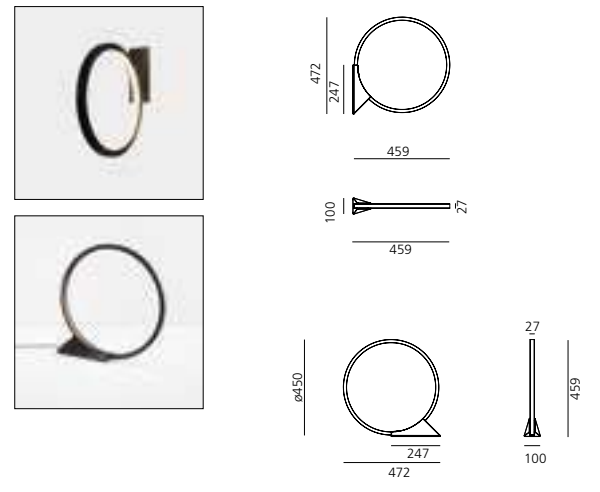


Walking

Carlotta de Bevilacqua

↪ 2017





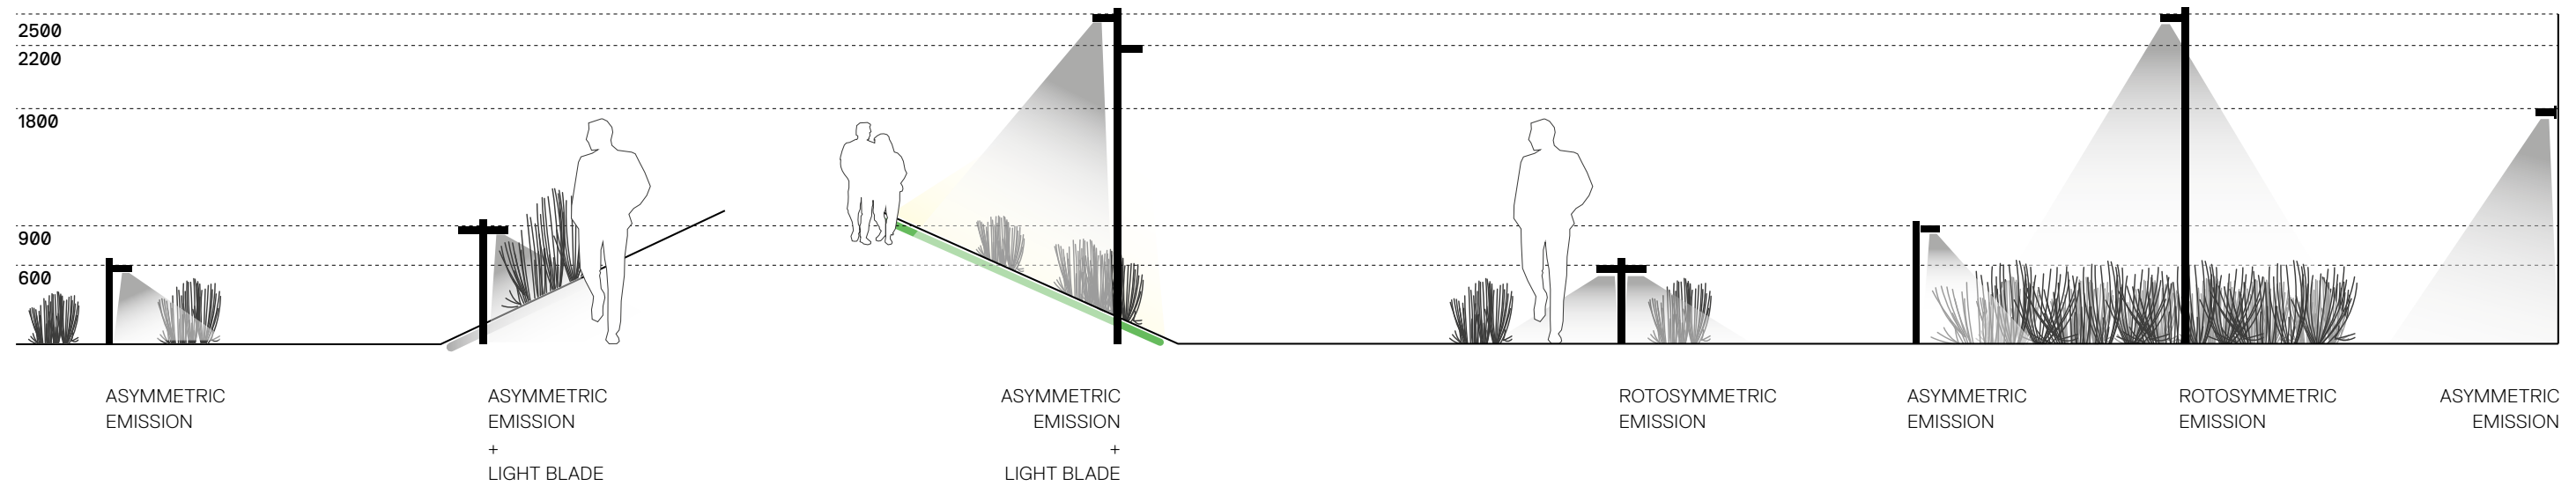

Walking optical system

It can create different luminous landscapes starting from three white or coloured lighting performances, either single or combined within the same element according to a space gradient of structures of different heights.

It defines a new, exciting lighting language, respectful of the surrounding space, which it approaches with deeds that promote its perception and a man-sized experience. A dynamic discovery of space that is allowed, among other things, by the possible interaction with sensors, the Artemide App and advanced intelligences.

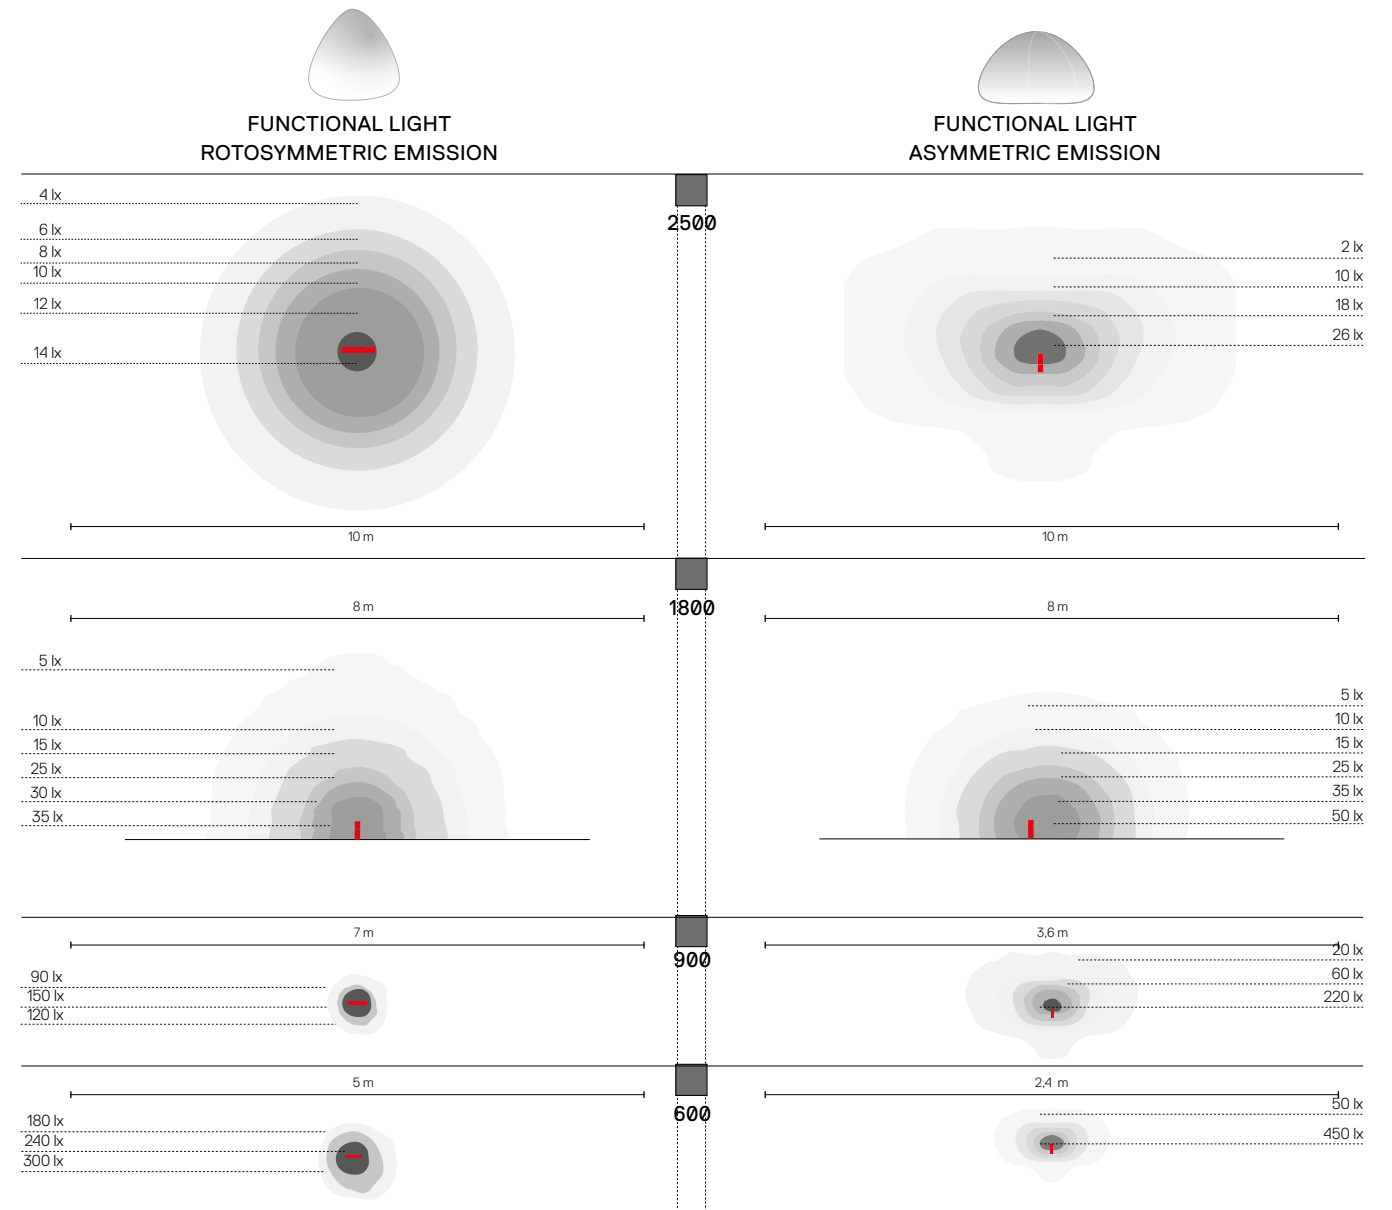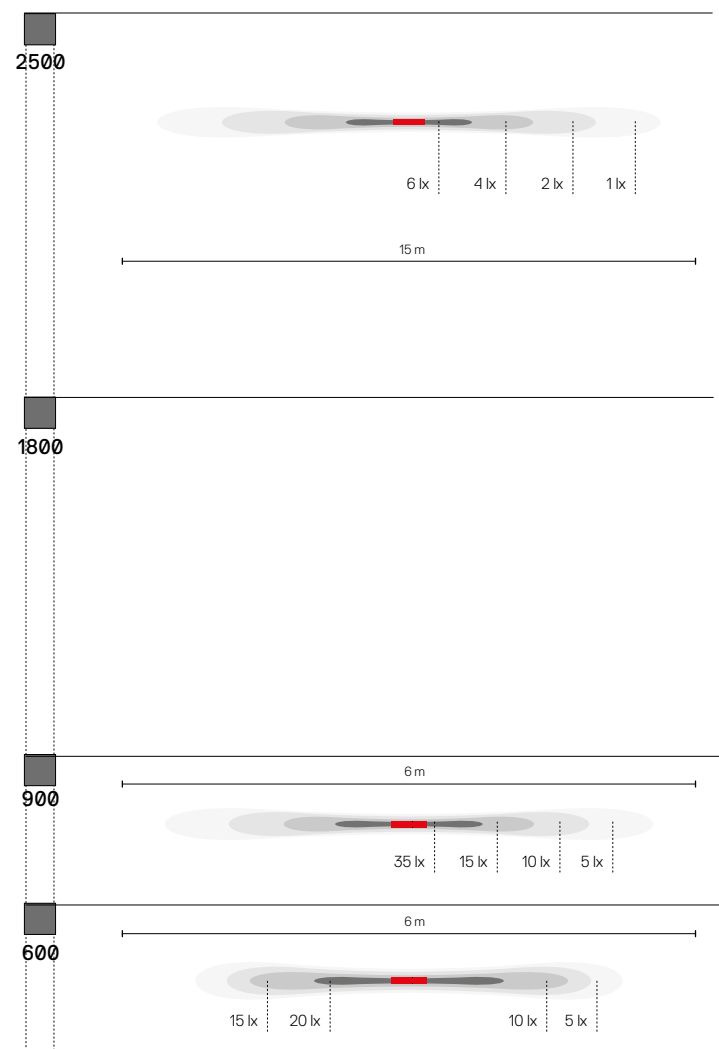

Walking head pole typologies

Walking wall typologies

FUNCTIONAL LIGHT



ROTSYMMETRIC EMISSION



5 2x63°
10,3W
334 lm



ASYMMETRIC EMISSION



5 2x60° / 16°+54°
10,3W
455 lm

LIGHT BLADE



RED EMISSION



GREEN EMISSION



BLUE EMISSION



WHITE EMISSION

FUNCTIONAL LIGHT



ROTSYMMETRIC EMISSION



5 2x63°
10,3W
334 lm



ASYMMETRIC EMISSION



5 2x60° / 16°+54°
10,3W
455 lm

LIGHT BLADE



RED EMISSION



GREEN EMISSION



BLUE EMISSION



WHITE EMISSION






Artemide
App
↪ on request






For further information on Walking
↪ visit artemide.com

Walking pole configuration typologies

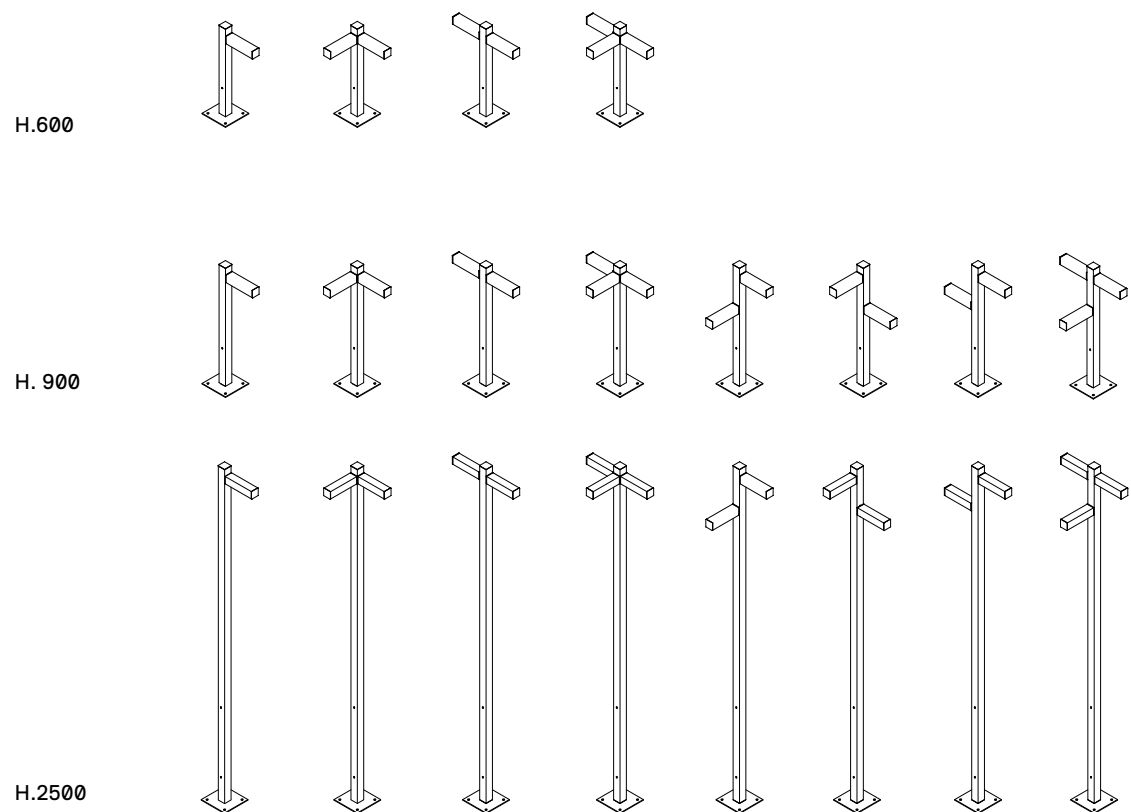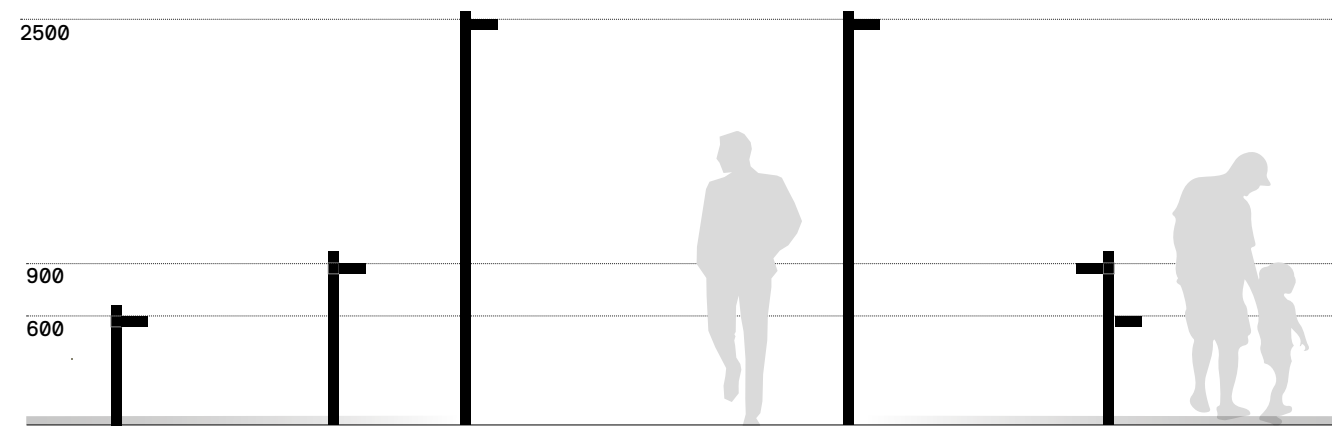

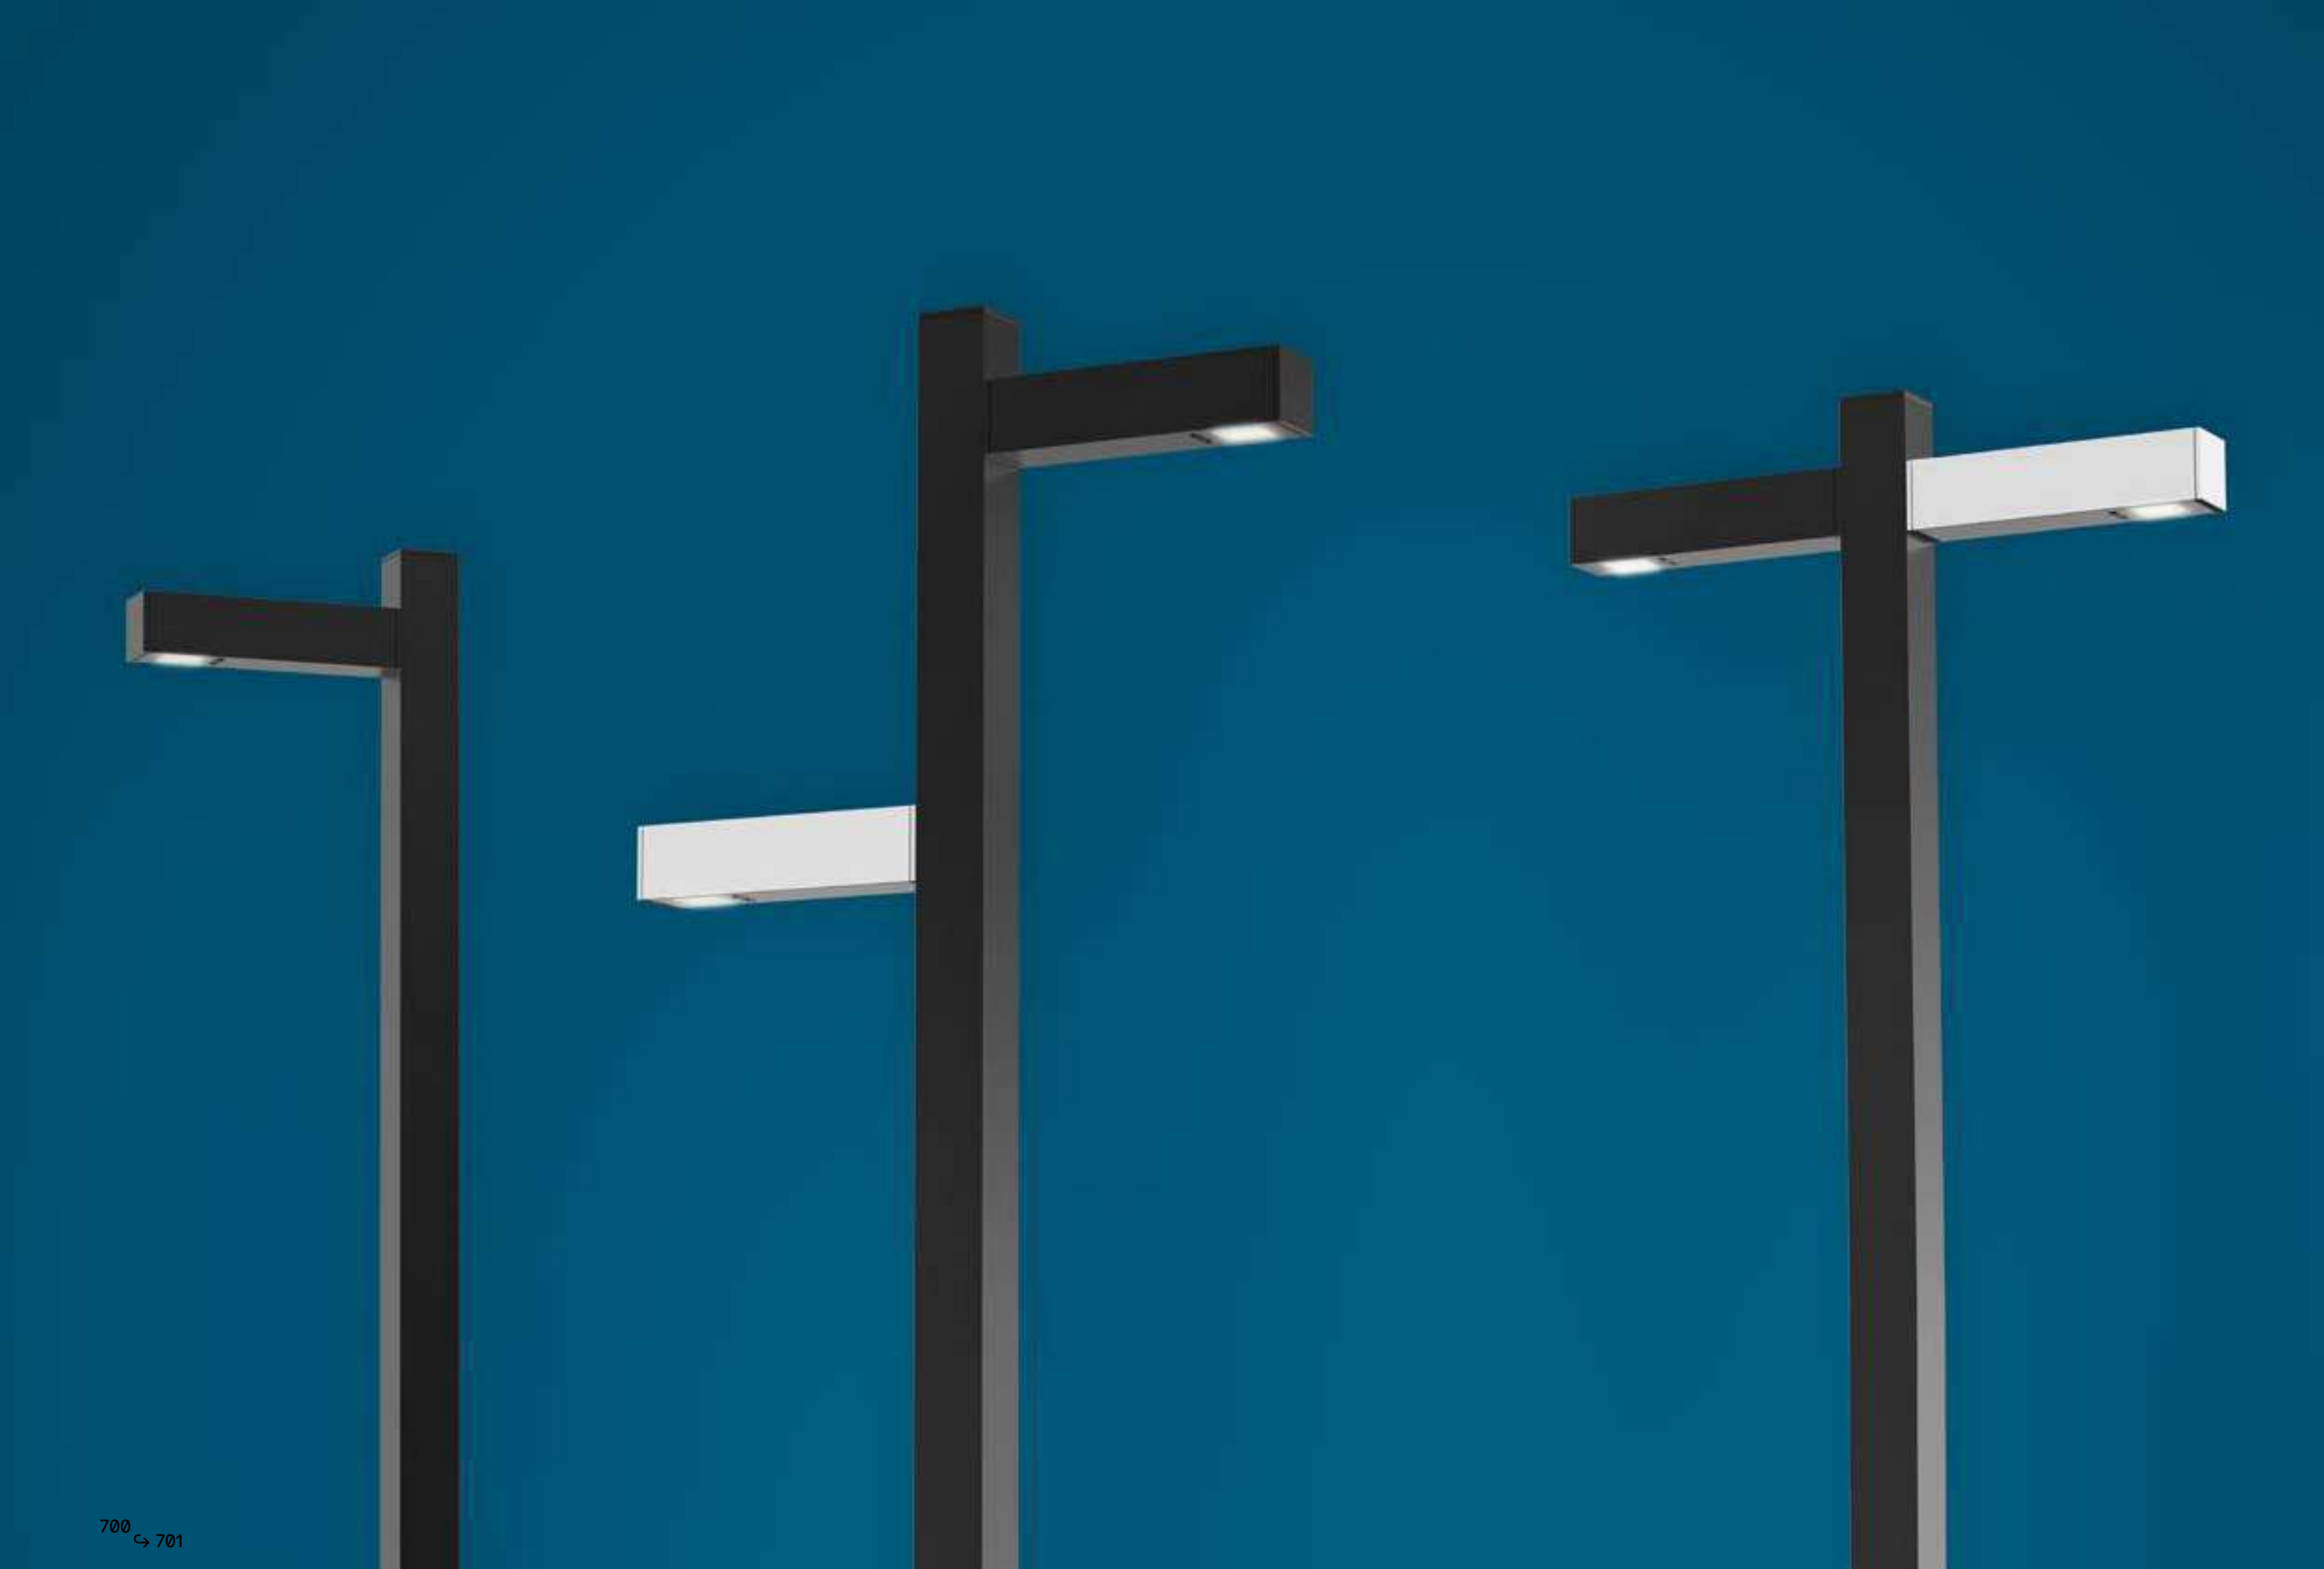

Walking head colors

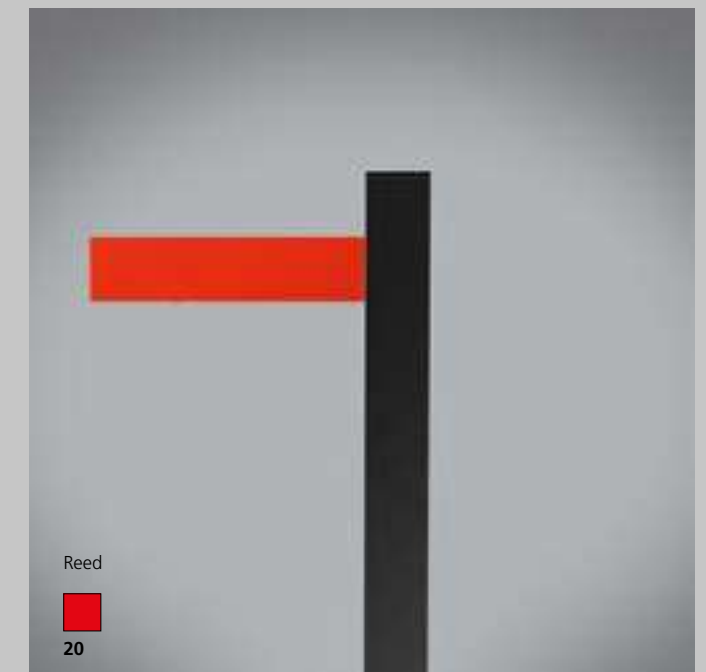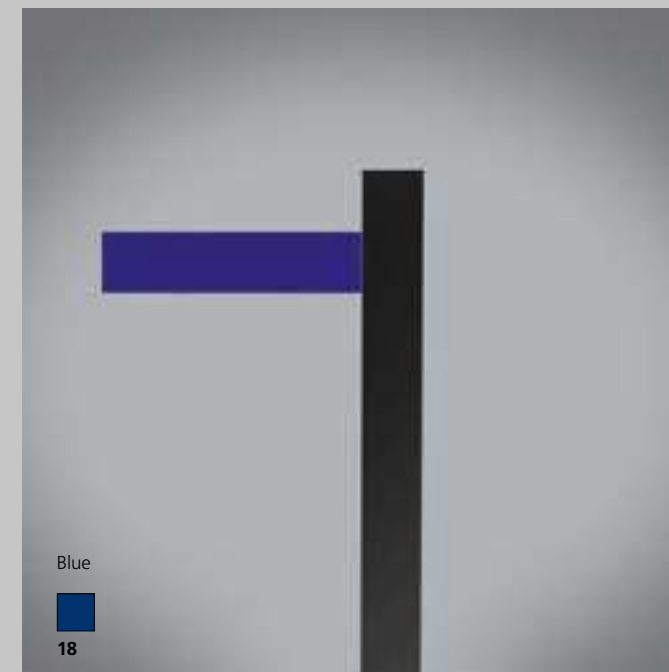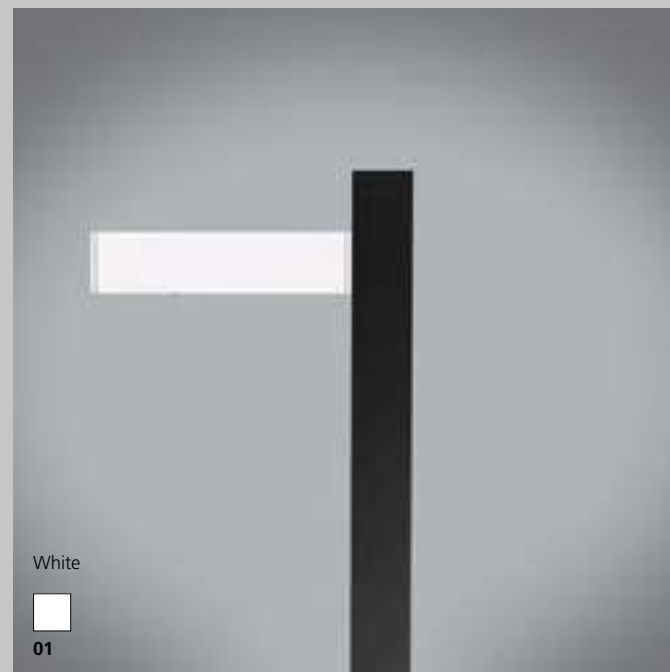


↪ WALKING - POLE

Black




POLE 600

Pole configuration		Code
Head	A Head	
	1x 60 h.	T4505A30
	2x90° 60 h.	T4505B30
	2x180° 60 h.	T4505C30
	3x270° 60 h.	T4505D30




POLE 900

Pole configuration				Code
Head	A Head up	B Head down		
	1x 90 h.			T4506A30
	2x90° 90 h.			T4506B30
	2x180° 90 h.			T4506C30
	3x180° 90 h.			T4506D30
	2x90° 90 h.	60 h.		T4506E30
	2x90° 90 h.	60 h.		T4506F30
	2x180° 90 h.	60 h.		T4506G30
	3x180° 90 h.	60 h.		T4506H30

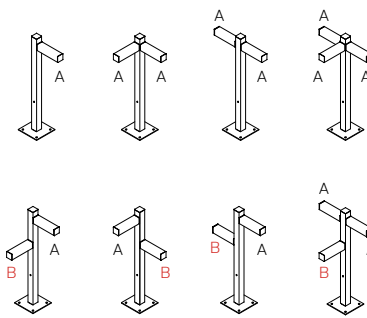


POLE 2500

Pole configuration				Code
Head	A Head up	B Head down		
	1x 250 h.			T4507A30
	2x90° 250 h.			T4507B30
	2x180° 250 h.			T4507C30
	3x180° 250 h.			T4507D30
	2x90° 250 h.	210 h.		T4507E30
	2x90° 250 h.	210 h.		T4507F30
	2x180° 250 h.	210 h.		T4507G30
	3x180° 250 h.	210 h.		T4507H30

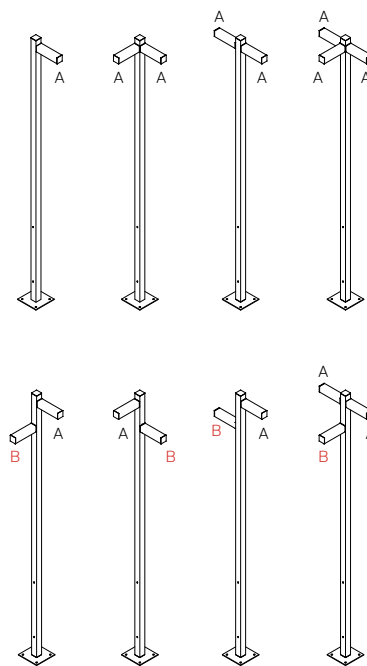

↪ WALKING - HEAD POLE

Grey-white Ral 9002 20	Blue 50	Black 30	Red 40	Yellow 60
------------------------------	------------	-------------	-----------	--------------





MacAdam 7SDCM
Life L90 (10K)>60500h
CRI =80

IP65



FUNCTIONAL LIGHT

W	L. Cable	Beam	Flux	CCT	Code
10,3 W	270	S	334 lm	3000K	T4501SM0. 20/30/40/50/60
		AS	455 lm	3000K	T4501AS0. 20/30/40/50/60



LIGHT BLADE

W	L. Cable	Light color	Code
10,3 W	270	Red	T4501LR0. 20/30/40/50/60
		Green	T4501LG0. 20/30/40/50/60
		Blue	T4501LB0. 20/30/40/50/60
		White	T4501LW0. 20/30/40/50/60






↔ WALKING - WALL

Grey-white Ral 9002	Blue	Black	Red	Yellow	S	AS	MacAdam 7SDCM Life L90 (10K)>60500h CRI =80	IP65
20	50	30	40	60				


FUNCTIONAL LIGHT

W	L. Cable	Beam	Flux	CCT	Code
10,3 W	270	S	334 lm	3000K	T4503SM0. 20/30/40/50/60
		AS	455 lm	3000K	T4503AS0. 20/30/40/50/60



LIGHT SIGNS


W	L. Cable	Light color	Code
10,3 W	270	Red	T4503LR0. 20/30/40/50/60
		Green	T4503LG0. 20/30/40/50/60
		Blue	T4503LB0. 20/30/40/50/60
		White	T4503LW0. 20/30/40/50/60



Antarktíkós


Carlotta de Bevilacqua

↪ 2017

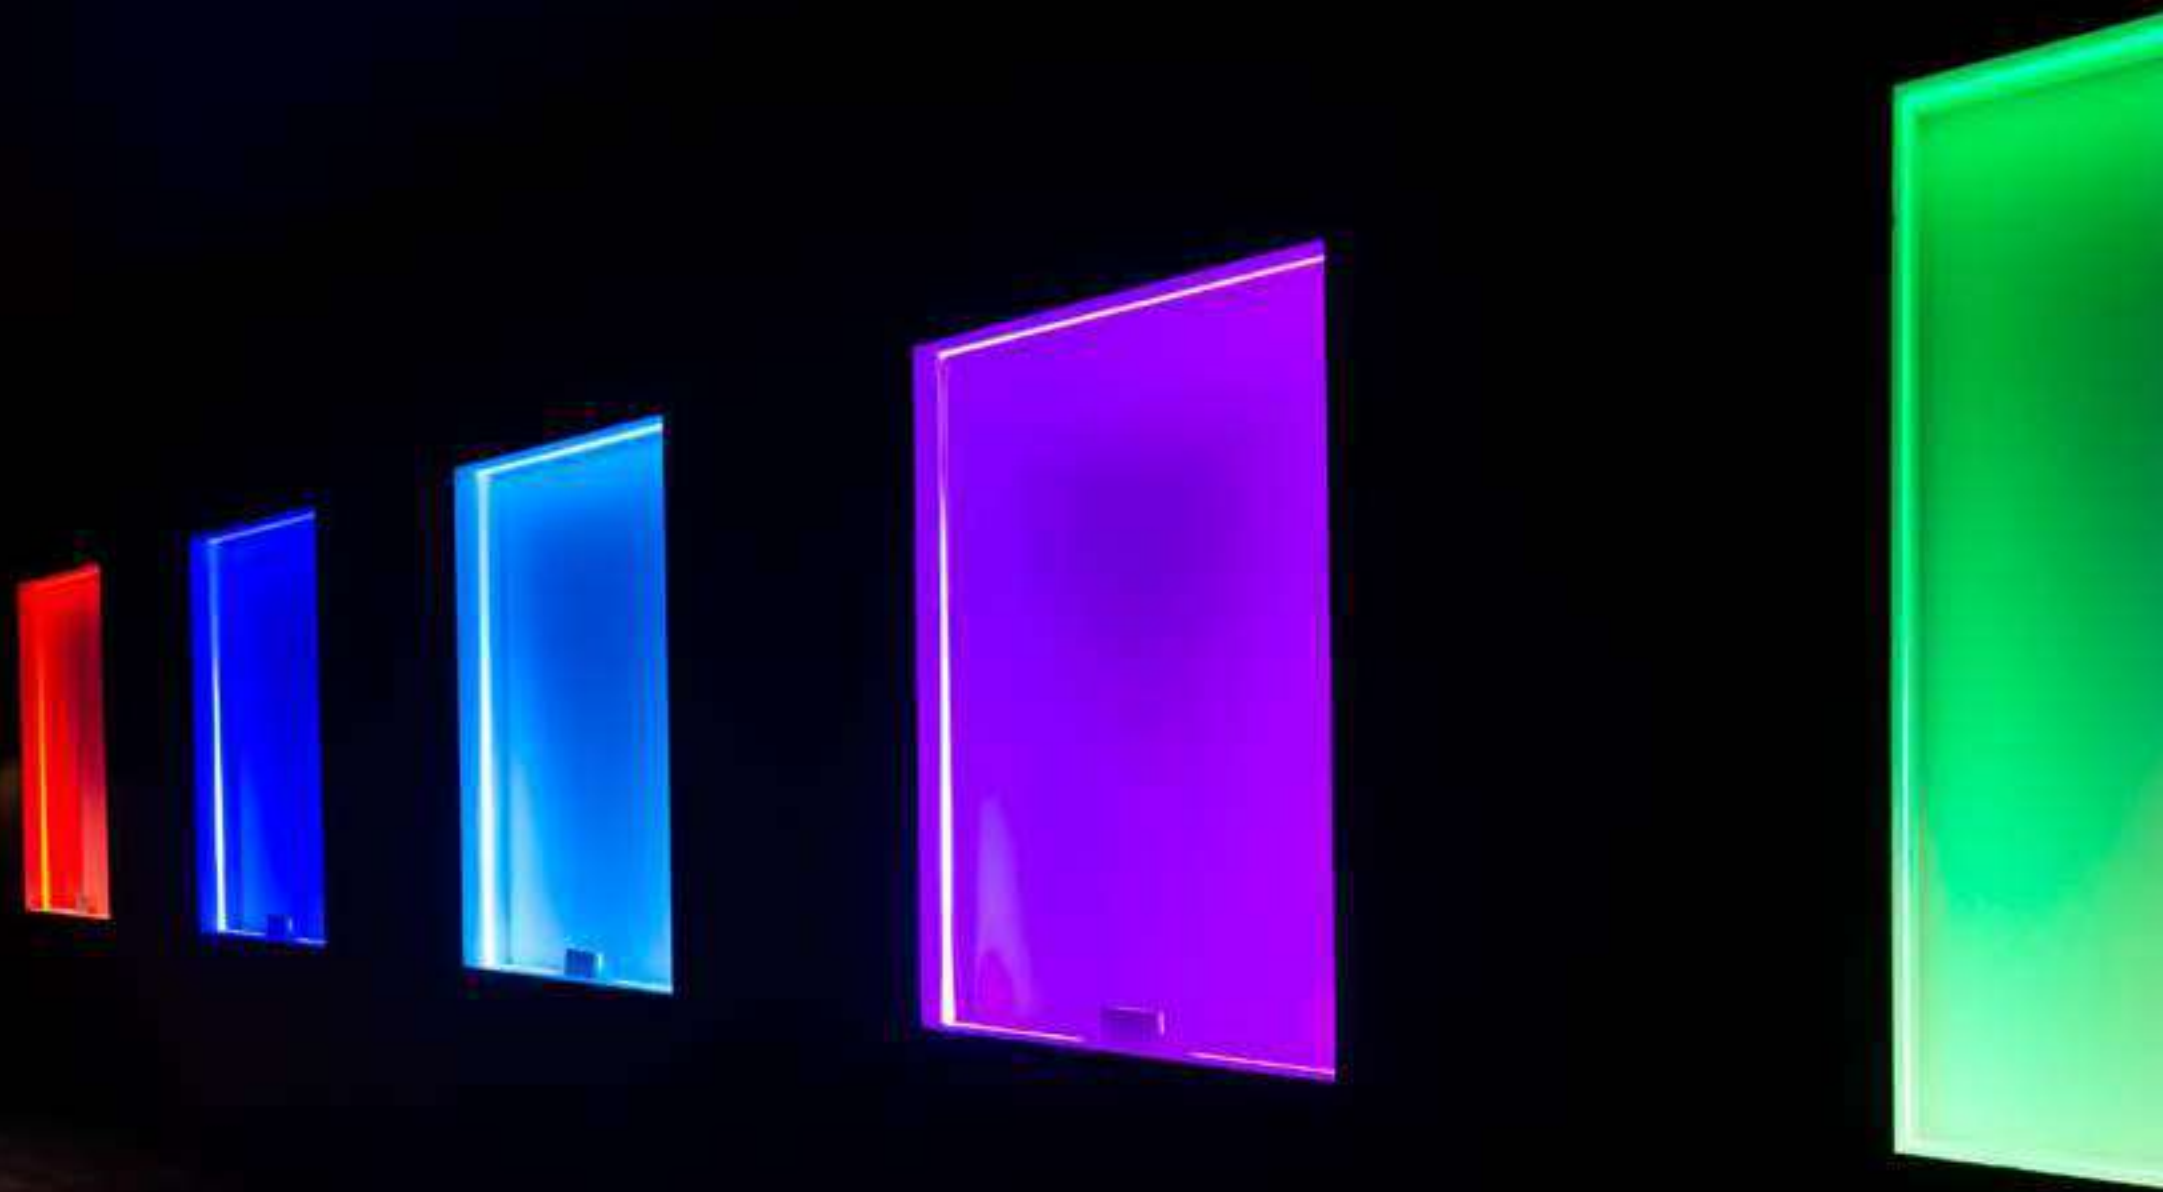

Antarktíkós optic system

An innovative patented optic realizes a light blade that, from a single LED source, draws a 360° light profile. A perfect tool for architectural lighting that emphasizes with high efficiency the different opening profiles.

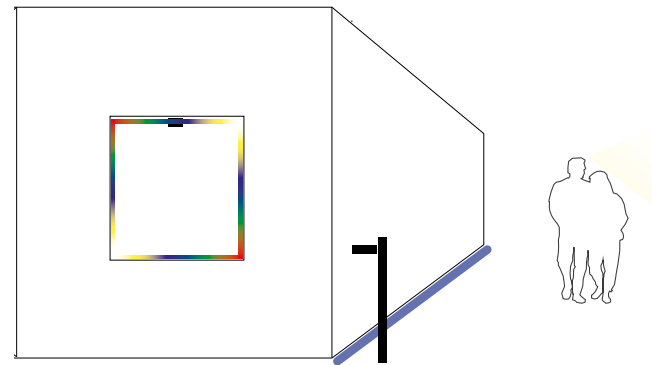

For further information on Antarktíkós
visit artemide.com

LIGHT TEMPERATURES AND COLORS

3000 K



↪ ANTARKTIKÓS

Grey-white
Ral 9002



AS




Driver 500/700mA
supplied separately.

MacAdam 7SDCM
Life L70 (10K)>35500h
CRI =80

IP65
IK06

ANTARKTIKÓS WHITE


W	Flux	CCT	Code
3 W	31 lm	3000K	T4520030





Driver	Vac	L _{mm}	W _{mm}	H _{mm}	IP	n°device in series	Code		
cc 10W	700mA	220-240	75	38	25	20	1-4max	Undimmable	NL19035
cc 14W	700mA	220-240	79	38	25	67	1-5max	Undimmable	DV3003
cc 25W	900mA	220-240	164	38	25	20	1-9max	DALI/PUSH dimmable	DV1003
cc 38W	900mA	220-240	185	35	33	67	1-12max	DALI/PUSH dimmable	DV1042

ANTARKTIKÓS RGB

W	Flux	Code
3 W	31 lm	T4521030



Driver	Vin	Vac	L _{mm}	W _{mm}	H _{mm}	IP	n°device in series	Code
25 W	100-277 Vac	12Vdc	148	40	32	67	max 5	DV1055
40 W	100-277 Vac	12Vdc	163	43	32	67	max 8	DV1056
96 W	100-277 Vac	12Vdc	140	63	32	67	max 20	DV1057
150 W	100-277 Vac	12Vdc	228	68	39	67	max 30	DV1043
DIMMER DMX	12-24 Vdc	12-24 pwm	88	54	25	20	max 1	DV1059
DIMMER DALI	12-24 Vdc	12-24 pwm	88	54	25	20	max 1	DV1052

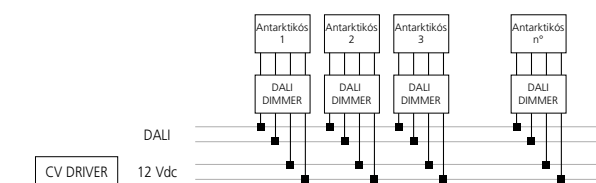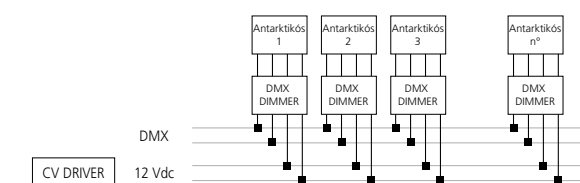

Reeds

Klaus Begasse

↪ 2013

Floor light fixture with diffuse emission, with monochromatic LED light sources.

Available with IP20 protection rating for indoors, IP67 and IP68 for outdoors. IP67 and IP68 versions are available in Single or Triple shape.

Light is diffused through 7 PMMA rods with different heights to give the impression of a reed bed and which can be screwed to the base by means of AISI 316 stainless steel bushes. Part of the light is also diffused on the floor around the base.

The base has an irregular shape, which has been designed to allow a «mosaic» connection with other light fixtures so as to create an elaborate composition as needed.

Technical features in compliance with EN60598-1 (IP20, IP67) and section 2-18 (IP68).

Reeds IP20

Consists of a base made up of a transparent polycarbonate casing. Installed between 2 aluminium plates and anti-scratch support feet.

Technopolymer aesthetic cover.

Complete with integrated ballast and plug with transparent cable. Switching on and off are performed by means of the pedal push button located on the cable.

Reeds IP67

Consists of a base made up of a transparent polycarbonate casing installed between 2 AISI316 stainless steel plates fixed by means of AISI316 stainless steel screws. Water sealing is assured by a silicone gasket. The light fixture can be fastened to the floor by means of the holes in the lower plate. Technopolymer aesthetic cover.

Complete with integrated ballast and supplied with a 1.5 m-long H05RN-F 2x1 cable provided with IP67 connector for the electrical connection to the mains suitable for 5-13.5mm diameter cables.

Reeds IP68

Consists of a base made up of a transparent polycarbonate casing installed between 2 AISI316 stainless steel plates fixed by means of AISI316 stainless steel screws. Water sealing is assured by a silicone gasket. The light fixture can be fastened to the floor by means of the holes in the lower plate. Technopolymer aesthetic cover.

The light fixture is supplied with 24V DC power and is provided with a 5 m-long H05RN-F 2x1 cable with IP68 connector for the electrical connection to the mains suitable for 5-13.5mm diameter cables.



For further information on Reeds
↪ visit artemide.com







↪ REEDS

Anthracite Grey 20	AS	220/240Vac 50/60Hz electronic ballast included	MacAdam 4SDCM Life L70 (6K)>35600h CRI =80	IP20/IP67/IP68 IK10
------------------------------	----	--	--	------------------------

IP20



W	Weight	Beam	Flux	CCT	Code
9,5 W	1,73 kg	AS	79 lm	3000K	T087300



IP67

W	Weight	Beam	Flux	CCT	Code
9,5 W	2,53 kg	AS	79 lm	3000K	T087400



Electronic ballast included.



IP68

W	Weight	Beam	Flux	CCT	Code
9,5 W	2,53 kg	AS	79 lm	3000K	T087500

Electronic ballast 24Vdc supplied separately.
Please see page 945 for drivers installation details.



Driver	VaC in	VaC out	L _{mm}	W _{mm}	H _{mm}	IP	Code
25 W 24Vdc	110-277	24	150	40	32	67	T409996
60 W 24Vdc	110-277	24	165	43	32	67	T409998
90 W 24Vdc	110-277	24	165	61	36	67	T409999


↪ REEDS TRIPLE

Anthracite Grey 20	AS	220/240Vac 50/60Hz electronic ballast included	MacAdam 4SDCM Life L70 (6K)>35600h CRI =80	IP20/IP67/IP68 IK10
------------------------------	----	--	--	------------------------

IP67

W	Weight	Beam	Flux	CCT	Code
28 W	7,38 kg	AS	237 lm	3000K	T087700


Electronic ballast included.

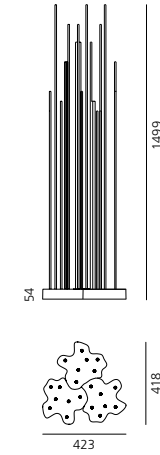

IP68

W	Weight	Beam	Flux	CCT	Code
28 W	7,38 kg	AS	237 lm	3000K	T087800

Electronic ballast 24Vdc supplied separately.
Please see page 945 for drivers installation details.

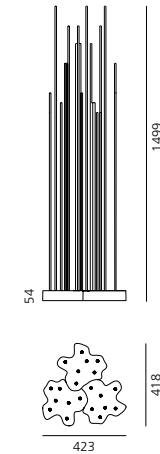

Driver	VaC in	VaC out	L _{mm}	W _{mm}	H _{mm}	IP	Code
60 W 24Vdc	110-277	24	165	43	32	67	T409998
90 W 24Vdc	110-277	24	165	61	36	67	T409999



Tetragono

Ernesto Gismondi

↪ 2013



For further information on Tetragono
↪ visit artemide.com

Lighting fixtures with direct asymmetrical light (floor version) and radial emission (wall version), with monochromatic LED light sources.

Floor or wall installation.

Finishing: anthracite grey painted.

Technical features of light fixtures in compliance with EN60598-1.

ENEC approved.

Tetragono floor: consists of lamp and supporting pole in extruded EN-AW-6060 aluminium, subjected to chromate treatment and painted, height 450 and 900mm, with painted steel base flange, with holes for floor installation by means of log bolts or dowels.

Tetragono wall: light fixture with radial light emission, consists of body and wall fixing plate; Lamp support in extruded EN-AW-6060 aluminium, subjected to chromate treatment and painted, with painted steel base flange, with holes for wall installation.

Lighting unit in die-cast EN-AB 47100 aluminium painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidising primer, polyester paint.

Provided with metalised polycarbonate reflectors.

UV resistant diffuser in shock resistant polycarbonate with bright finish.


AISI 316 fixing screws and silicone gaskets.

Provided with cable and IP68 connector for the connection to the mains suitable for 5-13.5mm diameter cables (floor version) or for max 3,5mm diameter cables (wall version).



↳ TETRAGONO

Anthracite Grey AS




220/240Vac 50/60Hz
electronic ballast
included

MacAdam 2SDCM
Life L70 (6K)>36300h
CRI =90

IP65
IK10


TETRAGONO WALL

W	Weight	Beam	Flux	CCT	Code
15 W	1,8 kg	AS	481 lm	3000K	T417300W00




TETRAGONO FLOOR 45

W	Weight	Beam	Flux	CCT	Code
15 W	3,4 kg	AS	481 lm	3000K	T417100W00



TETRAGONO FLOOR 90

W	Weight	Beam	Flux	CCT	Code
15 W	5,4 kg	AS	481 lm	3000K	T417200W00



Ippolito

Alessandro Pedretti
(Studio Rota & Partners)

↪ 2011



↪ IPPOLITO

Anthracite Grey
Light Grey

AS





Electronic ballast included.

MacAdam 2SDCM
Life L70 (6K)=36300h
CRI =90

IP65
IK10



IPPOLITO 45

W	Weight	Beam	Flux	CCT	Code
15 W	6,36 kg	AS	1137 lm	3000K	T085100



IPPOLITO 90

W	Weight	Beam	Flux	CCT	Code
15 W	8,81 kg	AS	1212 lm	3000K	T085000



Light fixture with direct emission, with a unique high-performance monochromatic COB LED.

Floor installation.

Available in two heights (h 45cm and h 90cm).

Consists of support with lamp compartment and ballast compartment.

Cylindrical lamp support in engineering polymer (compact polyurethane). Painted with polyurethane resistant to atmospheric and chemical agents.

Fixture head in die-cast EN-AB 47100 aluminium, painted with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

UV resistant diffuser in transparent shock resistant polycarbonate.

Accessory compartment in polymers with closure cover in AISI 316.

Hot galvanised steel mounting plate, with holes for ground fixing by means of log bolts or dowels.

AISI 316 stainless steel screws and silicone seal gasket.

Provided with cable and IP68 connector for connection to the mains cables with 5 to 13,5 mm diameters.

Technical features of light fixtures in compliance with EN60598-1.



For further information on Ippolito
↪ visit artemide.com

Piroscafo

Ernesto Gismondi
↪ 2014



Lighting appliance for ground fixing with directional light emission, using monochrome LED light sources.

The appliance consists of a body and a fixing base of EN-AB 47100 die-cast aluminium finished with a 3-stage outdoor treatment: nanotechnologies, anti-oxidising primer, polyester painting.



Shock-resistant tempered glass screen.

AISI 316 stainless steel screws and silicone seal gaskets.



Provided with cable and IP67 connector for connection to the mains. Supports cables with 7 to 12 mm diameters.

Technical specifications comply with the EN60598-1 norm.

↪ PIROSCAFO

Anthracite Grey 00	Rust 10	Green 20	AS 	220/240Vac 50/60Hz electronic ballast included	MacAdam 7SDCM Life L70 (6K)>36300h CRI = 80	IP65 
-----------------------	------------	-------------	---	--	---	---

W	Weight	Beam	Flux	CCT	Code
14 W	3,65 kg	AS	1143 lm	3000K	T0819. 00/10/20



For further information on Piroscafo
↪ visit artemide.com





Oblique

Arik Levy
↪ 2014

Series of direct-light appliances fitted with high-yield LED sources.

Floor, bollard, or wall fitting.

Available with 2 finishes: painted grey-white (RAL 9002) and charcoal grey.

Pre-treated with hard anodic oxide coating, for enhanced resistance to corrosion, and subsequent polyester painting.

The technical specifications of the appliances comply with EN60598-1.

Made up of lighting body, wall mount (wall version); lighting body, bollard available in two heights, floor fixing flange (bollard version.)

Accessories available for the wall version include: 250cm-high bollard; floor fixing peg.

EN-AB 471000 die-cast aluminium lighting body.

EN-AW-6060 aluminium extruded bollard.

Supplied with IP68 connector for connection with mains.



For further information on Oblique
↪ visit artemide.com




↪ OBLIQUE

White □ 20	Anthracite Grey ■ 00	AS ■	220/240Vac 50/60Hz electronic ballast included	MacAdam 3SDCM Life L70 (6K)= 50000h CRI =80	IP65 ⊕ IK07
------------------	----------------------------	---------	--	---	-------------------

OBLIQUE BOLLARD 75


W	Weight	Beam	Flux	CCT	Code
15 W	4 kg	AS	750 lm	3000K	T086300

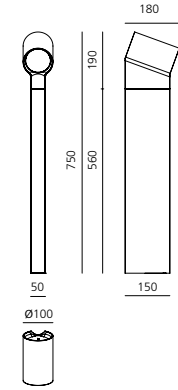

Accessories	Code
Ground picket	T086500

OBLIQUE BOLLARD 45


W	Weight	Beam	Flux	CCT	Code
15 W	43 kg	AS	750 lm	3000K	T086200



Accessories	Code
Ground picket	T086500

OBLIQUE

W	Weight	Beam	Flux	CCT	Code
20 W	2 kg	AS	918 lm	3000K	T086020



Accessories	Code
Ground picket	T086500
Pole	T086400



Basolo

Ernesto Gismondi

↪ 2014

↪ BASOLO

Anthracite grey



AS XF



220/240Vac 50/60Hz
electronic ballast included

MacAdam 2SDCM
Life L70 (6K) >36000h
CRI =80


IP67
IK06

BASOLO WALLWASHER

W	Weight	Beam	Flux	CCT
27 W	3,4 kg	AS	2067 lm	3000K

Fixed Code
T419700W00


Mobile Code
T440000W00



BASOLO CEILING

W	Weight	Beam	Flux	CCT
27 W	3,4 kg	XF	2220 lm	3000K

Code
T440100W00



Floor and ceiling asymmetrical wallwasher light fixture with a roto-symmetrical option, only available for the ceiling version. The ceiling version is also available with downlight optics with high visual comfort (UGR<19).

Fixture consisting of cubic body and floor / ceiling fixing plate. Ceiling version includes a security cable, Wallwasher version also available in movable version .

Body made in die-cast aluminium EN-AB 44100 with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

Includes a metal-finish polycarbonate reflector.

Diffuser in tempered silk-screened glass.

AISI 316 fixing screws and silicon gaskets.

Supplied with H05RN-F 3X1 cable and IP67 network connector using 5-13.5 diameter cables, housed in a compartment in the lower part of the fixture.

Technical features in compliance to EN60598-1.



For further information on Basolo
↪ visit artemide.com

Cuneo Cuneo Mini

Klaus Begasse
↔ 2010, 2015



The elliptical light emission and the flat shape of the fixture make it particularly suitable for floors or spacious areas in gardens to provide a side lighting.



For further information on Cuneo and Cuneo Mini
↪ visit artemide.com

Light fixture with direct side emission, with high-performance LED light sources. Monochromatic LEDs are used together with collimators and a light-diffusing prismatic screen to obtain an optimum lighting beam.

Floor or wall installation. In the wall installation, the light can be pointed either upwards or downwards.

Available in 3 finishes: light grey, dark grey and rust painted.

Consists of lighting cap and terminal board fixed together by means of locking screws.

Cap and terminal board in die-cast EN AB-47100 aluminium, gaskets in silicone rubber. Electronic ballast integrated in the fixture.

Cuneo: PMMA collimators installed on the LED light sources. Light-diffusing prismatic screen in PMMA siliconed flush with the lighting cap.

Cuneo Mini: High-yield COB LED source with high-reflection anodized aluminium body. Etched tempered glass screen glued flush to the lighting body with silicon.

Power connection to the mains to be carried out outside the fixture, without the need to open, by means of a pre-installed IP65 connection device suitable for cables with a diameter between 6 and 13 mm.


Wall installation by means of a bracket in folded steel sheet to which the fixture is fastened with two screws.

Screws in AISI 316 stainless steel.






All the components in die-cast aluminium and the steel bracket for wall or floor fixing are painted by means of 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

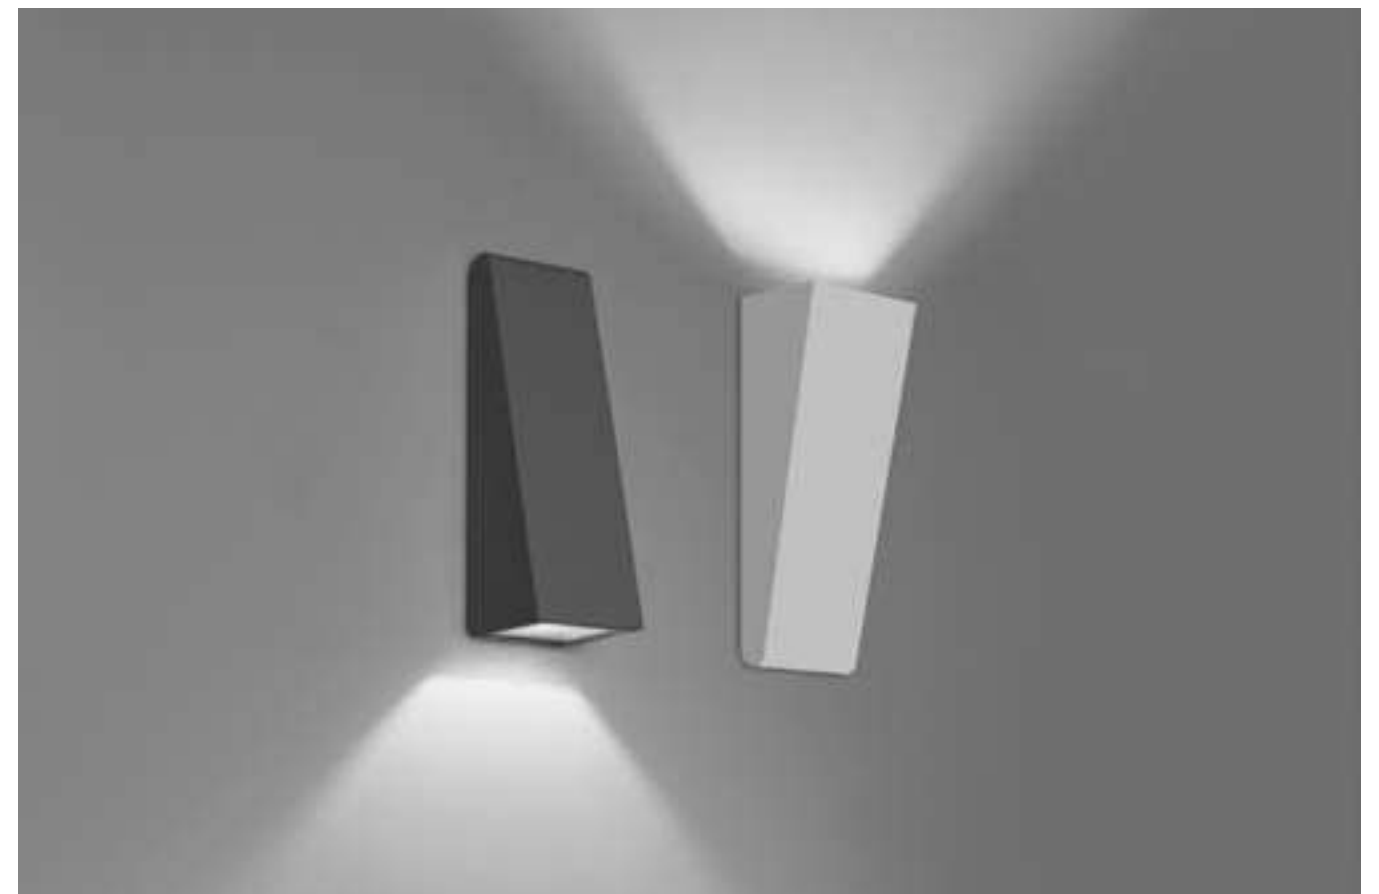Technical features of light fixtures in compliance with EN60598-1.

ENEC approved.





↪ CUNEO, CUNEO MINI

Grey-white Ral 9002	Rust	Anthracite Grey	AS	220/240Vac 50/60Hz electronic ballast included	MacAdam 2SDCM Life L70 (6K)= 50000h CRI =90	IP65
						
00	10	20				


CUNEO

W	Weight	Beam	Flux	CCT	Code
17 W	1,8 kg	AS	595 lm	3000K	T0827. 00/10/20



CUNEO MINI

W	Weight	Beam	Flux	CCT	Code
11 W	0,88 kg	AS	805 lm	3000K	T0828. 00/10/20





Niki



Ernesto Gismondi
↪ 1999



↪ NIKI

Inox Satiny 15	Inox Polished 13	XF 	220/240Vac 50/60Hz electronic ballast included	MacAdam 3SDCM Life L70 (6K) 50000h CRI=80	IP65  IK06
-------------------	---------------------	---	--	---	---

W	Weight	Beam	CCT	Code
75 W	3 kg	XF	E27 3000K	AH100. 13/15



For further information on Niki
↪ visit artemide.com

Light fixture with diffuse emission, with LED sources.
Wall and ceiling installation.

Lamp unit in AISI316 stainless steel.

Moulded covering frame in AISI316 stainless steel, satiny or polished finish.

AISI 316 stainless steel screws and polyurethane seal gaskets.

Suitable for watertight connection.
Electronic ballast.





DioscURI

Michele De Lucchi
↪ 1999



DESIGN PLUS
www.artemide.com

↪ DIOSCURI



220/240Vac 50/60Hz
electronic ballast
included

IP65



Wall and ceiling light fixture with diffuse emission.
Available in 4 sizes (ø14, ø25, ø35 e ø42 cm).
Wall support in thermoplastic resin.
Acid-etched blown glass diffuser, milk white colour.
Silicone seal gaskets.
Suitable for watertight connection.
Technical features of light fixtures in compliance
with EN60598-1.




For further information on DioscURI
↪ visit artemide.com

DIOSCURI 14

LED RETROFIT

W	IP
max 1x4W (E14)	44

Code
1039110A





DIOSCURI 25

LED RETROFIT

W	CCT
LED Retrofit max 1x8W (E27)	3000K

Code
0112010A





DIOSCURI 35

LED RETROFIT

W	CCT
LED Retrofit max 1x21W (E27)	3000K

Code
0116010A




DIOSCURI 42

LED RETROFIT

W	CCT
LED Retrofit max 1x21W (E27)	3000K

Code
0117010A



Nuda

Ernesto Gismondi

↪ 2010

Series of light fixtures with direct unilateral or bilateral emission, with high-performance LED light sources.

Floor and recessed installation.

Available in 3 finishes: grey-white painted (RAL 9002), dark grey and rust painted.

Painting is obtained by means of 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

AISI 316 stainless steel screws and silicone seal gasket.

Technical features of light fixtures in compliance with EN60598-1.

ENEC approved.

Nuda floor

Available in unilateral and bilateral emission version and in two heights (h 50cm and h 100cm).

Consist of lamp, support pole and ground mounting plate.

Lamp unit in die-cast EN-AB 47100 aluminium.

UV resistant diffuser in shock resistant polycarbonate with satin finish.

Specular reflector in aluminium. It conveys and diffuses the luminous flow downwards to ensure visual comfort.

Support pole in extruded EN-AW-6060 aluminium, chromate treated and painted.

Mounting plate in folded, welded and painted steel, with holes for ground fixing by means of log bolts or dowels.

Provided with IP67 cable and connector for the mains connection.

Nuda recessed

Consist of lamp and recessing box for recessed wall installation.

Lamp unit in painted die-cast EN-AB 44100 aluminium, complete with holding plate for electrical components.

Specular reflector in aluminium. It conveys and diffuses the luminous flow downwards to ensure visual comfort.

UV resistant diffuser in shock resistant polycarbonate with satin finish.

Aesthetic cover in painted aluminium.

Provided with IP67 cable and connector suitable for H07RN-F cables with a diameter from 5 to 13.5 mm for the mains connection.

Recessing box in reinforced polymer, can be ordered separately.




For further information on Nuda
↪ visit artemide.com



NUDA FLOOR 50 UNILATERAL

LED 8,5 W			Lighting application		
h	L	a	Em	E _{max}	E _{min}
0.5 m	0.5 m	1.8 m	52 lux	178 lux	0.5 lux




NUDA FLOOR 100 UNILATERAL

LED 17 W			Lighting application		
h	L	a	Em	E _{max}	E _{min}
1.0 m	1.0 m	2.5 m	24 lux	66 lux	0.5 lux



NUDA FLOOR 50 BILATERAL

LED 8,5 W			Lighting application		
h	L	a	Em	E _{max}	E _{min}
0.5 m	0.5 m	1.8 m	10 lux	59 lux	0.5 lux



NUDA FLOOR 100 BILATERAL

LED 17 W			Lighting application		
h	L	a	Em	E _{max}	E _{min}
1.0 m	1.0 m	2.5 m	7 lux	26 lux	0.5 lux



RECESSED HOLE
200 x 260 x 60 mm



RECESSING BOX
190 x 250 x 55 mm



LIGHTING UNIT



AESTHETIC COVER







Grey-white Ral 9002	Rust	Anthracite Grey	AS	220/240Vac 50/60Hz electronic ballast included	MacAdam 7SDCM Life L70 (10K)>35500h CRI =80	IP65 IK06
00	10	20				

NUDA RECESSED


W	Weight	Beam	Flux	CCT	Code
8 W	1,24 kg	AS	180 lm	3000K	T0835. 00/10/20

Recessing box **T083400**




NUDA FLOOR 50 UNILATERAL

W	Weight	Beam	Flux	CCT	Code
8 W	3,6 kg	AS	180 lm	3000K	T0836. 00/10/20





NUDA FLOOR 50 BILATERAL

W	Weight	Beam	Flux	CCT	Code
8 W	3,6 kg	AS	180 lm	3000K	T0837. 00/10/20





NUDA FLOOR 100 UNILATERAL

W	Weight	Beam	Flux	CCT	Code
17 W	5,21 kg	AS	306 lm	3000K	T0838. 00/10/20

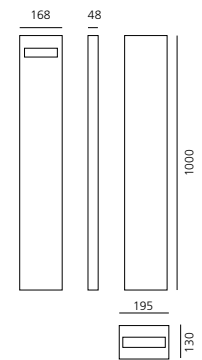

NUDA FLOOR 100 BILATERAL

W	Weight	Beam	Flux	CCT	Code
17 W	5,21 kg	AS	205 lm	3000K	T0839. 00/10/20

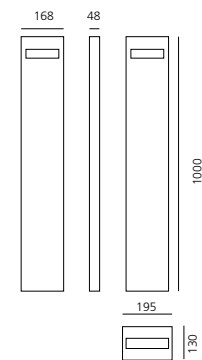

Ciclope

Alessandro Pedretti
(Studio Rota & Partners)

↪ 2009

Lighting system with diffuse unilateral or bilateral emission, with high-performance LED light sources.

Light emission is obtained by the combination of six monochromatic LED light sources, a reflector and an opaline diffuser.

Floor in unilateral and bilateral emission, wall or recessed installation.

Available in 3 finishes: light grey (RAL 9002), anthracite grey and rust painted.

Technical features of light fixtures in compliance with EN60598-1. ENEC approved.

Lighting unit consists of: frame in reinforced polymer; diffuser in light-diffusing polycarbonate; plate in pickled, machined and galvanised steel; watertight gasket in silicone rubber; LED circuit; electronic ballast; reflector in painted spun aluminium; PG13.5 cable gland, H05RN-F cable and IP65 electrical connection device suitable for cables with a diameter between 6 and 13 mm

to allow electrical interfacing with the external mains without the need to open the fixture.

The lighting unit houses the electrical components and sources.

Aesthetic cover in die-cast EN AB-47100 aluminium. The components in die-cast, extruded aluminium and steel are painted by means of 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

The elements are fixed together by means of screws. All the locking screws used outside the fixture and inside the stem are in AISI 304 stainless steel.


Ciclope floor: available in two heights (h 50cm and h 90cm), stem in extruded EN AW-6060 aluminium. Ground mounting plate in folded, welded and painted steel, with holes for ground fixing by means of log bolts or dowels.

Ciclope recessed: recessing box in reinforced polymer, can be ordered separately.

Ciclope wall: box in extruded EN AW-6060 aluminium.




For further information on Ciclope
↪ visit artemide.com

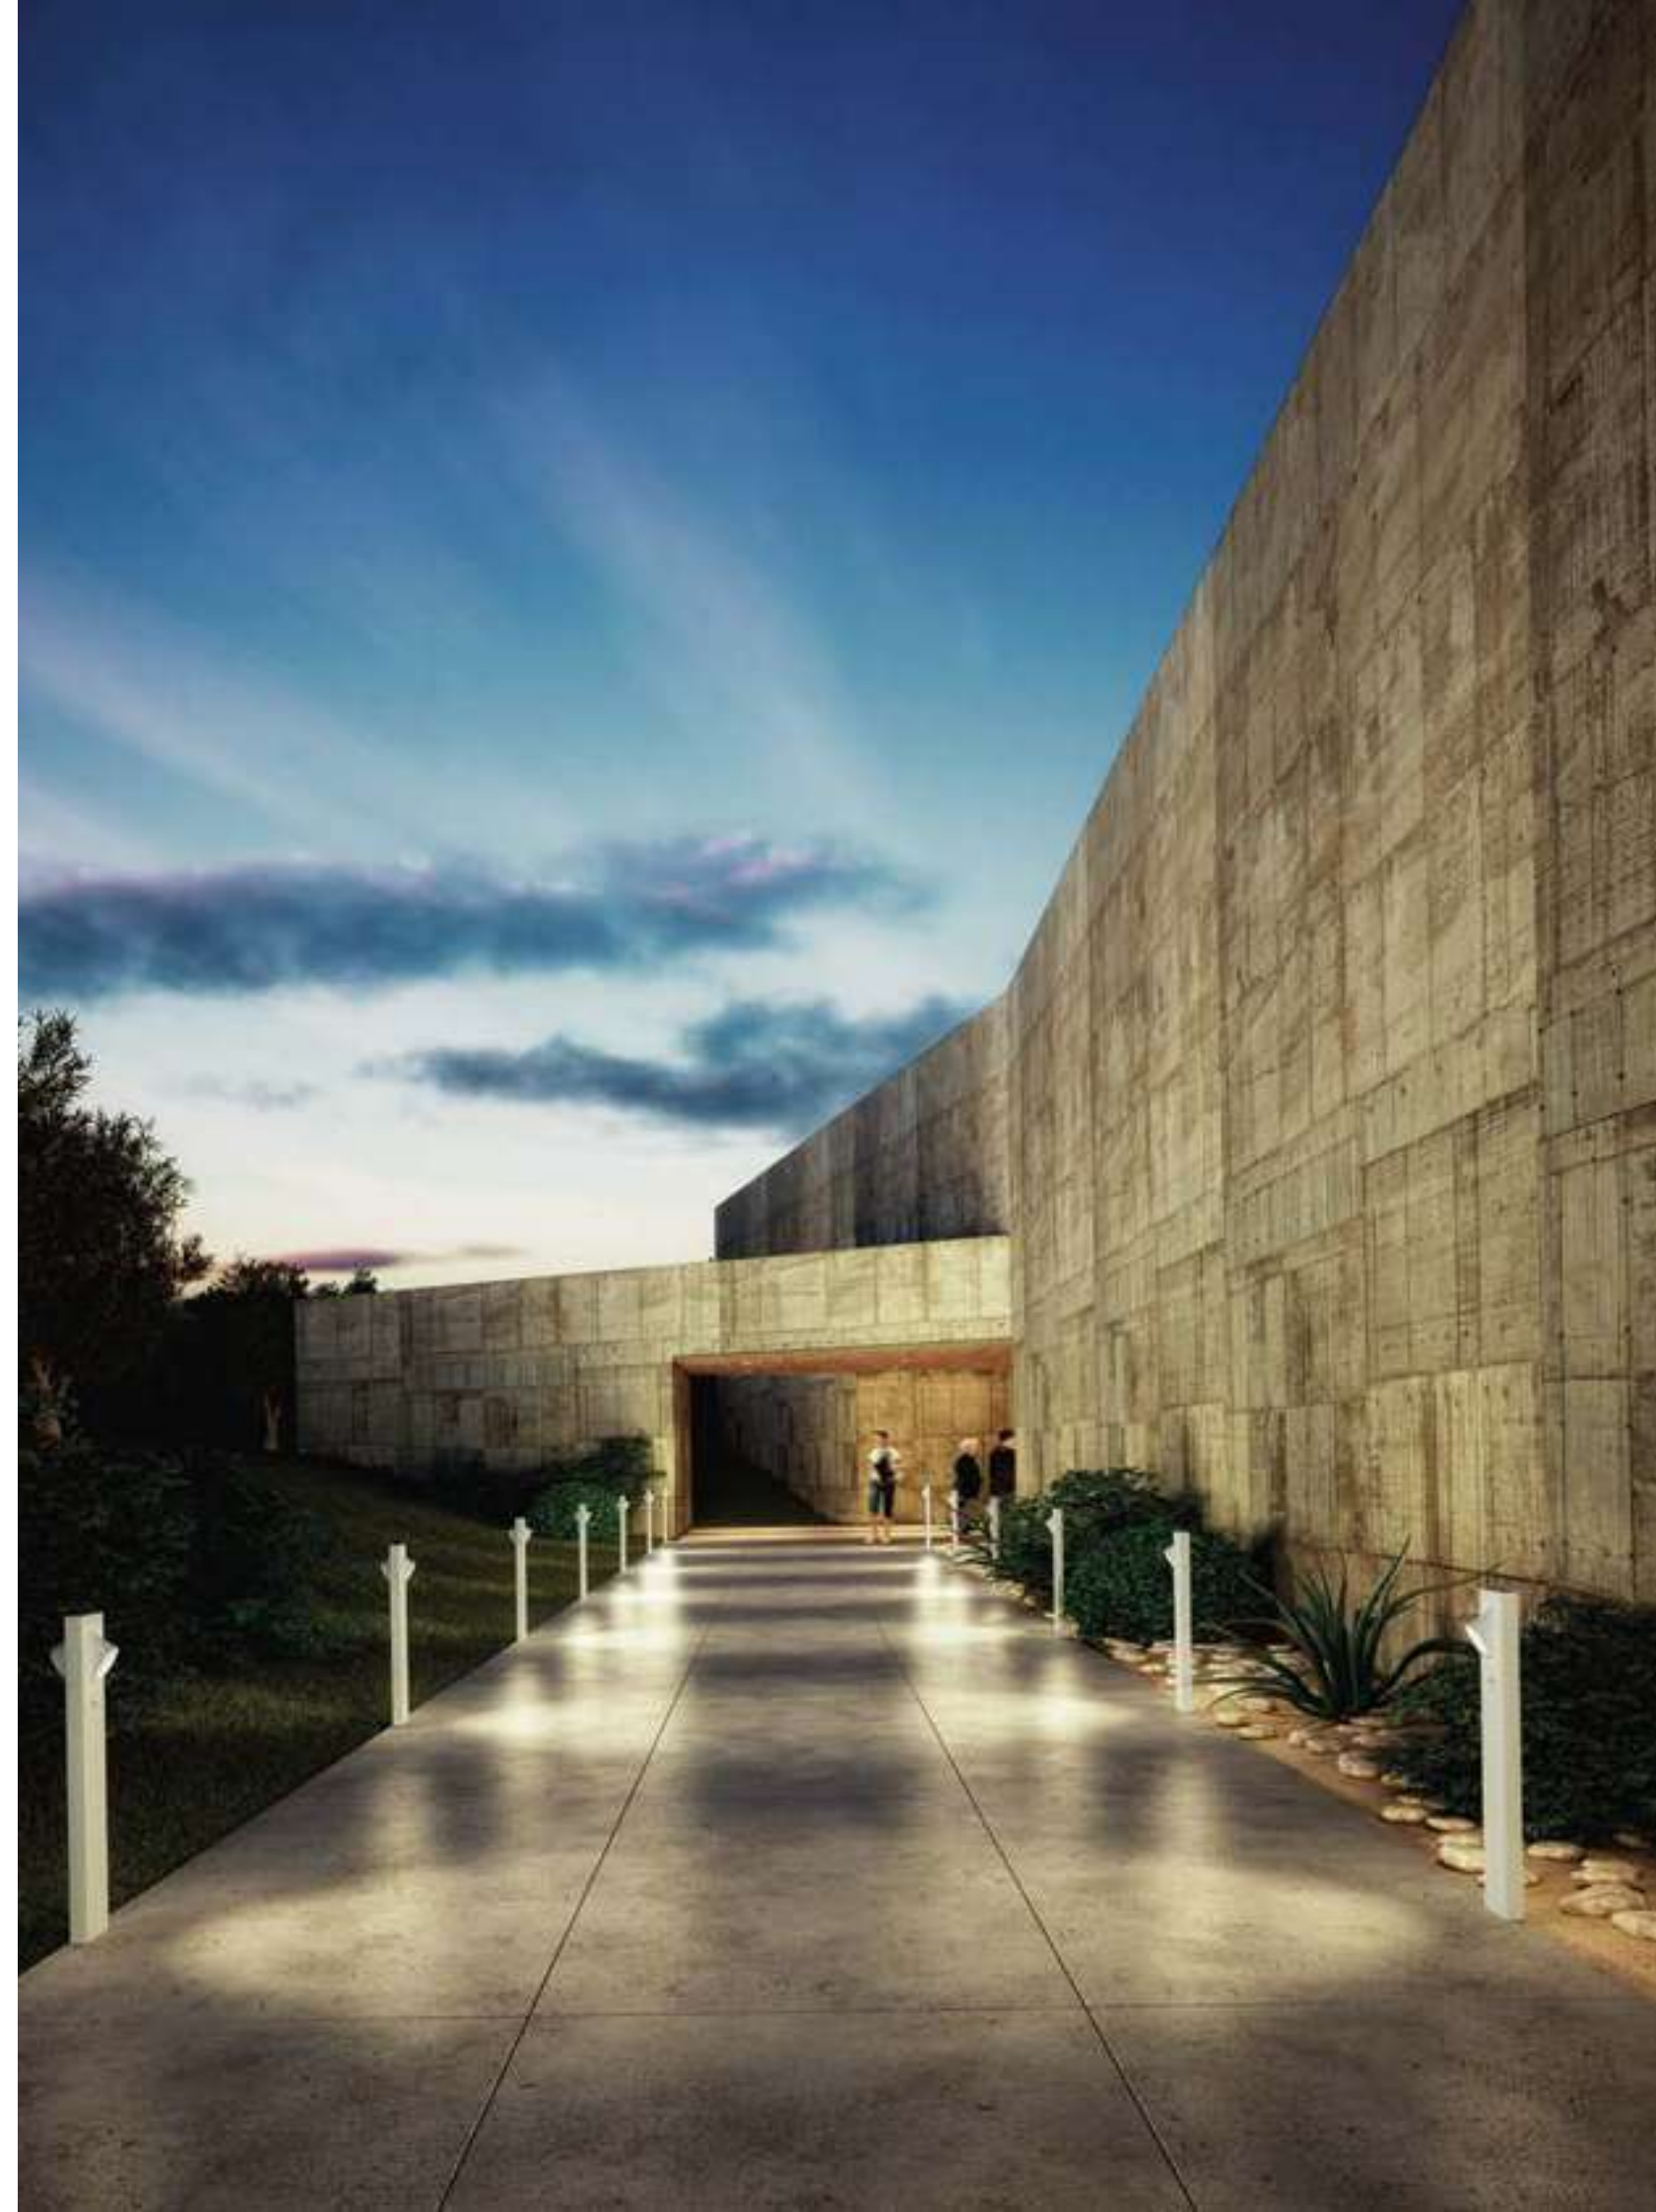



CICLOPE FLOOR 50 UNILATERAL

LED 6W			Lighting application		
h	L	a	Em	Emax	Emin
0.5 m	1.0 m	3 m	59 lux	378 lux	1 lux

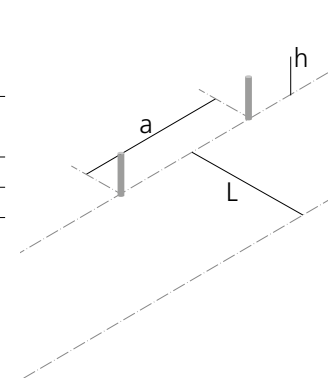



CICLOPE FLOOR 90 UNILATERAL/BILATERAL

LED 6W			Lighting application		
h	L	a	Em	Emax	Emin
0.9 m	1.0 m	3.5 m	28 lux	87 lux	1 lux

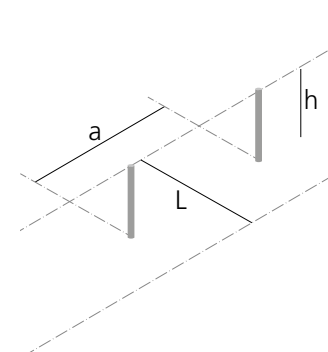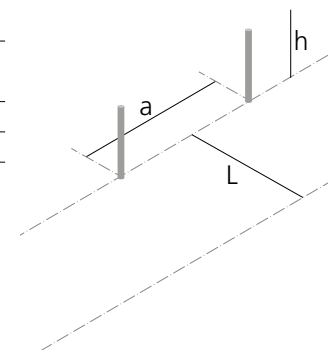

CICLOPE WALL/RECESSED

LED 6W			Lighting application		
h	L	a	Em	Emax	Emin
0.5 m	1.0 m	2.9 m	41 lux	281 lux	1 lux

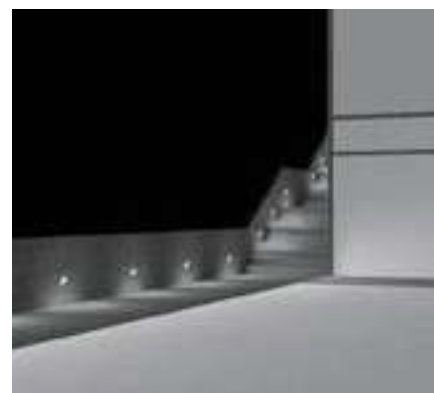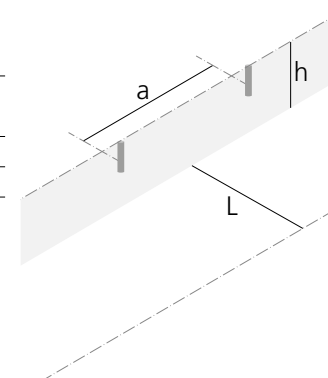

RECESSED HOLE
230 x 330 x 50 mm



RECESSING BOX
201 x 300 x 48,5 mm




LIGHTING UNIT



AESTHETIC COVER




↪ CICLOPE TERRA

Grey-white Ral 9002	Rust	Anthracite Grey	AS	220/240Vac 50/60Hz electronic ballast included	MacAdam 2SDCM Life L90 (20K)=118000h CRI =90	IP65 IK10
00	10	20		Mounting plate included		


CICLOPE FLOOR 50 UNILATERAL

W	Weight	Beam	Flux	CCT	Code
7 W	4,5 kg	AS	383 lm	3000K	T0810. 00/10/20




CICLOPE FLOOR 50 BILATERAL

W	Weight	Beam	Flux	CCT	Code
13 W	4,5 kg	AS	765 lm	3000K	T0813. 00/10/20




CICLOPE FLOOR 90 UNILATERAL

W	Weight	Beam	Flux	CCT	Code
7 W	5,5 kg	AS	383 lm	3000K	T0811. 00/10/20




CICLOPE FLOOR 90 BILATERAL

W	Weight	Beam	Flux	CCT	Code
13 W	5,5 kg	AS	765 lm	3000K	T0814. 00/10/20





↪ CICLOPE PARETE

Grey-white Ral 9002	Rust	Anthracite Grey	AS	220/240Vac 50/60Hz electronic ballast included	MacAdam 2SDCM Life L90 (20K)=118000h CRI =90	IP65 IK10
00	10	20				

CICLOPE RECESSED

W	Weight	Beam	Flux	CCT	Code
7 W	1,2 kg	AS	383 lm	3000K	T0815. 00/10/20




Recessing box

T081600

CICLOPE WALL

W	Weight	Beam	Flux	CCT	Code
7 W	2 kg	AS	383 lm	3000K	T0812. 00/10/20



Chilone

Ernesto Gismondi

↪ 2009

Series of light fixtures with direct emission, with high-performance LED light sources.

Floor, pole or wall installation.

Available in 3 finishes: light grey painted (RAL 9002), anthracite grey and rust painted.

Painting is obtained by means of 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

AISI 316 stainless steel screws and silicone seal gasket.

Provided with IP67 cable and connector for the mains connection.

Technical features of light fixtures in compliance with EN60598-1.

ENEC approved.

Consists of lamp, lamp support and: wall support (Chilone wall), ground fixing pole (Chilone pole), ground mounting plate (Chilone floor).

Lamp unit in die-cast EN-AB 47100 aluminium.

UV resistant diffuser in shock resistant polycarbonate with satiny finish.

Lamp support in extruded EN-AW-6060 aluminium.

Chilone wall: it can be installed with the light pointed either downwards or upwards. Wall support in steel included.

Chilone pole: height 250 cm, ground fixing pole in painted extruded EN-AW-6060 aluminium. It must be installed by means of a proper foundation plinth.

Chilone floor: available with downward emission in two heights (h45cm and h 90cm) and with upward emission (Chilone Up). Support pole in extruded EN-AW-6060 aluminium, chromate treated and painted. Mounting plate in folded, welded and painted steel, with holes for ground fixing by means of log bolts or dowels.




For further information on Chilone
↪ visit artemide.com




CHILONE FLOOR 45

LED 8 W			Lighting application		
h	L	a	Em	Emax	Emin
0.45 m	1.0 m	3.0 m	43 lux	842 lux	1 lux




CHILONE FLOOR 90

LED 8 W			Lighting application		
h	L	a	Em	Emax	Emin
0.90 m	1.0 m	4.0 m	16 lux	96 lux	1 lux

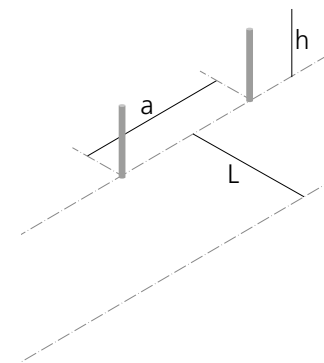

CHILONE POLE

LED 16 W			Lighting application		
h	L	a	Em	Emax	Emin
2.50 m	2.5 m	9 m	4 lux	9 lux	0.6 lux

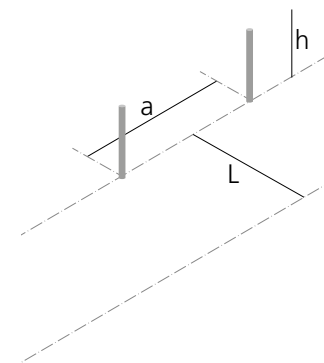

↪ CHILONE

Grey-white
Ral 9002
00

Rust
10

Anthracite
Grey
20

AS


220/240Vac 50/60Hz
electronic ballast
included

MacAdam 7SDCM
Life L70 (10K)>35500h
CRI = 80

IP65
IK06



CHILONE WALL

W	Weight	Beam	Flux	CCT	Code
16 W	3,81 kg	AS	515 lm	3000K	T0824. 00/10/20




CHILONE FLOOR 45

W	Weight	Beam	Flux	CCT	Code
8 W	3,98 kg	AS	194 lm	3000K	T0822. 00/10/20




CHILONE UP

W	Weight	Beam	Flux	CCT	Code
16 W	3,81 kg	AS	515 lm	3000K	T0823. 00/10/20





CHILONE FLOOR 90

W	Weight	Beam	Flux	CCT	Code
8 W	5,27 kg	AS	194 lm	3000K	T0821. 00/10/20



CHILONE POLE

W	Weight	Beam	Flux	CCT	Code
16 W	10,65 kg	AS	310 lm	3000K	T0820. 00/10/20

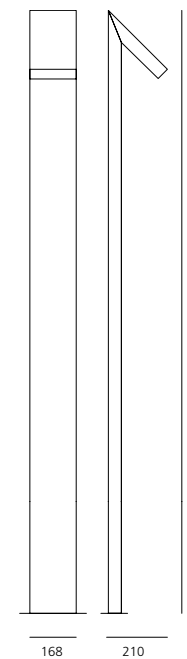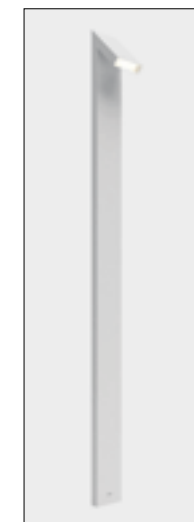



Granito

Ernesto Gismondi

↪ 2010

Light fixture with metal halide sources.

The four light beams projected through the fissures on the sides make it particularly suitable for lighting drives or creating light effects in parks and gardens.

Available in two heights (h 30cm and h 60cm).

Available in 2 finishes: anthracite grey and Cor-ten (weathering steel).

Transparent sodium-calcium bulb protection glass.

Ground mounting plate in steel with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

AISI 316 stainless steel screws and silicone seal gaskets.

Electronic ballast.

Suitable for watertight connection.

Technical features of light fixtures in compliance with EN60598-1.

ENEC approved.



For further information on Granito
↪ visit artemide.com



↪ GRANITO

Rust
00

Anthracite Grey
20

AS


220/240Vac 50/60Hz
electronic ballast
included

IP65
IK10

GRANITO 30

W
METAL HALIDE 1x35W (G12) – HIT


Code
T0830. 00
20



GRANITO 60

W
METAL HALIDE 1x35W (G12) – HIT

Code
T0831. 00
20



The colour of Cor-ten steel may change in time depending on weather conditions. Before stabilization, Cor-ten steel may release rust powder that may stain the surface where it is placed. Artemide recommends not to position it on sensitive surfaces, such as clear stones, marbles, etc.





Calumet

Ernesto Gismondi
↪ 2012



Lighting system with single or double emission, with high-performance LED light sources combined with lenses which optimize the light emitting efficiency of the beams and determine their spread.

Available in two sizes: \varnothing 8 e \varnothing 13 cm.

Ceiling and wall installation.

Available in two finishes: light grey and anthracite grey painted.

Wall version with single or double emission.

Consist of lighting body, lighting cap and wall fixing bracket / ceiling fixing flange (in EN AW-6060 aluminium)

Cylindrical body in EN AW-6060 aluminium containing the electronic power supply components.

Optical lighting body in EN AW-6060 aluminium.

Led and collimator lenses which swing by means of an aluminium bracket.

Diffuser in toughened glass.

Wall fixing bracket in bent steel.

Water tight silicone gaskets.

Electronic ballast integrated in the body.

PMMA lenses with narrow (wall-version) or wide (ceiling-version) beam.

Wall version: IP65 electrical connection device suitable for cables with a diameter between 6 and 13 mm and allowing the electrical interfacing with the external mains without need of opening the fixture.

Ceiling version: wiring to be made inside the fixture, by piercing a membrane fairlead IP65 suitable for of 6-13mm diameter cables.

All fixing dowels used outside the fixture are in AISI 304 stainless steel.






The components in die-cast aluminium and the steel bracket for wall fixing are painted by means of 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

Technical features of light fixtures in compliance with EN60598-1.




For further information on Calumet
↪ visit artemide.com

↪ CALUMET

Grey-white Ral 9002	Anthracite Grey	XS	F	220/240Vac 50/60Hz electronic ballast included	MacAdam 4SDCM CRI =80	IP65 IK06
						
00	10					

CALUMET 8 WALL


One emission					Code
W	Weight	Beam	Flux	CCT	
4 W	1,69 kg	7,8°	184 lm	3000K	T41911NW.00/10



Double emission					Code
W	Weight	Beam	Flux	CCT	
7,5 W	1,69 kg	2x7,8°	369 lm	3000K	T41922NW.00/10

CALUMET 13 WALL



One emission					Code
W	Weight	Beam	Flux	CCT	
7,5 W	3,8 kg	6°	366 lm	3000K	T41941NW.00/10



Double emission					Code
W	Weight	Beam	Flux	CCT	
15 W	3,8 kg	2x6°	732 lm	3000K	T41952NW.00/10


CALUMET 8 CEILING

					Code
W	Weight	Beam	Flux	CCT	
4 W	1,69 kg	25°	189 lm	3000K	T41931LW.00/10



CALUMET 13 CEILING

					Code
W	Weight	Beam	Flux	CCT	
7,5 W	3,8 kg	38°	321 lm	3000K	T41961LW.00/10





Molla

Ernesto Gismondi

↪ 2011

Light fixture with 2 combined light beams: the large one with lighting function and the narrow one with decorative function. Wall installation. The fixture can be installed with the main beam pointed either downwards or upwards according to the kind of lighting desired (direct or indirect).

The large beam is obtained by the combination of a monochromatic LED light source with a reflector. The narrow beam is obtained by the combination of a monochromatic LED light source with a high-performance projector.

Available in two finishes: light grey and anthracite grey painted.

Consists of lighting cap unit and terminal board fixed together by means of locking screws.

Cap and terminal board in die-cast EN AB-47100 aluminium.

Watertight gasket in silicone rubber.

Electronic ballast integrated in the fixture. Projector consists of a body in reinforced polymer and PMMA lenses.

Tempered and silkscreened light-diffusing glasses, siliconed flush with the lighting cap.

Power connection to the mains to be carried out outside the fixture, without the need to open it, by means of a pre-installed IP65 connection device suitable for cables with a diameter between 6 and 13 mm.

Wall fixing by means of a bracket in folded steel sheet to which the fixture is fastened with two screws.

Locking screws used outside the fixture in AISI 316 stainless steel.

Die-cast aluminium and bracket painted with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

Technical features of light fixtures in compliance with EN60598-1.



For further information on Molla
↪ visit artemide.com

↪ MOLLA

Grey-white
Ral 9002
00

Anthracite
Grey
10

EL


220/240Vac 50/60Hz electronic ballast included

MacAdam 3SDCM
CRI = 80

IP65

W	Weight	Beam	Flux	CCT
14 W	2 kg	AS	407 lm	3000K


Code
T4190NLW. 00/10




Effetto

Ernesto Gismondi

↪ 2011

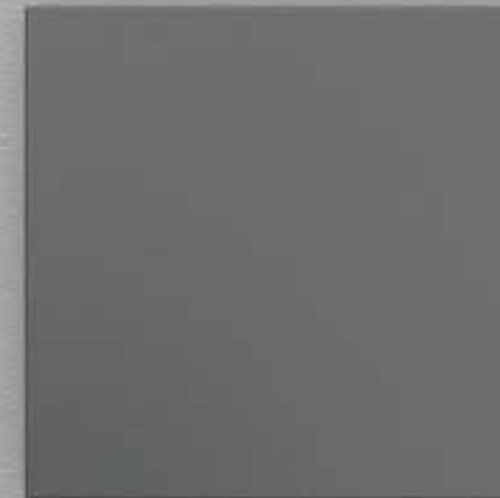

For further information on Effetto
↪ visit artemide.com

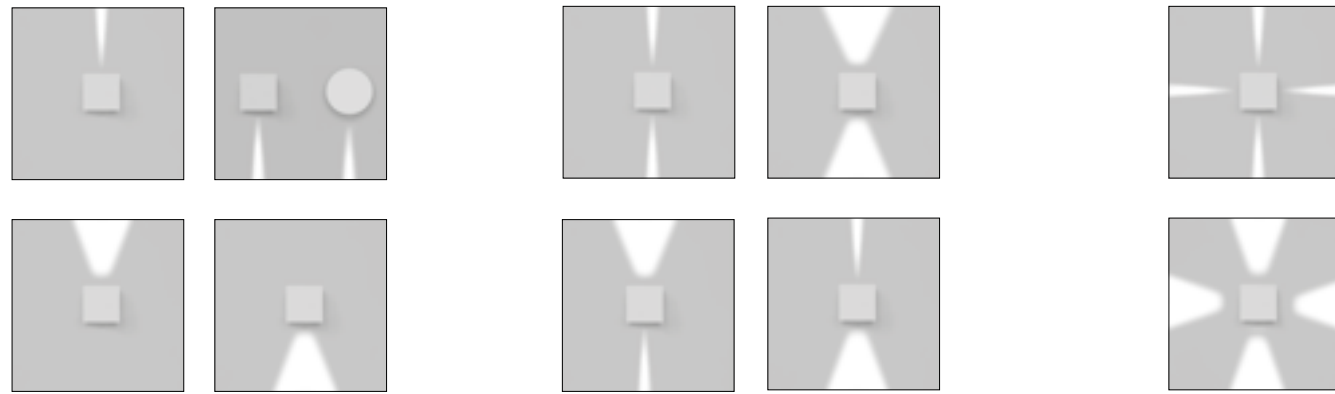

Light fixture with 1, 2 or 4 light beams using monochromatic LED light sources together with light-diffusing lenses which optimize the optical performance of the beams and establish their width. Designed to create geometric lights of scenic effect, it is available with beams of the same spread or with combined beams.

Beam spread $2,6^\circ / 38^\circ$ (Effetto Round) and $3,6^\circ / 46^\circ$ (Effetto Square).

Wall installation.

Available in two shapes: square and round and in two finishes: grey-white painted and rust painted.

Consists of lighting cap unit and terminal board fixed together by means of locking dowels.

Cap in die-cast EN AB-47100 aluminium.

Terminal board in reinforced polymer.

Watertight gasket in silicone rubber.

Electronic ballast integrated in the fixture.


PMMA lenses siliconed flush with the cap to obtain two different beam angle opening (narrow and wide).

Wiring to be carried out inside the terminal board by piercing an IP65 membrane grommet suitable for cables with a diameter of 6-13 mm.

Locking dowels used outside the fixture in AISI 316 stainless steel.

Painted die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

Technical features of light fixtures in compliance with EN60598-1.

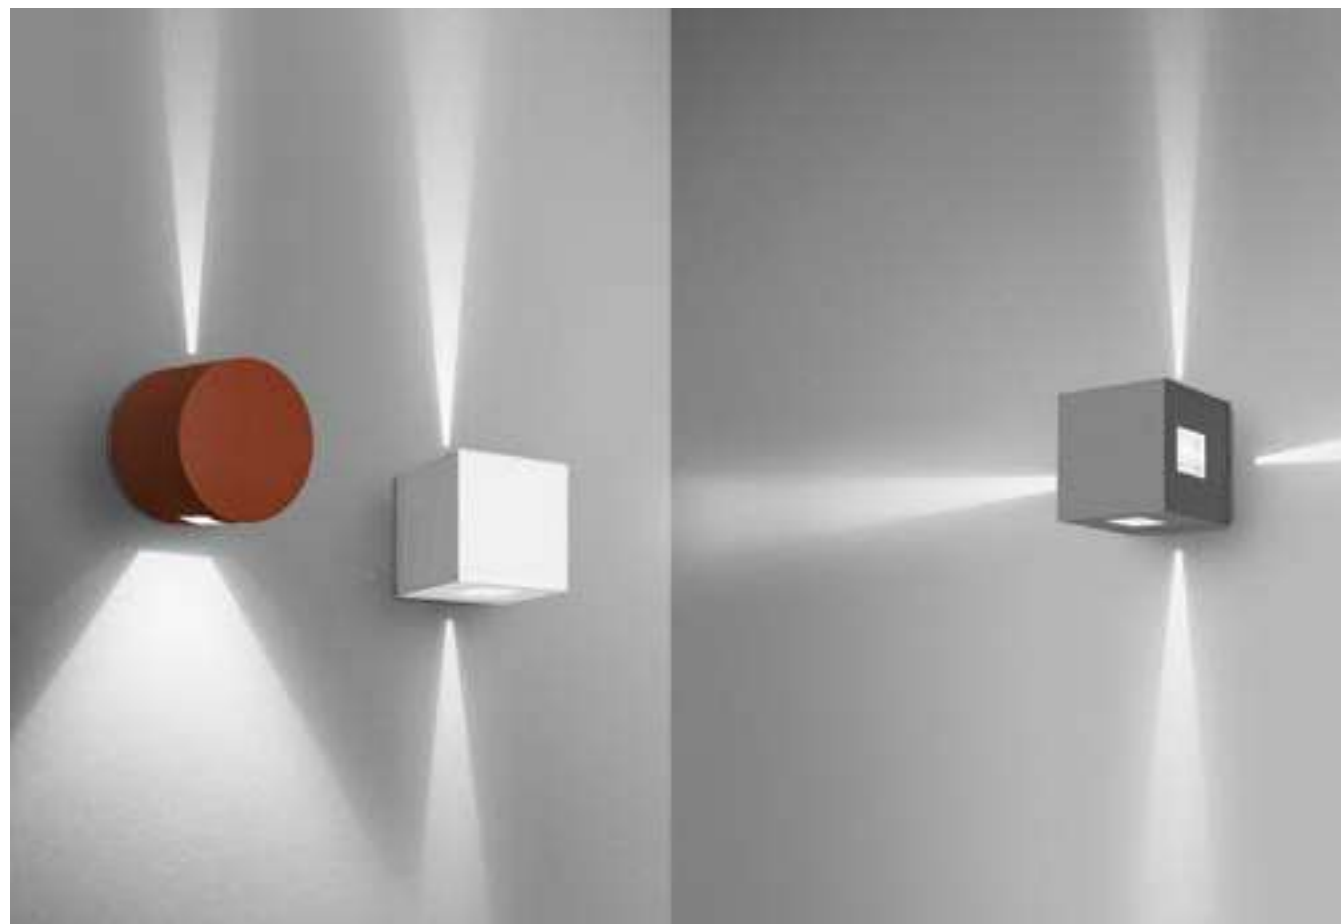

↪ EFFETTO

Grey-white Ral 9002 Rust Anthracite Grey
 00 10 20

XS WF XF

220/240Vac 50/60Hz electronic ballast included.

MacAdam 4SDCM Life L70 (9K)> 51400h CRI =80

IP65
 IK10

1 narrow beam



W	Weight	Beam Square	Beam Round	Flux Square	Flux Round	CCT
4,5 W	2,5 kg	1x3,6°	1x3,6°	19 lm	23,5 lm	3000 K

Square

Code
T42021NW. 00/10/20

Round

Code
T42121NW. 00/10/20



1 large beam


W	Weight	Beam Square	Beam Round	Flux Square	Flux Round	CCT
4,5 W	2,5 kg	1x4,6°	1x4,6°	54,50 lm	50 lm	3000 K

Square

Code
T42021LW. 00/10/20

Round

Code
T42121LW. 00/10/20



2 narrow beams



W	Weight	Beam Square	Beam Round	Flux Square	Flux Round	CCT
7 W	2,5 kg	2x 3,6°	2x 3,6°	37,6 lm	49,34 lm	3000 K

Square

Code
T42012NW. 00/10/20

Round

Code
T42112NW. 00/10/20



1 narrow beam 1 large beam


W	Weight	Beam Square	Beam Round	Flux Square	Flux Round	CCT
7 W	2,5 kg	1x 3,6°+ 1x 46°	1x 3,6°+ 1x 46°	73,32 lm	73,36 lm	3000 K

Square

Code
T42011NLW. 00/10/20

Round

Code
T42111NLW. 00/10/20

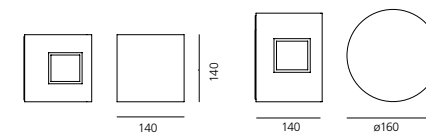

↪ EFFETTO

Grey-white Ral 9002 Rust Anthracite Grey
 00 10 20

XS WF XF

220/240Vac 50/60Hz electronic ballast included.

MacAdam 4SDCM Life L70 (9K)> 51400h CRI =80

IP65
 IK10

2 large beams



W	Weight	Beam Square	Beam Round	Flux Square	Flux Round	CCT
7 W	2,5 kg	2x46°	2x46°	109 lm	99,8 lm	3000 K

Square

Code
T42012LW. 00/10/20

Round

Code
T42112LW. 00/10/20

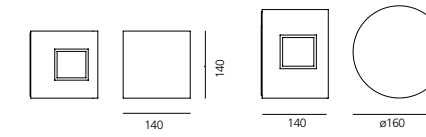

4 narrow beams




W	Weight	Beam Square	Beam Round	Flux Square	Flux Round	CCT
11 W	2,5 kg	4x 3,6°	4x 3,6°	76,1 lm	102 lm	3000 K

Square

Code
T42004NW. 00/10/20

Round

Code
T42104NW. 00/10/20



4 large beams




W	Weight	Beam Square	Beam Round	Flux Square	Flux Round	CCT
11 W	2,5 kg	4x 46°	4x 46°	218 lm	204 lm	3000 K

Square

Code
T42004LW. 00/10/20

Round

Code
T42104LW. 00/10/20



Tolomeo XXL

Michele De Lucchi, Giancarlo Fassina

↪ 2009



Light fixture with direct emission, with fluorescent or LED.

Available with base or fixed support (pivot) made of mass-coloured concrete.

Diffuser in mass-pigmented polypropylene, screen in light-diffusing silkscreened methacrylate, reflector in painted aluminium.

Mobile-arm structure in extruded EN-AW-6060 aluminium with bright anodizing treatment.

Polished-painted articulations in die-cast EN-AB 46100 aluminium.

Adjustment system in AISI 316 stainless steel.

Silicone seal gaskets.

Suitable for watertight connection.

Electronic ballast.

Technical features of light fixtures in compliance with EN60598-1.

ENEC approved.



For further information on Vector
↪ visit artemide.com





↪ TOLOMEO XXL

Silver Grey 00	XF	220/240Vac 50/60Hz electronic ballast included	MacAdam 3SDCM Life L70 (6K)=50000h CRI =90	IP65 30° base/90° perno
-------------------	----	--	--	----------------------------

TOLOMEO XXL WITH BASE

LED				Code
W	Beam	Flux	CCT	
55 W	XF	4774 lm	3000K	1532150A



TOLOMEO XXL WITH FIXED SUPPORT

LED				Code
W	Beam	Flux	CCT	
55 W	XF	4774 lm	3000K	1535150A



Tolomeo Outdoor

Michele De Lucchi, Giancarlo Fassina

↪ 2015

Floor, suspension, and hook, as well as lampshade and lamppost versions, made with materials and finishes suited for outdoor use.

The LED source is contained within a diffusing cap fitted inside a clear IP65 plastic element.

The suspension version has protection rating IP65, whereas the floor and hook versions have protection rating IP44.

All the versions of Tolomeo Outdoor are available with or without lampshade.

The frames with lighting body of the lamppost and lampshade versions have different features.

Tolomeo Outdoor Paralume





For further information on Tolomeo Outdoor
↪ visit artemide.com

Tolomeo Outdoor Lampione



↪ TOLOMEO OUTDOOR PARALUME

Structure Aluminium	White	Dove Grey	Black	XF	MacAdam 3SDCM Life L70 (6K)=50000h CRI =80	IP44/ IP65
	30	40	50			


TOLOMEO OUTDOOR PARALUME FLOOR

W	Weight	Beam	Flux	CCT
20 W	3,8 kg	XF	815 lm	3000K
Base + rod				
Diffuser ø52				

Code
T076100
T076300
T0773. 30/40/50



IP44

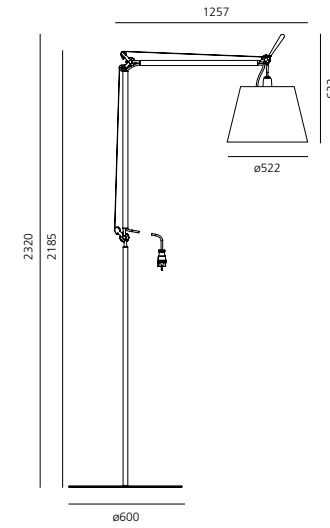


TOLOMEO OUTDOOR PARALUME SUSPENSION

W	Weight	Beam	Flux	CCT
20 W	2 kg	XF	815 lm	3000K
Diffuser ø52				

Code
T076000
T0773. 30/40/50



IP65




TOLOMEO OUTDOOR PARALUME HOOK

W	Weight	Beam	Flux	CCT
20 W	2 kg	XF	815 lm	3000K
Diffuser ø52				

Code
T076500
T0773. 30/40/50



IP44



↪ TOLOMEO OUTDOOR LAMPIONE

Structure Aluminium		XF	MacAdam 3SDCM Life L70 (6K)=50000h CRI =80	IP44/ IP65


TOLOMEO OUTDOOR LAMPIONE FLOOR

W	Weight	Beam	Flux	CCT
20 W	4,6 kg	XF	1613 lm	3000K
Base + rod				

Code
T078100
T076300



IP44

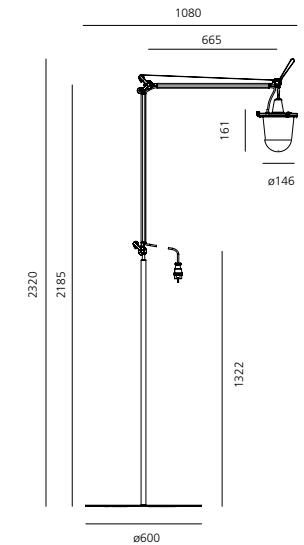


TOLOMEO OUTDOOR LAMPIONE SUSPENSION

W	Weight	Beam	Flux	CCT
20 W	2 kg	XF	1613 lm	3000K

Code
T078000



IP65




TOLOMEO OUTDOOR LAMPIONE HOOK

W	Weight	Beam	Flux	CCT
20 W	2 kg	XF	1613 lm	3000K

Code
T078500



IP44





Downlighting Walk over Drive over

↳




Ego downlight _____	798
Ego walk over / drive over _____	816
Megara _____	834
Microled _____	842
Aria _____	844
Faci _____	848
Faci Vetro _____	852



Ego downlight

↳ 2012

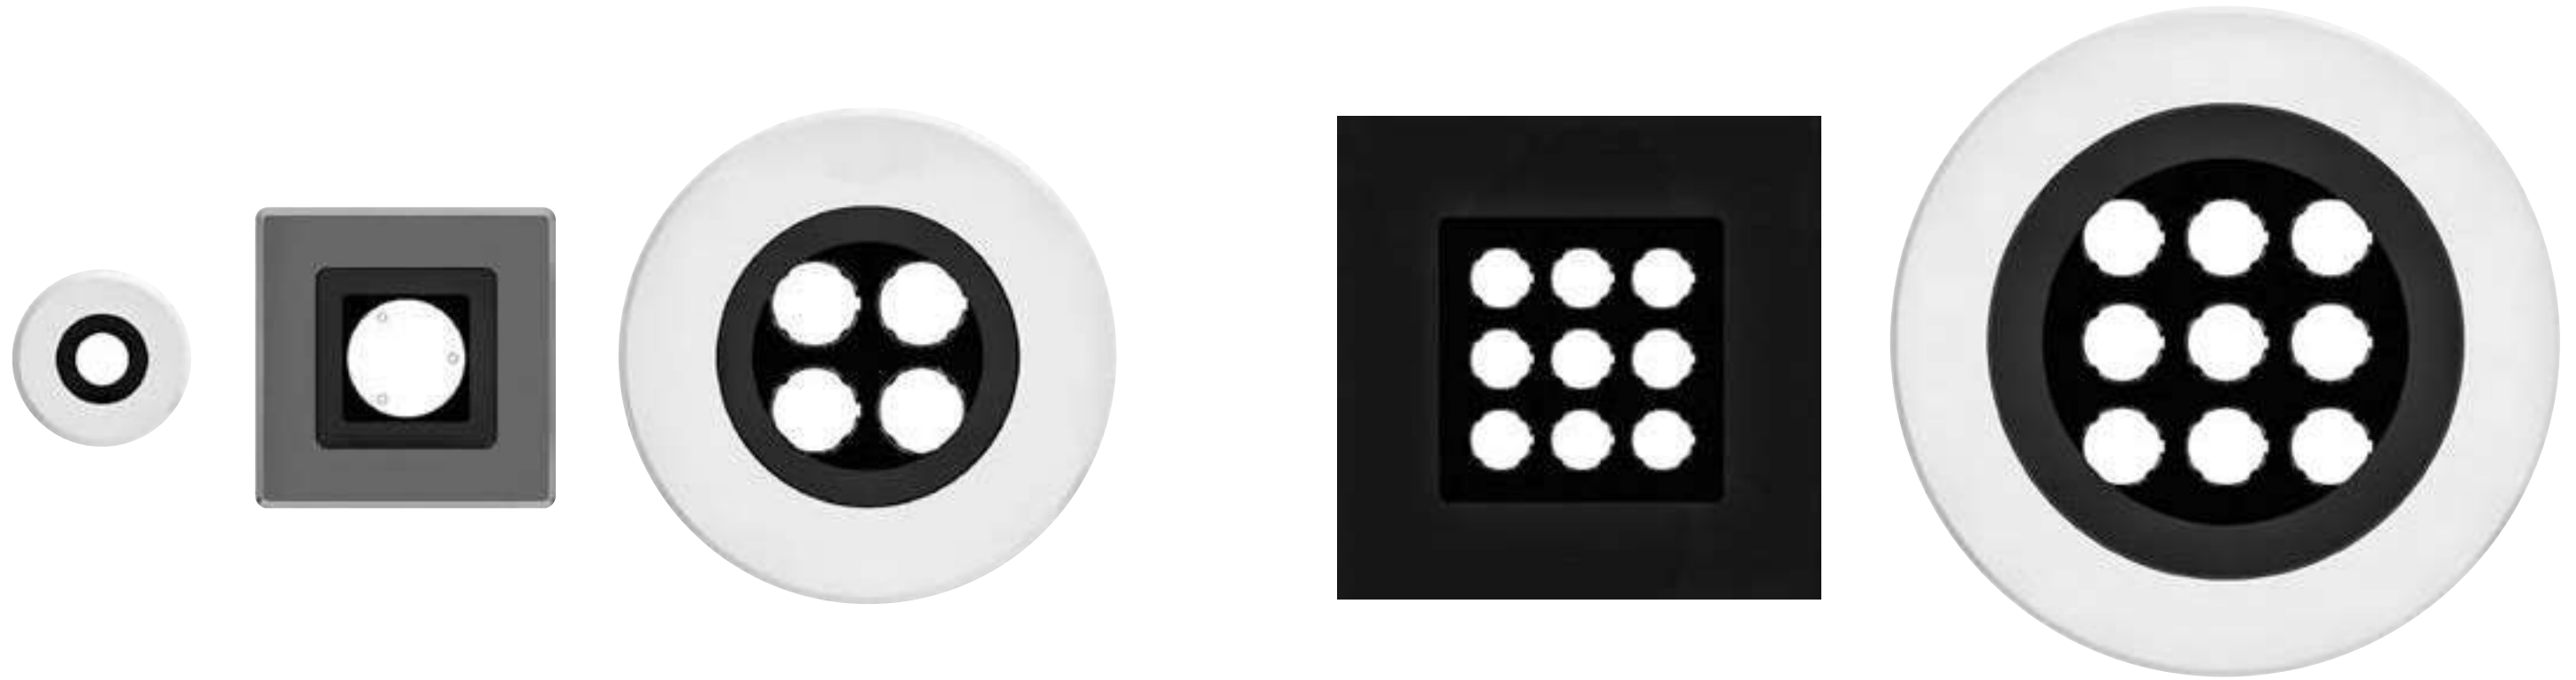

Ego downlight typologies



Ego 55 downlight
Recessed depth 94 mm



∅ 47 ±1 mm



max 35 mm

Ego 55 downlight
Recessed depth 60 mm



∅ 47 ±1 mm



max 40 mm

Ego 90 downlight
Recessed depth 90 mm



∅ 80 ±2 mm



max 35 mm

Ego 90 downlight
Recessed depth 60 mm



∅ 80 ±2 mm



max 35 mm

Ego 150 downlight
Recessed depth 120 mm



∅ 135 ±2 mm



□ 135 ±2 mm



max 40 mm

Ego 150 downlight
Recessed depth 60 mm



∅ 135 ±2 mm



□ 135 ±2 mm



max 40 mm

Ego 220 downlight
Recessed depth 117 mm



∅ 203 ±2 mm



□ 203 ±2 mm



max 40 mm

Ego 220 downlight
Recessed depth 60 mm



∅ 203 ±2 mm



□ 203 ±2 mm




max 35 mm

Remote ballast
supplied separately.
(Ego Flat, Ego 55-90)

Lighting unit
with built-in springs.

Round or square frame in aluminium
or stainless steel.
Silkscreened tempered glass.

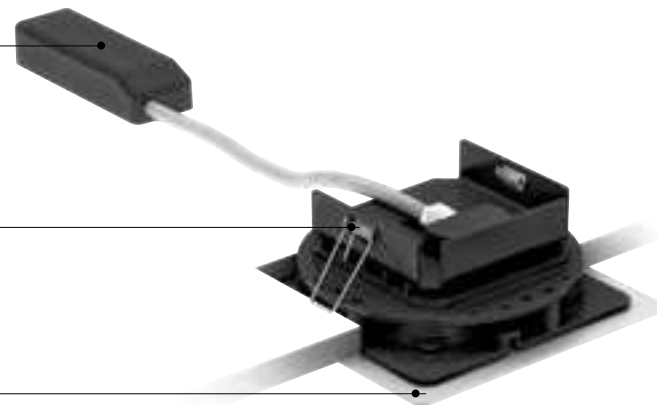

Light fixture with high-performance LED light sources.

Ceiling installation.

Two different housing depths.

Round and square version in five sizes.

Consists of body, frame, glass diffuser, fixing springs (Ego Flat and Ego 55-90), fixing brackets (Ego 150-220-320).

Body in EN AB-44100 aluminium, silicone gaskets.

Frame in aluminium or stainless steel AISI 316.

Black silkscreened tempered glass, 8mm-thick.

Fixing springs in harmonic iron.

Power connection to the mains by means of a H05RN-r cable and IP68 electrical terminal board, supplied with the fixture.

Glass surface temperature lower than 40°C.

Fixed and adjustable optics. PMMA lenses in 3 different versions of beams.

Painted die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, anti-oxidant primer, polyester paint.

Technical features of light fixtures in compliance with EN60598-1 and part 2-13.



For further information on Ego Downlight
visit artemide.com



↳ EGO 55 DOWNLIGHT ROUND

Aluminium IK09 Stainless steel IK10

XS WF EL

Electronic ballast 24V SELV supplied separately


MacAdam 4SDCM Life L90 (9K) >54400h CRI = 80

IP65/ IP67

Fixed beam

EGO 55 DOWNLIGHT ROUND

Aluminium IK09						Stainless steel IK10					
W	CRI	Weight	Beam	Flux	CCT	Code	Code	Code	Code	Code	Code
1,5 W	=80	0,28 kg	14°	83 lm	3000K	T4081SPW00	T4080SPW00				
			32°	76 lm	3000K	T4081WFLW00	T4080WFLW00				
			EL	78 lm	3000K	T4081ELPTW00	T4080ELPTW00				



∅ 47±1 max 35 mm

Driver	24W IP67	DALI	185x35x33mm	DV1041
Driver	25 W IP67		148x40x32mm	T409996
Driver	60 W IP67		163x43x32mm	T409998
Driver	90 W IP67		161x61x36mm	T409999

Verify driver / recessed hole's dimensions.
Please see page 945 for drivers installation details.

↳ EGO 55 DOWNLIGHT SQUARE

Aluminium IK09 Stainless steel IK10

XS WF EL

Electronic ballast 24V SELV supplied separately


MacAdam 4SDCM Life L90 (9K) >54400h CRI = 80

IP65/ IP67

Fixed beam

EGO 55 DOWNLIGHT SQUARE

Aluminium IK09						Stainless steel IK10					
W	CRI	Weight	Beam	Flux	CCT	Code	Code	Code	Code	Code	Code
1,5 W	=80	0,52 kg	14°	83 lm	3000K	T4061SPW00	T4060SPW00				
			32°	76 lm	3000K	T4061WFLW00	T4060WFLW00				
			EL	78 lm	3000K	T4061ELPTW00	T4060ELPTW00				

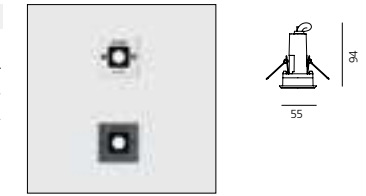


∅ 47±1 max 35 mm

Driver	24W IP67	DALI	185x35x33mm	DV1041
Driver	25 W IP67		148x40x32mm	T409996
Driver	60 W IP67		163x43x32mm	T409998
Driver	90 W IP67		161x61x36mm	T409999

Verify driver / recessed hole's dimensions.
Please see page 945 for drivers installation details.

EGO 55 FLAT DOWNLIGHT ROUND

Aluminium IK09						Stainless steel IK10					
W	CRI	Weight	Beam	Flux	CCT	Code	Code	Code	Code	Code	Code
1 W	=80	0,39 kg	14°	83 lm	3000K	T42001SPW00	T42009SPW00				
			32°	76 lm	3000K	T42001WFLW00	T42009WFLW00				
			EL	78 lm	3000K	T42001ELPTW00	T42009ELPTW00				



∅ 47±1 max 40 mm


Electronic ballast 350mA SELV supplied separately

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	Code
cc 14W 350mA	220-240	79 x 38 x 25	67	4	-	DV3001
cc 23W 350mA	220-240	185 x 35 x 33	67	5	DALI	DV1042

Verify driver / recessed hole's dimensions.

EGO 55 FLAT DOWNLIGHT SQUARE

Aluminium IK09						Stainless steel IK10					
W	CRI	Weight	Beam	Flux	CCT	Code	Code	Code	Code	Code	Code
1 W	=80	0,39 kg	14°	83 lm	3000K	T42002SPW00	T42010SPW00				
			32°	76 lm	3000K	T42002WFLW00	T42010WFLW00				
			EL	78 lm	3000K	T42002ELPTW00	T42010ELPTW00				

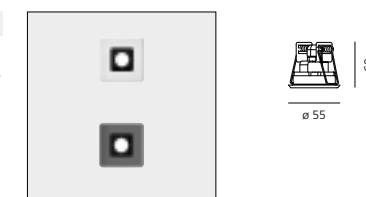

∅ 47±1 max 40 mm

Electronic ballast 350mA SELV supplied separately

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	Code
cc 14W 350mA	220-240	79 x 38 x 25	67	4	-	DV3001
cc 23W 350mA	220-240	185 x 35 x 33	67	5	DALI	DV1042


Verify driver / recessed hole's dimensions.

↳ EGO 90 DOWNLIGHT ROUND

Aluminium IK09	Stainless steel IK10	XS	WF	EL	Electronic ballast 24V SELV supplied separately	MacAdam 4SDCM Life L90 (9K) >54400h CRI = 80	IP65/ IP67
----------------	----------------------	----	----	----	--	--	------------

EGO 90 DOWNLIGHT ROUND

Aluminium IK10						Stainless steel IK10					
W	CRI	Weight	Beam	Flux	CCT	Code	Code	Code	Code	Code	Code
3 W	=80	0,50 kg	10°	220 lm	3000K	T4083SPW00	T4082SPW00				
			24°	179 lm	3000K	T4083FLW00	T4082FLW00				
			EL	162 lm	3000K	T4083ELPTW00	T4082ELPTW00				



∅ 80±2
max 35 mm

Driver	24W IP67	DALI	185x35x33mm	DV1041
Driver	25 W IP67		148x40x32mm	T409996
Driver	60 W IP67		163x43x32mm	T409998
Driver	90 W IP67		161x61x36mm	T409999


Verify driver / recessed hole's dimensions.
Please see page 945 for drivers installation details.

↳ EGO 90 DOWNLIGHT SQUARE

Aluminium IK09	Stainless steel IK10	XS	WF	EL	Electronic ballast 24V SELV supplied separately	MacAdam 4SDCM Life L90 (9K) >54400h CRI = 80	IP65/ IP67
----------------	----------------------	----	----	----	--	--	------------

EGO 90 DOWNLIGHT SQUARE

Aluminium IK10						Stainless steel IK10					
W	CRI	Weight	Beam	Flux	CCT	Code	Code	Code	Code	Code	Code
3 W	=80	0,50 kg	10°	220 lm	3000K	T4063SPW00	T4062SPW00				
			24°	179 lm	3000K	T4063FLW00	T4062FLW00				
			EL	162 lm	3000K	T4063ELPTW00	T4062ELPTW00				




∅ 47±2
max 35 mm

Driver	24W IP67	DALI	185x35x33mm	DV1041
Driver	25 W IP67		148x40x32mm	T409996
Driver	60 W IP67		163x43x32mm	T409998
Driver	90 W IP67		161x61x36mm	T409999

Verify driver / recessed hole's dimensions.
Please see page 945 for drivers installation details.

EGO 90 FLAT DOWNLIGHT ROUND

Aluminium IK10						Stainless steel IK10					
W	CRI	Weight	Beam	Flux	CCT	Code	Code	Code	Code	Code	Code
3 W	=80	0,52 kg	10°	220 lm	3000K	T42003SPW00	T42011SPW00				
			24°	179 lm	3000K	T42003FLW00	T42011FLW00				
			EL	162 lm	3000K	T42003ELPTW00	T42011ELPTW00				



∅ 80±2
max 35 mm


Electronic ballast 350mA SELV supplied separately

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	Code
cc 14W 350mA	220-240	79 x 38 x 25	67	4	-	DV3001
cc 23W 350mA	220-240	185 x 35 x 33	67	5	DALI	DV1042

Verify driver / recessed hole's dimensions.

EGO 90 FLAT DOWNLIGHT SQUARE

Aluminium IK10						Stainless steel IK10					
W	CRI	Weight	Beam	Flux	CCT	Code	Code	Code	Code	Code	Code
3 W	=80	0,52 kg	10°	220 lm	3000K	T42004SPW00	T42012SPW00				
			24°	179 lm	3000K	T42004FLW00	T42012FLW00				
			EL	162 lm	3000K	T42004ELPTW00	T42012ELPTW00				



∅ 80±2
max 35 mm

Electronic ballast 350mA SELV supplied separately

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	Code
cc 14W 350mA	220-240	79 x 38 x 25	67	4	-	DV3001
cc 23W 350mA	220-240	185 x 35 x 33	67	5	DALI	DV1042

Verify driver / recessed hole's dimensions.


↳ EGO 150 DOWNLIGHT ROUND



EGO 150 DOWNLIGHT ROUND

						Aluminium IK09		Stainless steel IK09	
W	CRI	Weight	Beam	Flux	CCT	Code		Code	
8 W	=80	1,3 kg	5°	366 lm	3000K	T4085NSPW00		T4084NSPW00	
			38°	321 lm	3000K	T4085WFLW00		T4084WFLW00	
			EL	366 lm	3000K	T4085ELPTW00		T4084ELPTW00	

220/240Vac 50/60Hz electronic ballast included

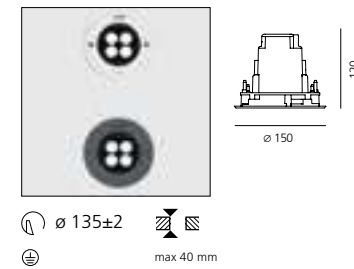


↳ EGO 150 DOWNLIGHT SQUARE



EGO 150 DOWNLIGHT SQUARE

						Aluminium IK09		Stainless steel IK09	
W	CRI	Weight	Beam	Flux	CCT	Code		Code	
8 W	=80	1,35 kg	5°	366 lm	3000K	T4065NSPW00		T4064NSPW00	
			38°	321 lm	3000K	T4065WFLW00		T4064WFLW00	
			EL	366 lm	3000K	T4065ELPTW00		T4064ELPTW00	

220/240Vac 50/60Hz electronic ballast included

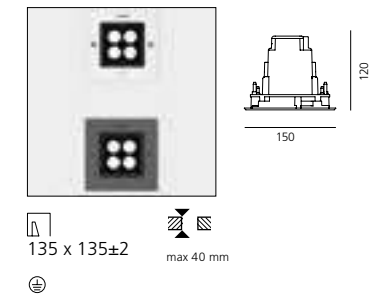


EGO 150 FLAT DOWNLIGHT ROUND

						Aluminium IK09		Stainless steel IK09	
W	CRI	Weight	Beam	Flux	CCT	Code		Code	
6 W	=80	0,88 kg	5°	366 lm	3000K	T42005NSPW00		T42013NSPW00	
			38°	321 lm	3000K	T42005WFLW00		T42013WFLW00	
			EL	366 lm	3000K	T42005ELPTW00		T42013ELPTW00	

Electronic ballast 500mA SELV supplied separately

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	
cc 14W 500mA	220-240	79 x 38 x 25	67	2	-	DV3002
cc 28W 500mA	220-240	120 x 38 x 25	67	2-3	-	DV1039
cc 31W 500mA	220-240	185 x 35 x 33	67	3	DALI	DV1042

Verify driver / recessed hole's dimensions.

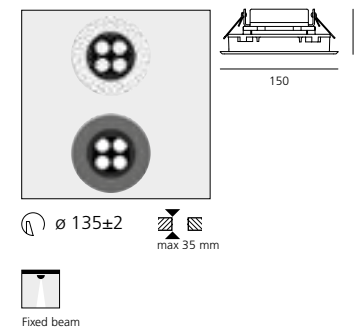


EGO 150 FLAT DOWNLIGHT SQUARE

						Aluminium IK09		Stainless steel IK09	
W	CRI	Weight	Beam	Flux	CCT	Code		Code	
6 W	=80	0,88 kg	5°	366 lm	3000K	T42006NSPW00		T42014NSPW00	
			38°	321 lm	3000K	T42006WFLW00		T42014WFLW00	
			EL	366 lm	3000K	T42006ELPTW00		T42014ELPTW00	

Electronic ballast 500mA SELV supplied separately

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	
cc 14W 500mA	220-240	79 x 38 x 25	67	2	-	DV3002
cc 28W 500mA	220-240	120 x 38 x 25	67	2-3	-	DV1039
cc 31W 500mA	220-240	185 x 35 x 33	67	3	DALI	DV1042

Verify driver / recessed hole's dimensions.

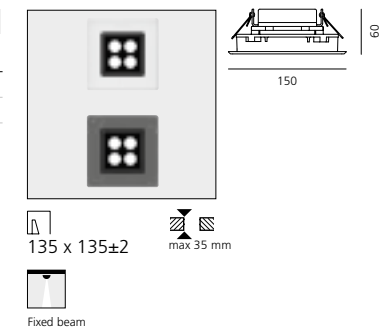


↳ EGO 220 DOWNLIGHT ROUND



EGO 220 DOWNLIGHT ROUND


						Aluminium IK10		Stainless steel IK10	
W	CRI	Weight	Beam	Flux	CCT	Code	Code	Code	Code
17 W	=80	2,6 kg	5°	787 lm	3000K	T4087NSPW00	T4086NSPW00		
			38°	794 lm	3000K	T4087WFLW00	T4086WFLW00		
			EL	797 lm	3000K	T4087ELPTW00	T4086ELPTW00		

220/240Vac 50/60Hz electronic ballast included

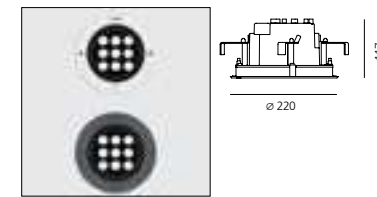

∅ 203±2
max 40 mm


↳ EGO 220 DOWNLIGHT SQUARE

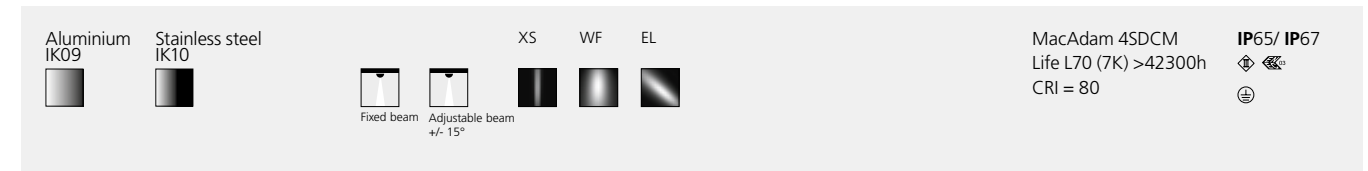

EGO 220 DOWNLIGHT SQUARE

						Aluminium IK10		Stainless steel IK10	
W	CRI	Weight	Beam	Flux	CCT	Code	Code	Code	Code
17 W	=80	2,7 kg	5°	787 lm	3000K	T4067NSPW00	T4066NSPW00		
			38°	794 lm	3000K	T4067WFLW00	T4066WFLW00		
			EL	797 lm	3000K	T4067ELPTW00	T4066ELPTW00		

220/240Vac 50/60Hz electronic ballast included

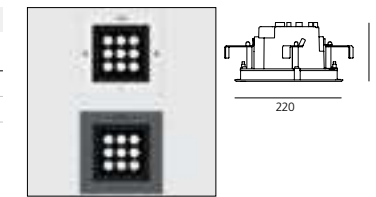

203 x 203±2
max 40 mm


EGO 220 FLAT DOWNLIGHT ROUND

						Aluminium IK10		Stainless steel IK10	
W	CRI	Weight	Beam	Flux	CCT	Code	Code	Code	Code
14 W	=80	1,78 kg	5°	787 lm	3000K	T42007NSPW00	T42015NSPW00		
			38°	794 lm	3000K	T42007WFLW00	T42015WFLW00		
			EL	797 lm	3000K	T42007ELPTW00	T42015ELPTW00		

Electronic ballast 500mA SELV supplied separately

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	
cc 28W 500mA	220-240	120 x 38 x 25	67	1	-	DV1039
cc 31W 500mA	220-240	185 x 35 x 33	67	1	DALI	DV1042

Verify driver / recessed hole's dimensions.

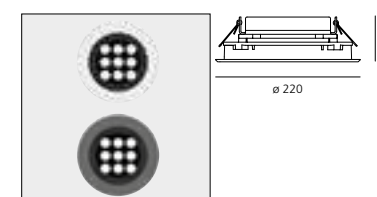

∅ 203±2
max 35 mm




EGO 220 FLAT DOWNLIGHT SQUARE

						Aluminium IK10		Stainless steel IK10	
W	CRI	Weight	Beam	Flux	CCT	Code	Code	Code	Code
14 W	=80	1,78 kg	5°	787 lm	3000K	T42008NSPW00	T42016NSPW00		
			38°	794 lm	3000K	T42008WFLW00	T42016WFLW00		
			EL	797 lm	3000K	T42008ELPTW00	T42016ELPTW00		

Electronic ballast 500mA SELV supplied separately

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	
cc 28W 500mA	220-240	120 x 38 x 25	67	1	-	DV1039
cc 31W 500mA	220-240	185 x 35 x 33	67	1	DALI	DV1042

Verify driver / recessed hole's dimensions.

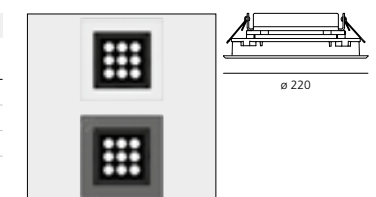

203 x 203±2
max 35 mm



Ego downlight

↳ glass



↳ EGO 150 GLASS DOWNLIGHT

Black Glass

XS WF EL


MacAdam 4SDCM
Life L70 (7K) >42300h
CRI = 80

IP65/ IP67
IK09

Fixed beam Adjustable beam +/- 15°


EGO 150 GLASS DOWNLIGHT

W	CRI	Weight	Beam	Flux	CCT	Round Code	Square Code
8 W	=80	1,3 kg	5°	366 lm	3000K	T4130NSPW00	T4120NSPW00
			38°	321 lm	3000K	T4130WFLW00	T4120WFLW00
			EL	366 lm	3000K	T4130ELPTW00	T4120ELPTW00

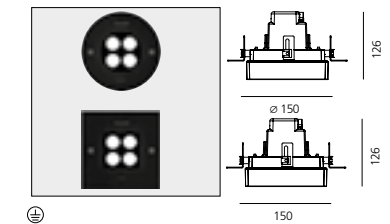


220/240Vac 50/60Hz electronic ballast included

Plate for plasterboard	T409919	T409920
------------------------	----------------	----------------



EGO 150 FLAT GLASS DOWNLIGHT


W	CRI	Weight	Beam	Flux	CCT	Round Code	Square Code
6 W	=80	0,92 kg	5°	366 lm	3000K	T42017NSPW00	T42018NSPW00
			38°	321 lm	3000K	T42017WFLW00	T42018WFLW00
			EL	366 lm	3000K	T42017ELPTW00	T42018ELPTW00

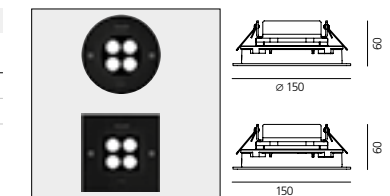

Electronic ballast 500mA supplied separately

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	Code
cc 14W 500mA	220-240	79 x 38 x 25	67	2	-	DV3002
cc 28W 500mA	220-240	120 x 38 x 25	67	2-3	-	DV1039
cc 31W 500mA	220-240	185 x 35 x 33	67	3	DALI	DV1042

Verify driver / recessed hole's dimensions.



Extra Spot optic 6°
Concentrated luminous flow to highlight details avoiding unwanted light dispersion.



Wide Flood optic 40°
Wide luminous flow suitable for lighting large areas.



Elliptical optic EL
Elliptical distribution of the luminous flow suitable for wall washer effect.

↳ EGO 220 GLASS DOWNLIGHT

Aluminium IK09	Stainless steel IK10	XS	WF	EL	MacAdam 4SDCM	IP65/ IP67
					Life L70 (7K) >42300h	
					CRI = 80	IK09
		Fixed beam	Adjustable beam ±15°			

EGO 220 GLASS DOWNLIGHT


						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
17 W	=80	2,4 kg	5°	787 lm	3000K	T4131NSPW00	T4121NSPW00
			38°	794 lm	3000K	T4131WFLW00	T4121WFLW00
			EL	797 lm	3000K	T4131ELPTW00	T4121ELPTW00

220/240Vac 50/60Hz electronic ballast included

Plate for plasterboard

T409917

T409918

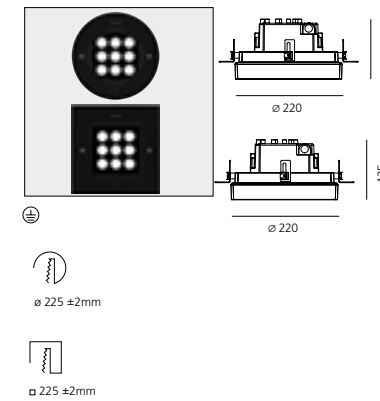



EGO 220 FLAT GLASS DOWNLIGHT

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
14 W	=80	1,67 kg	4°	787 lm	3000K	T42019NSPW00	T42020NSPW00
			38°	794 lm	3000K	T42019WFLW00	T42020WFLW00
			EL	797 lm	3000K	T42019ELPTW00	T42020ELPTW00

Electronic ballast 500mA SELV supplied separately

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	
cc 28W 500mA	220-240	120 x 38 x 25	67	1	-	DV1039
cc 31W 500mA	220-240	185 x 35 x 33	67	1	DALI	DV1042

Verify driver / recessed hole's dimensions.

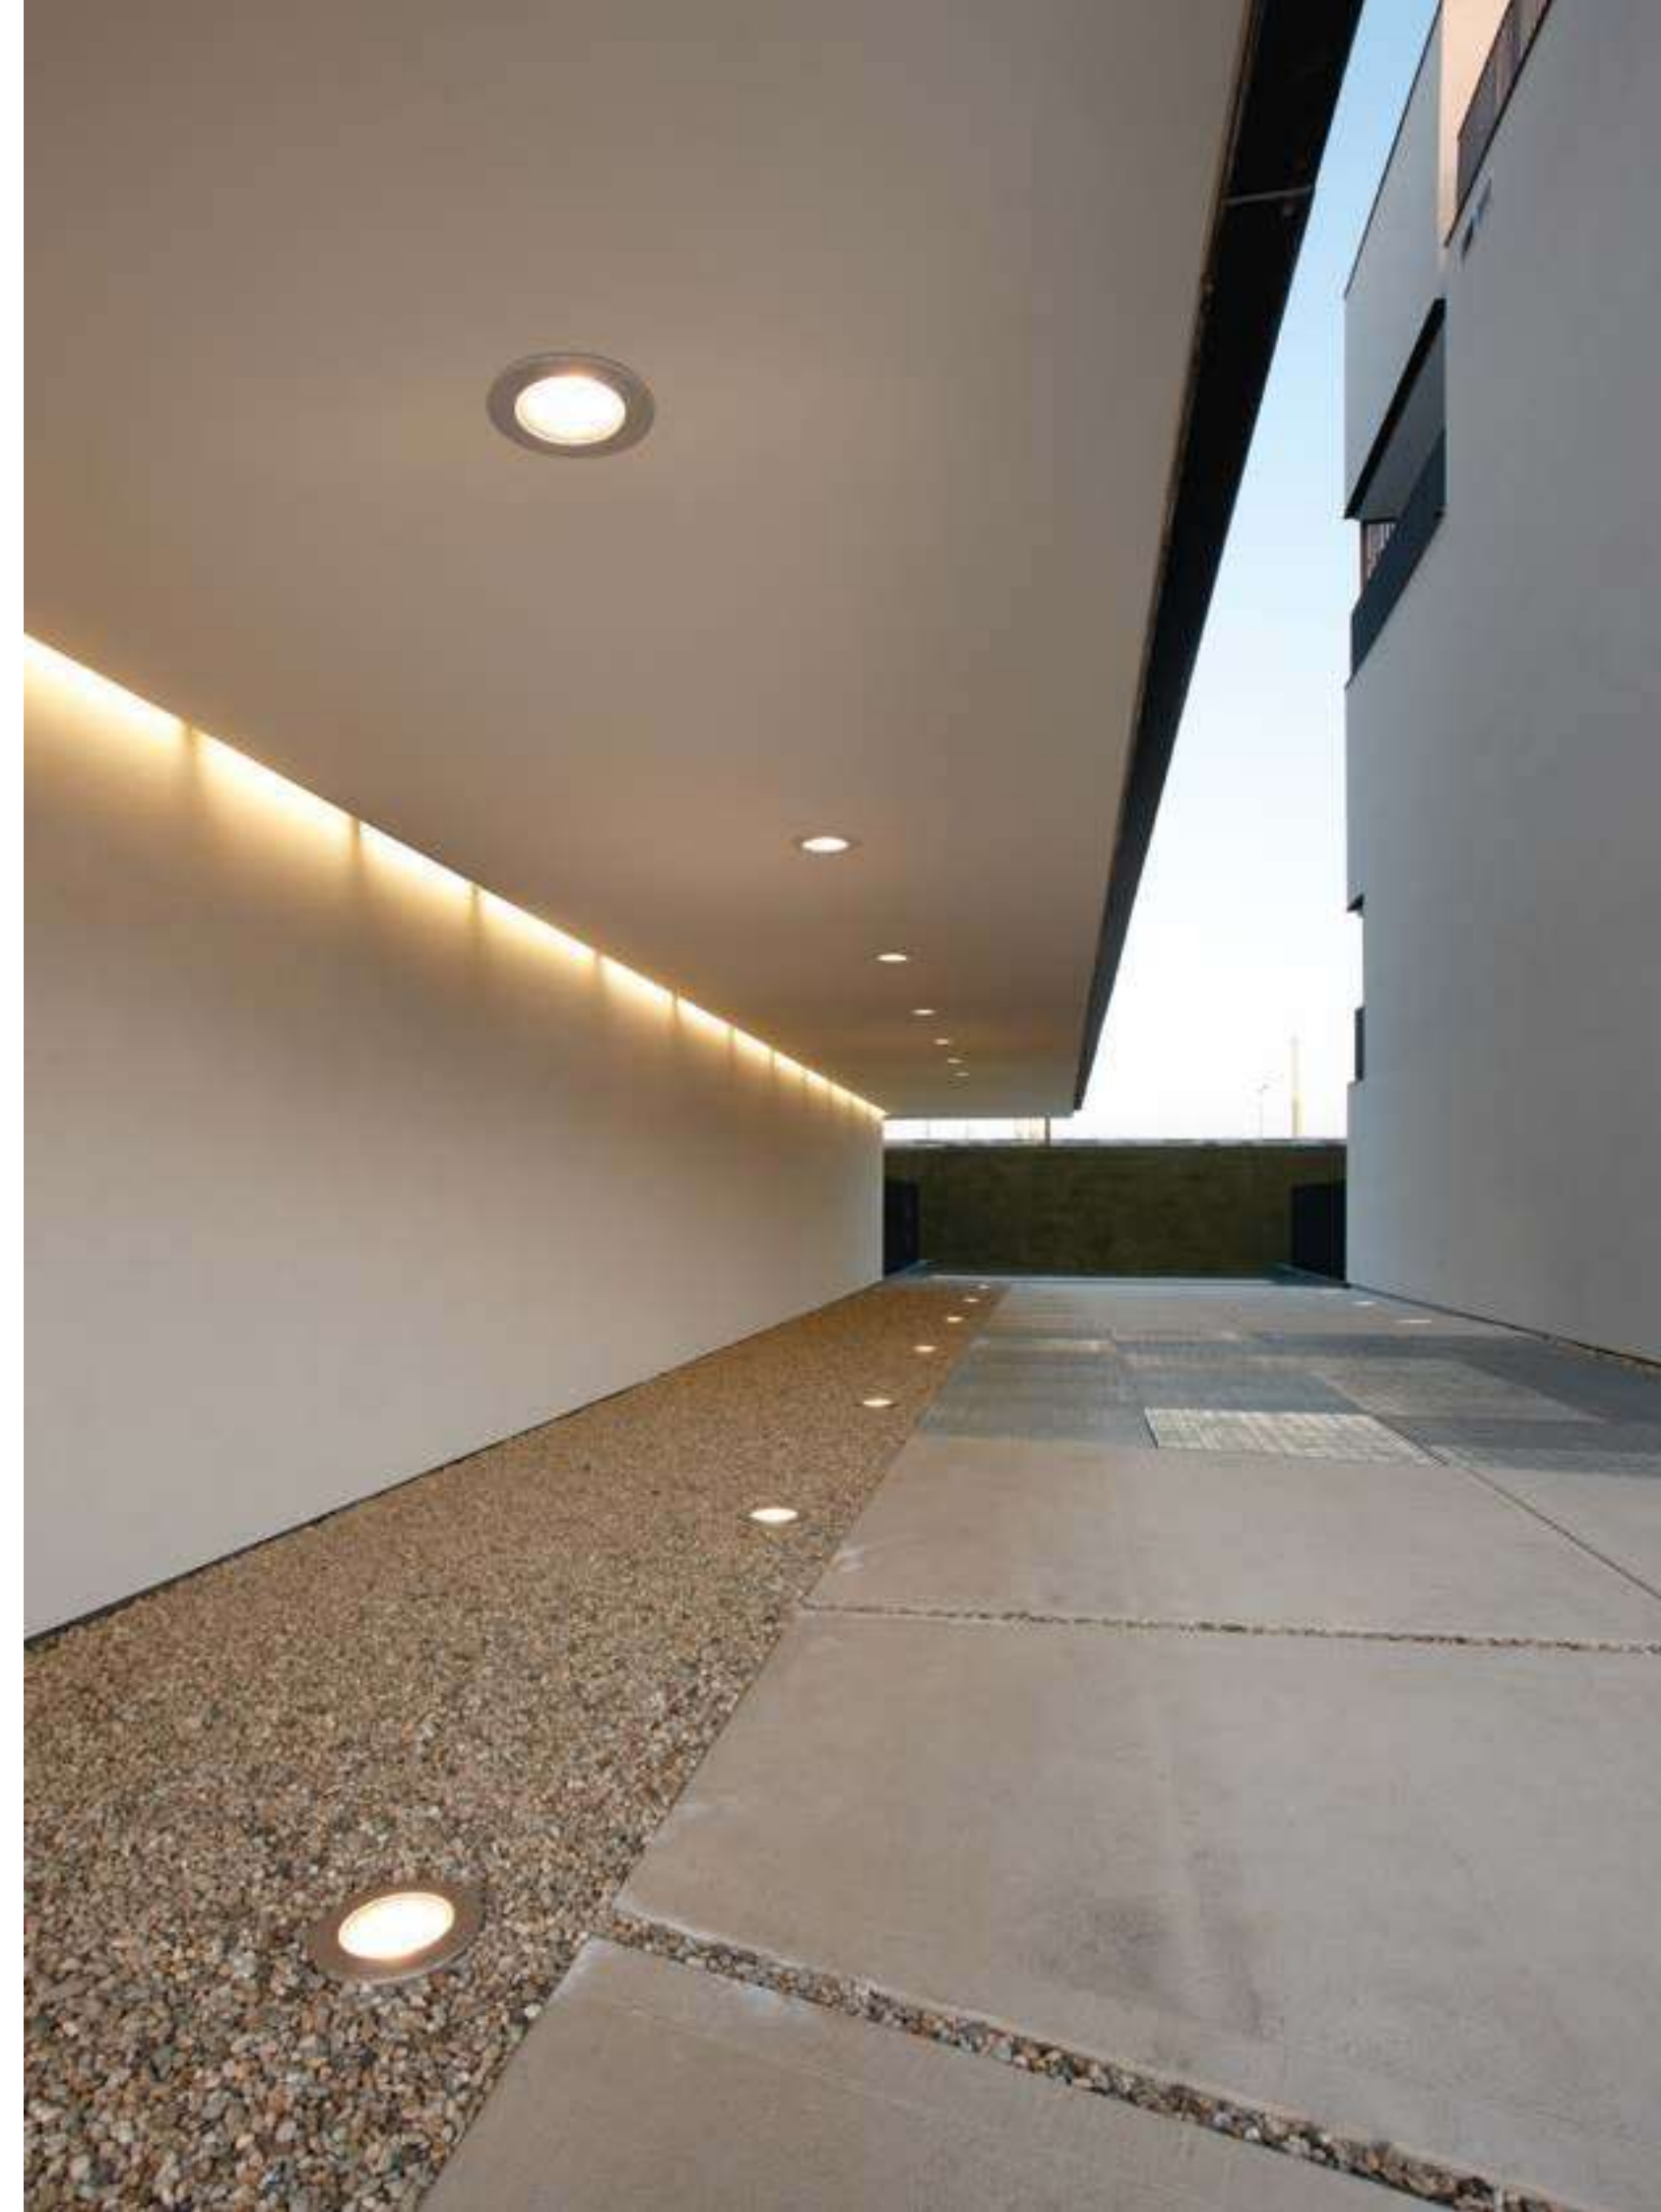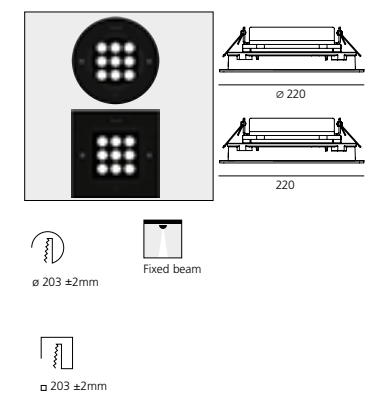

Ego walk over Ego drive over


↳ 2012





Ego
↪ Walk over
Drive over

Ego walk/drive over typologies

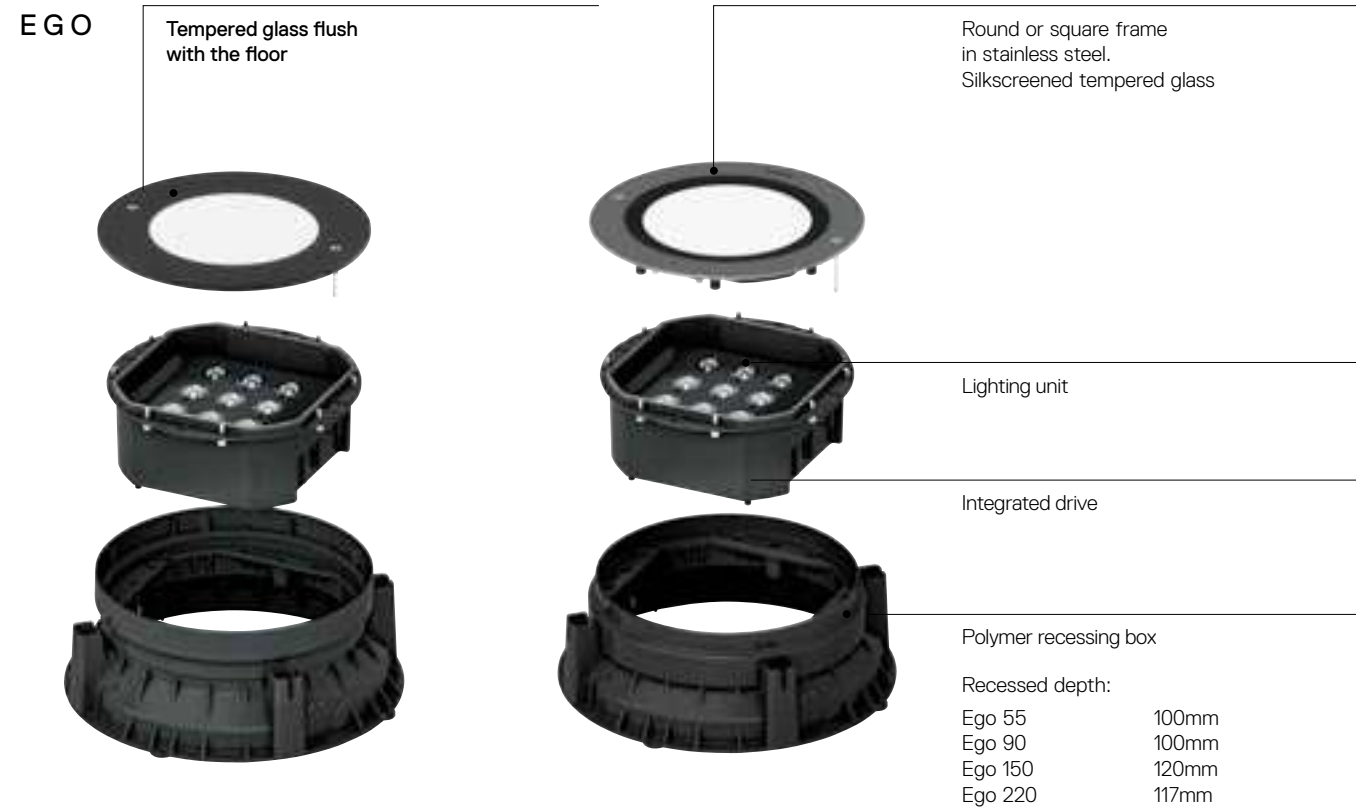

Light fixture with high-performance LED light sources.
Recessed ground installation.
Walk-over and drive-over versions.

Depth of recess box:
Ego WO/DO: 110-120 mm
Ego Flat WO: 60 mm

WO/DO round and square version, each one in 5 different sizes.

Fixture consisting of body, frame, glass diffuser, housing.
Aluminium body EN AB-44100 with silicone gaskets.
All versions are available with stainless steel frames.
Ego 55-90 / Ego flat 55-90 also available with polished aluminium frame.
Ego 150-220 / Ego flat 150-220 also available with 8mm-thick glass flush with the floor.

Housing in composite techno polymer, to be ordered separately.

Ego Flat WO H05RN-F feeding cable length: 300 cm.
Ego WO/DO feeding cable:
H05RNF 2x1 for Ego 55 - 90,
H05RNF 3x1 for Ego 150,
H07RNF 3x1 for Ego 220 - 320, cable length 30 cm.

All Ego versions (excluding Flat version) are supplied with electronic power supply inside the luminaire body. For 55 and 90 versions 24 V power supply and remote power supply to be ordered separately.

All Ego Flat can be operated by a remote power supply to be ordered separately. Connection cable includes a IP68 electrical terminal board.


Housing locked by anti-vandal TORX screws in AISI 316 stainless steel.

Glass surface temperature below 40°C.

Fixed and adjustable lenses in PMMA in 3 versions with different beam angles.

Die-cast painted aluminium with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

Technical features of light fixtures in compliance with EN60598-1 and part 2-13.

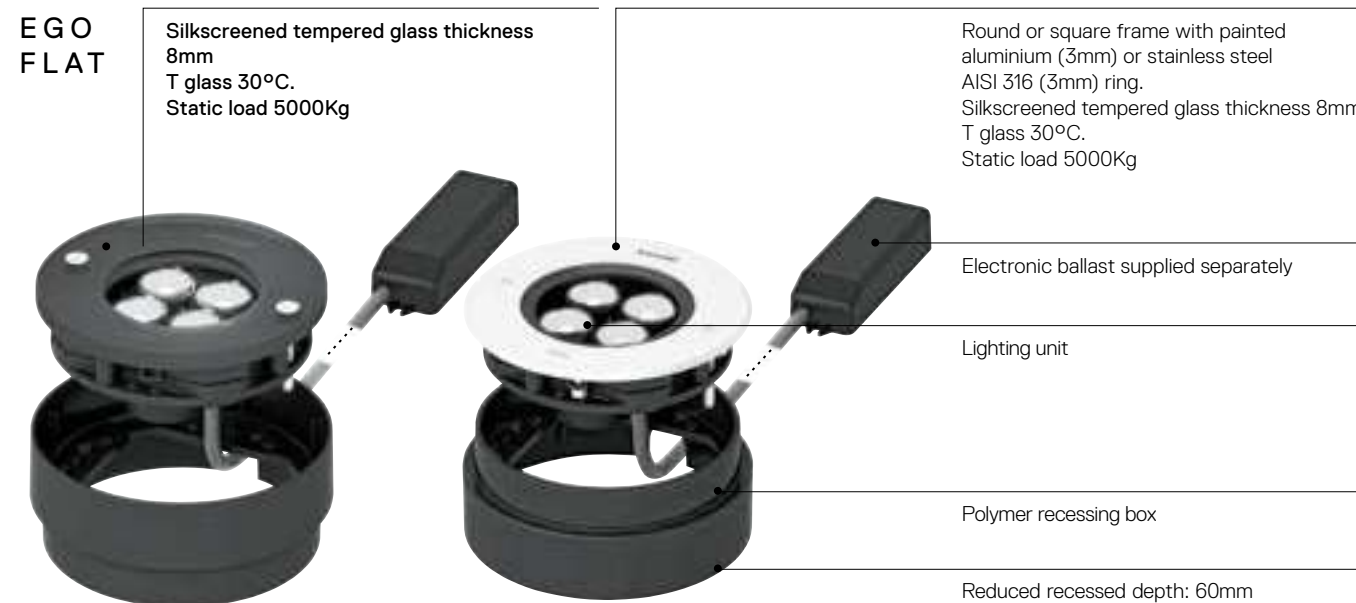

For further information on Ego walk over/drive over
↪ visit artemide.com

↳ EGO 55 ALUMINIUM

Aluminium

XS WF EL

Electronic ballast
24V SELV supplied
separately

MacAdam 4SDCM
Life L90 (10K) >54400h
CRI = 80

IP65/ IP67
IK09








EGO 55 WALK OVER

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
1,5 W	=80	0,28 kg	14°	83 lm	3000K	T4031SPW00	T4001SPW00
			32°	76 lm	3000K	T4031WFLW00	T4001WFLW00
			EL	77 lm	3000K	T4031ELPTW00	T4001ELPTW00




Recessing box				T409908
Drive	24 W IP67	DALI	185x35x33mm	DV1041
Drive	24 W IP67		148x40x32mm	T409996
Drive	60 W IP67		163x43x32mm	T409998
Drive	90 W IP67		161x61x36mm	T409999

Please see page 945 for drives installation details.

EGO 55 FLAT WALK OVER

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
1 W	=80	0,39 kg	14°	83 lm	3000K	T40000SPW00	T40001SPW00
			32°	76 lm	3000K	T40000WFLW00	T40001WFLW00
			EL	77 lm	3000K	T40000ELPTW00	T40001ELPTW00



Electronic ballast 350mA supplied separately

Recessing box							NL40021H0
Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM		Code
cc 14W 350mA	220-240	79 x 38 x 25	67	2-10	-		DV3001
cc 23W 350mA	220-240	185 x 35 x 33	67	3-12	DALI		DV1042

Verify drive / recessed hole's dimensions.

↳ EGO 55 STAINLESS STEEL

Stainless steel

XS WF EL

Electronic ballast
24V SELV supplied
separately

MacAdam 4SDCM
Life L90 (10K) >54400h
CRI = 80

IP65/ IP67
IK09








EGO 55 DRIVE OVER

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
1,5 W	=80	0,28 kg	14°	83 lm	3000K	T4032SPW00	T4002SPW00
			32°	76 lm	3000K	T4032WFLW00	T4002WFLW00
			EL	77 lm	3000K	T4032ELPTW00	T4002ELPTW00

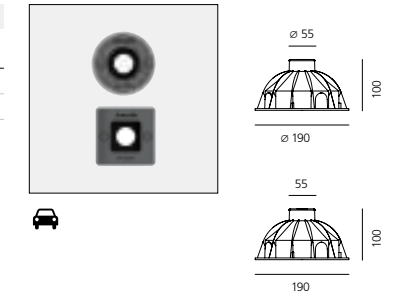


Recessing box				T409908
Drive	24 W IP67	DALI	185x35x33mm	DV1041
Drive	24 W IP67		148x40x32mm	T409996
Drive	60 W IP67		163x43x32mm	T409998
Drive	90 W IP67		161x61x36mm	T409999

Please see page 945 for drives installation details.

EGO 55 FLAT WALK OVER

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
1 W	=80	0,39 kg	14°	83 lm	3000K	T40002SPW00	T40003SPW00
			32°	76 lm	3000K	T40002WFLW00	T40003WFLW00
			EL	77 lm	3000K	T40002ELPTW00	T40003ELPTW00

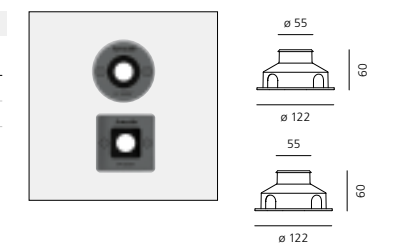

Electronic ballast 350mA supplied separately

Recessing box							NL40021H0
Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM		Code
cc 14W 350mA	220-240	79 x 38 x 25	67	2-10	-		DV3001
cc 23W 350mA	220-240	185 x 35 x 33	67	3-12	DALI		DV1042

Verify drive / recessed hole's dimensions.

↳ EGO 90 ALUMINIUM

Aluminium

Fixed beam Adjustable beam +/- 8° XS WF EL

Electronic ballast 24V SELV supplied separately

MacAdam 4SDCM Life L90 (10K) >54400h CRI = 80


IP65/ IP67 IK09





EGO 90 WALK OVER

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
3 W	=80	0,50 kg	10°	220 lm	3000K	T4034SPW00	T4004SPW00
			24°	179 lm	3000K	T4034FLW00	T4004FLW00
			EL	162 lm	3000K	T4034ELPTW00	T4004ELPTW00




Recessing box				T409907	
Drive	24 W	IP67	DALI	185x35x33mm	DV1041
Drive	24 W	IP67		148x40x32mm	T409996
Drive	60 W	IP67		163x43x32mm	T409998
Drive	90 W	IP67		161x61x36mm	T409999

Please see page 945 for drives installation details.

EGO 90 FLAT WALK OVER

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
3 W	=80	0,50 kg	10°	220 lm	3000K	T40004SPW00	T40005SPW00
			24°	179 lm	3000K	T40004FLW00	T40005FLW00
			EL	162 lm	3000K	T40004ELPTW00	T40005ELPTW00



Recessing box				NL40022H0
---------------	--	--	--	-----------

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	Code
cc 14W 350mA	220-240	79 x 38 x 25	67	2-10	-	DV3001
cc 23W 350mA	220-240	185 x 35 x 33	67	3-12	DALI	DV1042

Verify drive / recessed hole's dimensions.

↳ EGO 90 STAINLESS STEEL

Stainless steel

Fixed beam Adjustable beam +/- 8° XS WF EL

Electronic ballast 24V SELV supplied separately

MacAdam 4SDCM Life L90 (10K) >54400h CRI = 80


IP65/ IP67 IK09





EGO 90 DRIVE OVER

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
3 W	=80	0,50 kg	10°	220 lm	3000K	T4033SPW00	T4003SPW00
			24°	179 lm	3000K	T4033FLW00	T4003FLW00
			EL	162 lm	3000K	T4033ELPTW00	T4003ELPTW00

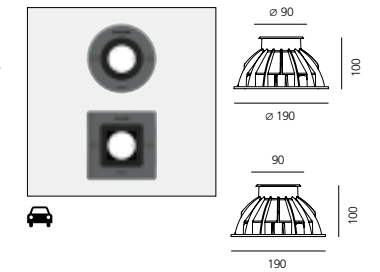


Recessing box				T409907	
Drive	24 W	IP67	DALI	185x35x33mm	DV1041
Drive	24 W	IP67		148x40x32mm	T409996
Drive	60 W	IP67		163x43x32mm	T409998
Drive	90 W	IP67		161x61x36mm	T409999

Please see page 945 for drives installation details.

EGO 90 FLAT WALK OVER

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
3 W	=80	0,50 kg	10°	220 lm	3000K	T40006SPW00	T40007SPW00
			24°	179 lm	3000K	T40006FLW00	T40007FLW00
			EL	162 lm	3000K	T40006ELPTW00	T40007ELPTW00

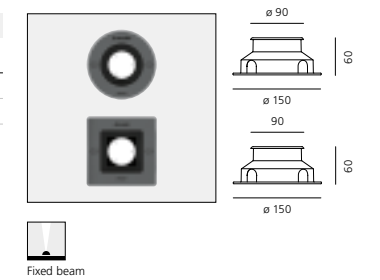

Recessing box				NL40022H0
---------------	--	--	--	-----------

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	Code
cc 14W 350mA	220-240	79 x 38 x 25	67	2-10	-	DV3001
cc 23W 350mA	220-240	185 x 35 x 33	67	3-12	DALI	DV1042

Verify drive / recessed hole's dimensions.

↳ EGO 150 STAINLESS STEEL

Stainless steel

MacAdam 4SDCM
Life L70 (7K) >42300h
CRI = 80


IP65/ IP67
IK09

EGO 150 DRIVE OVER

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
8 W	=80	1,35 kg	5°	366 lm	3000K	T4036NSPW00	T4006NSPW00
			38°	321 lm	3000K	T4036WFLW00	T4006WFLW00
			EL	366 lm	3000K	T4036ELPTW00	T4006ELPTW00

220/240Vac 50/60Hz electronic ballast included

Recessing box	T409905	T409906
---------------	----------------	----------------

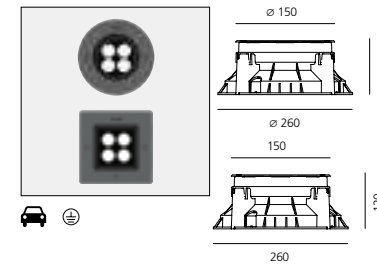

↳ EGO 220 STAINLESS STEEL

Stainless steel

MacAdam 4SDCM
Life L70 (7K) >42300h
CRI = 80


IP65/ IP67
IK09

EGO 220 DRIVE OVER

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
16 W	=80	3,20 kg	5°	787 lm	3000K	T4039NSPW00	T4009NSPW00
			38°	794 lm	3000K	T4039WFLW00	T4009WFLW00
			EL	797 lm	3000K	T4039ELPTW00	T4009ELPTW00

220/240Vac 50/60Hz electronic ballast included

Recessing box	T409903	T409904
---------------	----------------	----------------

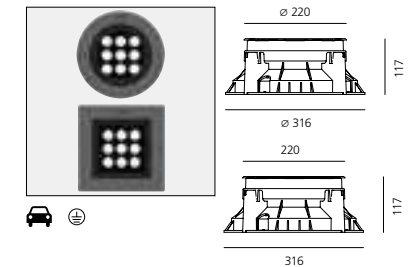

EGO 150 FLAT WALK OVER


						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
6 W	=80	0,88 kg	5°	366 lm	3000K	T40010NSPW00	T40011NSPW00
			38°	321 lm	3000K	T40010WFLW00	T40011WFLW00
			EL	366 lm	3000K	T40010ELPTW00	T40011ELPTW00

Electronic ballast 500mA SELV supplied separately

Recessing box	NL40025H0	NL40023H0
---------------	------------------	------------------

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	Code
cc 14W 500mA	220-240	79 x 38 x 25	67	2	-	DV3002
cc 28W 500mA	220-240	120 x 38 x 25	67	2-3	-	DV1039
cc 31W 500mA	220-240	185 x 35 x 33	67	3	DALI	DV1042

Verify drive / recessed hole's dimensions.



EGO 220 FLAT WALK OVER


						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
14 W	=80	1,78 kg	5°	787 lm	3000K	T40014NSPW00	T40015NSPW00
			38°	794 lm	3000K	T40014WFLW00	T40015WFLW00
			EL	797 lm	3000K	T40014ELPTW00	T40015ELPTW00

Electronic ballast 500mA SELV supplied separately

Recessing box	NL40026H0	NL40023H0
---------------	------------------	------------------

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	Code
cc 28W 500mA	220-240	120 x 38 x 25	67	1	-	DV1039
cc 31W 500mA	220-240	185 x 35 x 33	67	1	DALI	DV1042

Verify drive / recessed hole's dimensions.

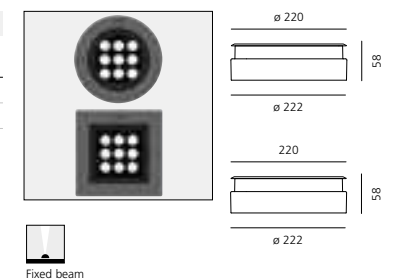

Ego walk over ↪ Glass



↳ EGO 150 GLASS WALK OVER

Black Glass

Fixed beam Adjustable beam +/- 15°


XS WF EL

MacAdam 4SDCM
Life L70 (7K) >42300h
CRI = 80

IP65/ IP67
IK09

EGO 150 WALK OVER

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
8 W	=80	1,35 kg	5°	366 lm	3000K	T4110NSPW00	T4100NSPW00
			38°	321 lm	3000K	T4110WFLW00	T4100WFLW00
			EL	366 lm	3000K	T4110ELPTW00	T4100ELPTW00
220/240Vac 50/60Hz electronic ballast included							
Recessing box						T409913	T409914

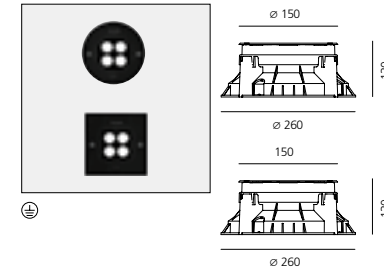

↳ EGO 220 GLASS WALK OVER

Black Glass

Fixed beam Adjustable beam +/- 15°


XS WF EL

MacAdam 4SDCM
Life L70 (7K) >42300h
CRI = 80

IP65/ IP67
IK09


EGO 220 WALK OVER

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
17 W	=80	3,20 kg	5°	787 lm	3000K	T4111NSPW00	T4101NSPW00
			38°	794 lm	3000K	T4111WFLW00	T4101WFLW00
			EL	797 lm	3000K	T4111ELPTW00	T4101ELPTW00
220/240Vac 50/60Hz electronic ballast included							
Recessing box						T409911	T409912

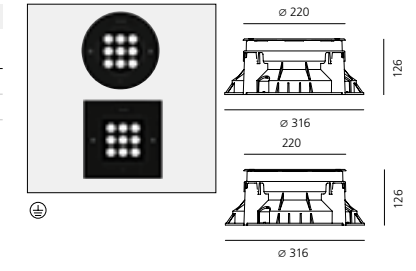


EGO 150 FLAT WALK OVER

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
6 W	=80	0,92 kg	5°	366 lm	3000K	T40017NSPW00	T40018NSPW00
			38°	321 lm	3000K	T40017WFLW00	T40018WFLW00
			EL	366 lm	3000K	T40017ELPTW00	T40018ELPTW00
Electronic ballast 500mA supplied separately							
Recessing box						NL40029H0	NL40027H0

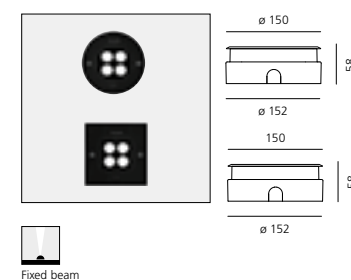

EGO 220 FLAT WALK OVER

						Round	Square
W	CRI	Weight	Beam	Flux	CCT	Code	Code
14 W	=80	1,67 kg	5°	787 lm	3000K	T40019NSPW00	T40020NSPW00
			38°	794 lm	3000K	T40019WFLW00	T40020WFLW00
			EL	797 lm	3000K	T40019ELPTW00	T40020ELPTW00
Electronic ballast 500mA supplied separately							
Recessing box						NL40030H0	NL40028H0

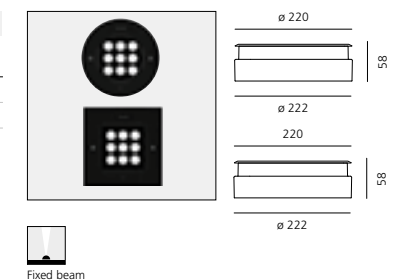

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	Code
cc 14W 500mA	220-240	79 x 38 x 25	67	2	-	DV3002
cc 28W 500mA	220-240	120 x 38 x 25	67	2-3	-	DV1039
cc 31W 500mA	220-240	185 x 35 x 33	67	3	DALI	DV1042

Driver	V(ac)	L x W x H(mm)	IP	N.max	DIM	Code
cc 28W 500mA	220-240	120 x 38 x 25	67	1	-	DV1039
cc 31W 500mA	220-240	185 x 35 x 33	67	1	DALI	DV1042

Verify drive / recessed hole's dimensions.

Verify drive / recessed hole's dimensions.

Megara

Michele De Lucchi

↪ 2011

Light fixture with high-performance LED light sources.

Drive-over recessed floor installation with floor-protruding cap. All the versions are drive-over up to 5000Kg. Due to the low height of the cap, Megara 90 is also suitable for installation in walk-over areas, being careful to avoid areas of direct transit (near walls, buildings, etc.). Cap's temperature 35° C.

3 sizes (90, 150, 220 mm).

Composed by body, cap, diffuser, recessing box.

Body and cap in painted EN AB44100 aluminium, silicone gaskets; provided with 30 cm-long pre-resined three-pole connection cable (H07RN-F for versions 90 and 150, H05RN-F for version 220).

Electronic ballast integrated in the body.

Diffuser in UV resistant polycarbonate.

Power connection to the mains by means of the IP68 connector supplied with the light fixture, which can be housed in the recessing box and is suitable for cables with a diameter from 5 to 13.3 mm.

Fixing to the recessing box is ensured by means of anti-vandal screws TORX.

Recessing box for laying in reinforced polymer to be ordered separately.

Radial emission beam optic.

1, 2, 4 beam and full configurations.

Screws in AISI 316 stainless steel.

Painted die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

Technical features of light fixtures in compliance with EN60598-1 and part 2-13.



For further information on Megara
↪ visit artemide.com



MEGARA 90 - 1 BEAM



MEGARA 150 - 1 BEAM



MEGARA 220 - 1 BEAM



MEGARA 90 - 2 BEAMS



MEGARA 150 - 2 BEAMS



MEGARA 220 - 2 BEAMS



MEGARA 90 - 4 BEAMS



MEGARA 150 - 4 BEAMS



MEGARA 220 - 4 BEAMS



MEGARA 90 - FULL



MEGARA 150 - FULL



MEGARA 220 - FULL


PAINTED ALUMINIUM CAP

DIFFUSER IN UV RESISTANT POLYCARBONATE

RECESSING BOX IN POLYMER

Recessed depth:

Megara 90	101mm
Megara 150	122mm
Megara 220	118mm

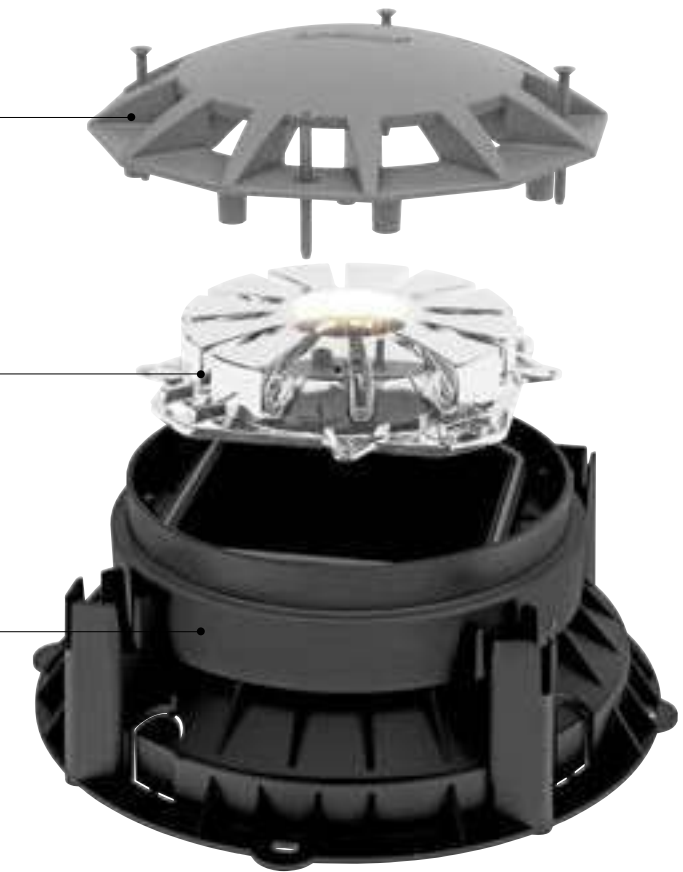

↪ MEGARA 90

Dark grey



EL



220/240Vac 50/60Hz
electronic ballast included

MacAdam 4SDCM
L70(6K)>39300 h
CRI =80



IP65/ IP67



1 Beam

W	Weight	Beam	Flux	CCT
2,5 W	0,4 kg	AS	7 lm	3000K



Code
T415300W00



2 Beams

W	Weight	Beam	Flux	CCT
2,5 W	0,4 kg	AS	12 lm	3000K



Code
T415200W00



3 Beams

W	Weight	Beam	Flux	CCT
2,5 W	0,4 kg	AS	15 lm	3000K



Code
T415100W00



4 Beams

W	Weight	Beam	Flux	CCT
2,5 W	0,4 kg	AS	22 lm	3000K

Code
T415000W00



Accessories

Recessing box

Code
T409907

↪ MEGARA 150

Dark grey



EL



220/240Vac 50/60Hz
electronic ballast included

MacAdam 4SDCM
L70(6K)>39300 h
CRI =80



IP65/ IP67



1 Beam

W	Weight	Beam	Flux	CCT
4 W	1 kg	AS	8 lm	3000K



Code
T415700W00



2 Beams

W	Weight	Beam	Flux	CCT
4 W	1 kg	AS	14 lm	3000K



Code
T415600W00



3 Beams

W	Weight	Beam	Flux	CCT
4 W	1 kg	AS	18 lm	3000K



Code
T415500W00



4 Beams

W	Weight	Beam	Flux	CCT
4 W	1 kg	AS	26 lm	3000K

Code
T415400W00







Accessories

Recessing box

Code
T409905


↪ MEGARA 220

Dark grey 	EL 	220/240Vac 50/60Hz electronic ballast included	MacAdam 4SDCM L70(6K)>39300 h CRI =80	IP65/ IP67  IK10 
--	---	---	---	--

1 Beam

W	Weight	Beam	Flux	CCT
8,5 W	0,4 kg	AS	8 lm	3000K


Code
T416100W00



2 Beams

W	Weight	Beam	Flux	CCT
8,5 W	0,4 kg	AS	13 lm	3000K


Code
T416000W00



3 Beams

W	Weight	Beam	Flux	CCT
8,5 W	0,4 kg	AS	17 lm	3000K



Code
T415900W00



4 Beams

W	Weight	Beam	Flux	CCT
8,5 W	0,4 kg	AS	26 lm	3000K

Code
T415800W00



Accessories

Recessing box

Code
T409903



Microled

↪ 2013

Light fixture with high-performances LED light sources.

Floor installation.

Consists of diffuser, body, ring, housing.

Diffuser in glass, 3mm-thick.

Body in technopolymer, with or without frame.

Ring in stainless steel AISI 316L.

Housing in plastic material (available separately).

Remote driver.

Electrical connection to the ballast by means of a two-pole H05RN-F cable and appropriate IP68 terminal board.



For further information on Microled
↪ visit artemide.com



↪ MICROLED

Stainless steel



XF



Driver 12Vdc SELV supplied separately.
Walkable 500 kg.

IP65 / IP67




IK10

CRI =75


MICROLED

W	Weight	Beam	Flux	CCT
0,5 W	0,2 kg	XF	5,6 lm	3000K

Code
NL42036VSK0




∅ 36




W	Weight	Beam	Flux	CCT
0,5 W	0,2 kg	XF	5,6 lm	3000K

Code
NL42037VSK0



∅ 36



Accessories

Recessing box

Code
NL42040H0


Driver	Vac	IP	L _{mm}	W _{mm}	H _{mm}
25W 12Vdc	24 Vdc	IP67	148	40	32 25 max
60W 12Vdc	24 Vdc	IP67	163	43	32 60 max

Code
T409996
T409998


MICROLED RGB

W	Weight	Beam
1,5 W	0,2 kg	XF

Code
NL42038




∅ 36




W	Weight	Beam
1,5 W	0,2 kg	XF

Code
NL42039



∅ 36



Accessories

Recessing box

DSC 30 USB interface DMX stand alone

9V/350mA ballast with mini USB connector for DSC30

50cm cable with HE10 connector for keyboard (optional)

Code
NL42040H0
NL19030
NL19031

NL7833

Driver	Vac	W	Vdc	Ch	Control	LxWxH	IP	1,5W	Code
Driver NLX1-100	120-250Vac	95W	24Vdc PWM	1xRGB	DMX/DALI	388x42x30	40	50 max	NL12150
Driver NLX1-75	24Vdc	144W	24Vdc PWM	1xRGB	DMX/DALI	153x50x23	40	80 max	NL19084
PSU 150W	90-305Vac	150W	24Vdc			228x68x39	67		DV5004
Driver NLX2-75	90-260Vac	75W	24Vdc PWM	2xRGB	DMX	270x200x80	40	40 max	NL75190
Driver NLX1-100 IP	120-250Vac	95W	24Vdc PWM	1xRGB	DMX/DALI	340x103x61	66	50 max	DV1046

*PSU 24Vdc (i.e. Cod. DV5004) mandatory

Aria

Massimo Sacconi

↪ 2012

Light fixture with high-performance LED light sources.
Wall or ceiling installation.

Composed by: frame (aluminium), body (injection mould of aluminium), asymmetrical reflector, fixing springs or housing (bend metal - to be ordered separately).

Body and frame are painted with outdoor treatment three stages: nanotechnologies, antioxidant primer, polyester paint.

Metalized polycarbonate reflector.

Silicone gasket.

Protection screen in tempered glass, 3mm-thick.

Electrical connection to the ballast by means of a cable with appropriate terminal board supplied with the fixture.

Technical features of light fixtures in compliance with EN60598-1.



For further information on Aria
↪ visit artemide.com


↪ ARIA

White 01 06	Black 04 04	Silver 12 02	EL 	Electronic ballast 700 mA supplied separately	MacAdam 4SDCM CRI = 85	IP40/ IP65 650°
-------------------	-------------------	--------------------	--------	--	---------------------------	--------------------

ARIA MINI

W	Weight	Beam	CCT	Flux	IP
6 W	0,60 kg	AS	3000 K	215 lm 204 lm	65 40

Code
AJ100. 01/04/12
AJ300. 01/04/12



Life L70 (6K)>36000h

72 x 52 ±2

Accessories


Recessing box

Code
AJ90000

ARIA MICRO

W	Weight	Beam	CCT	Flux	IP
2,5 W	0,36 kg	AS	3000 K	57 lm 40	65 40

Code
NL31019VTK0.06/04/02
NL31018VTK0.06/04/02



Life L70 (10K)>60500h

49 x 46 ±2


Accessories

Recessing box

Code
NL31020H0


Driver	V(ac)	DIM	L _{mm}	W _{mm}	H _{mm}	IP	Aria Mini			Code
							3W	6 W	2,5 W	
cc 14W 350mA	220-240	-	79	38	25	67	4			DV3001
cc 14W 700mA	220-240	-	79	38	25	67		2	2-8	DV3003
cc 30W 700mA	220-240	-	120	38	25	67		3-4	7-12	DV3004
cc 9W 350mA	220-240	-	75	38	22	67	2			NL19032
cc 10W 700mA	220-240	-	75	38	22	67		1	2-3	NL19035
cc 20W 700mA	220-240	-	125	38	22	67		2	2-7	NL19036
cc 30W 700mA	220-240	-	125	38	22	20		3-4	7-12	DV1040
cc 23W 350mA	220-240	DALI	185	35	33	67	4			DV1042
cc 38W 700mA	220-240	DALI	185	35	33	67		4	3-13	DV1042

Verify driver / recessed hole's dimensions.

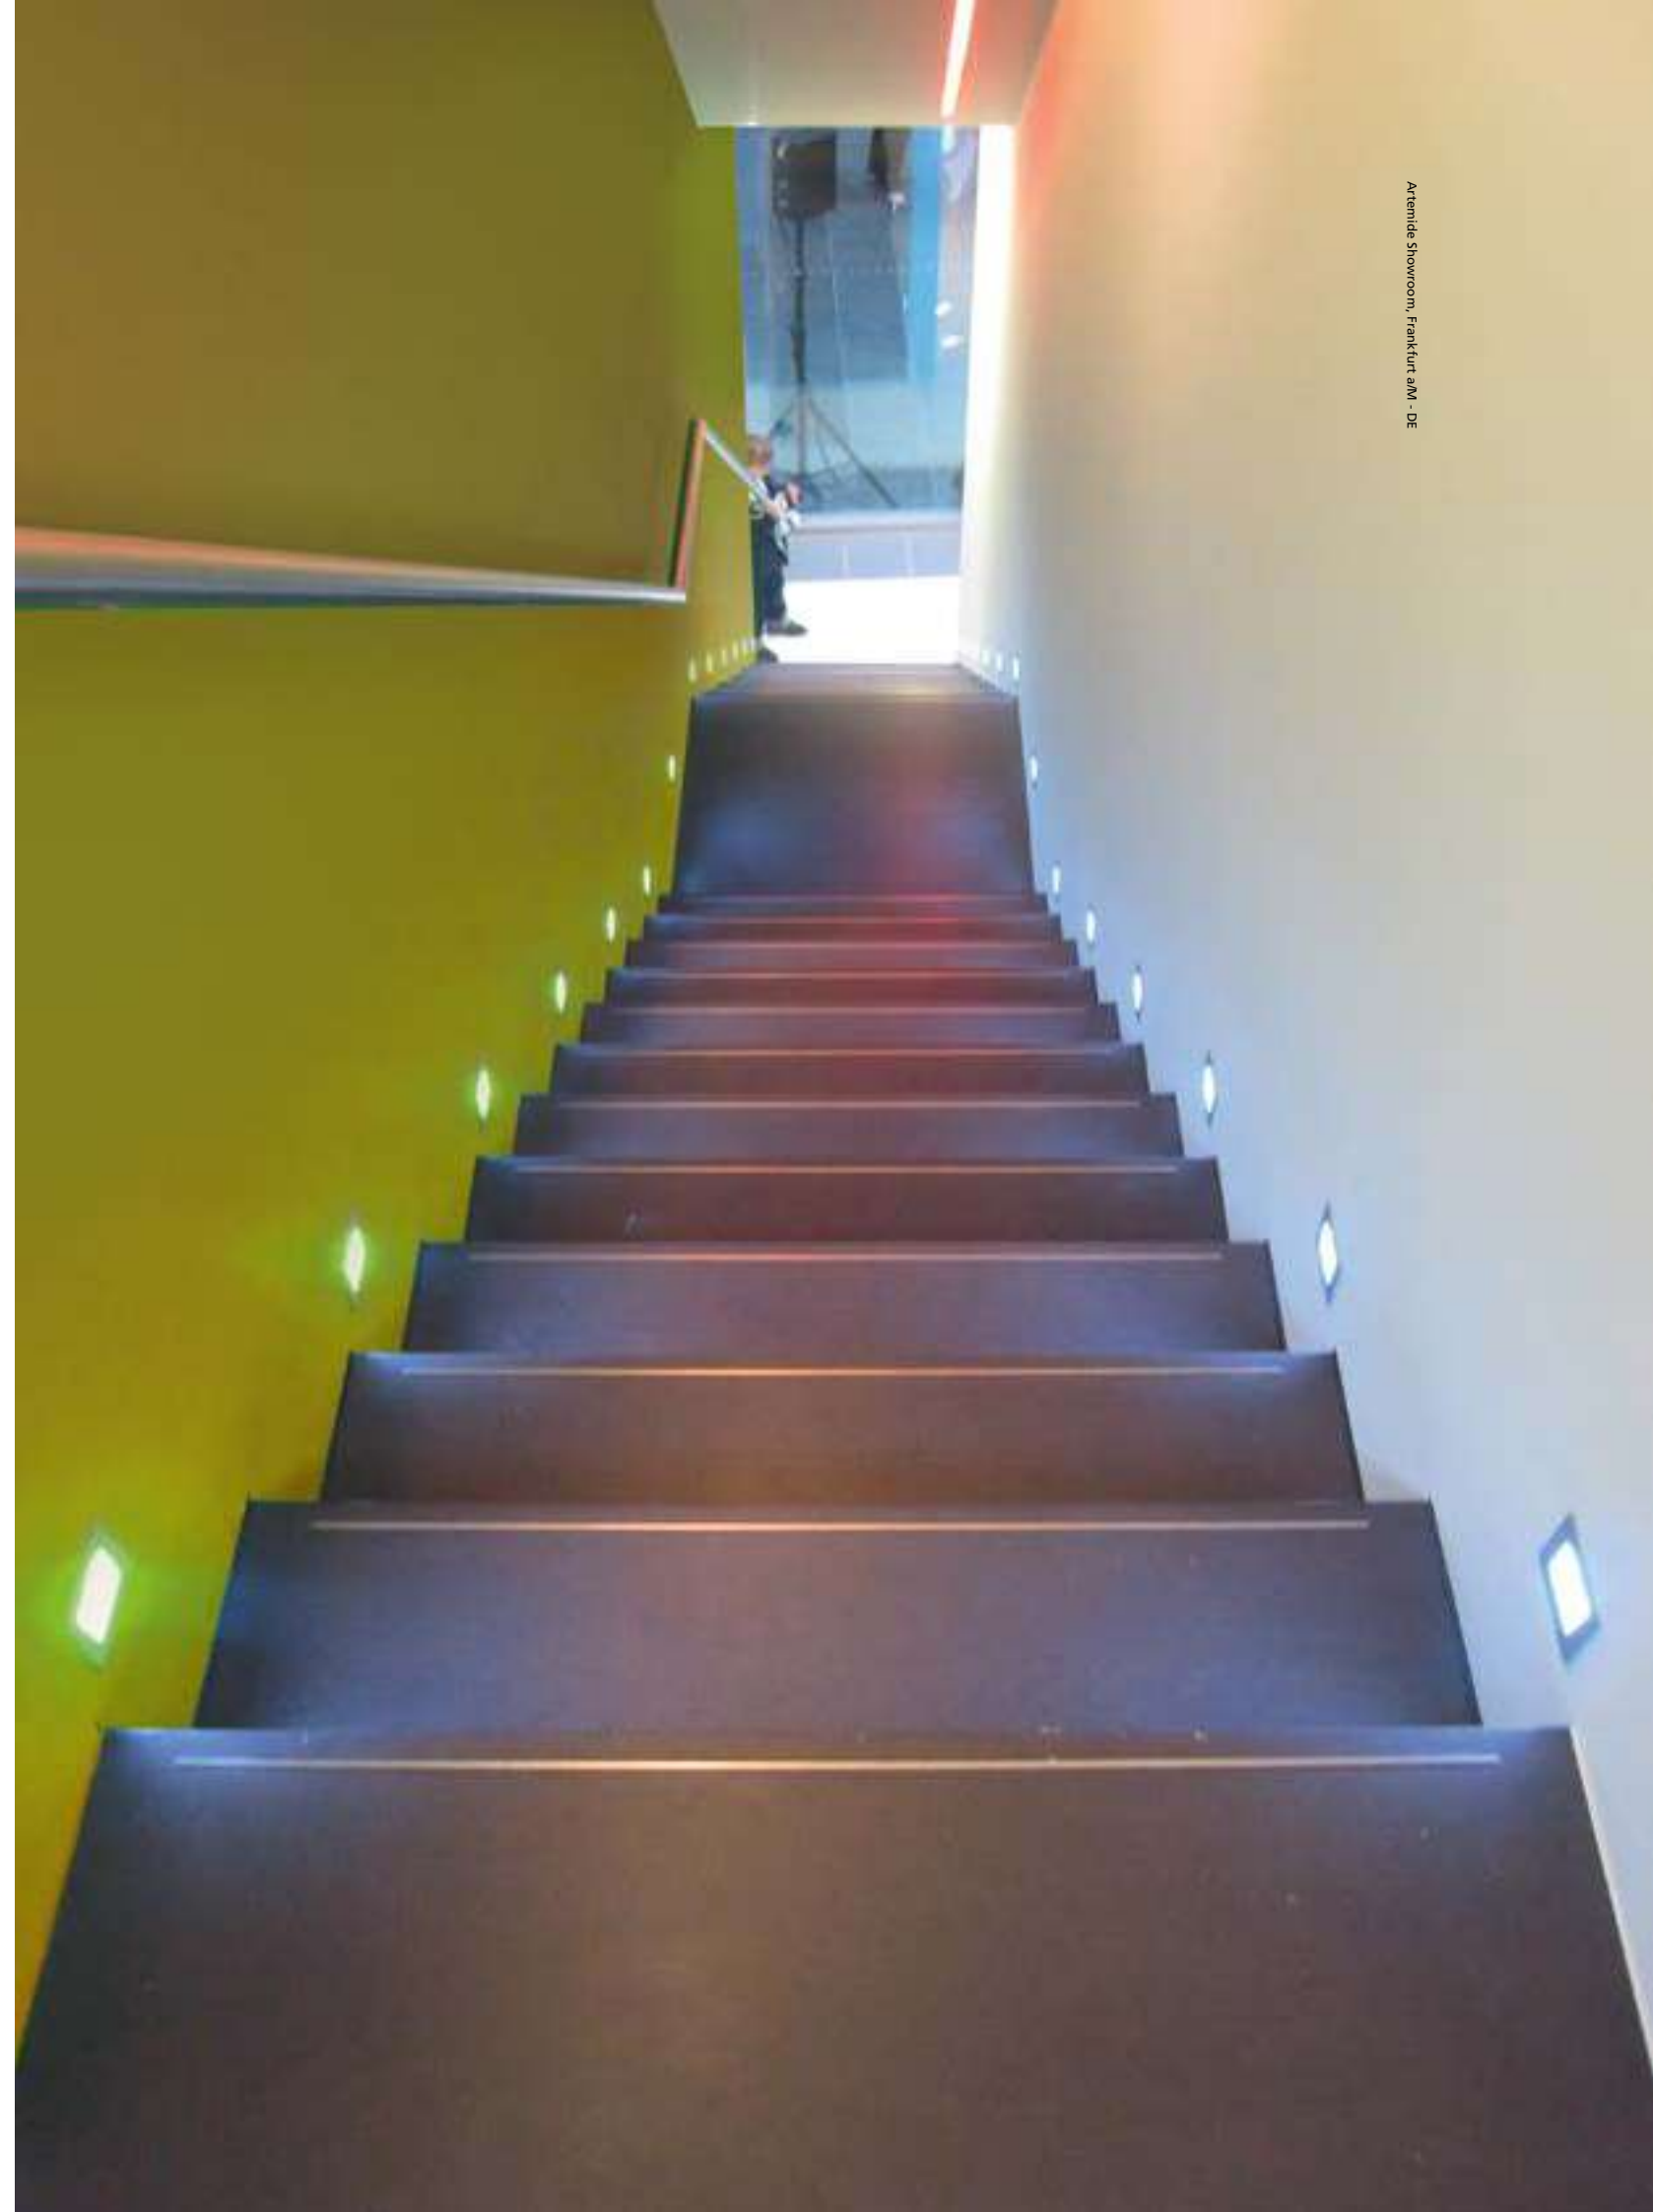

Faci

Ernesto Gismondi
↪ 2012

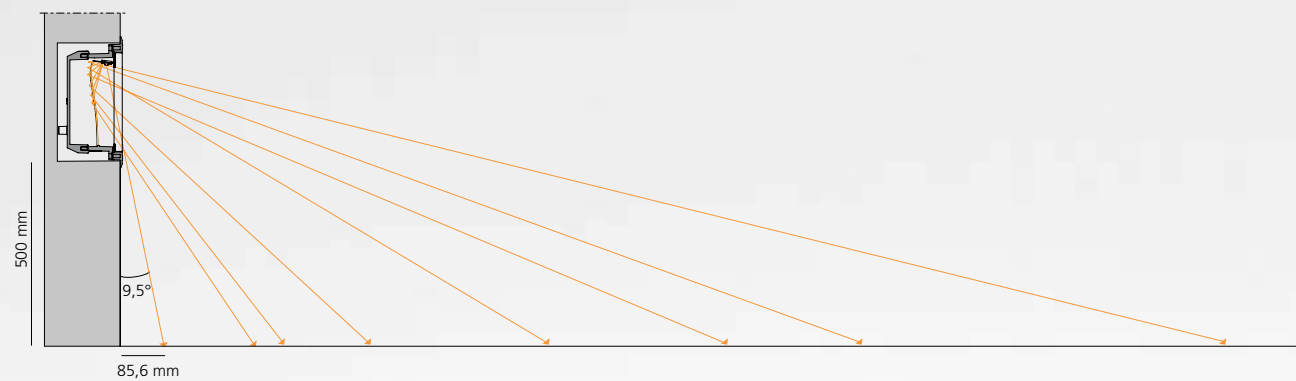

For further information on Faci
↪ visit artemide.com



Recessed hole
Faci 12
160 x 160 x 80 mm
Faci 24
280 x 160 x 80 mm
Faci 36
400 x 160 x 80 mm

Recessing box
Faci 12
135 x 137 x 75 mm
Faci 24
256 x 137 x 75 mm
Faci 36
376 x 137 x 75 mm

Body in nylon reinforced with fibre glass

Reflector in optic aluminium with high coefficient of reflection + strip LED

Tempered glass and chromed zamak frame

Light fixture with high-performance LED light sources.
Recessed wall installation.

3 sizes (120, 240 and 360 mm length).

Consist of by lamp body and recessing box.

Body in high-resistance reinforced polymer. The lamp body is snap-fitted into the recessing box, then it is fixed by means of two anti-vandal screws Torx. This product is suitable for areas at risk of vandalism.

Aluminium reflector conveying and diffusing the light flow downwards to ensure an even floor lighting and visual comfort without glare.

Diffuser in 8mm-thick silkscreened tempered glass to ensure higher vandal-proof resistance.

Front frame in chromed zamac.

Recessing box for laying in reinforced polymer, with low depth, can be ordered separately.





Wiring inside the lamp body with IP65 grommet suitable for cables with a diameter of 8-12 mm for the connection to the mains.

AISI 316 setscrews and silicone seal gaskets.

Technical features of light fixtures in compliance with EN60598-1.


Installation must be carried out by specialized personnel. Carefully follow the instructions.

↪ F A C I


Polished 	EL 	220/240Vac 50/60Hz electronic ballast 50/60Hz included	IP65  IK10 
---	---	---	--

FACI 12

W	Weight	Beam	Flux	CCT	Code
3 W	0,6 kg	AS	62 lm	3000K	T417400W00

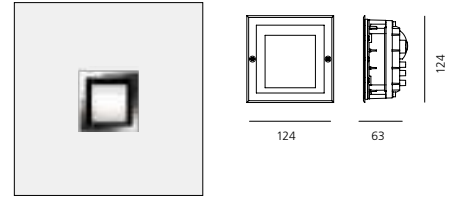


Accessories	Code
Recessing box 135x137x75 mm	T409921


 160x160x80h

FACI 24

W	Weight	Beam	Flux	CCT	Code
7 W	0,84 kg	AS	189 lm	3000K	T417600W00

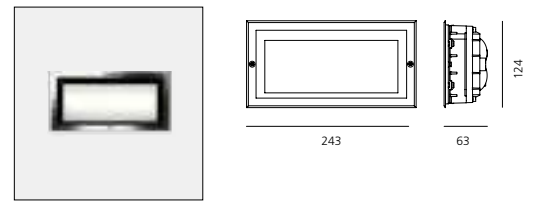


Accessories	Code
Recessing box 256x137x75 mm	T409922


 280x160x80h

FACI 36

W	Weight	Beam	Flux	CCT	Code
9 W	1,16 kg	AS	265 lm	3000K	T417800W00

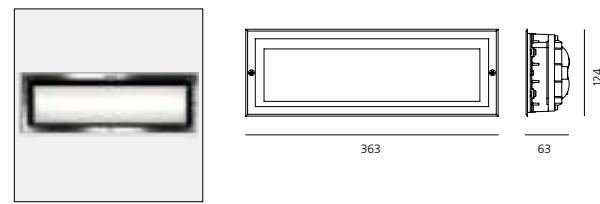

Accessories	Code
Recessing box 376x137x75 mm	T409923

 400x160x80h



Centro Servizi dello Studentato Universitario - Trento, IT
 Project Studio Palerm and Fabares de Nava S.L. Architected + CIA SIS Engineering, Ing Luca Marini

Faci vetro

Ernesto Gismondi

↪ 2012



Recessed hole
Faci 12
160 x 160 x 80 mm
Faci 24
280 x 160 x 80 mm
Faci 36
400 x 160 x 80 mm



Recessing box
Faci 12
135 x 137 x 75 mm
Faci 24
256 x 137 x 75 mm
Faci 36
376 x 137 x 75 mm



Lighting unit

Light fixture with high-performance LED light sources.
Recessed wall installation.

Consist of 3 sizes (120, 240 and 360mm length).

Composed by lamp body and recessing box.

Body in high-resistance reinforced polymer. The lamp body is snap-fitted into the recessing box, so the final product has no visible screws and the glass is flush with the wall.

Aluminium reflector conveying and diffusing the light flow downwards to ensure an even floor lighting and visual comfort without glare.

Diffuser in 6mm-thick silkscreened tempered glass.

Recessing box for laying in reinforced polymer, with low depth, can be ordered separately.

Wiring inside the lamp body with IP65 grommet suitable for cables with a diameter of 8-12mm for the connection to the mains.





AISI 316 setscrews and silicone seal gaskets.

Technical features of light fixtures in compliance with EN60598-1.





For further information on Faci vetro
↪ visit artemide.com


↪ FACI VETRO

Black glass 	EL 	220/240Vac 50/60Hz electronic ballast 50/60Hz included	IP65  IK10 
--	---	---	--

FACI VETRO 12

W	Weight	Beam	Flux	CCT	Code
3 W	0,6 kg	AS	62 lm	3000K	T417500W00






 160x160x80h

Accessories	Code
Recessing box 135x137x75 mm	T409921

FACI VETRO 24

W	Weight	Beam	Flux	CCT	Code
5 W	0,84 kg	AS	189 lm	3000K	T417700W00






 280x160x80h

Accessories	Code
Recessing box 256x137x75 mm	T409922

FACI VETRO 36

W	Weight	Beam	Flux	CCT	Code
9 W	1,16 kg	AS	265 lm	3000K	T417900W00

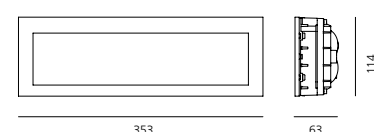

 400x160x80h

Accessories	Code
Recessing box 376x137x75 mm	T409923



Centro Servizi dello Studentato Universitario, Trento - IT
 Project: Studio Palerm and Tabares de Nava s.L. Arquitectos + CLASIS Engineering, Ing Luca Masini

Projector



- Minispot _____ 858
- Ego Spot _____ 862
- Epulo _____ 866
- Falange _____ 870
- Obice _____ 874



Minispot

↪ 2007






Light fixture with high-performance LED light sources.
 Ground, floor, wall installation.
 Consists of body, metal ring, diffuser in opaline polycarbonate, 3mm thick.
 Body and metal ring in anticorrosive aluminium, anodized.
 Silicone o-ring gaskets.
 Remote driver supplied separately.
 Power connection to the driver by means of H05RN-F cable and IP68 electrical terminal board, supplied with the fixture.
 Fixed optic. PMMA lenses in 3 different versions of beams.
 Picket for ground installation.
 Technical features of light fixtures in compliance with EN60598-1 and part 2-5.
 Installation must be carried out by specialized personnel.




For further information on Minispot
 ↪ visit artemide.com



↪ MINISPOT

Silver grey 	F 	WF 	Driver 700mA SELV supplied separately	MacAdam 3SDCM Life L70 (6K)=50000h CRI =80	IP65  ±150° 
--	--	---	---------------------------------------	--	---

W	Weight	Beam	Flux	CCT	Code
2W	0,19 kg	F 24°	99 lm	3000 K	NL702910K0
		WF 32°	95 lm	3000 K	NL702925K0
		WF° 45	114 lm	3000 K	NL7029ELK0



Accessories	Code
Picket in anodised metal 37 x 180mm	NL97150

Driver	V(ac)	L _{mm}	W _{mm}	H _{mm}	IP	N°	DIM	Code
cc 14 W 700mA	220-240	79	38	25	67	1 - 5	-	DV3003
cc 30 W 700mA	220-240	120	38	25	67	7 - 12	-	DV3004
cc 38W 700mA	220-240	185	35	33	67	3 - 13	DALI	DV1042



Private residence, Milan - IT, interior design: Erna Corbetta. Ph. Beppe Raso









Private residence, Milan - IT, interior design: Erna Colibetta. Ph: Rocco Raso

Ego Spot


↪ 2005



↪ EGO SPOT





Silver grey 	S F EL   	Driver 24Vdc SELV supplied separately	MacAdam 3SDCM Life L70 (6K)=50000h CRI = 80	IP65  +/-90° 
--	---	--	---	--

W	Weight	Beam	Flux	CCT	Code
12 W	0,75 kg	S 10°	755 lm	3000K	T7633SPW00
		F 26°	711 lm	3000K	T7633FLW00
		EL	723 lm	3000K	T7633ELPTW00

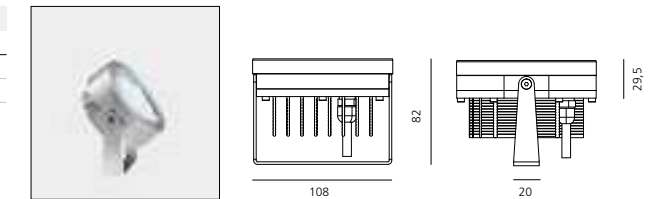

Accessories	Code
Picket	NL97150

Driver	Vdc	IP	LxWxH	24W	DIM	Code
24W	24Vdc	IP67	185x35x35	1	DALI	DV1041
25W	24Vdc	IP67	148x40x32	1		T409996
60W	24Vdc	IP67	163x43x32	4		T409998
90W	24Vdc	IP67	161x61x36	6		T409999
150W	24Vdc	IP67	228x68x39	10		DV5004
288W	24Vdc	IP20	156x52x26		DALI/PUSH/1-10/0-10 DIMMER	NL19096

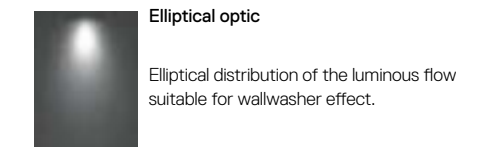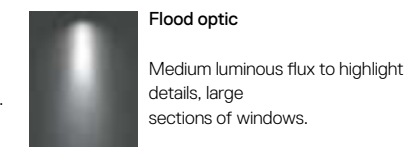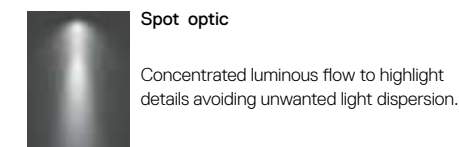

Light fixture with high-performance LED light sources.
Ground, floor, wall installation.
Consists of body, frame, glass and bracket.
Aluminium folded sheet bracket. All aluminium components are anodized.
Diffuser in glass, 10mm-thick.
Gaskets in EPDM.
Remote driver supplied separately.

Power connection to the driver by means of H05RN-F cable and IP68 electrical terminal board, supplied with the fixture.
Fixed optic. PMMA lenses in 3 different versions of beams.
Picket for ground installation in galvanized sheet iron.
Painted aluminium with 2-stage outdoor treatment: antioxidant primer, polyester paint.
Technical features of light fixtures in compliance with EN60598-1 and part 2-13.
Installation must be carried out by specialized personnel.



For further information on Ego Spot
↪ visit artemide.com



Hotel Château Monfort, Milan - IT, Arch. Sofia Vedani + FZI Interiors, ph. Stefano Oppo

Epulo






Ernesto Gismondi
↪ 2005



For further information on Epulo
↪ visit artemide.com




↪ EPULO

Grey-white RAL9002 00 	Anthracite grey 10 	XS 	WF 	EL 	220/240Vac 50/60Hz electronic ballast included	MacAdam 4SDCM Life L70 (4K) 60500h CRI = 80	45° (right/left) 90° (up/down) 180°	IP65 IK06
--	---	---	---	---	---	---	---	--------------


EPULO 13

W	Weight	Beam	Flux	CCT	Code
23W	2,71 kg	XS 6°	1231 lm	3000K	T418910W.00/10
		WF 40°	1187 lm	3000K	T418939W.00/10
		EL	1198 lm	3000K	T4189ELW.00/10



EPULO 18

W	Weight	Beam	Flux	CCT	Code
38W	5,00 kg	XS 6°	2188 lm	3000K	T418810W.00/10
		WF 40°	2110 lm	3000K	T418839W.00/10
		EL	2136 lm	3000K	T4188ELW.00/10



Extra Spot optic 6°
Concentrated luminous flow to highlight details avoiding unwanted light dispersion.



Wide Flood optic 40°
Wide luminous flow suitable for lighting large areas.



Elliptical optic EL
Elliptical distribution of the luminous flow suitable for wall washer effect.

Light fixture with adjustable direct emission, with high-performance LED light sources.

Floor, wall and eaves installation.

2 sizes: Epulo 13 and Epulo 18.

Available in two finishes: grey-white painted (RAL 9002) and anthracite grey painted.

Consists of lighting unit, terminal board and fixing bracket. Rotation on the base +/-180°, side body tilt +/-45° and front body tilt +0/-90 by means of a spherical joint allowing an accurate adjustment.

Body and terminal board in EN AB-47100 aluminium, fixing bracket in stainless steel, silicone gaskets. Electronic ballast integrated in the body.

Silkscreened tempered glass siliconed flush with the body to avoid backwater.

The device is provided with a safety cable with hook to allow easy wiring during its installation in any position.

IP67 connector for electric connection to the mains, it can be housed in the terminal board compartment and is suitable for cables with a diameter of 5-13.5mm.

PMMA lenses in 3 different versions of beams.

Screws in AISI 316 stainless steel.

The components in die-cast aluminium and the steel bracket are painted with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

Technical features of light fixtures in compliance with EN60598-1 and part 2-5.



Falange

Wilmotte & Industries

↪ 2011

Adjustable light fixture with direct emission, with high-performance LED light sources.

Ground, wall, eaves installation.

2 sizes: 134x134, 238x134 mm.

Composed by adjustable lighting unit and support (housing the wiring) by means of a graduated metal ring allowing an accurate adjustment. Positioning is maintained by means of locking dowels.

Body and support in EN AB44100 aluminium, silicone gaskets.

Electronic ballast integrated in the body.

Silkscreened tempered glass siliconed to a secondary frame.

Wiring to be carried out by means of plug IP 68.

PMMA lenses in 3 different versions of beams.

AISI 316 stainless steel screws.

Painted die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

Technical features of light fixtures in compliance with EN60598-1 and part 2-5.








For further information on Falange
↪ visit artemide.com






↪ FALANGE

Grey-white RAL9002 02	Anthracite grey 05	S WF EL   	220/240Vac 50/60Hz electronic ballast included	MacAdam 4SDCM Life L70 (10K)>60500h CRI = 80	IP65  180° 60° 
-----------------------------	--------------------------	--	--	--	---




FALANGE 9

W	Weight	Beam	Flux	CCT	Code
22 W	2,00 kg	S 10°	958 lm	3000K	NL3000010K0. 02/05
		WF 34°	764 lm	3000K	NL3000039K0. 02/05
		EL	830 lm	3000K	NL30000ELK0. 02/05



FALANGE 18

W	Weight	Beam	Flux	CCT	Code
44 W	3,05 kg	S 10°	1917 lm	3000K	NL3000110K0. 02/05
		WF 34°	1529 lm	3000K	NL3000139K0. 02/05
		EL	1661 lm	3000K	NL30001ELK0. 02/05

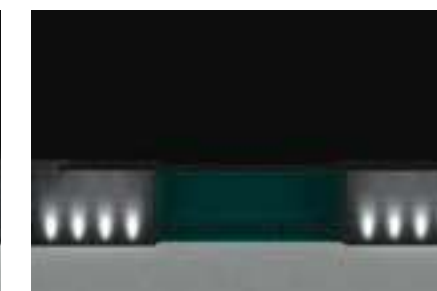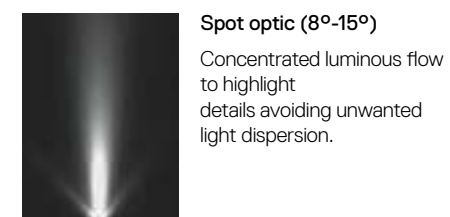



Obice

Alessandro Pedretti
(Studio Rota & Partners)
↔ 2014, 2016




↪ OBICE

White 20	Black 10	F	WF	220/240Vac 50/60Hz electronic ballast included	Life L80 (13K) 78600h CRI = 80	IP40 / IP65 INK06 +35°/-125° 359°
-------------	-------------	---	----	---	-----------------------------------	---

OBICE


W	Weight	Beam	Flux	CCT	Code
10 W	1,24 kg	19°	670 lm	3000 K	T430518W. 10/20
		34°	605 lm	3000 K	T430534W. 10/20

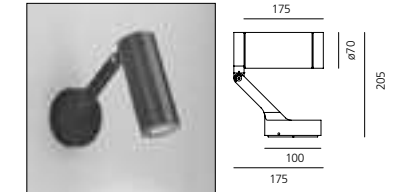

IP65
MacAdam 2SDC
Life = L70(6K)>36000

OBICE MINI


W	Beam	Flux	CCT	Code
7 W	19°	505 lm	3000 K	T430418W. 10/20
	34°	460 lm	3000 K	T430434W. 10/20

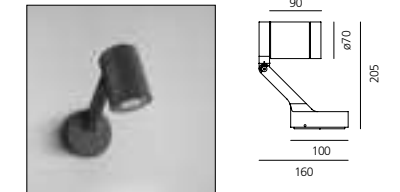

IP65
MacAdam 2SDC
Life = L70(6K)>36000

Driver 24Vdc SELV supplied separately


Driver	Vdc	IP	LxWxH	7W	DIM	Code
24W	24Vdc	IP67	185x35x35	1	DALI	DV1041
25W	24Vdc	IP67	148x40x32	3		T409996
60W	24Vdc	IP67	163x43x32	7		T409998
90W	24Vdc	IP67	161x61x36	10		T409999
150W	24Vdc	IP67	228x68x39	18		DV5004
288W	24Vdc	IP20	156x52x26		DALI/PUSH/1-10/0-10 DIMMER	NL19096



OBICE MICRO

W	Weight	Beam	Flux	CCT	Code
3 W	0,28 kg	23°	112 lm	3000 K	M3160FLW. 10/20
		32°	115 lm	3000 K	M3160WFLW. 10/20

IP40	IP65
M3160FLW. 10/20	T4314FLW. 10/20
M3160WFLW. 10/20	T4314WFLW. 10/20

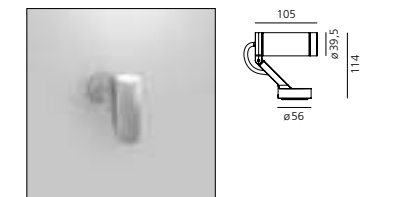

MacAdam 4SDC
Life = L70(6K)>50000

Accessories

Image	Description	Code
	Accessories holder	T4306000. 10/20
	Lens for elliptical emission	T430700000



For further information on Obice
↪ visit artemide.com

Lights fixture with high-performance LED light sources.
Wall / ceiling installation.
Monochromatic light.
Consist of: body, adjustable joint, terminal board and protective screen.
Body in injection mould of aluminium.
Terminal base and adjustable joint in injection mould of aluminium.
Flange, protection screen in tempered glass, 4mm-thick, with black opal serigraphy.
Integrated power supply (Obice e Obice Micro), 24Vdc remote driver included (Obice mini).
Wiring to be carried out by means of a plug (IP68) located in the terminal base (only for Obice and Obice Micro).
Technical features of light fixtures in compliance with EN60598-1.

Scenographic Lighting

↳



Spike _____ 880

LineaLed

drive over _____ 884

LineaLed

wallwasher _____ 888

Dedalo _____ 892



Spike

↪ 2006



Lighting appliance with high-yield LED sources.
Wall or ceiling mounted.

Monochrome or RGB light.

EN AW6060 T5 extruded aluminium body.

3mm-thick methacrylate diffuser.

Die-cast aluminium caps with silicon rim.

EN AB 47100 aluminium adjustment brackets.

Power unit connection with bipolar H05RN-F cable
(monochrome) or quadripolar silicon/rubber cable
(RGB), with standard IP 68 clamp.

Remote 24 Vdc power unit.

Body in anodized extruded aluminium. Caps and
brackets in painted die-cast aluminium with 3-stage
outdoor treatment: nanotechnologies, anti-oxidant
primer, polyester paint.

Optional painted extruded aluminium anti-glare
screen.

Optical units. PMMA lenses with 3 different beam
options.

RGB version made up of monochrome red, green and
blue LEDs.

Technical specifications of EN60598-1 compliant
appliances.



For further information on Spike
↪ visit artemide.com



↳ SPIKE

Silver grey S F EL 24Vdc power supplied separately.
* new version longer than 4 mm. MacAdam 4SDCM IP65
Life L90 (9K) >54400h
CRI =80

SPIKE

Watt	Lenght	Weight	Beam	Flux	CCT	Code
12W	268 mm*0,37 kg		S13°	594 lm	3000K	T430010W00
			F 27°	554 lm	3000K	T430025W00
			EL	594 lm	3000K	T4300ELW00
24W	490 mm*0,75 kg		S13°	1188 lm	3000K	T430110W00
			F 27°	1108 lm	3000K	T430125W00
			EL	1188 lm	3000K	T4301ELW00
36W	730 mm*1,06 kg		S13°	1782 lm	3000K	T430210W00
			F 27°	1662 lm	3000K	T430225W00
			EL	1782 lm	3000K	T4302ELW00
48W	970 mm*1,34 kg		S13°	2376 lm	3000K	T430310W00
			F 27°	2216 lm	3000K	T430325W00
			EL	2376 lm	3000K	T4303ELW00

Antidazzle screen

	Code
Spike 12W	T430806
Spike 24W	T430812
Spike 36W	T430818
Spike 48W	T430824

Driver	Vdc	IP	LxWxH	12W	24W	36W	48W	DIM	Code
24W	24Vdc	IP67	185x35x35	1				DALI	DV1041
25W	24Vdc	IP67	148x40x32	1				-	T409996
60W	24Vdc	IP67	163x43x32	4	2	1	1	-	T409998
90W	24Vdc	IP67	161x61x36	6	3	2	1	-	T409999
150W	24Vdc	IP67	228x68x39	1	5	3	2	-	DV5004
288W	24Vdc	IP20	156x52x26					DALI/PUSH/1-10/0-10 DIMMER	NL19096

SPIKE RGB

Watt	Lenght	Weight	Beam	Code
25W	784 mm*1,06 kg		S10°	NL5003110C002
			F 25°	NL5003130C002
			EL	NL50031ELC002
			40°	NL5003140C002

Driver	Vac	W	Vdc	Ch	Control	LxWxH	IP	25W	Code
Driver NLX1-100	120-250Vac	95W	24Vdc PWM	1xRGB	DMX/DALI	388x42x30	40	3 max	NL12150
Driver NLX1-75		144W	24Vdc PWM	1xRGB	DMX/DALI	153x50x23	40		NL19084
PUS 150W	90-305Vac	150W	24Vdc			228x68x39	67	5 max	DV5004
Driver NLX2-75	90-260Vac	75W	24Vdc PWM	2xRGB	DMX	270x200x80	40	3 max	NL75190
Driver NLX1-100 IP	120-250Vac	95W	24Vdc PWM	1xRGB	DMX/DALI	340x103x61	66	3 max	DV1046




Code
NL19030

DSC 30 USB interfaced DMX stand alone
Digital interface provided with software. If connected to the PC USB port, it transforms the programme instructions into DMX 512 control signals.
DSC30 (512 DMX controllable channels, real-time clock, local use) allows computer-interactive programming and stand-alone mode, that is the possibility of autonomous interface repetition without PC connection.

9V/350mA ballast with mini USB connector for DSC30 **NL19031**

50cm-long cable with HE10 connector for connection to a keyboard **NL7833**



Antidazzle screen **T430836**

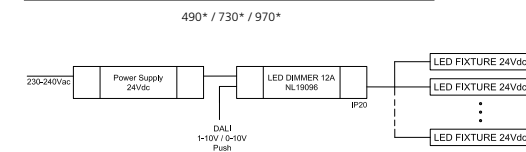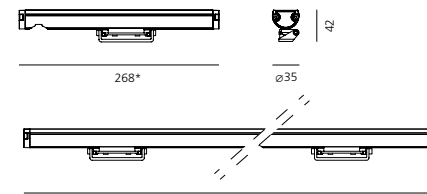

Code
DV1041
T409996
T409998
T409999
DV5004
NL19096



16,7 M

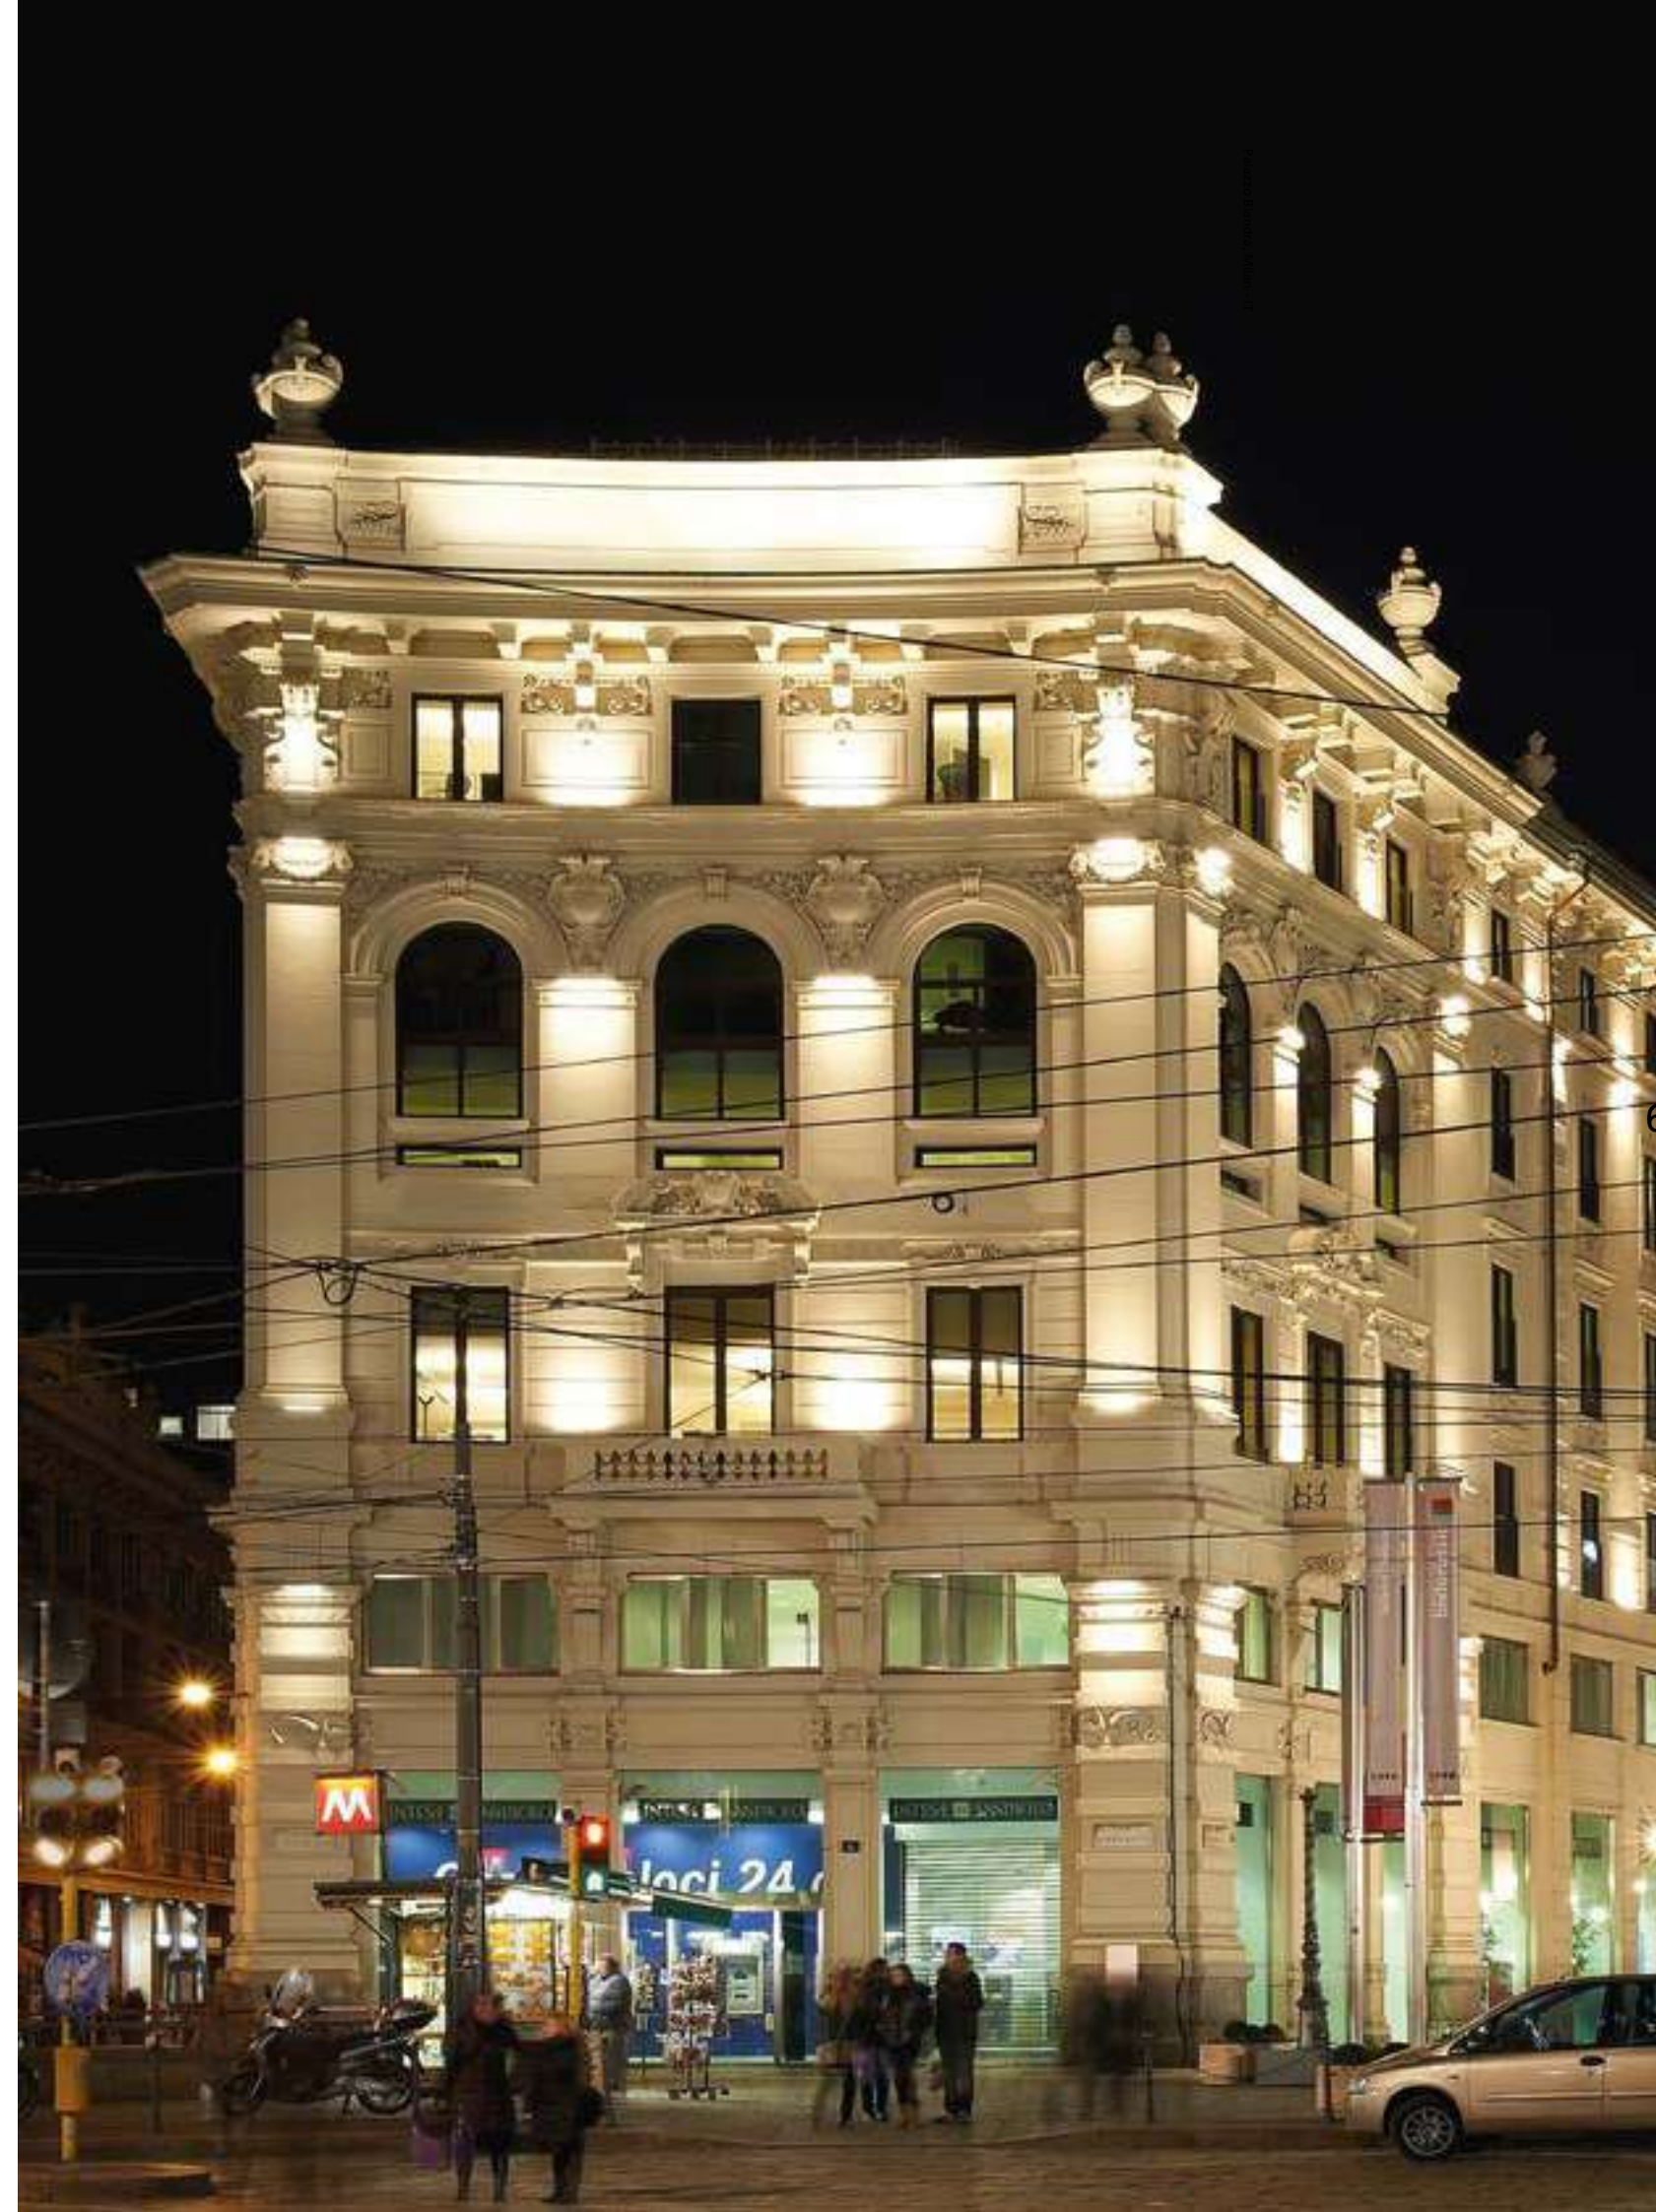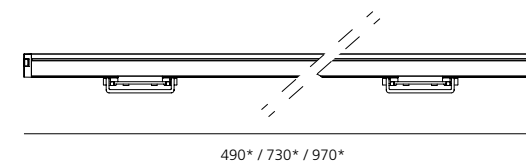

LineaLed - Drive over

Carlotta de Bevilacqua

↪ 2010




Walk over and drive over approved up to 5000Kg.
Light fixture with high-performance LED light sources.
Walk-over and drive-over recessed floor installation.
Monochromatic or RGB light.
Composed of body, diffuser, recessing box, closing end caps, junctions.
Body in extruded EN AW6060 T5 aluminum.
Opal non-slippery tempered glass 8mm-thick.
Glass surface temperature lower than 35°.
Profile end caps in aluminum EN AW 6060.
Recessing box for laying in stainless steel AISI 304.

Recessing box end caps and junction in stainless steel AISI 304.
Electrical connection to the ballast by means of a two-pole cable H05RN-F, with IP68 quick-release terminal block which is supplied with the fixture and can be housed in the recessing box.
24Vdc remote ballast.
Body fastened to the recessing box by means of proper pre-stressed steel springs supplied with the fixture.
Painted profile with 2-stage outdoor treatment: primer, outdoor paint.
RGB version with Full Colour RGB LEDs.
Technical features of light fixtures in compliance with EN60598-1.



For further information on LineaLed - Drive-over
↪ visit artemide.com


↳ LINEALED DRIVE OVER

Silver grey 	XF 	24Vdc power supplied separately.	MacAdam 7SDCM Life L70 (6K)=35000h CRI =75	IP65 / IP67 
--	---	----------------------------------	--	--

LINEALED


W	Length	Beam	Flux	CCT
5W	618 mm	XF	115 lm	3000K
8W	978 mm	XF	206 lm	3000K

Code
NL7398VSKO
NL7419VSKO

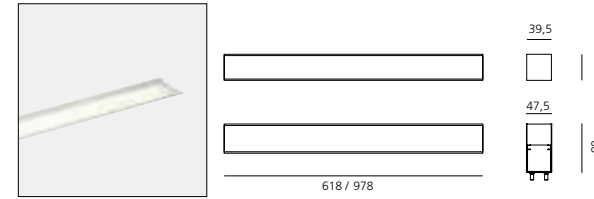

Driver	Vdc	IP	LxWxH	12W	24W	36W	48W
24W DALI	24Vdc	IP67	185x35x35	4			
25W	24Vdc	IP67	148x40x32	1			
60W	24Vdc	IP67	163x43x32	4	2	1	1
90W	24Vdc	IP67	161x61x36	6	3	2	1
150W	24Vdc	IP67	228x68x39	1	5	3	2
288W DIMMER	24Vdc	IP20	156x52x26				

Code
DV1041
T409996
T409998
T409999
DV5004
NL19096




Maximum linear length of a series of products with one supply line: 6m.
For lines of length exceeding 6m, provide multiple supply lines.

LINEALED RGB

W	Length
10W	618mm
16W	978mm

Code
NL76480
NL76490

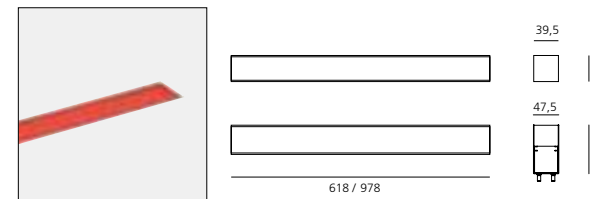

16,7 M

Driver	Vac	W	Vdc	Ch	Control	LxWxH	IP	25W	Code
Driver NLX1-100	120-250Vac	95W	24Vdc PWM	1xRGB	DMX/DALI	388x42x30	40	3 max	NL12150
Driver NLX1-75		144W	24Vdc PWM	1xRGB	DMX/DALI	153x50x23	40		NL19084
PUS 150W	90-305Vac	150W	24Vdc			228x68x39	67	5 max	DV5004
Driver NLX2-75	90-260Vac	75W	24Vdc PWM	2xRGB	DMX	270x200x80	40	3 max	NL75190
Driver NLX1-100 IP	120-250Vac	95W	24Vdc PWM	1xRGB	DMX/DALI	340x103x61	66	3 max	DV1046

PWM driver for fixtures with autonomous colour programmers for stand-alone or controlled working by means of DMX 512 protocol for installations of all sizes.

Code
DSC 30 USB interfaced DMX stand alone
NL19030

Digital interface provided with software. If connected to the PC USB port, it transforms the programmers instructions into DMX 512 control signals.
DSC30 (512 DMX controllable channels, real-time clock, local use) allows computer-interactive programming and stand-alone mode, that is the possibility of autonomous interface repetition without PC connection.


9V/350mA ballast with mini USB connector for DSC30	NL84100
--	---------

50cm-long Cable with HE10 connector for connection to a keyboard	NL77270
--	---------

Accessories	Code
Housing L=622mm	NL76720
Housing L=982mm	NL76700
Continuity joint - 80 x 50 x 1,5mm	NL75810
Housing end cap (pair) - 46,5 x 62,5 x 1,5mm	NL76750
Power supply connector & connector end cap	NL19052

Female power connector for discontinuous connection	NL19023
---	---------

Male power connector for discontinuous connection	NL19021
---	---------

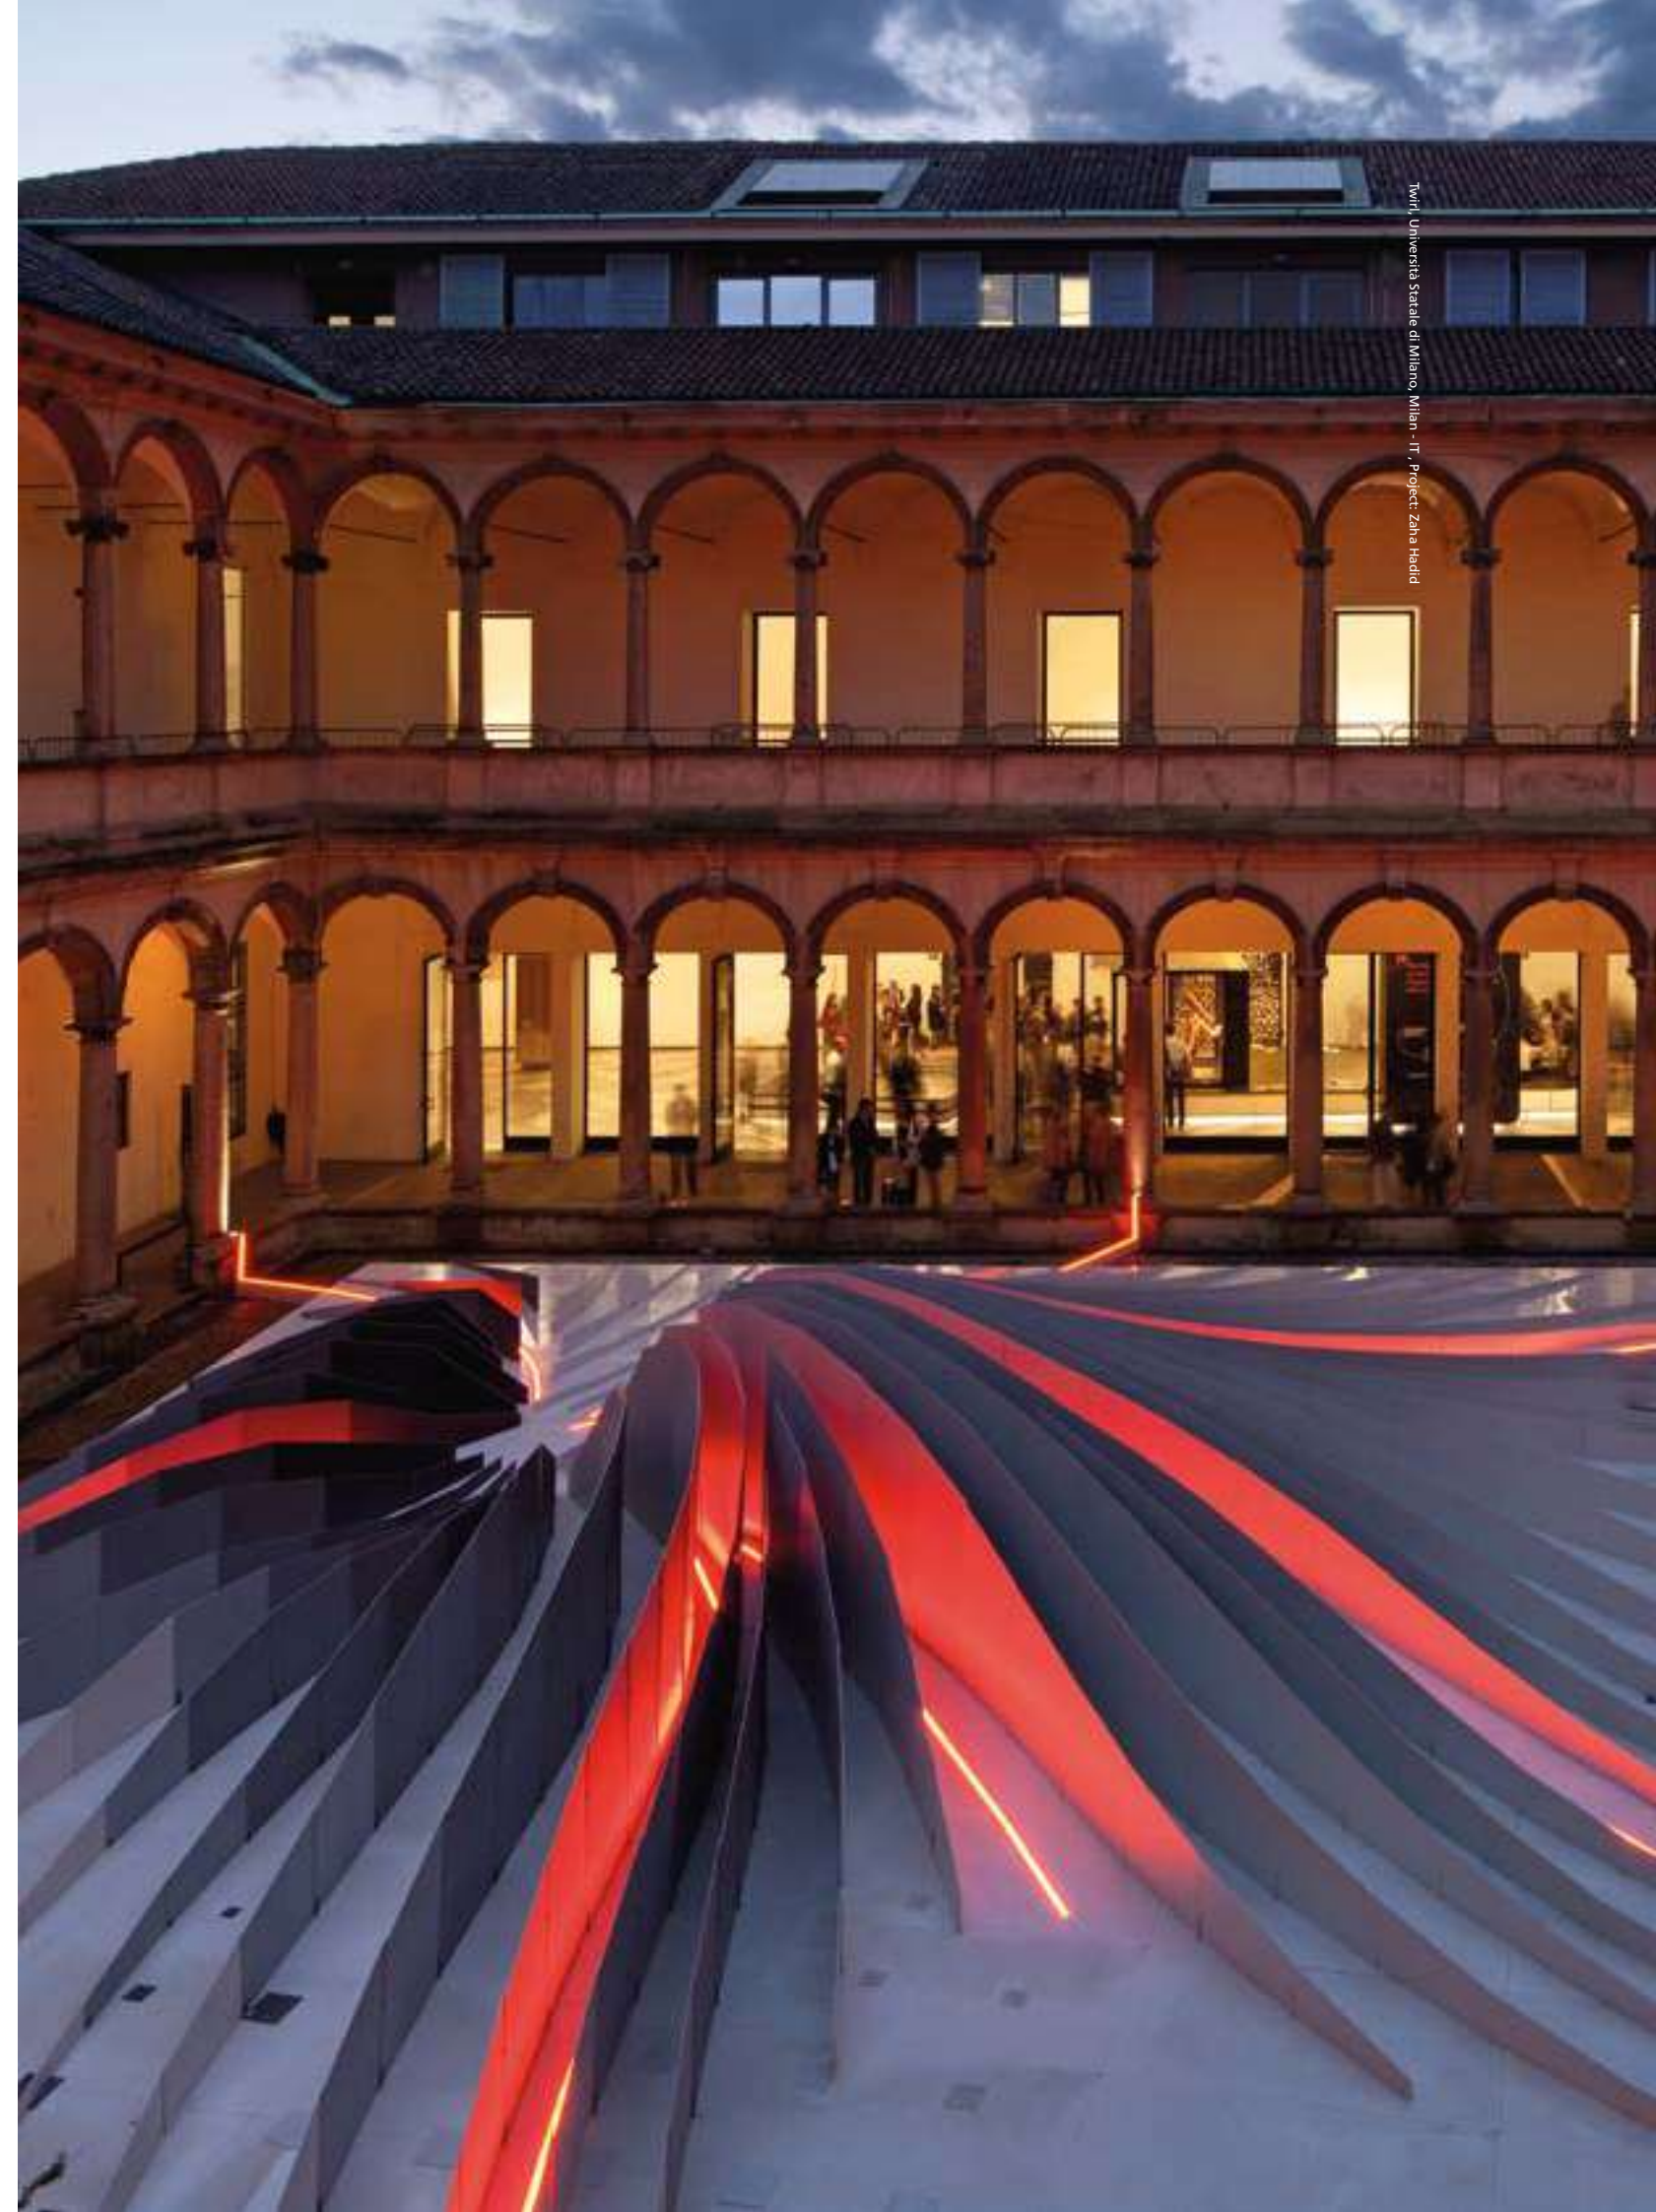

Tirif, Università Statale di Milano, Milano - IT - Project: Zaha Hadid

LineaLed - Wallwasher

Carlotta de Bevilacqua

↪ 2011

Walk over and drive over approved up to 5000Kg.
Light fixture with high-performance LED light sources.

LineaLed Wallwasher: walk-over and drive-over recessed floor installation. Consist of body, diffuser, recessing box, closing end caps, junctions. Body fastened to the recessing box by means of proper pre-stressed steel springs supplied with the fixture.

LineaLed Wallwasher adjustable: Wall or ceiling installation. Consist by body in extruded aluminium, protection glass, adjustable die-cast aluminium brackets.

Body in extruded EN AW6060 T5 aluminium.

Transparent non-slippery tempered glass 8mm-thick. Glass surface temperature lower than 50°.

Profile end caps in injection-mould polycarbonate with silicone gasket.

Recessing box for laying, recessing box end caps and junction in stainless steel AISI 304.

Electrical connection to the ballast by means of a two-pole cable H05RN-F; with IP68 quick-release terminal block which is supplied with the fixture and can be housed in the recessing box (LineaLed Wallwasher) or with IP68 terminal board supplied with the fixture (LineaLed Wallwasher adjustable). 24Vdc remote ballast.

Optics. PMMA lenses in 3 different versions of beams.

Painted profile and brackets with 2-stage outdoor treatment: primer, outdoor paint.






Technical features of light fixtures in compliance with EN60598-1.



For further information on LineaLed - Wallwasher
↪ visit artemide.com






↪ LINEALED WALLWASHER

Silver grey 	S  F  EL 	Driver 24Vdc SELV supplied separately.	MacAdam 2SDCM Life L70 (6K)=50000h CRI =80	IP65/ IP67  IK07
--	--	---	--	---

LINEALED WALLWASHER

W	Length	Weight	Beam	Flux	CCT	Code
8,5 W	300 mm	0,9 kg	S 12°	416 lm	3000K	NL1732010K0
			F 28°	411 lm	3000K	NL1732025K0
			EL	416 lm	3000K	NL17320ELK0
17 W	500 mm	1,5 kg	S 12°	832 lm	3000K	NL1732110K0
			F 28°	822 lm	3000K	NL1732125K0
			EL	832 lm	3000K	NL17321ELK0
25 W	780 mm	2,21 kg	S 12°	1248 lm	3000K	NL1732210K0
			F 28°	1234 lm	3000K	NL1732225K0
			EL	1248 lm	3000K	NL17322ELK0
34 W	978 mm	2,77 kg	S 12°	1665 lm	3000K	NL1732310K0
			F 28°	1645 lm	3000K	NL1732325K0
			EL	1665 lm	3000K	NL17323ELK0






Maximum linear length of a series of products with one supply line: 2m.
For lines of length exceeding 2m, provide multiple supply lines.
Choose cable cross-section according to the load / maximum voltage drop 2V

Accessories

	Code
Housing L=300mm	NL76740
L=500mm	NL76730
L=780mm	NL76710
L=980mm	NL76700
Continuity joint - 80 x 50 x 1,5mm	NL75810
Housing end cap (pair) - 46,5 x 62,5 x 1,5mm	NL76750
Power feed connector & connector end cap	NL19052
Female power connector for discontinuous connection	NL19023
Male power connector for discontinuous connection	NL19021

LINEALED WALLWASHER ADJUSTABLE

W	Length	Weight	Beam	Flux	CCT	Code
8,5 W	300 mm	0,9 kg	S 12°	416 lm	3000K	NL1733010K0
			F 28°	411 lm	3000K	NL1733025K0
			EL	416 lm	3000K	NL17330ELK0
17 W	500 mm	1,5 kg	S 12°	832 lm	3000K	NL1733110K0
			F 28°	822 lm	3000K	NL1733125K0
			EL	832 lm	3000K	NL17331ELK0
25 W	780 mm	2,21 kg	S 12°	1248 lm	3000K	NL1733210K0
			F 28°	1234 lm	3000K	NL1733225K0
			EL	1248 lm	3000K	NL17332ELK0
34 W	978 mm	2,77 kg	S 12°	1665 lm	3000K	NL1733310K0
			F 28°	1645 lm	3000K	NL1733325K0
			EL	1665 lm	3000K	NL17333ELK0



Driver	Vdc	IP	LxWxH	8,5W	17W	25W	34W	DIM	Code
24W	24Vdc	IP67	185x35x35	2	1			-	DV1041
25W	24Vdc	IP67	148x40x32	2	1			-	T409996
60W	24Vdc	IP67	163x43x32	6	3	2	1	-	T409998
90W	24Vdc	IP67	161x61x36	8	4	3	2	-	T409999
150W	24Vdc	IP67	228x68x39	12	7	5	3	DALI	DV5004
288W	24Vdc	IP20	156x52x26					DALI/PUSH/1-10/0-10 DIMMER	NL19096

Spot optic (12°)

Concentrated luminous flow to highlight details avoiding unwanted light dispersion.



Flood optic (28°)

Medium luminous flux to highlight details, large sections of windows.



Elliptical optic (EL)

Elliptical distribution of the luminous flow suitable for wallwasher effect.





Chiesa di Capalbio Scalo, Capalbio - IT

Dedalo

↪ 2013

↪ DEDALO

XF 	Driver 24Vdc SELV supplied separately	MacAdam 3SDCM Life L70 (4K)=50000h CRI =80	IP65/ IP40 
---	--	--	---


DEDALO

W	Lenght	Weight	Flux	CCT	IP65 Code	IP40 Code
24 W 300 LED	5000 mm	0,4 kg	1104 lm	3200K	NL17034VTK0	NL17032VTK0
48 W 600 LED	5000 mm	0,4 kg	2202 lm	3200K	NL17034VTK1	NL17032VTK1

24 W divisible every 100 mm
48 W divisible every 50mm



Driver	Vac	L _{mm}	W _{mm}	H _{mm}	IP	24W	48W	DIM	Code
cv 60W 24Vdc	90-305	163	43	32	67	2max	1max	-	T409998
cv 90W 24Vdc	90-305	161	61	36	67	3max	1max	-	T409999
cv 150W 24Vdc	90-305	228	68	39	67	5max	2max	-	DV5004
Dimmer 144W 12Vdc	20	156	68	39					NL19096
Dimmer 288W 24Vdc Vin 24Vdc	156	52	26	20	DALI/PUSH/	1-10/0-10			NL19096
Connection Kit (1 male - 2 female)									NL170330



DEDALO RGB


W	Lenght	Weight	RGB	IP65 Code	IP40 Code
60 W 240 LED	5000 mm	0,48 kg	16,7m	NL17037	NL17036

60 W divisible every 62,5 mm

Driver	Vac	W	Vdc	Ch	Control	LxWxH	IP	60W	Code	
Driver NLX1-100	120-250Vac	95W	12Vdc	PWM	1xRGB	DMX/DALI	388x42x30	40	1 max	NL12150
Driver NLX1-75		72W	12Vdc	PWM	1xRGB	DMX/DALI	153x50x23	40	1 max	NL19084
PSU 150W	90-305Vac	150W	12Vdc				228x68x39	67	1 max	DV1043
Driver NLX1-100 IP	120-250Vac	95W	12Vdc	PWM	1xRGB	DMX/DALI	340x103x61	66	1 max	DV1043

DSC 30 USB interface DMX stand alone
9V/350mA ballast with mini USB connector for DSC30
50cm cable with HE10 connector for keyboard (optional)

Code
NL19030
NL19031
NL7833

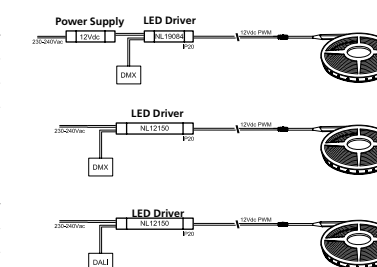

Light fixture with high-performance LED light sources.
Ceiling, wall or floor installation.
Flexible profile.
Flexible UV-resistant polyurethane resin rim.
Accurate led selection equal to 3-Step MacAdam, ensuring colour consistency.
3M adhesive film to fix the product, supplied with the fixture.

Remote driver.
Electrical connection to the driver by means of H05RN-F (IP65) or FEP-FEP cable (IP40), and appropriate terminal board, provided with the fixture.
RGB Full colour LED.
Operating temperature -20°C / +40°C.
Technical features of light fixtures in compliance with EN60598-1.



For further information on Dedalo
↪ visit artemide.com

Places and Street Lighting



Solar Tree

2nd Generation _____ 896

Solar Tree 2.0 _____ 906

Indicta _____ 914

Poto _____ 916

Sostituto Spot _____ 918

Sostituto Palo _____ 920

Cefiso _____ 924

Cefiso Palo _____ 930

Cariddi _____ 934

Cariddi Palo _____ 938

Solar Tree 2nd Generation

Ross Lovegrove

↪ 2017

Solar Tree 2nd Generation develops and opens up to IoT interaction, to create new scenarios and introduce new and unexpected perspectives for future smart cities.

Solar Tree is conceived as a lighting appliance combining the LED-based lighting technique with the solar photovoltaic technology in a very peculiar and innovative design.

The project is aimed, on one hand, at minimizing the environmental impact of the product's use (deriving, in particular, from reduced consumption of energy obtained from fossil fuels), while ensuring that the appliance can provide service continuity and, therefore, the expected luminous performance, without being vulnerable to random weather agents or suffer design imbalance (number of panels, accumulator size) calculated for winter months. Such imbalance implies significant dimensions, weights, and costs and would not ensure continuous operation in off-average weather conditions.

The same logical principles implemented in the automotive sector on electric cars, with hybrid versions taking the lead over pure electric battery-based ones for a number of reasons, such as costs, performance, and state of the art of certain technologies, were used to develop the Solar Tree project by Artemide. With its mixed accumulator/solar and network configuration, it provides the best possible energy saving and functionality combination.




For further information on Solar Tree 2nd Generation
↪ visit artemide.com





- The structure consists of curved steel poles of different diameters and heights, reaching a maximum total 6.4m height above road level.
- The system includes 10 “grass blades” with 3mm-thick poles with a 42mm diameter, fitted with 1 1W terminal LED protected by a PMMA diffuser screen, and 10 4mm-thick poles with a 76mm diameter supporting the heads.
- The heads are composed by an anodized aluminum structure and, in the lower part, of a UV-resistant PC cover, which ensures protection against water and dust. They are all equipped with solar panels.
- The poles are painted with green epoxy paint for exteriors, with iridescent effects on a galvanized base substrate.
- Four of the ten heads (all with photovoltaic cells on the top) are fitted with a COB LED unit with a warm white colour temperature, for an asymmetric direct emission.
- The base is made of hot-zinc coated sheet steel designed for enclosure in a plinth of the appropriate size, not provided with the appliance, to be sunk into the ground. Alternatively a base is available, also made of zinc-coated steel with reinforced concrete stabilizing units forming a round seat. In this case the base can simply rest on the ground, even if ground fixing is always recommended.
- The connection/cabling elements, as well as the control and charging boards, are contained in multiple water-tight boxes with plug-and-socket connectors with protection rating IP65 or higher, and located either in appropriate spots at the foot of the base for easy inspection and maintenance, or inside the concrete stabilizing unit, as specified in detail for the Solar Tree version constituting the object of the supply.
- The airtight accumulators are contained in specific boxes that allow, on one hand, to protect the battery mechanically and from outer agents and, on the other to release any gas discharges, to be provided for by the law.

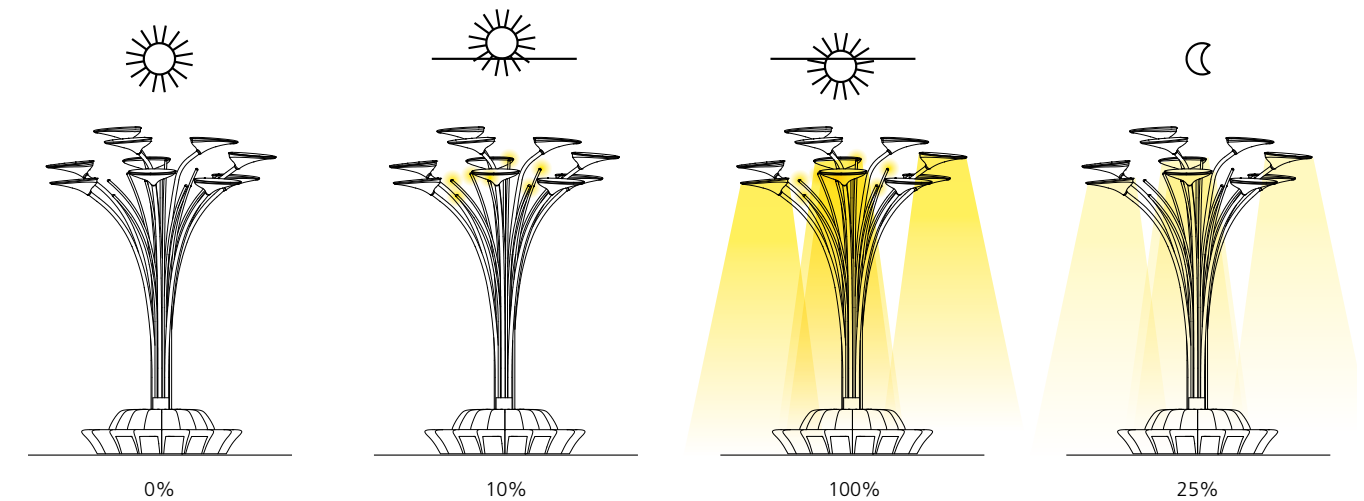

WORKING

Solar Tree was designed for operation in the HYBRID configuration: in addition to the batteries, generally of the appropriate capacity to contain energy for autonomous operation for up to 7-10 days (with an energy-saving operation cycle, better specified below) with full charge, connection with the mains is provided for energy supply to the appliances (via an appropriate DC power unit connected with the mains) when the batteries are depleted. This is to ensure full service availability even in case of persistent bad weather and/or reduced sun irradiation or 100% use of the luminous performance of the appliance, or anyway when the energy balance is negative.

At dusk (recognized by determination of the dawn and sunset time entered into the calculation routine of the management programme or otherwise), the LED sources are turned on until dawn according to the pre-set duty-cycle.

In “HYBRID” appliances, the system draws energy from the batteries until these fall to the lower charge limit, then switches automatically to the mains.

For appliances based on this configuration, if mains connections coincided with the desired switching time of the public lighting appliances to which the Solar Tree functionally refers, appropriate settings would ensure that the voltage available upon powering is interpreted as a start signal for the Solar Tree and vice versa in case of disconnection from the mains.

WORKING PROGRAMS

Two operating modes are available to satisfy individual needs – Manual and Automatic. The Automatic mode can, in turn, be configured in three different ways, according to the desired performance and energy saving attitude. More specifically: AUTO ECO: 100% operation at times of maximum attendance of the venue, limited operation of the LED heads only in the middle of the night (to ensure average 8 lux ground illumination, the LED sources are turned on and adjusted to approximately 25% of their nominal operating power from sunset to dawn. This mode is recommended to tend to full operation coverage even during the fall/winter in view of energy balance).

AUTO 100%: an operation mode that tends to ensure maximum operating performance of the appliance adjusting to the increased input of solar energy (if any).

CUSTOMIZED: the user can select the desired operating times and profiles.

The above-described profiles can be associated with deadlines and, therefore, be selected alternatively.

MANUAL: can be enabled by the user in case of special events and/or needs. The user can access the “fine” adjustment menu for selection on a 0-100% scale of the flow emitted by the individual LED heads and by the bunch of stems. The sources then remain switched on and adjusted according to the user’s settings until switching off or returning to the automatic mode under the user’s control.

CONFIGURATION

The light fitting configuration includes an analysis of the potential incoming energy (geographical location of the light fitting) and a detailed analysis of the physical location of the light fitting (proximity of buildings or trees). Lastly, an analysis of the level of requested service and performance will be implemented (luminance levels, operation hours, potential discontinuity in the service, if any).


TECHNICAL DATA

Total number of heads with solar panels: 10
 Solar panel voltage in open circuit: 10V max
 Peak power for each panel: about 75 W
 Number of heads with COB LEDs: 4
 Installed power for each light head: 20 W at 1000mA.
 LEDs color temperature: 3000K, 3SDCM
 Maximum luminous flux for each head: minimum 2200 lm.
 Total number of “stems”: 10


LED power for each “stem”: about 1 W with a power supply of 350mA.
 2 batteries
 Battery voltage: 12V
 Single battery capacity: 230 Ah
 2 batteries boxes
 1 box for 10 light stem panels wiring connection
 1 box of 10 luminous “stems” wiring connection
 1 power supply and battery connection box and power supply for LED heads + luminous “stems” + wireless charging / presence sensors (optional)

Solar Tree

2nd Generation

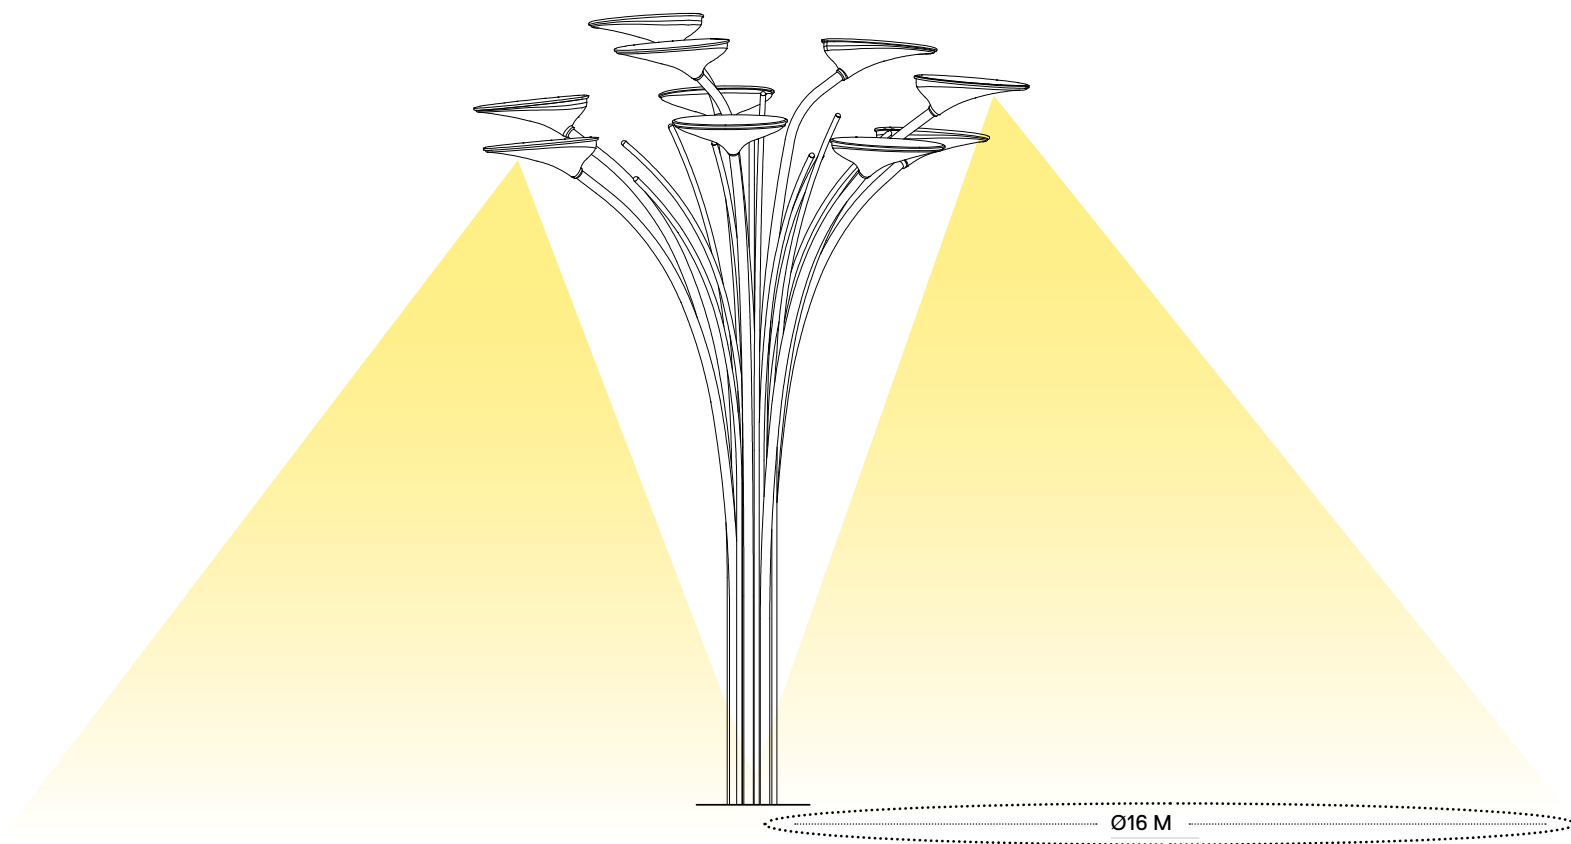

new lighting performances

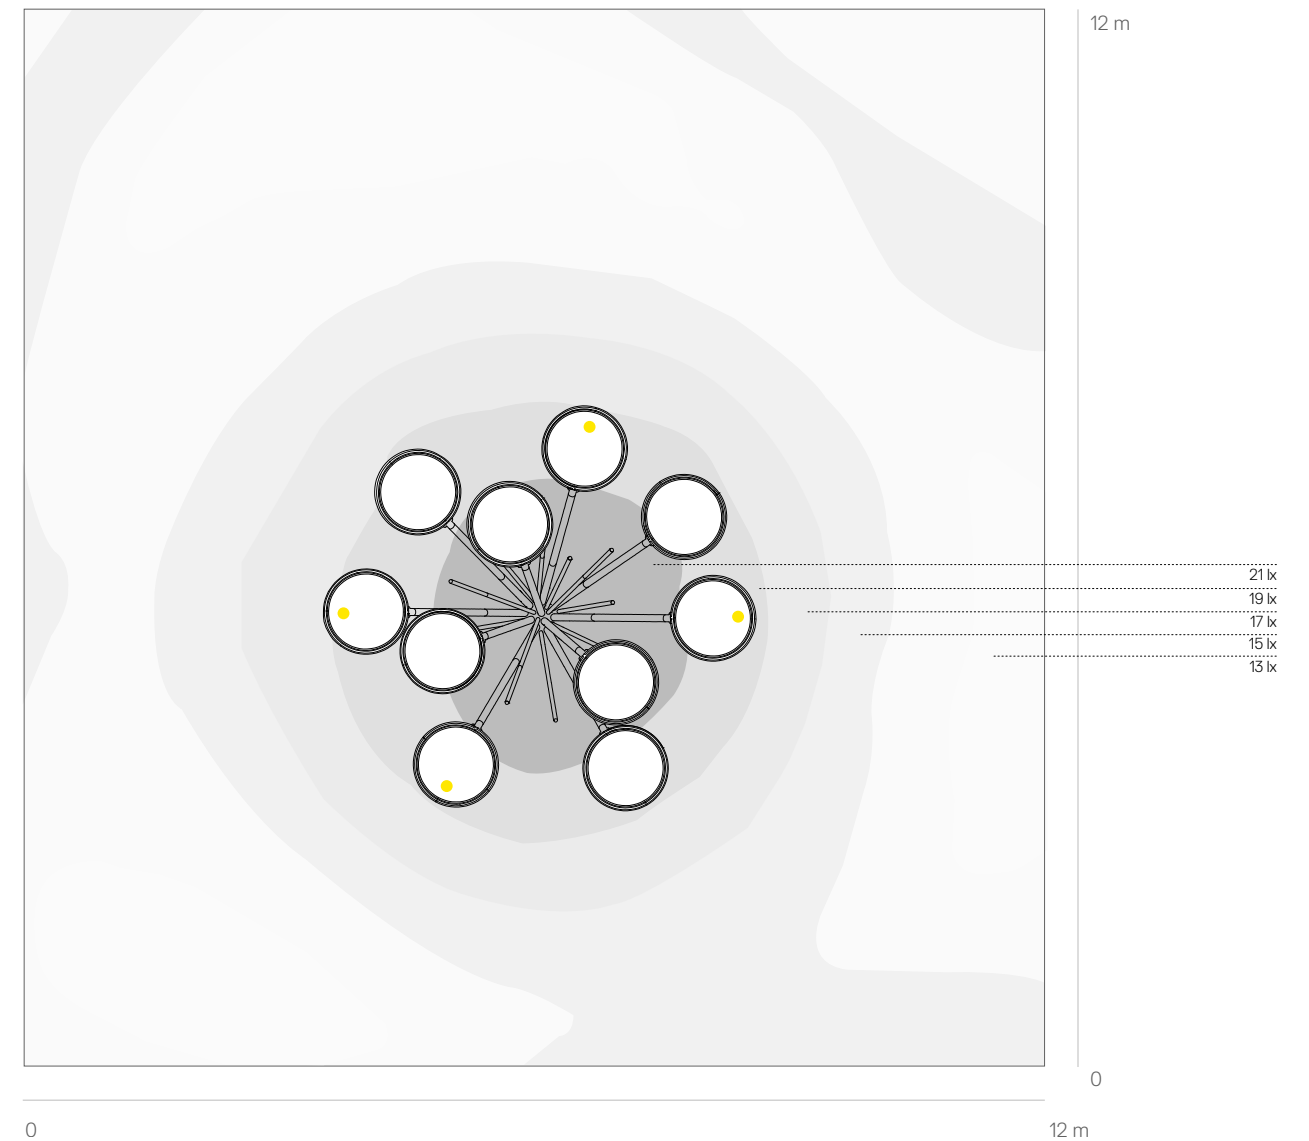


LUMINOUS PERFORMANCE: ASYMMETRIC EMISSION
APPLIANCE'S PHOTO-BIOLOGICAL RISK: CLASS EXEMPT
LIGHTING VALUE AT 32% OF THE MAXIMUM POWER: EM = 8 LUX ON AREA 12 X 12M

Solar Tree 2nd Generation



new intelligences and optionals

NEW INTELLIGENCES


ETHERNET NETWORK
USB ACCESS FOR DIAGNOSTICS /
SETTING / SERVICE ACCESS /
REMOTE ACCESS

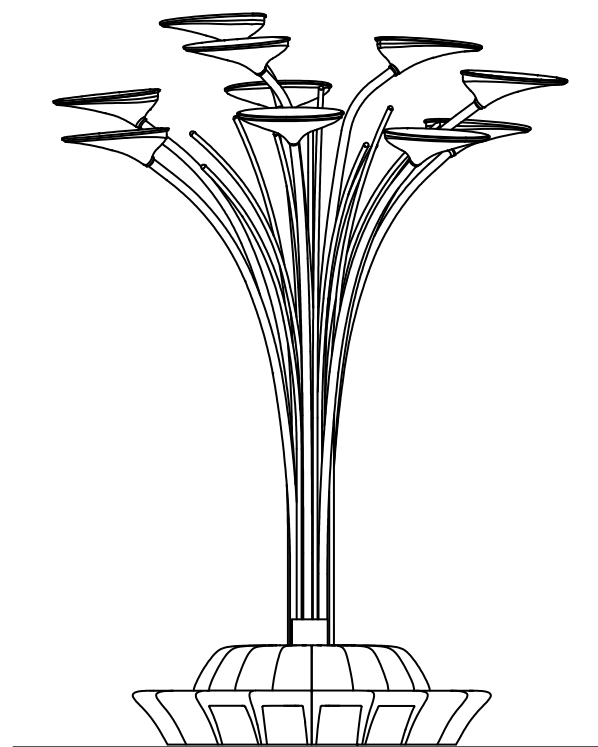

OPTIONAL - PRESENCE SENSOR

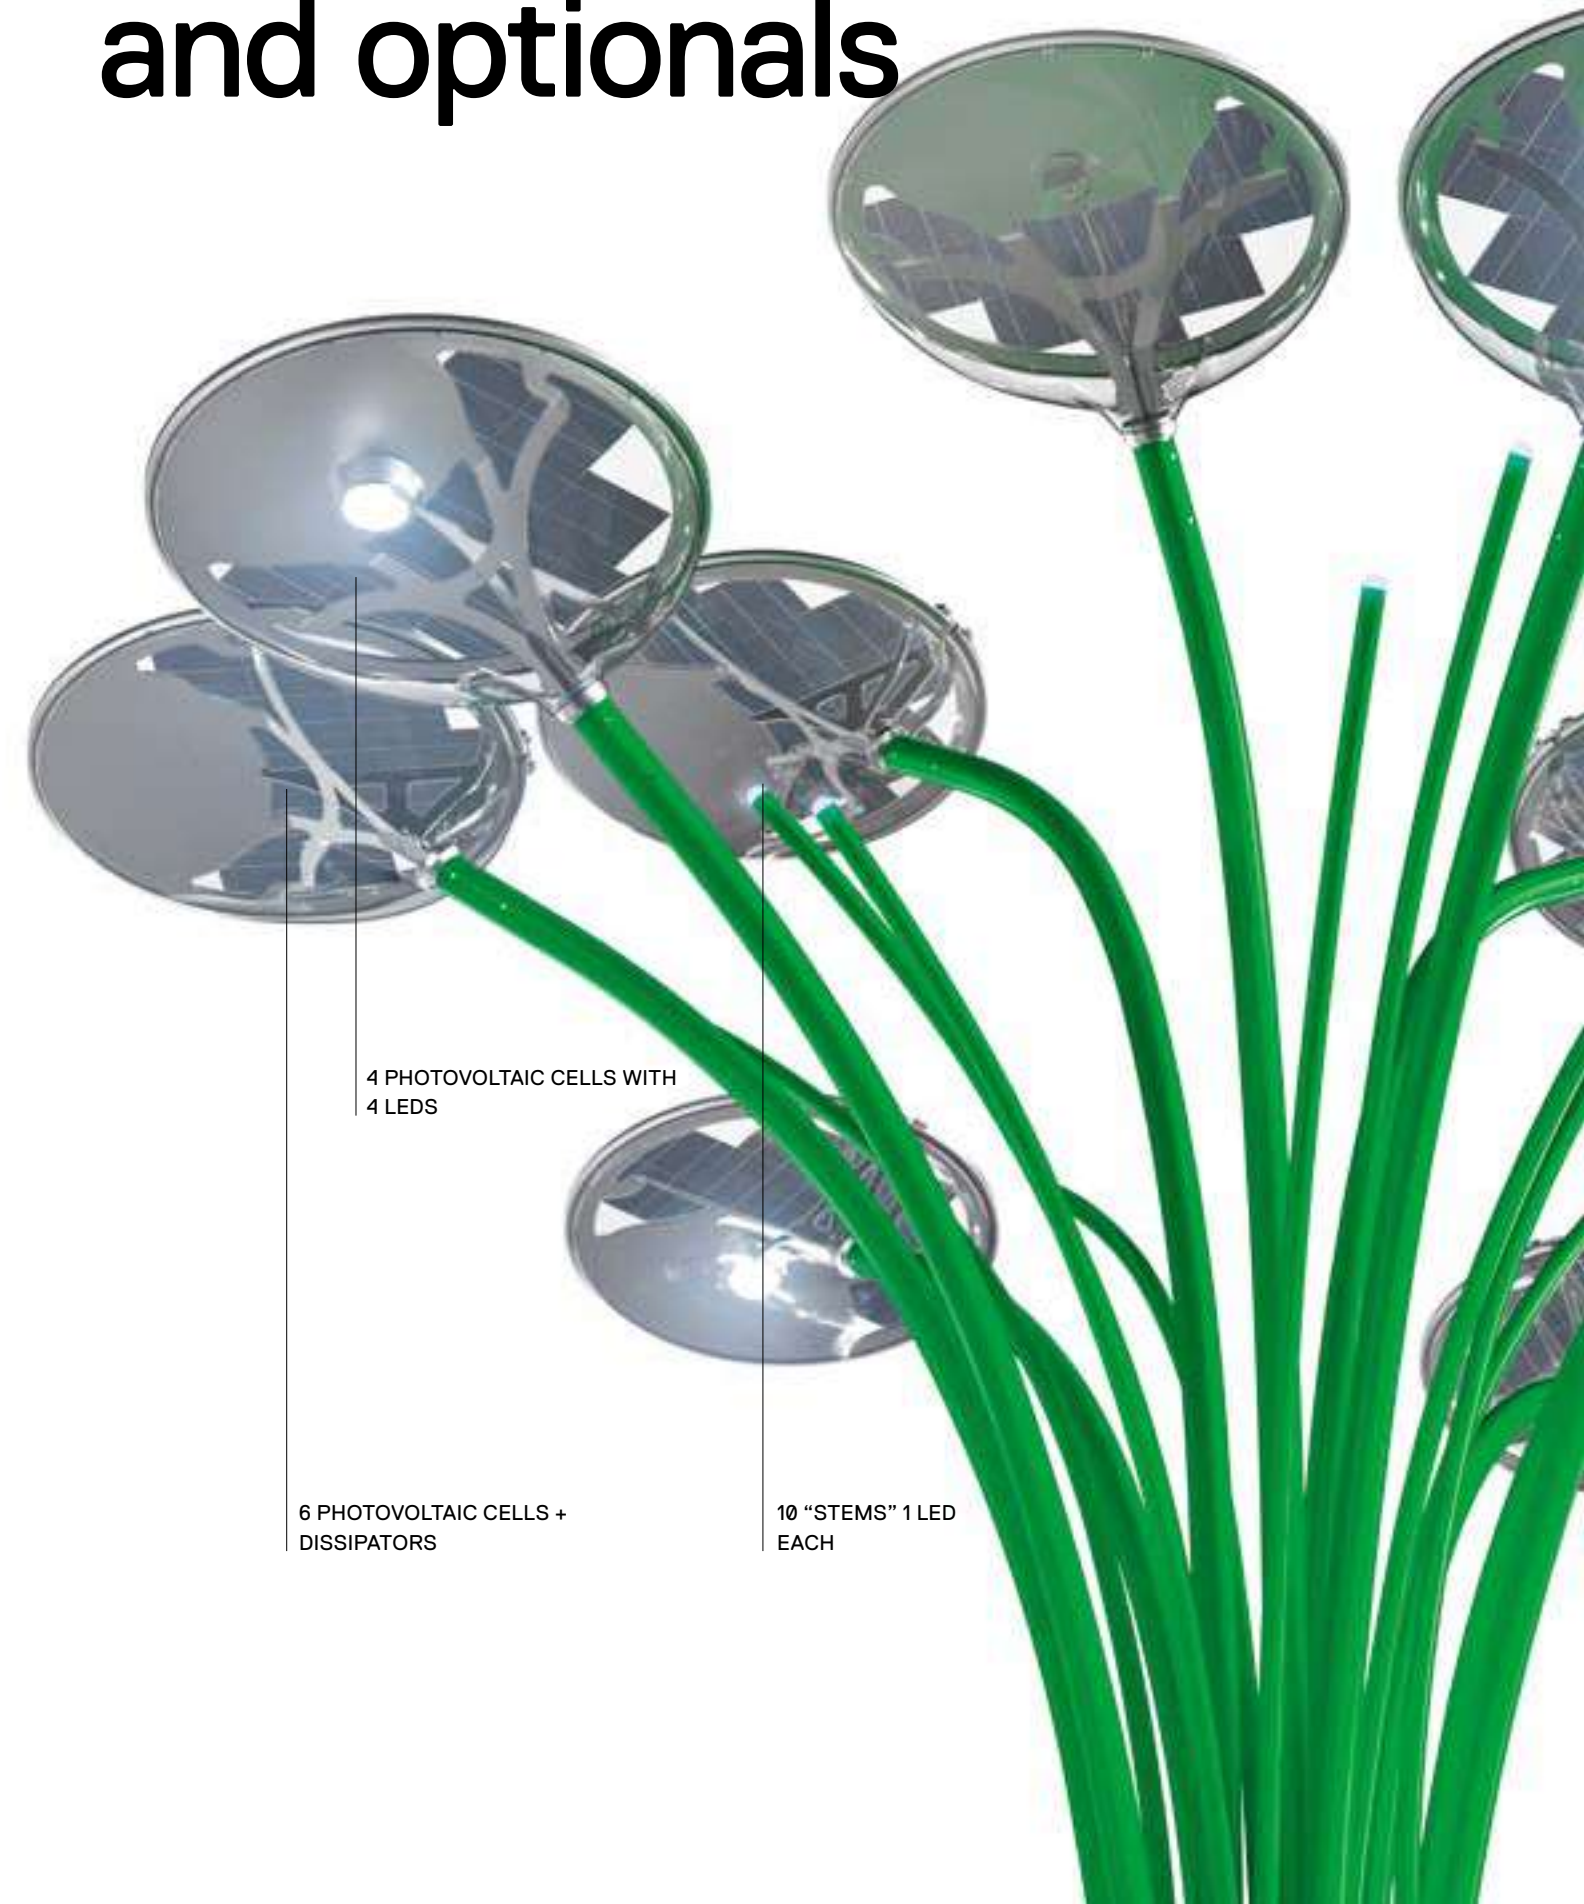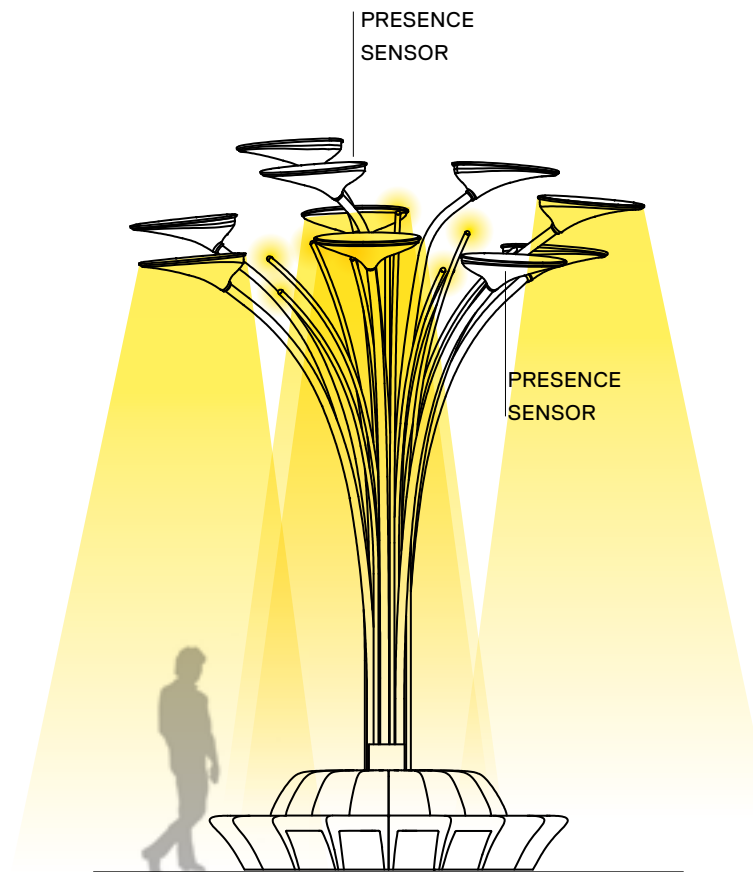

↳ SOLAR TREE 2ND GENERATION




MacAdam 3SDCM IP65
Life L70 (6K) 50000h
CRI = 80


SOLAR TREE 2ND GENERATION WITH BENCH

W	Flux	CCT	Code
4 heads LED29 W (116 W Tot.) + 10 stems LED 1,5 W (15 W Tot.)	2200 lm (8800 lm Tot.)	3000K	AU00109

10 heads with solar panels (4 with COB LED)
10 LED "stems", batteries, structure with 18 benches
Weight: 10.000 kg
Wind resistance: 170 km/h



4600

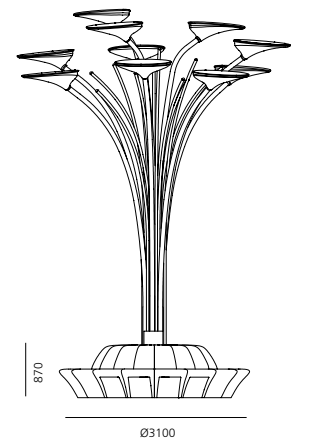


6350

IP65 power box and pole heads
IP44 battery compartment
IK10

W	Flux	CCT	Code
4 heads LED29 W (116 W Tot.) + 10 stems LED 1,5 W (15 W Tot.)	2200 lm (8800 lm Tot.)	3000K	AU00309

10 heads with solar panels (4 with COB LED)
10 LED "stems", batteries, structure with 18 benches
Presence sensor, ethernet network
usb access for diagnostics,
setting, service access, remote access
Weight: 10.000 kg
Wind resistance: 170 km/h

↳ SOLAR TREE 2ND GENERATION




MacAdam 3SDCM IP65
Life L70 (6K) 50000h
CRI = 80


SOLAR TREE 2ND GENERATION WITHOUT BENCH

W	Flux	CCT	Code
4 heads LED29 W (116 W Tot.) + 10 stems LED 1,5 W (15 W Tot.)	2200 lm (8800 lm Tot.)	3000K	AU00409

10 heads with solar panels (4 with COB LED)
10 LED "stems", batteries
Plinth dimensioning to be defined in the project phase
Wind resistance to be calculated in relation to the installation site



4600

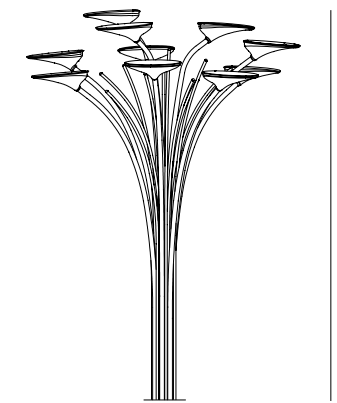

6350


IP65 power box and pole heads
IP44 battery compartment
IK10

W	Flux	CCT	Code
4 heads LED29 W (116 W Tot.) + 10 stems LED 1,5 W (15 W Tot.)	2200 lm (8800 lm Tot.)	3000K	AU00209


10 heads with solar panels (4 with COB LED)
10 LED "stems", batteries
Plinth dimensioning to be defined in the project phase
Wind resistance to be calculated in relation to the installation site
Presence sensor, ethernet network
usb access for diagnostics,
setting, service access, remote access

W	Flux	CCT	Code
4 heads LED29 W (116 W Tot.) + 10 stems LED 1,5 W (15 W Tot.)	2200 lm (8800 lm Tot.)	3000K	AU00509

4 heads with solar panels with 4 COB LED
10 LED "stems", batteries
Plinth dimensioning to be defined in the project phase
Wind resistance to be calculated in relation to the installation site



4600



6350

IP65 power box and pole heads
IP44 battery compartment
IK10

Solar Tree 2.0

Ross Lovegrove

↪ 2017

Solar Tree 2.0 has progressed to become a family of modular solutions. Two post heights are the structural features to use to put together various configurations to accommodate the needs of urban areas, with solutions that are not only functional but also interactive and energy-smart, to promote a new sustainable and social dimension for the city and for mankind.




For further information on Solar Tree 2.0
↪ visit artemide.com




Solar Tree 2.0

SOLAR TREE 2.0 - 380







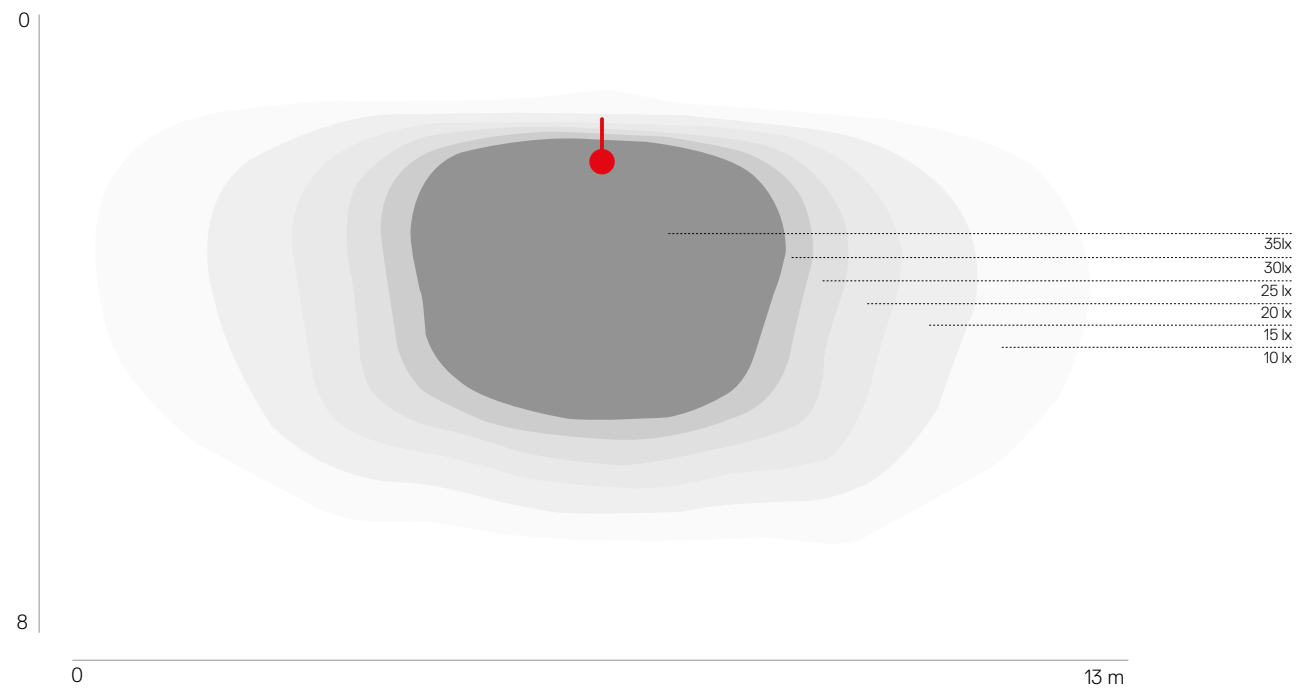


SOLAR TREE 2.0 - 500

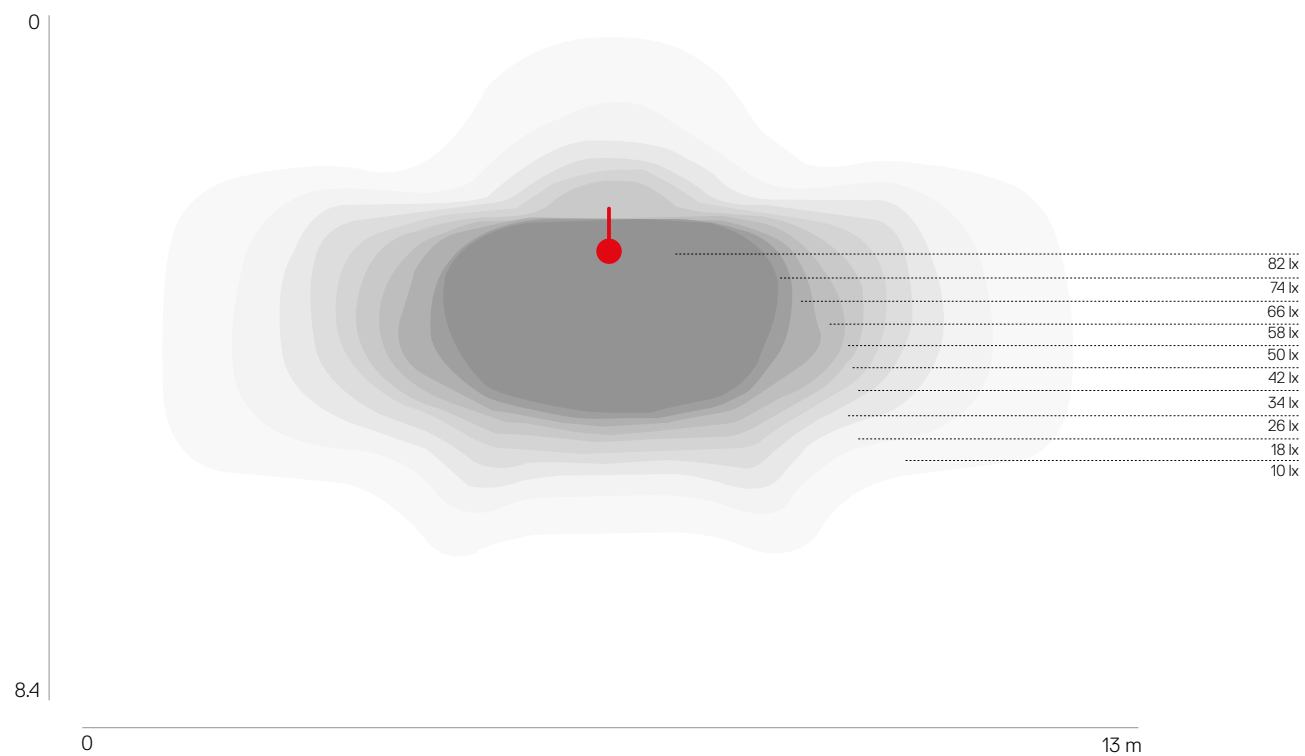

Solar Tree 2.0

a new family of poles



SOLAR TREE 2.0 - 380

IDEAL FOR LIGHTING CYCLE PATHS,
PEDESTRIANS AND HISTORIC CENTERS.
DISTANCE BETWEEN POLES 14M

SOLAR TREE 2.0 - 500

IDEAL FOR ROADS AND VEHICULAR PATH IN
URBAN CENTERS.
DISTANCE BETWEEN POLES 18M



↳ SOLAR TREE 2.0

Black



01



AS



MacAdam 3SDCM IP65
 Life L70 (6K) 50000h
 CRI = 90



SOLAR TREE 2.0 - 380

W	Weight	Beam	Flux	CCT	Code
35 W	37 kg	AS	2300 lm	4000K	AU00304



SOLAR TREE 2.0 - 500

W	Weight	Beam	Flux	CCT	Code
35 W	46 kg	AS	3200 lm	4000K	AU00404

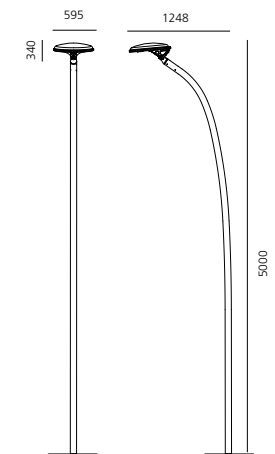

Indicta

Ernesto Gismondi

↪ 2010

Danese Milano, Milano - (IT)

↪ INDICTA



Anthracite Grey

AS


MacAdam 4SDCM
Life L70 (6K)>35600h
CRI = 80

IP65

W	Weight	Beam	Flux	CCT	Code
24 W	4,8 kg	AS	1433 lm 1341 lm	3000K 4000K	T084810 T084800

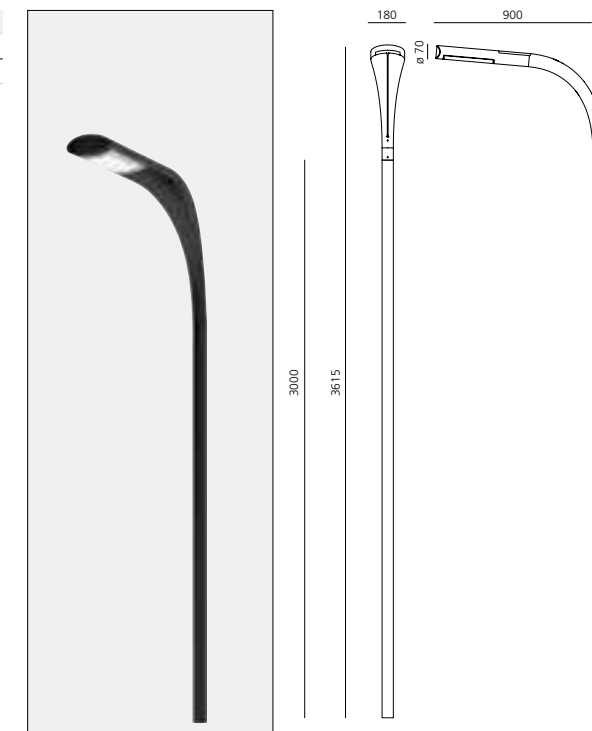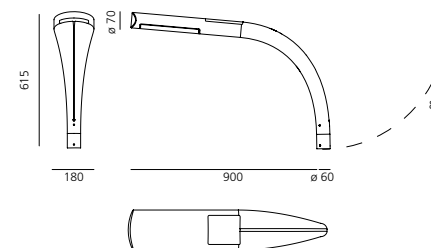

LED 23 W			Lighting application		
h	L	a	Em	Emax	Emin
3.5 m	4.0 m	13 m	12 lux	33 lux	2.8 lux



Light fixture with direct emission, with high-performance LED light sources.
 ø60mm pole installation with ø35x110mm shank (not supplied).
 Anthracite grey finish.
 Consists of optical housing and support for pole installation.
 Optical housing in extruded EN-AW-6060 aluminium, chromate treated and painted with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.
 UV resistant diffuser in shock resistant polycarbonate.

High-efficiency asymmetrical optics in metalised polycarbonate.
 Optical housing support in high-resistance mass-coloured reinforced polymers.
 AISI 316 stainless steel screws and silicone seal gaskets.
 Provided with IP67 cable and connector for the mains connection.
 Technical features of light fixtures in compliance with EN60598-1.
 ENEC approved.




For further information on Indicta
 ↪ visit artemide.com

Poto


Ernesto Gismondi

↪ 2014

↪ POTO

White 00	Anthraxite Grey 20	AS 	220/240Vac 50/60Hz electronic ballast included	MacAdam 2SDCM Life L70 (6K)>36300h CRI=80	IP65 IK10
-------------	-----------------------	---	--	---	--------------

W	Weight	Beam	Flux	CCT	Code
45 W	12,7 kg	AS	2586 lm	3000K	T0826. 00/20

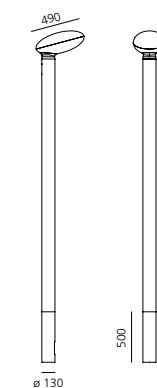

Pole appliance for direct lighting.

Consists of a pole head attached to the pole with grub screws.

The provided EN AW6060 aluminium pole should be bathed in concrete for 0.5m and rise 2.5m up from the ground.

The lighting body is fitted with an IP67 connector supporting cables with 5 to 13.5 mm diameters, to be fitted inside the pole.

The head has a transparent diffuser and a matt white top cap both in impact resistant PMMA. The body fitted inside the pole is made of EN AW6060 aluminium. Silicon seals.

Electronic power pack fitted inside the body suited for 4kV surges.

Internal reflector of metallised zamac fitted by sanded glass filter.

All the screws used for the outside of the product are made of AISI 316 INOX steel.

All the aluminium parts are finished with a 3-stage outdoor treatment: nanotechnologies, anti-oxidant primer, polyester paint.










For further information on Poto
↪ visit artemide.com

Sostituto Spot


Ernesto Gismondi
↪ 2013



↪ SOSTITUTO SPOT

Anthracite Grey 	S F AS   	220/240Vac 50/60Hz electronic ballast included	MacAdam 4SDCM Life L70 (6K) = 51400h CRI = 80	IP65  IK10  80° 
--	---	--	---	--

W	Weight	Beam	Flux	CCT	Code
106 W	8,3 kg	S 9°	9183 lm	3000K	T418410W00
		F 24°	9276 lm	3000K	T418423W00
		AS	8795 lm	3000K	T4184ELW00



Light fixture with direct emission, with monochromatic LED light sources.

Floor, wall, eaves installation.

Consists of lighting unit composed by 3 interchangeable optical units, wiring terminal board and fixing plate. Positioning is maintained by means of locking dowels. Tilting with 5° adjustments. Positioning is ensured by means of fastening screws.

EN AB47100 aluminium body and terminal board, silicone gaskets. Electronic ballast integrated in the body.

Polycarbonate diffuser silicone-sealed to the lens supporting unit.

IP68 connector for the electrical connection to the mains, which can be located in the base compartment and is suitable for 5-13.5 mm diameter cables.

LED circuits with PMMA lenses in 3 beam versions: 9°, 24° and elliptical 12x40°.

All the screws used outside the product are in AISI 316 stainless steel.

All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint.

Technical features of the lighting fixtures in compliance with EN60598-1 and section 2-5.

Protection level from 4KV impulse overvoltage.



For further information on Sostituto Spot
↪ visit artemide.com



Spot optic

Concentrated luminous flow to highlight details avoiding unwanted light dispersion.



Flood optic

Wide luminous flow suitable for lighting large areas.

Sostituto Palo

Ernesto Gismondi

↪ 2013

Light fixture with direct emission, with monochromatic LED light sources.

Pole installation (pole not supplied).

The appliance is made up of a lighting body and a pole joint, adjustable with 5° angles up to 90° for use with horizontal terminal poles. Positioning is ensured by means of fastening screws.

Die-cast EN-AB 47100 aluminium lighting unit with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

Asymmetrical high-efficiency PMMA optical units. High-transparency shock-resistant polycarbonate screens. Consists of 3 interchangeable optical units.

Electronic ballast integrated in the body.

IP68 connector for connection with the mains inside the pole joint, accommodates cables with a 7-12 mm diameter.

AISI 316 fixing screws and silicone gaskets.

Suitable for ME3a and ME4a road lighting.

Technical features in compliance with EN60598-1-2-3.

Protection level from 4KV impulse overvoltage.

ENEC approved.



For further information on Sostituto Palo
↪ visit artemide.com

↪ SOSTITUTO PALO

Anthracite Grey
20

AS


220/240Vac 50/60Hz
electronic ballast
included

MacAdam 4SDCM
Life L70 (9K)>51400 h
CRI = 80

IP65
IK10
80°

STANDARD


W	Weight	Beam	Flux	CCT	Code
106 W	8,5 kg	AS	7609 lm	4000K	T4183ELN00




HIGH FLUX

W	Weight	Beam	Flux	CCT	Code
106 W	8,5 kg	AS	11261 lm	4000K	T4183ELH00

CRI=70

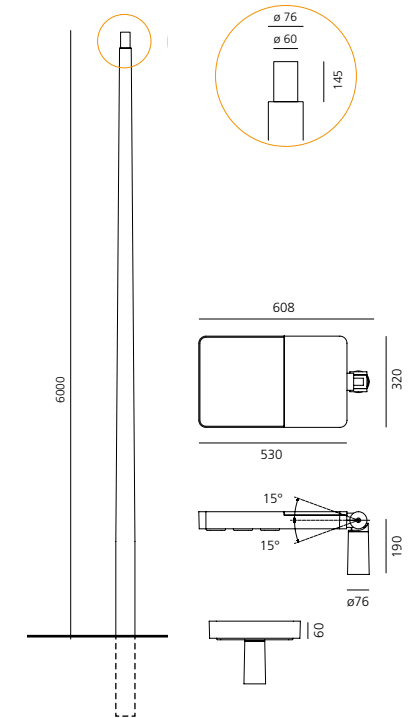

LED 105 W			Lighting application		
h	L	a	Em	Emax	Emin
6.0 m	6.0 m	24 m	23 lux	55 lux	13 lux





LAND ROVER

LAND ROVER

JAGUAR

BOY SALMON

Cefiso

Alessandro Pedretti
(Studio Rota & Partners)

↪ 2011

Light fixture with adjustable direct emission, with high-performance LED light sources.

Floor, wall and eaves installation.

2 sizes: Cefiso 14, Cefiso 20.

Available in two finishes: grey-white painted (RAL 9002) and anthracite grey painted.

Consists of adjustable lighting unit and terminal board. A graduated metal ring allows an accurate adjustment. Positioning is maintained by means of locking dowels.

Body and terminal board in EN AB44100 aluminium, silicone gaskets.

Electronic ballast integrated in the body.

Silkscreened tempered glass siliconed flush with the body to avoid backwater.

Wiring to be carried out inside the terminal board by piercing an IP65 grommet suitable for cables with a diameter of 8-13 mm.

PMMA lenses in 3 different versions of beams.

Screws in AISI 316 stainless steel.








Painted die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

Technical features of light fixtures in compliance with EN60598-1 and part 2-5.




For further information on Cefiso
↪ visit artemide.com

↪ CEFISO

Grey-white Ral 9002  00	Anthracite Grey  10	XS 	WF 	WW 	220/240Vac 50/60Hz electronic ballast included	MacAdam 4SDCM Life L70 (6K)>39300h CRI =80	IP65  IK10 90° 180° 
---	---	---	---	---	--	--	---


CEFISO 14

W	Weight	Beam	Flux	CCT	Code
23 W	2,1 kg	XF 5,4°	1231 lm	3000K	T418010W.00/10
		WF 40°	1187 lm	3000K	T418039W.00/10
		WW	1198 lm	3000K	T4180ELW.00/10

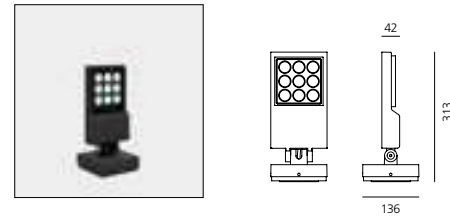

CEFISO 20

W	Weight	Beam	Flux	CCT	Code
38 W	4,4 kg	XF 5,4°	2188 lm	3000K	T418110W.00/10
		WF 40°	2110 lm	3000K	T418139W.00/10
		WW	2136 lm	3000K	T4181ELW.00/10

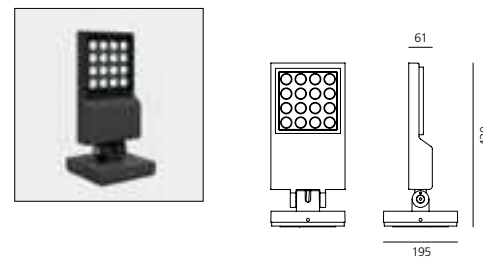

Extra Spot optic
Concentrated luminous flow to highlight details avoiding unwanted light dispersion.



Wide Flood optic
Wide luminous flow suitable for lighting large areas.



Elliptical optic (WW)
Elliptical distribution of the luminous flow suitable for wall washer effect.



Centro Servizi dello Studentato Università Trento - IT
 Project: Studio Palerm and Tabares de Nova s. L. Arquitectos + CLA S&S Engineering, Ing Luca Masini



Cefiso Palo

Alessandro Pedretti
(Studio Rota & Partners)
↪ 2011



Light fixture with adjustable direct emission, with high-performance LED light sources.

Pole installation.

Available in two finishes: light grey painted and anthracite grey painted.

Consists of lighting unit and pole support. Fixing is maintained by means of locking dowels.

The pole, not supplied, must have a \varnothing 60 mm and h90 mm shank to correctly fix the head- pole. The pole height must be 4 m from the ground to provide a correct surface lighting. In this way, the poles can be installed at a distance of 15 m, suitable to light a 4 m carriageway in compliance with S3 class for cycle tracks.

Body in EN AB44100 aluminium, pole support in galvanized iron, silicone gaskets.

Electronic ballast integrated in the body.

The light fixture is protected from impulse overvoltage up to 4KV both in differential and common mode.

Silicone-sealed silk-screened tempered glass.

IP67 connector for electric connection to the mains, it can be housed in the pole compartment and is suitable for cables with a diameter of 5-13.5 mm.

LED circuits with PMMA lenses with road emission beam.

Screws in AISI 316 stainless steel.



All parts in die-cast aluminium and galvanised iron are painted with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint.

Technical features of light fixtures in compliance with EN60598-1.


↪ CEFISO PALO

Grey-white Ral 9002 00	Anthraccite Grey 10	WW	220/240Vac 50/60Hz electronic ballast included	MacAdam 4SDCM Life L70 (6K)>39300h CRI = 80	IP65 IK10
------------------------------	---------------------------	----	--	---	--------------

W	Weight	Beam	Flux	CCT	Code
41 W	2,1 kg	AS	1848 lm	3000K	T418200W.00/10

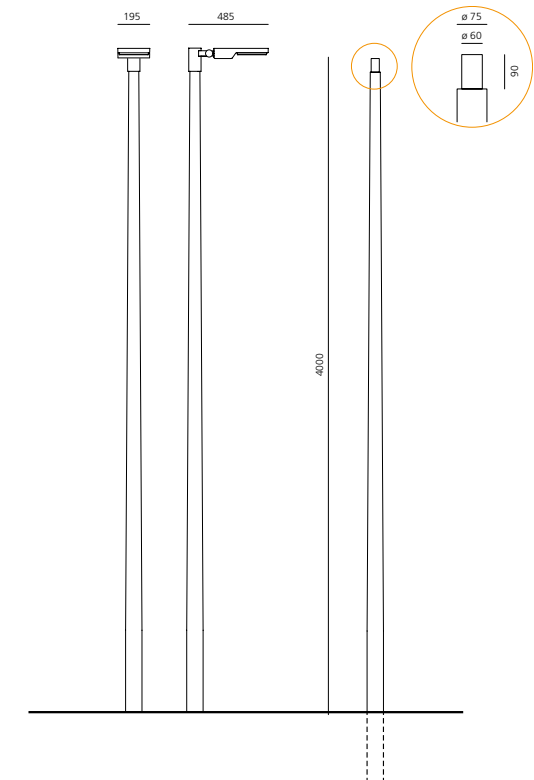

LED 40W			Lighting application		
h	L	a	Em	Emax	Emin
4.0 m	4.0 m	15 m	13 lux	27 lux	2.3 lux



Suitable for street lighting in the class S3 (bike paths).



For further information on Cefiso Palo
↪ visit artemide.com



Cariddi

Ernesto Gismondi

↪ 2013

CARIDDI 30 / CARIDDI 40
OPTICS 12°





CARIDDI 30
OPTICS 16° - 35°

CARIDDI 40
OPTICS 17° - 36°




↪ CARIDDI

Anthraxite Grey 	S F WF 	220/240Vac 50/60Hz electronic ballast included	MacAdam 2SDCM Life L70 (10K)>36300h CRI = 80	IP65 IK07 130° 180° 
--	---	---	--	--


CARIDDI 30

W	Weight	Beam	Flux	CCT	Code
28 W	3,9 kg	S 12°	229 lm	3000K	T418610W00
		F 16°	1638 lm	3000K	T418620W00
		WF 35°	1468 lm	3000K	T418640W00



CARIDDI 40

W	Weight	Beam	Flux	CCT	Code
41 W	3,9 kg	S 12°	356 lm	3000K	T418710W00
		F 17°	2322 lm	3000K	T418720W00
		WF 36°	2405 lm	3000K	T418740W00



Floor, wall, ceiling, eaves installation.

Consists of an adjustable lighting unit and terminal board. Positioning is maintained by means of locking dowels.

The base and the lighting unit are connected by a H05RN-F 3x1 cable.

EN AB47100 aluminium head and terminal board, EN AW6060 aluminium body, silicone gaskets.

Electronic ballast integrated in the body.

Silicone-sealed silk-screened tempered glass.

Wiring to be performed inside the terminal board by piercing an IP65 grommet suitable for 8-12 mm diameter cables.

LED COB with PMMA lens and anodized aluminium reflector in 3 different beam versions.

The optical unit in the narrow-beam version is made up of a N-SF15 optical glass condensation lens and an external PMMA projection lens glued flush with the closing bezel of the lighting body.

Available in 2 different powers.

All the screws used outside the product are in AISI 316 stainless steel.

All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint.

Technical features of the light fixtures in compliance with EN60598-1 and section 2-5.



For further information on Cariddi
↪ visit artemide.com



Cariddi palo

Ernesto Gismondi

↪ 2014



↪ CARIDDI PALO

Anthracite Grey



AS



MacAdam 3SDCM
Life L70 (6K) >36300h
CRI = 80



IP65



IK07



W	Weight	Beam	Flux	CCT	Code
24 W	3,9 kg	AS	1760 lm	3000K	T419800W00



An adjustable direct lighting appliance that consists of a pole joint and an adjustable lighting body. Fixed into position with 6 grub screws.

The pole, not included, should have a 60mm spigot to allow appropriate fixing of the pole head. The pole should be 4m high to ensure appropriate surface illumination. Under these conditions, poles can be installed 15m apart to illuminate a 4m lane, in order to ensure compliance with class S3 for cycling lanes.

Cabling should be accommodated within the pole head, accessible through a lid, using an IP67 sealed connector fit for cables with 5 to 13.5mm diameters.

The lighting body is powered through a H05RN-F 2x1 cable.

Aluminium EN AB47100 head, pole joint, and sealing caps; aluminium EN AW6060 body and glass-holding ring, silicon gaskets. Electronic power unit inside the body.

Suited for public use, protected for 4kV surges, both in the common and in the differential mode.

Moulded silicon road lighting appliance. The tempered glass diffuser glued flush to the lighting body ensures the absence of lighting pollution.

INOX AISI 316 steel screws.

Die-cast aluminium elements painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint.

The technical features of the appliances comply with the EN60598-2-3 norm.



For further information on Cariddi Palo
↪ visit artemide.com



↪ **Technical**

The carefulness of Artemide for new technologies and for the improvement of its products implies a continuous updating of technical information.

For in-depth and detailed products specifications, Artemide recommends to refer to the website and Artemide Cloud platform, tools that are constantly updated.


www.artemide.com
cloud.artemide.com

PRODUCT GENERAL INFORMATION

↳ A.24 SOSPENSIONE - EMISSIONE SHARPING

White 01 Fast delivery	Black 04	Brushed Silver 15	Brushed Copper 18	Brushed Bronze 20	F	XF	*Uses 1 DALI address ** Uses 2 DALI addresses *** Uses 3 DALI addresses	MacAdam 2SDCM Life L90 (20K) 118000h CRI = 90	IP20
------------------------------	-------------	----------------------	----------------------	----------------------	---	----	---	---	------

Modulo lineare - emissione diretta					Code
Length	W	Beam	Flux	CCT	
1176 mm*	22W	F 24°	1528 lm	2700K	AQ424. 01/04 15/18/20
			1628 lm	3000K	AQ420. 01/04 15/18/20
			1742 lm	4000K	AQ421. 01/04 15/18/20
		XF 62°	1624 lm	2700K	AQ444. 01/04 15/18/20
			1731 lm	3000K	AQ440. 01/04 15/18/20
			1852 lm	4000K	AQ441. 01/04 15/18/20
2352 mm**	46W	F 24°	3056 lm	2700K	AQ425. 01/04 15/18/20
			3256 lm	3000K	AQ422. 01/04 15/18/20
			3485 lm	4000K	AQ423. 01/04 15/18/20
		XF 62°	3249 lm	2700K	AQ445. 01/04 15/18/20
			3461 lm	3000K	AQ442. 01/04 15/18/20
			3704 lm	4000K	AQ443. 01/04 15/18/20

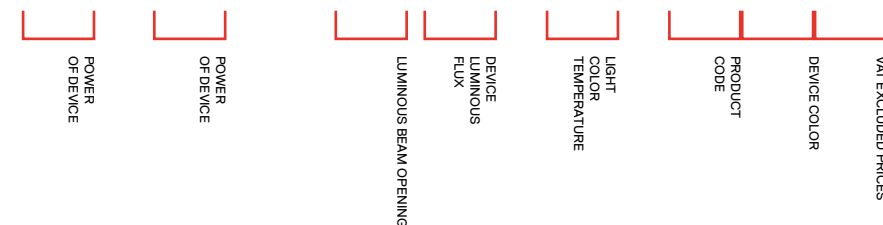


CLASSIFICATIONS

Class I
 Device in which electrical safety is provided by an additional protective conductor (earth) connected to the metal frame of the lamp.

Class II
 Device in which protection against electric shocks is not provided solely by the basic insulation, but which has additional safety measures such as double or reinforced insulation. These measures do not involve earthing devices and do not depend on the installation conditions.

Class III
 Device in which protection against electric shocks is based on a safety extra-low voltage power source and in which no voltages greater than this can be generated. A class III device does not need earth protection.

RATES



The diagrams shown in this catalogue are expressed in millimetres.

IP DEGREE OF PROTECTION

Electrical fittings are designed to prevent the intrusion and contact of solids and liquids with live parts. Resistance to the penetration of solids and liquids is expressed by the acronym IP, followed by two digits that show the degree of protection: the first digit refers to solid bodies, the second to liquids.

- First digit
- 0 No protection.
 - 1 Protected against the penetration of solid bodies larger than 50 mm.
 - 2 Protected against the penetration of solid bodies larger than 12 mm.
 - 3 Protected against the penetration of solid bodies larger than 2.5 mm.
 - 4 Protected against the penetration of solid bodies larger than 1 mm.
 - 5 Protected against dust.
 - 6 Totally dust-tight.

APPROVALS

ENEC certification of European conformity.

DALI

Each DALI device occupies one address, unless otherwise specified.

DRIVER

One driver powers one device, unless otherwise specified.

ARTEMIDE APP

When a product managed by Artemide App is installed, the application takes priority on the DALI dimming.

- Second digit
- 0 No protection.
 - 1 Protected against dripping water.
 - 2 Protected against dripping water up to 15° from the vertical.
 - 3 Protected against rain.
 - 4 Protected against splashing water.
 - 5 Protected against water jets.
 - 6 Protected against waves.
 - 7 Water-tight on immersion.
 - 8 Water-tight on submersion.

↳ CHARACTERISTICS OF LED AND COMPONENTS

Artemide always develops its products with special attention to the flexibility of using all possible innovations in the field of LEDs. Many are, in fact, a variety of components available on the market, each with its own special features and suitable for different purposes.

Artemide designs and manufactures all the LED circuits required to turn on the product and operate it correctly over time, in order to prevent any problems and quickly repair any possible defects.

Among the most important types of LED used are:

- 5mm LED, which offers the highest average life span with intermediate light levels;
- SMD-LED, which enables the size to be minimised while maintaining good values of luminous flux;
- Power LED, characterised by a wide choice of power and luminous flux and high life expectancy;
- multi-chip LED, characterised by high power, up to over 20W per module, with high luminous flux.

Artemide offers the possibility of using dimmable systems (1-10V, PUSH button, DALI) or home automation control and lighting management systems by means of specific drivers or ad-hoc solutions. The dimming of the LED allows you to create user-controlled lighting scenarios and adjust the brightness for better viewing comfort.

Artemide is able to customise and tailor their products to meet the various design requirements, thanks to the electronic control and the flexibility in the choice of LED. To request any type of specific or special project, you can contact our technical department.

Artemide manufactures its circuits with power signals in constant current or constant voltage, equivalent to a connection in series or in parallel to the products, respectively. For the correct selection of the transformer or power supply required to operate the lighting, we recommend you follow these guidelines:

Power calculation for electronic driver with constant current:
To properly select the driver necessary for electrical installation, it is sufficient to sum up the power values of each fixture, expressed in W (Watt), as indicated in the catalogue, and to select a ballast with a rated power 20% higher than the resulting total power value.

7 x Linea LED 8W - 24Vdc
7 x 8W = 56W + 20% = 67,2W -> Power supply T409999

Power calculation for electronic driver with constant current
To properly select the driver with constant current (350/500/700mA), choose the driver following the indication "N° LED max" in the relevant driver table.

3 x Zeno Up 3 - 500mA
3 x 3 = 9 LED x 2W -> Power supply NL19034

↳ DRIVERS

Constant current driver for series connection (indoor use)

Code	Description	V (Vac)	I (mA)	P (W)	N°Led max*	L (mm)	W (mm)	H (mm)	
NL19041	Driver 8W 500mA SLIM	220-240	500	8	4	22	110	19	indip. use
NL19036	Driver 20W 700mA	220-240	700	20	2-7	125	38	23	indip. use

Constant current driver for series connection (outdoor use)

Code	Description	V (Vac)	I (mA)	P (W)	N°Led max*	L (mm)	W (mm)	H (mm)	IP Rate
DV3001	Driver 14W 350mA	220-240	350	14 W	1-10	79	38	25	IP 67
DV3002	Driver 14W 500mA	220-240	500	14 W	1-7	79	38	25	IP 67
DV3003	Driver 14W 700mA	220-240	700	14 W	1-5	79	38	25	IP 67
DV3004	Driver 30W 700mA	220-240	700	30 W	7-10	120	38	25	IP 67
DV1042	Driver 23-55W 350-1000mA	220-240	350/500/700	23/27/38W	3-12	185	35	33	IP 67

Constant-power ballasts with plastic wrapper for parallel connection

Code	Description	V _{in} (Vac)	V _{out} (Vac)	P (VA)	L (mm)	W (mm)	H (mm)	IP Rate
T409996	Driver 25W 24Vdc	100-277	24	25	150	40	32	IP 67
T409998	Driver 60W 24Vdc	100-277	24	60	165	43	32	IP 67
T409999	Driver 90W 24Vdc	100-277	24	90	165	61	36	IP 67
DV5004	Driver 150W 24Vdc	100-277	24	150	228	68	39	IP 67
DV1041	Driver 24W 24Vdc	220-240	24	24	185	35	33	IP 67
DV1043	Driver 150W 12Vdc	100-277	12	150	228	68	39	IP 67

↳ DRIVERS

SPECIFICATIONS FOR NAIAD 55 AND NAIAD 90 POWER SUPPLY

Number of fixtures which can be installed according to: Power, Cable section, Line length

Ego 55

Code	Power	Line length	Cable 1,5 mm ²	Cable 2,5 mm ²	Cable 4 mm ²
T409996	25W 24Vdc	10 m	13	13	13
	25W 24Vdc	50 m	13	13	13
	25W 24Vdc	100 m	13	13	13
	25W 24Vdc	150 m	12	12	13
	25W 24Vdc	200 m	11	12	13

T409998

60W 24Vdc	10 m	33	33	33
60W 24Vdc	50 m	31	32	33
60W 24Vdc	100 m	27	30	31
60W 24Vdc	150 m	23	27	30
60W 24Vdc	200 m	19	25	29

T409999

90W 24Vdc	10 m	49	50	50
90W 24Vdc	50 m	43	46	48
90W 24Vdc	100 m	35	42	46
90W 24Vdc	150 m	26	37	42
90W 24Vdc	200 m	19	31	39

Ego 90

Code	Power	Line length	Cable 1,5 mm ²	Cable 2,5 mm ²	Cable 4 mm ²
T409996	25W 24Vdc	10 m	5	5	5
	25W 24Vdc	50 m	5	5	5
	25W 24Vdc	100 m	4	5	5
	25W 24Vdc	150 m	4	4	5
	25W 24Vdc	200 m	4	4	4

T409998

60W 24Vdc	10 m	12	12	12
60W 24Vdc	50 m	12	12	12
60W 24Vdc	100 m	10	11	12
60W 24Vdc	150 m	8	10	11
60W 24Vdc	200 m	7	9	11

T409999

90W 24Vdc	10 m	18	18	18
90W 24Vdc	50 m	16	17	18
90W 24Vdc	100 m	13	16	17
90W 24Vdc	150 m	9	14	16
90W 24Vdc	200 m	7	12	15

SPECIFICATIONS FOR REEDS IP68 AND REEDS IP68 TRIPLE POWER SUPPLY

Number of fixtures which can be installed according to: Power, Cable section, Line length

Reeds IP68

Code	Power	Line length	Cable 1,5 mm ²	Cable 2,5 mm ²	Cable 4 mm ²
T409996	25W 24Vdc	10 m	2	2	2
	25W 24Vdc	50 m	2	2	2
	25W 24Vdc	100 m	2	2	2
	25W 24Vdc	150 m	2	2	2
	25W 24Vdc	200 m	1	2	2

T409998

60W 24Vdc	10 m	5	5	6
60W 24Vdc	50 m	5	5	5
60W 24Vdc	100 m	4	4	5
60W 24Vdc	150 m	3	4	4
60W 24Vdc	200 m	2	3	4

T409999

90W 24Vdc	10 m	8	8	8
90W 24Vdc	50 m	7	7	8
90W 24Vdc	100 m	5	6	7
90W 24Vdc	150 m	3	5	6
90W 24Vdc	200 m	2	4	5

Reeds IP68 triple

Code	Power	Line length	Cable 1,5 mm ²	Cable 2,5 mm ²	Cable 4 mm ²
T409998	60W 24Vdc	10 m	1	1	2
	60W 24Vdc	50 m	1	1	1
	60W 24Vdc	100 m	1	1	1
	60W 24Vdc	150 m	1	1	1
	60W 24Vdc	200 m	-	1	1

T409999

90W 24Vdc	10 m	2	2	2
90W 24Vdc	50 m	2	2	2
90W 24Vdc	100 m	1	2	2
90W 24Vdc	150 m	1	1	2
90W 24Vdc	200 m	-	1	2

Max surge supported by the ballasts: 2kV.

Working temperature of the ballasts: -35°C + 50°C.

The ballasts must not be directly exposed to UV-rays.

When calculating sections/lengths, all the fixtures should supplied with power at the line end.

The IP67 connector supplied with the fixtures is suitable for sections from 1.5 to 4 mm².

Insulation class II. Earthing is not required.

↪ CONSTANT CURRENT REGULATORS




DIMMABLE CONSTANT CURRENT REGULATORS FOR INDOOR USE

Code	Description	V (Vac)	I (mA)	N°Led max	L (mm)	W (mm)	H (mm)
NL11103	Constant current regulator 350mA	12	350	1-3	19	57	16
		24	350	1-6	19	57	16
NL11107	Constant current regulator 500mA	12	500	1-3	19	57	16
		24	500	1-6	19	57	16
NL11108	Constant current regulator 700mA	12	700	1-2	19	57	16
		24	700	1-5	19	57	16

DIMMABLE CONSTANT CURRENT REGULATORS FOR OUTDOOR USE


Code	Description	V (Vac)	I (mA)	N°Led max	L (mm)	Ø (mm)	IP Rate
NL11106	Constant current regulator 350mA IP67	12	350	1-3	130	32	IP 67
		24	350	1-6	130	32	IP 67
NL11104	Constant current regulator 500mA IP67	12	500	1-3	130	32	IP 67
		24	500	1-6	130	32	IP 67
NL11102	Constant current regulator 700mA IP67	12	700	1-2	130	32	IP 67
		24	700	1-5	130	32	IP 67

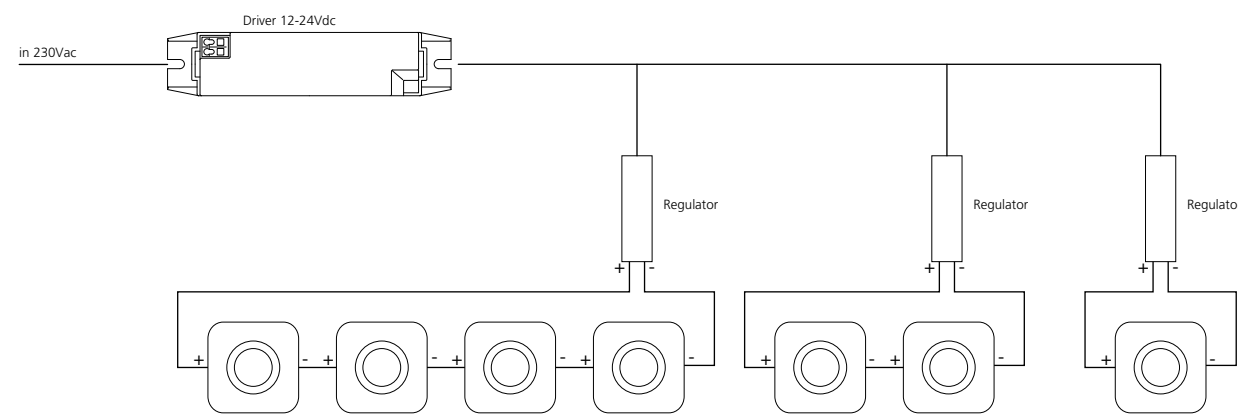


↪ RGB CONTROL SYSTEMS

WIRING DIAGRAM FOR RGB LED SYSTEMS RGB

Artemide Drivers and controller allow a flexible and fully programmable dynamic lighting System. The LED Drivers are compatible with the USITT DMX 512 Standard which is a simple, reliable and economic light management and can be easily interfaced with modern domotic Systems. The DMX data lines are electrically opto-isolated to ensure the maximal reliability and to avoid disturbances.

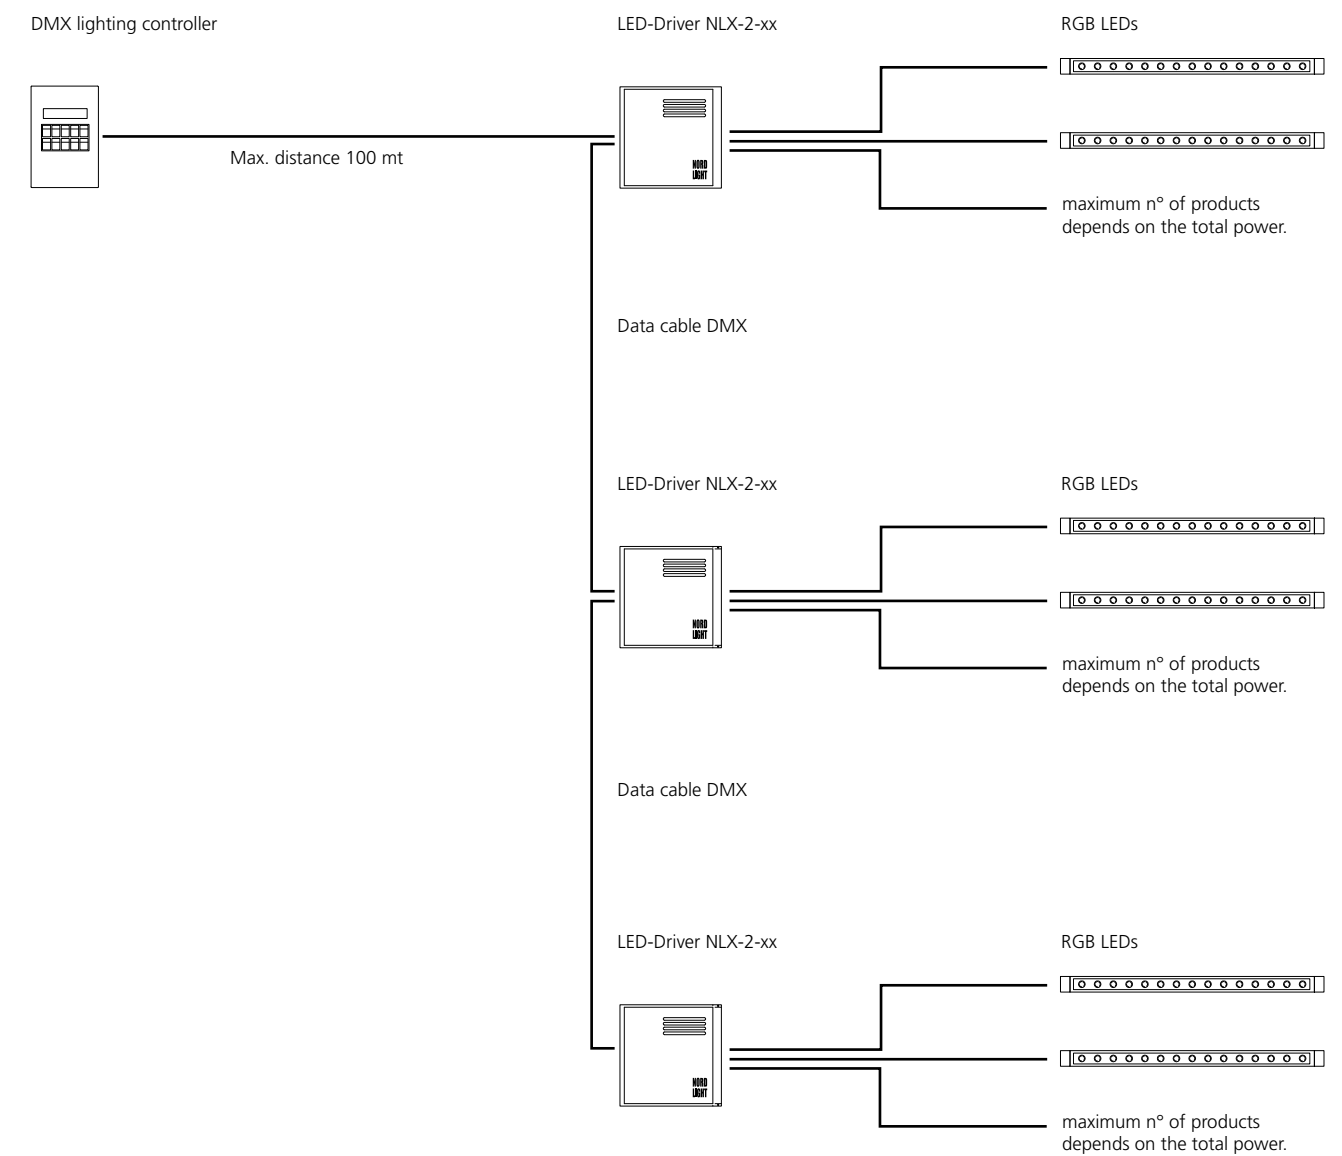


CONTROLLERS DMX



NL19030 DSC30 USB interface - DMX stand alone							
Data In	Data Out	DMX ch.	Scenes	Driver	Data cable	L x W x H (mm)	Weight (kg)
USB	DMX	2x512 stand alone	255	5-5,5Vdc - 300mA excl.	DMX 2m/XLR + USB	80x40x90	0,7
USB	DMX	2x512 live	255	5-5,5Vdc - 300mA excl.	DMX 2m/XLR + USB	80x40x90	0,7

NL19031 5Vdc 300mA plug-in power supply Mini-USB
NL7833 50cm cable with HE10 connector for keyboard (optional)

Standard USB-DMX "Stand Alone" interface (512 channels, real-time clock, Local use), software, USB cable. Live mode with a computer; Stand Alone mode. Scenes can be triggered in sequential or using external push-buttons to trigger for instance 8 Scenes. Upon request: connection to external keyboard or to domotics Systems. Needs an external power supply for the Stand Alone mode. Upon request: connection to external keyboard or to domotics Systems.



NL19081 DSC60 USB/Ethernet Interface							
Data In	Data Out	DMX ch.	Scenes	Driver	Data cable	L x W x H (mm)	Weight (kg)
Ethernet	DMX	2x512	250	5-5,5Vdc - 300mA excl.	DMX 2m/XLR + Ethernet	80x40x90	0,7

NL19031 5Vdc 300mA plug-in power supply Mini-USB

Standard USB and Ethernet DMX "Stand Alone" Interface (2x512 channels), with software, USB cable, 3 DMX 512 universes in live mode with a computer (not included); 2 DMX512 universes in stand-alone mode. Micro sd-card memory for stand-alone use, 8 dry contact trigger ports via HE10 connector (upon request). Clock & calendar function. Stand-alone mode with 5 areas and 250 scenes. WIFI remote control option with smart phone/tablet (IOS, ANDROID, Windows, Linux) to trigger scene. Simply connect to your wireless local network, the WIFI remote control app will automatically find the interface and allow you to control it. A second application, compatible with any IOS and ANDROID smart phones or tablets, allows you to easily create or change the lighting surroundings in each area. In just a few steps, you'll be able to take control of all your DMX fixtures in live, or Stand Alone mode. The simple application can be used by just about everyone in any situation. The interface needs an external power supply for the Stand Alone mode.



NL19080 DSC70 USB Glass Touch Sensitive Control Keypad							
Data In	Data Out	DMX ch.	Scenes	Driver	Data cable	L x W x H (mm)	Weight (kg)
USB	DMX	512	99	5-12Vdc - 300mA excl.	RJ45 + USB	110x86x10	0,2

NL19083 5Vdc 300mA plug-in power supply

Thanks to the "All-in-One" technology, the DSC70 includes a high-tech keypad, stand-alone memory storage and a powerful DMX512 lighting software package. It offers the best solution for projects requiring a large amount of scenes along with an uncluttered and intuitive interface. The computer programmable, flat wall mounted lighting controller is ideal for LED, RGB & DMX lighting and capable of playing up to 99 scenes, each of which can be modified by touching the mode button to change the dimmer and color. The LED display makes it easy to tell which scene number is playing. The panel allows it to be mounted on any single gang wall socket around the world. Large memory capacity, 4 touch sensitive buttons, glass wall-mounted DMX controller. Micro-USB for programming. For PC, Mac & Tablet with USB. 32bit RM technology, software included. Stand alone operation. Ready to use (pre-loaded). The interface needs an external power supply which can be placed in the gang wall socket.

DRIVERS LED



LED Driver NLX IP40

Code	Description	Contr.	P (W)	V _{in}	V _{out} (Vdc)	CH	L x W x H (mm)	Weight (kg)
NL75190	NLX 2-75	DMX	75	100-240 Vac	24	2xRGB	270x200x80	1,4
NL19084	NLX 1-75	DMX/RDM	72/144	12-24 Vdc	12-24	1xRGB(W)	153x50x23	0,2
NL12150	NLX 1-100	DMX/DALI	95	120-250 Vac	12/24	2xRGB(W)	388x42x30	0,7



LED Driver NLX IP66

Code	Description	Contr.	P (W)	V _{in}	V _{out} (Vdc)	CH	L x W x H (mm)	Weight (kg)
DV1046	NLX 1-100IP	DMX/DALI	95	120-250	24	1xRGB	340x103x61	1,7


PWM Driver for LED units with pre-installed colour-programmes for an independent stand-alone Mode or operation through the DMX512 protocol. The DMX interface allows lighting systems of any size and can be easily integrated with domotic Systems.

Max distance between LED driver and RGB products.

Fixture	Max distance from driver
Spike RGB	20m
Spike IP65 RGB	20m
LineaLed RGB	20m
Dedalo RGB	20m

PWM Driver for LED units with pre-installed colour-programmes for an independent stand-alone Mode or operation through the DMX512 protocol. The DMX interface allows lighting systems of any size and can be easily integrated with domotic Systems.

EXAMPLE OF WI-FI CONTROL OF THE RGB SYSTEM

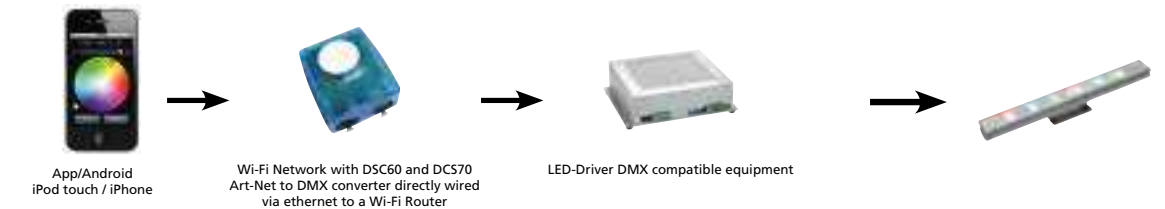

SPECIAL DEVICES FOR PROJECTS



Code	Description	V IN	DMX Channels	IP	Dimensions
NL78070	Splitter DMX 1 in to 8 out				
DV1044	DMX/RDM Splitter - 4CH DIN-RAIL	12-24-48Vdc	4 x 512	10	79x92x62mm DIN RAIL 4mod.
DV1045	PSU 15W 24Vdc 0.63A (for DV1045)	85-264Vac			17,5x90x54,5mm DIN RAIL 1mod.



This is a 4 way DMX splitter, features one DMX/RDM input/THRU and 4 DMX/RDM outputs. This unit takes the incoming DMX signal and splits the signal into 4 separate output channels. Each output channel and the input channel are completely electronically isolated from each other, all channels have independent line drivers to boost the DMX signal. In addition, the timing of outputs are regenerated in digital mode from a 32bit ARM processor.

The RDM return messages are amplified and redistributed on the other outputs. They can be redistributed on other splitters up to a maximum of 3 different splitter.

LIGHTING MANAGEMENT

Dimmer DALI

Code	Description	Signal	V (Vdc)	I (A)	P (W)	L (mm)	W (mm)	H (mm)	
NL19090	Dimmer DALI	DALI, Push	10-24	5	120 max	172	42	20	IP20
NL19096	Dimmer Master	DALI, 1-10V; 0-10; Push	12-24	12	288 max	156	52	26	IP20
NL19097	Dimmer SLAVE + NL19096	DALI, 1-10V; 0-10; Push	12-24	12	288 max	156	52	26	IP20

↳ CODES INDEX

Table with 4 columns of codes ranging from 0112010A to 121200A. Includes codes like 0112010A, 0116010A, 0117010A, etc.

↳ CODES INDEX

Table with 4 columns of codes ranging from AF46104 to AN25304. Includes codes like AF46104, AF46105, AF46201, etc.

CODES INDEX

Table with 5 columns of alphanumeric codes ranging from AQ26101 to AQ37004.

CODES INDEX

Table with 5 columns of alphanumeric codes ranging from AT10500APP to BH26505.

⇐ CODES INDEX

Table with 4 columns: Code, Value, Code, Value. Contains a comprehensive list of codes and their corresponding values, such as DG12700F09 135 L172021 197 M081737 91 M025160 423 M249231 665 M256425 236 M278825 232 M2990 443 M325200 239 M330800 233 NL1907280K004 283 NL4203534Y004 231 T40001ELPTW00 824 T4101ELPTW00 833 T42016NSPW00 811 T4507C30 704.

⇐ CODES INDEX

Table with 4 columns: Code, Value, Code, Value. Contains a comprehensive list of codes and their corresponding values, such as M325200 239 M330800 233 NL1907280K004 283 NL4203534Y004 231 T40001ELPTW00 824 T4101ELPTW00 833 T42016NSPW00 811 T4507C30 704.

Headquarters

Artemide S.p.A.
Via Bergamo, 18
20010 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1 - 93526.1
Numero verde 800 834 093
(from Italy only)
info@artemide.com
www.artemide.com

Communication and Marketing Department

Via Canova, 34
20145 Milan (MI), Italy
Tel. +39 02.349611
communication@artemide.com
www.artemide.com

Italy

Head office:
Artemide Italia s.r.l.
Via Bergamo 18
20010 Pregnana Milanese (MI)
Tel. +39 02 93518 1
Tel. +39 02 93526 1
Numero Verde 800 834 093
artemideitalia@artemide.com

Milano Monforte Showroom:
Corso Monforte 19, 20122 Milano
Tel. +39 02 76006930
Tel. +39 02 794039
monforte@artemide.com

Milano Manzoni Showroom:
Via Manzoni 12, 20121 Milano
Tel. +39 02 778712201
Tel. +39 02 778712202
manzoni@artemide.com

Milano Danese Showroom:
Piazza San Nazaro in Brolo 15,
20122 Milano
Tel. +39 02 58304150
showroomdanese@artemide.com

Roma Margutta Showroom:
Via Margutta 107, 00187 Roma
Tel. +39 06 36001802
Tel. +39 06 36001808
margutta@artemide.com

Treviso Showroom:
Via Campana 47
ang. Piazza San Francesco,
31100 Treviso
Tel. +39 0422 410115
treviso@artemide.com

Milano Lighting Consultancy Center:
Via Manzoni 12, 20121 Milano
Tel. +39 02 778712201
Tel. +39 02 778712202
manzonilighting@artemide.com

Roma Lighting Consultancy Center:
Via Pisanelli 1, 00196 Roma
Tel. +39 06 94537550
pisanelli@artemide.com

Europe

Albania
Principal dealer:
A Bi Esse
Rr. 28 Nentori Nr. 73
1051 Kashar, Tirana
Tel. +355 42 407290
Tel. +355 69 4065800
info@abiessae.al

Austria
Head office and Showroom:
Artemide Handelsgesellschaft m.b.H.
Gonzagagasse 1 / Morzinplatz
1010 Wien
Tel. +43 (0)1 803 21 82
info@artemide.at

Azerbaijan
Principal dealer:
Studio 151
Port Baku Residence
Uzeyir Hacıbəyov str. 151,
1001 Baku
Tel. +994 12 599 2040/41
studio151@office.az

Belarus
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

Denmark
Head Office & Showroom:
Artemide Scandinavia A/S
Skudehavnsvej 5
DK-2150 Copenhagen
Tel. +45 7020 1700
info@artemide.dk

Estonia
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

Brussels showroom and Lighting Consultancy Center:
Chaussée de Waterloo 410
1050 Brussels - Belgium
Tel. +32 02 534 03 67
artemide.brussels@skynet.be

Amsterdam showroom and Lighting Consultancy Center:
Hobbemakade 89,
1071 XR Amsterdam Holland
Tel. +31 20 4702668
artemide.amsterdam@artemide.nl

Bosnia and Herzegovina
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

Bulgaria
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

Czech Republic
Principal dealer:
Selene spol. s.r.o.
Neumannova 161, 3
83 01 Prachatice
Tel. +420 388 310 326
info@selene.cz

Showroom:
Myslikova 9
Praha 1 110 00

Cyprus
Sales Offices:
Artemide Hellas S.A.
34, Solonos St.
106 73 Athens
Tel. +30 210 3646770
info@artemide.gr

Croatia
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

North Greece Branch Offices & Showroom:
92, G. Papandreou St.
546 65 Thessaloniki
Tel. +30 2310 403934
thessaloniki@artemide.gr

Hungary
Principal dealer and Showroom:
Rio Lámpastúdió Kft.
Ráday u. 45.
H-1092 Budapest
Tel. +36 1 323 1637
rio@lampastudio.hu

Ireland
Sales Offices:
Artemide GB Ltd.
Tel. +44 20 7631 5200
info@artemide.co.uk

Kosovo
Principal dealer:
Light House Studio
Veternik nn, 1000 Prishtine
Tel. +386 43 733 333
info@lighthouse-kos.com

Latvia
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

Lithuania
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

Principal dealer:
Delight LT UAB
K.Kalinausko st. 20,
03107 Vilnius
Tel. +370 5 2104218
info@delight.lt

Germany
Head office and Showroom:
Artemide Deutschland GmbH & Co. KG
Hans-Böckler-Straße 2
58730 Fröndenberg
Tel. +49 (0)2373 975 0
info@artemide.de

Artemide München Lighting Consultancy Center:
Luise-Ullrich-Straße 20,
80636 München
Tel. +49 (0) 89 70065198
muenchen@artemide.de

Frankfurt Showroom:
Baseler Straße 10
60329, Frankfurt
Tel. +49 (0)69 33 99 569 0
frankfurt@artemide.de

Greece
Head office:
Artemide Hellas S.A.
34, Solonos St.
106 73 Athens
Tel. +30 210 3646770
info@artemide.gr

North Greece Branch Offices & Showroom:
92, G. Papandreou St.
546 65 Thessaloniki
Tel. +30 2310 403934
thessaloniki@artemide.gr

Hungary
Principal dealer and Showroom:
Rio Lámpastúdió Kft.
Ráday u. 45.
H-1092 Budapest
Tel. +36 1 323 1637
rio@lampastudio.hu

Ireland
Sales Offices:
Artemide GB Ltd.
Tel. +44 20 7631 5200
info@artemide.co.uk

Kosovo
Principal dealer:
Light House Studio
Veternik nn, 1000 Prishtine
Tel. +386 43 733 333
info@lighthouse-kos.com

Latvia
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

Lithuania
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

Principal dealer:
Delight LT UAB
K.Kalinausko st. 20,
03107 Vilnius
Tel. +370 5 2104218
info@delight.lt

Macedonia
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

Malta
Head Office:
Artemide Italia S.r.l.
Tel. +39 02 93518 1
Tel. +39 02 93526 1
artemideitalia@artemide.com

Moldova
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

Montenegro
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

Norway
Distributor:
Limelight AS
Sandakerveien 24C, inng. D9
No-0473 Oslo
Tel. +47 4000 1589
info@limelight.no

Poland
Head Office:
Artemide Dystrybucja Polska
sp. z o.o.
Ul. Saperow 4, 82-300 Elblag
Tel. +48 55 236 11 85
info@liralighting.pl

Showroom:
Ul. Rydygiera 8, Warsaw

Portugal
Principal Dealer:
Fluxograma S.A.
Rua da Garagem nº3
2794-021 Carnaxide
Tel. +351 214 257 500
fluxograma@fluxograma.com

Romania
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

Russia
Head office:
Artemide Agency OOO
Bolshoj Zlatoustinskij Pereulok,
bldg 1/1, office 103
101000 Moscow
Tel. +7 495 984 2238
info@artemide-agency.ru

Serbia
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

Slovakia
Principal dealer:
Akl s.r.o.
Vietnamská 45
82104 Bratislava
Tel. +421 907 767 008
info@aklsro.sk

Slovenia
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

Spain
Sales Office, Showroom and Lighting Consultancy Center:
Artemide S.A.
C/Vico, 12-18 bajos
08021 Barcelona
Tel. +34 093 478 3911
artemide@artemide.es

Head Office:
Via Bergamo, 18
20010 Pregnana Milanese (MI)
Tel. +39 02 935181
espana@artemide.com

Sweden
Head office:
Artemide Scandinavia A/S
Skudehavnsvej 5
DK-2150 Copenhagen
Tel. +45 7020 1700
info@artemide.dk

Switzerland
Artemide Lighting Consultancy Center:
Albulastraße 60
8048 Zürich
Tel. +41 (0)43/ 268 27 27
info@artemide.ch

Turkey
Principal dealer:
Oztas Aydinlatma
Yskender Cad., 24
34420 Istanbul - Sishane
Tel. +90 212 237 52 36
info@oztasaydinlatma.com

Ukraine
Sales Offices:
Artemide HUB
Borislava Pekica 14
11000 - Belgrade
Tel. +39 0331 1818703 (Italy)
Tel. +381 11 4041899 (Serbia)
mail@artemidehub.com

United Kingdom
Head office, Showroom and Lighting Consultancy Center:
Artemide GB Ltd.
106 Great Russell Street
London WC1B 3NB
Tel. +44 20 7631 5200
info@artemide.co.uk

America

Canada

Head office:

Artemide Ltée/Ltd.
11105, rue Renaude Lapointe
Montréal, Québec H1J 2T4
Tel. +1 514 323 6537
Toll free +1 888 777 2783
infocanada@artemide.net
www.artemide.net

Flagship Store:

Toronto, ON
5 Mill Street
Toronto, Ontario M5A 3R6
Tel. +1 416 628 6718
torontoshowroom@artemide.net

Sales offices:

Toronto, ON
Tel. +1 416 628 6718
torontoshowroom@artemide.net

U.S.A.

Headquarters:

Artemide, Inc.
250 Karin Lane
Hicksville, NY 11801
Tel. +1 631 694 9292
Toll free +1 877 Art 9111
infousa@artemide.net
www.artemide.net

Flagship stores:

Chicago, IL
351 W Hubbard street
Chicago, IL 60654
Tel. +1 312 475 0100
chicagoshowroom@artemide.net

New York, NY

46 Greene Street
New York, NY 10013
Tel. +1 212 925 1588
newyorkshowroom@artemide.net

Sales offices:

Chicago, IL
Tel. +1 312 475 0100
chicagoshowroom@artemide.net

Miami, FL

Tel. +1 305 444 5800
miami@artemide.net

New York, NY

Tel. +1 212 925 1588
newyorkshowroom@artemide.net

San Francisco, CA

Tel. +1 415-393-9955
sanfrancisco@artemide.net

For information regarding distributors and points of sale for Central & South American countries not listed, please email:
infolatam@artemide.net

Central & South America

Argentina

Distributor:
Head Office & Showroom:
Edimetra S.A.
Paraguay 792 3° Piso
1057 Buenos Aires
Tel. +54 11 4312-2590
info@artemide.com.ar

Bolivia

Showroom:
Studio Tessuto
Local 103, Urubó Business Center
Santa Cruz, Bolivia
Tel. +591 3 321 6313
info@studiotessuto.com

Brasil

Distributor:
Head Office & Showroom:
Cynthron
Rua do Rócio, 423, 18° andar,
Vila Olimpia
04552 000, São Paulo
Tel. +55 11 3846 8100
cynthron@cynthron.com.br

Chile

Showroom:
Interdesign
Isidora Goyenechea 3200
Las Condes, Santiago
Tel. +56 2 22314114
info@interdesign.cl

Colombia

Showroom:
Milk Luminance
Cra 43-A #11B-95
Medellin
Tel. +57-(4) 448 5583
Tel. +57 31130 15090
info@milk.com.co
www.milk.com.co

Costa Rica

Showroom:
Alumimundo, S.A
Apt. 1013 Diagonal Oficinas
Centrales de Pizza HutPavas,
San Jose
Costa Rica 1013-1000 S.J.
Tel. +506 4101-8600
www.alumimundo.com

Dominican Republic

Distributor:
Spazio di Casa
Ave. Max Henriquez Ureña, N°17
Ensanche Naco, Santo Domingo
Tel. +1 809 368 2001
info@spaziodicasa.com

Ecuador

Showroom:
Integral Iluminacion Km. 2.5
Via Samborondon Tornero 3 Mz.
Solar 5, Guayaquil-Ecuador
Tel. +593 4 6000 622
info@integral.com.ec
www.integral.com.ec

Guatemala

Showroom:

D'illuminazione Diagonal 6 12-42
Zona 10 Edificio Design Center
Oficina #220
Guatemala City, Guatemala
Tel. +502-2458-4404
www.dilluminazione.com

Nicaragua

Showroom:

Michel Pierson
Edificio CAR 3, 2da planta
Planes de Altamira
Managua, Nicaragua
Tel. +505 2299 3936
Tel. +505 2299 3937
www.michelpierson.com.ni

Mexico

Distributor:
Head Office, Showroom & Customer Service:
Scultura Luminosa
Suderman #246,
Col. Chapultepec Morales
Mexico D.F. 11570
Tel. +52 55 5250 2661
info@artemide.mx

Panama

Showrooms:
Idea Design Center
Av. Samuel Lewis con Calle 59
Kenex plaza, Obarrio, Panama City
Rep. de Panama
Tel. +507 216 90 67
info@ideapanama.com

Lumicentro
Ave. Justo Arosemena,
Esquina Calle 33
Ave. Ecuador. Edificio Lumicentro
Apartado 0816-01064
Panama City, Rep. de Panama
Tel. +507 300 2400
info@lumicentro.com

Peru

Showroom:

Hilite
Av. Los Conquistadores 575
San Isidro, Perú
Tel. +511 422 9123
ventas@hiliteperu.com

Puerto Rico

Distributor:
San Juan Lighting
1519 Parana Street San Juan
Puerto Rico 00926-2814
Tel. +1 (787) 767-7286
slj@sanjuanlighting.com
www.sanjuanlighting.com

Uruguay

Showroom:

TRIOS Lighting
Luis de la Torre 593b
Montevideo, Uruguay
Tel. +598 2711 9260
info@trioslighting.com

Venezuela

Showroom:

Iluminación HELIOS
Av. San Felipe, Centro Coinasa,
Mezzanina La Castellana, Caracas
1060, Venezuela
Tel. +58 212 265 58 83
informacion@helios.com.ve

Asia / Oceania

Australia

Head office and Showroom:

Adelaide
Ornare Imports Pty. Ltd.
28 Fullarton Rd, Norwood SA 5067
Tel. +61 08 8362 3029
info@artemide.com.au
www.artemide.com

Office and Showrooms: Sydney

504-508 Cleveland St.
Surry Hills NSW 2010
Tel. +61 02 9699 8472
sydney@artemide.com.au

Melbourne

46-48 Rathdowne St.
Carlton VIC 3053
Tel. +61 03 9349 3310
melbourne@artemide.com.au

China

Head office:

Artemide Trading
(Shanghai) Co., Ltd.
Room 1907, 19/F, New Hualian
Mansion, East Wing,
755 Middle Huai
Hai Road, Huang Pu District,
Shanghai
Tel. +86 21 6448 3650
info@artemide.cn

Affiliated Showrooms:

Beijing

Unit 1-B-20, International Furniture,
Hall 1, Easy Home, No. 65 North 4th
Ring Road, Chaoyang District,
Beijing
Tel. +86 010 8463 6098
jinhongshijia@126.com

A81112, 1st Floor, Red Star Macalline
N°.193 East 4th Ring Road
Chaoyang District, Beijing
Tel. +86 010 8511 8718

Hong Kong and Macao

Head Office:

Artemide Ltd.
Unit 1303, 13/F, Ruttonjee House
Ruttonjee Centre, 11 Duddell Street
Central, Hong Kong
Tel. +852 2523 0050
info@artemide.com.hk

Showroom:

Shop 102-103, Ruttonjee Centre,
11 Duddell Street,
Central, Hong Kong
Tel. +852 2523 0333

India

Head office:

Artemide Lighting India Pvt. Ltd.
Unit N°. 5, 2nd floor, Raghuvanshi
Mills Compound, Senapati Bapat
Marg, Lower Parel, Mumbai
400013, Maharashtra
Tel. +91 22 61774800
Tel. +91 9953554435
info@artemide.in
anindya@artemide.in

Region: West

Showroom and Registered Office:

Unit N°. 5, 2nd floor, Raghuvanshi
Mills Compound, Senapati Bapat
Marg, Lower Parel, Mumbai
400013, Maharashtra
Tel. +91 9920628841
Tel. +91 22 61774800
pramod.tambe@artemide.in
anindya@artemide.in
arun.khattri@artemide.in

Region: South

Tel. +91 9312829394
Tel. +91 9538998132
arun.khattri@artemide.in
ravi@artemide.in

Region: Delhi NCR

Showroom:

N°.5, Retreat Farms, Khullar Farms,
Ashok Lane, Mandi Road, Mehrauli
New Delhi - 110030
Tel. +91 9811163966
Tel. +91 9810945899
Tel. +91 8447147522
ashwani.gupta@artemide.in
dheeraj.kapoor@artemide.in
sumit@artemide.in

Region: North

Tel. +91 9811163966
Tel. +91 9810945899
ashwani.gupta@artemide.in
dheeraj.kapoor@artemide.in

Region: East

Tel. +91 9312829394
Tel. +91 9811163966
arun.khattri@artemide.in
ashwani.gupta@artemide.in

Indonesia

Sales Offices:

Artemide Ltd.
Tel. +852 2523 0050
info@artemide.com.hk

Japan

Head office:

Artemide Japan K.K.
#2013 1-41-7 Tomigaya Shibuya-ku
151-0063 Tokyo Japan
Tel. +81 3 5738 7410
info@artemide.co.jp

Malaysia

Distributor:

Lightcraft (KL) Sdn Bhd
145-5&6, Jalan Sungai Besi,
57100 Kuala Lumpur, Malaysia
Tel. +603 9222 4219
info@lightcraft.com.my

New Zealand

Distributor:

ECC Lighting
39 Nugent Street, Auckland
Tel. +64 9 379 9680
info@ecc.co.nz

61 Thorndon Quay
Tel. +64 4 473 3456
Wellington
info@ecc.co.nz

Philippines

Sales Offices:

Artemide Ltd.
Tel. +852 2523 0050
info@artemide.com.hk

Singapore

Distributor:

Million Lighting Co Pte Ltd
203 Kallang Bahru
Million Building, Singapore 339340
Tel. +65 6743 2033
enquiry@millionlighting.com
showrooms@millionlighting.com
www.millionlighting.com

South Korea

Distributor:

Duomo & Co.
735, Nonhyun-ro, Gangnam-gu
Seoul, Korea
Tel. +82 2 516 7083
info@duomokorea.com
www.duomokorea.com

Thailand

Sales Offices:

Artemide Ltd.
Tel. +852 2523 0050
info@artemide.com.hk

Taiwan

Distributor:

Mithus Co. Ltd.
4F, No. 236, Liancheng Rd.,
Zhonghe Dist. New Taipei City
23553, Taiwan
Tel. +886 2 2221 1668
allen.chang@bravocasa.com.tw
www.mithus.tw

Vietnam

Distributor:

Cao Tran Co., Ltd
23 Tran Phu, P4-Q.5
Ho Chi Minh City, Vietnam
Tel. +84 8 3833 3334
caotran@cara.com.vn
www.cara.com.vn

Middle East & Africa

Head office & Showroom:

Artemide Middle-East
Dubai Design District (D3)
Building 6 - 3rd Floor - Offices A307
Dubai, UAE
Tel. +971 4 425 0213
info@artemide.ae

For information regarding distributors and points of sale for Middle East & Africa countries, please email:
info@artemide.ae

© Artemide S.p.A.

Art direction & editing
Studio de Bevilacqua
Carlotta de Bevilacqua
MISCENT

with
Ippolita Ciampini
Diego Martinelli
Alessandra De Vecchi

Image editing
and 3D visualization
Giona Andreani
Simone Fantoni
Alessandro Peccati

Still lifes
Jean Pierre Maurer
Manuel Maurer
Gio Pini
Federico Villa
Miro Zagnoli
Michele Nastasi

Prepress
Actualtype s.r.l.

Press
Rotolito Lombarda



Compasso D'oro
1967-1989-1994-2004 -2018



Winner European
Design Prize '97



ISO 9001:2008



ISO 14001:2004



BIAN CARBONE



**CTF STAGE2
ISO 17025**

Artemide S.p.A.
reserves the right to change, at any time
and without prior warning, the technical
specifications of any product illustrated
in this catalogue.