

06/2022

# MODULAR



## ENCYCLOPEDIA SECRETO

Discover the inner secrets of Modular Lighting Instruments. Who's keeping secrets, and how? What are they? *Not for the faint hearted.*



**MODULAR**  
LIGHTING —  
INSTRUMENTS



# Step into the light

Enter Secreto. Play with light and  
darkness. Share or be observed.

Which side will you choose?





## An eye for detail

At Modular Lighting Instruments, we pay obsessive attention to detail. High-quality textures with anodized aluminum and powder finishes. No wires and screws to be seen. We make our own parts, to customize our designs as we want them. We love to express our extreme passion for beauty and this time, we're sharing our enthusiasm in a workbook for you. Because we know, you love details too.

Take your time to flip through your new compact workbook. We made it small and easy to browse, so that it'll serve as your go-to reference book for architectural luminaires. All our products are listed with brief descriptions, beautiful images, as well as with all product specs and article numbers. Look, it's all in there.





## Telling secrets

We've been known to provoke. We express ourselves with controversial themes to start conversations. Today, we're taking our distinguishing narrative forward with *Secreto*.

Modular Lighting Instruments is bringing two worlds to light. One in which an identity is shown, and one in which another is revealed. Much like many of our luminaires, we like to play in the dark.



## Duality exposed

In *Secreto*, we uncover the secret world of several characters and their double lives, by following the life of a voyeur. Herself, confronted by the duality of her own actions. Solitary and remote by day, reaching out into the multiple lives she observes by night. Just like light, she peeks into dark corners and spaces where secrets reside, and brings stories to life.







---

# A world of hidden stories

Secreto plays with the contemporary theme of online sharing, and exposes its counterparts, privacy and secrecy. All around us, people are publishing their lives. But what we see, isn't always what really is. Secreto peeks into our other lives, the ones with secrets.



*Want to know a secret?*

*Visit our campaign page at: [supermodular.com/secreto](http://supermodular.com/secreto)*

---



# NOVELTIES

Inspiring new thoughts and ideas that break convention. This is why we focus on high-end design and extreme modularity. We want to offer beauty, functionality, technology, in one. One daring lighting instrument with endless compositions to play with. We're not afraid of creating extraordinary designs with different choices. Because freedom of choice is what gives extraordinary people new ways of using our designs differently.



397 — MINUDE45-ADJUSTABLE JACK with MODUPOINT LED DEEP RECESSED



209 — PLACEBO UP with GLASS TUBE & PLACEBO DOULI  
453 — PLACEBO UP with GLASS TUBE & PLACEBO DOULI - TRACK 48V




333 — TETRIX CONE




**643** — SLD35 - ANO BRONZE



**647** — SLD50 NAKED - ANO SILVER BRONZE

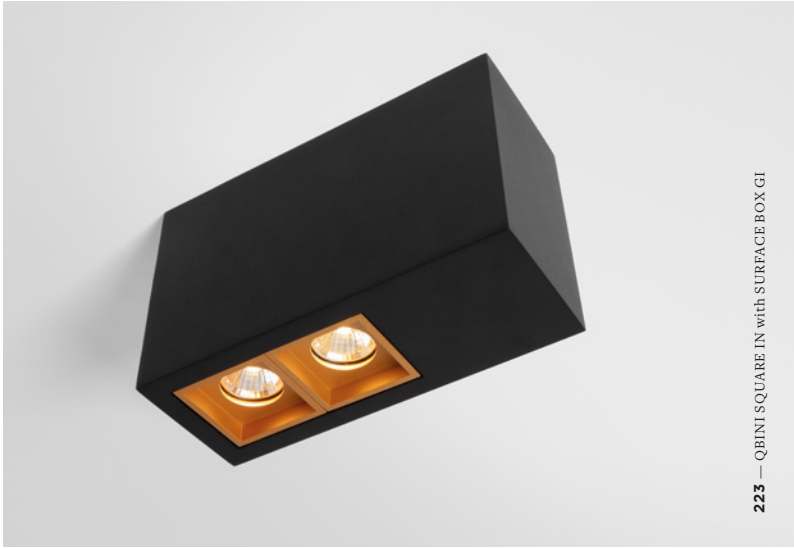

223 — QBINI SQUARE IN with SURFACE BOX GI




397 — MINUDE 45 ADJUSTABLE JACK with CEILING BASE



39 — EXTRUDED



417 — MARBUL TRACK 48V



535 — HOLLOW




385 — MARBULITO JACK with  
MODUPOINT LED




453 — PLACEBO DOWN with GLASS BALL DOWN - TRACK 48V



85 — KOMPAS & HOOLAHOOP / TULIP BLOOM & BLOSSOM FOR KOMPAS

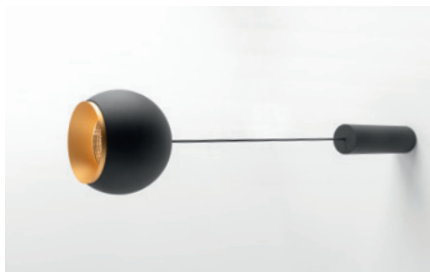

301 — SMART BALL SUSPENSION




485 — REKTOR TRACK 230V




477 — MARBUL TRACK 230V



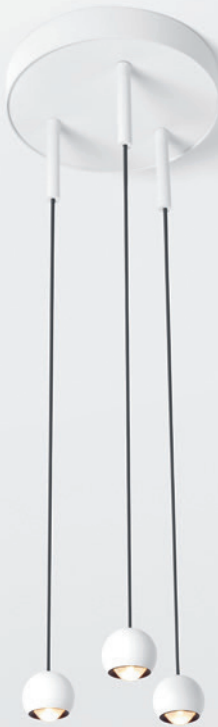

385 — MARBULITO JACK SUSPENSION with CEILING BASE

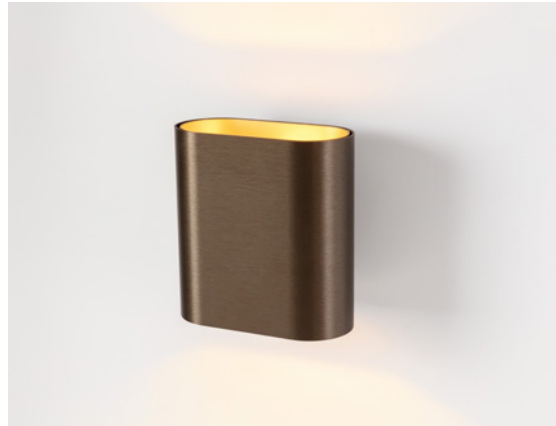


529 — DUELL WALL - BRONZE - CHAMPAGNE





391 — MEDARD 42-JACK with MODUPOINT LED DEEP RECESSED

249 — SHELLBY with ANO CHAMPAGNE SKIN

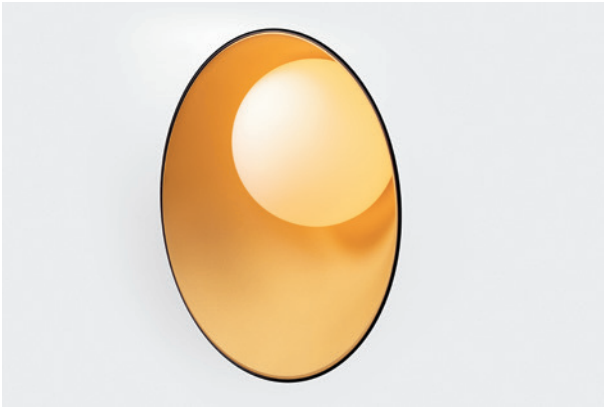

571 — SULFER UPLIGHT



01	CEILING
02	JACK
03	TRACK
04	WALL
05	EXTERIOR
06	PROFILES
07	GOODIES

01





# CEILING

# 01

## *surface*



**BOLSTER**

27



**DUELL**

34



**FLAT MOON**

50



**FLAT MOON  
ECLIPS**

58




**IZAR**

67




**LOTIS TUBED**

134



**MARBUL**

138




**MÉDARD**

154



**MÉDARD  
STRETCHED**

155



**NOMAD**

200




**NOMAD  
MINIMAL**

207



**QBINI  
SURFACE BOX<sup>(2)</sup>**

197



**REKTOR**

238



**SEMIH**

246



**SMART  
SURFACE BOX<sup>(1)</sup>**

306



**SMART SURFACE  
TUBED<sup>(1)</sup>**


312

# CEILING & DESK


*desk*



**STOVE**  
33<sup>1</sup>



**UNITED (ASY)**  
366



**MÉDARD**  
161



**VAEDER**  
37<sup>2</sup>


<sup>(1)</sup> to be combined with Smart Cake / Smart Kup / Smart Lotis  
<sup>(2)</sup> to be combined with 1x or 2x Qbini units

# 01

## *suspended*



**EXTRUDED**  
41



**FLAT MOON**  
50




**FLAT MOON  
ECLIPS**  
58



**IZAR**  
67



**KOMPAS &  
HOOLAHOOP**  
87




**LOTIS TUBED**  
99



**MARBUL**  
142




**MINUDE  
SUSPENSION**  
167



**PLACEBO**  
211




**SMART BALL <sup>(1)</sup>**  
302




**SMART TUBED  
SUSPENSION <sup>(1)</sup>**  
316



**TULIP**  
361



**UNITED**  
366



**VAEDER**  
372

<sup>(1)</sup> to be combined with Smart Cake / Smart Kup / Smart Lotis



# CEILING


## *recessed square*



**LOTIS SQUARE**  
128



**MARCEL**  
148




**MINI MULTIPLE**  
170



**MINI MULTIPLE TRIMLESS**  
180



**MULTIPLE**  
190



**MULTIPLE TRIMLESS**  
194



**QBINI**  
224




**REKTOR**  
240




**SLIDE**  
257

# 01

## *recessed round*




**BOLSTER**  
27



**CHAPEAU**  
29




**DOWNUT**  
31



**DUELL**  
35




**FLAT MOON**  
56



**FLAT MOON  
ECLIPS**  
60




**HOLLOW**  
64




**K**  
70



**LOTIS (ASY)**  
112



**MARBUL**  
140



**MÉDARD  
SEMI-RECESSED**  
152



**MÉDARD  
STRETCHED  
SEMI-RECESSED**  
156




**MÉDARD**  
158




**MINUDE  
SEMI-RECESSED**  
165




**PUPIL**  
221




**SCOTTY**  
243




**SHELLBY**  
251



**SMART CAKE**  
260




**SMART KUP**  
272




**SMART LOTIS (ASY)**  
282



**TETRIX**  
337



**THIMBLE**  
354





**WINK (ASY)**  
376



# BOLSTER

*Think roller skates and rock 'n roll. Bolster always brings a touch of 60s to a room. Choose the fully chromed version with mirror effect or tone things down with the matte black or white versions, also edged in chrome. Available as a foot, recessed and pendant variant. Highly adjustable (offering 359° rotation and 90° inclination), Bolster will create a festive atmosphere in the entire room.*

## Bolster foot GU10



1X QPAR 16-20 | GU10 | 50W



\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES



RESISTIVE DIMMABLE	
black struc	11051632

## Bolster recessed 155 for LED GU10 AR111





1X LED AR111 (NOT INCL.) | GU10 | 15W



black struc	11052232
-------------	----------

## Bolster recessed 155 AR111 GE



1X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111



black struc	11050432
-------------	----------




# CHAPEAU

**Design** — Couvreur-Devos


*We take our hats off to this luminaire. Chapeau looks like Robin Hood's hat on the inside, hence the name. Chapeau's big innovation lies in the tilting system. When fully folded up in its shell, Chapeau is a downlighter, and you can see a glimpse of the rim of its bulb holder. However, the bulb holder can also be tilted to produce a clever wash effect on the walls. Available for fully recessed mounting or for recessed mounting with a rim, which creates a beautiful contrast on the ceiling. Crowned by a Good Design Award.*

more info? [supermodular.com/en/chapeau](http://supermodular.com/en/chapeau)

## Chapeau 206 LED GE



OUTLET



1X LED ARRAY INCL. | 16.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

11949730 REFLECTOR LED Ø80 FLOOD

11949930 REFLECTOR LED Ø80 SPOT




	2700K / CRI90+
	25°
black struc	11900132


### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	940lm / 11W	1290lm / 16.2W

## Chapeau trimless 222 LED GE



OUTLET



1X LED ARRAY INCL. | 16.2W

! RECESSED RING INCLUDED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES

11949730 REFLECTOR LED Ø80 FLOOD

11949930 REFLECTOR LED Ø80 SPOT



	2700K / CRI90+
	25°
black struc	11970132

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	940lm / 11W	1290lm / 16.2W





# DOWNUT

*This tantalising recessed luminaire was probably inspired by an addiction to sweet treats. The perfect circle makes the lamp both playful and minimalist. Downut blends in perfectly with your architecture. The inner disc can easily be given the same colour or texture as the surrounding decor.*



## Downut flange 292 TL5C GI





1X T16-R 2GX13 22W



NOT DIMMABLE	
white struc	11030709
PUSHDIM	
white struc	11037709
DALI	
white struc	11036709

## Downut 350 TL5C GI



1X T16-R 2GX13 55W





NOT DIMMABLE	
white struc	11030109
1-10V	
white struc	11035109
DALI/PUSHDIM	
white struc	11036109

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11030330 CONBOX 440X400X120X438

## Downut flange 367 TL5C GI



1X T16-R 2GX13 55W



NOT DIMMABLE	
white struc	11030209
1-10V	
white struc	11035209
DALI/PUSHDIM	
white struc	11036209

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

11030330 CONBOX 440X400X120X438






# DUELL

SEE ALSO



WALL - P529




EXTERIOR - P584

*Duell has Modular L.I. written all over it. With its gentle curves, Duell gives every room a softer touch. The duo toned fixtures allow you to play with colour. For ceiling-mounted applications, we offer both a recessed version and a surface-mounted version. The recessed version has an attractive broad rim. Duell surface is available in a directional variant. The complete Duell range is available in LED and is perfect for accent lighting in a room.*

## Duell surface 1x LED GI



1X LED ARRAY INCL. 9.2W



CONNECTED > SEE GOODIES



NOT DIMMABLE	2700K / CRI90+	
	20°	40°
black struc - gold	11073032	11073232
white struc - champagne	11073009	11073209


1-10V/PUSHDIM	2700K / CRI90+	
	20°	40°
black struc - gold	11072932	11073132
white struc - champagne	11072909	11073109


**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
(white struc (champagne interior))

2700K / 20°	592lm / 11W
-------------	-------------

## Duell surface 1x GU10



1X QPAR 16 GU10 MAX. 50W





\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES



RESISTIVE DIMMABLE	
black struc - gold	11070732
white struc - champagne	11070709

## Duell recessed 1x LED GE



1X LED ARRAY INCL. | 9.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE



CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290930 GYPKIT 190X190 - R38X80

## Duell recessed 1x LED RG



1X LED ARRAY INCL. | 9.2W

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290930 GYPKIT 190X190 - R38X80



	2700K / CRI90+	
	20°	40°
white struc - champagne	-	11073739
white struc - gold	11073889	11073789

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc (champagne interior))

	350mA	500mA
2700K / 20°	460lm / 6.2W	592lm / 9.2W





NOT DIMMABLE	2700K / CRI90+	
	20°	40°
white struc - gold	-	11071689

1-10V/PUSHDIM	2700K / CRI90+	
	20°	
white struc - champagne	11071339	
white struc - gold	11071389	

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc (champagne interior))

2700K / 20°	592lm / 11W
-------------	-------------

## Duell recessed 1x MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256



12290930 GYPKIT 190X190 - R38X80



white struc - black

11070429

## Duell recessed 1x GU10



1X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290930 GYPKIT 190X190 - R38X80





RESISTIVE DIMMABLE

white struc - black

11070829

## Duell recessed 2x LED GE



2X LED ARRAY INCL | 9.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290930 GYPKIT 190X190 - R38X80



2700K / CRI90+

20°

40°

white struc - black

11074229

11074129

white struc - champagne

-

11074139

white struc - gold


11074289

11074189


### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc (champagne interior) - values per lamp)

	350mA	500mA
2700K / 20°	460lm / 6.2W	592lm / 9.2W

## Duell recessed 2x LED RG



2X LED ARRAY INCL. | 9.2W



v 30° (1 lamp only) ø 76 (x 2) | 156 h 85

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290930 GYPKIT 190X190 - R38X80




NOT DIMMABLE	2700K / CRI90+	
	20°	
white struc - black	11072229	
white struc - champagne	11072239	
white struc - gold	11072289	

1-10V/PUSHDIM	2700K / CRI90+	
	20°	40°
white struc - champagne	11072139	11072339
white struc - gold	-	11072389


### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc (champagne interior) - values per lamp)

2700K / 20° 592lm / 22W

## Duell recessed 2x MR16 GE



2X QR-CBC 51 | GU 5.3 | MAX. 50W



v 45° (1 lamp only) ø 76 (x 2) | 156 h 118



white struc - black	11070529
white struc - champagne	11070539
white struc - gold	11070589

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290930 GYPKIT 190X190 - R38X80



EXTRUDED - ANODIZED CHAMPAGNE/ANODIZED CHAMPAGNE



EXTRUDED - ANODIZED BLACK/ANODIZED SILVER BRONZE



EXTRUDED 600MM - ANODIZED BRONZE/ANODIZED BRONZE



EXTRUDED - WHITE MATT/WHITE MATT





# EXTRUDED

Design — Alain Gilles

more info? [supermodular.com/en/extruded](https://supermodular.com/en/extruded)

*Strong lines to bring vertical structure to your space, Extruded takes its own place. Its small looped hook at the tip peeks out subtly. The graceful lines that carve the outside of Extruded's tube never fail to capture your curiosity. All the way at the bottom, the conical lampshade offers a well-defined, flood beam of light, inviting intimate dialogue.*

## A story of light and lines

Watch Extruded tell a new story at every moment, thanks to the extrusions that catch light differently as the hours go by. The carefully designed ribs bring richness to the luminaire. Structure your space vertically with any of the 3 offered lengths or create a rhythm by playing with vertical lines. Or simply, let Extruded be. A graphic architectural element.

## Vividly present & future-proof

Make Extruded's presence in a room even more pleasing by adding warm dim technology. Lower the brightness, and the colour of the light becomes warmer. This results in an instant magical glow, and cosy feeling. Think about different installation options as well. Semi-recessed or surface mounted, with or without integrated LED gear, which comes with different dimming technologies, or Casambi-integrated smart lighting.

## Colours for statement

There's only one way to decide which of the several colours, or colour combinations will suit your space. You'll just have to discover yourself. Many rich anodised colours, matched in predefined colour schemes are making Extruded a tempting luminaire to play with. A thin, long, matte black power cable gives you freedom in deciding the height above your perfect, chosen spot for Extruded.



EXTRUDED - ANODIZED BLACK/ANODIZED BLACK



EXTRUDED - ANODIZED CHAMPAGNE/ANODIZED CHAMPAGNE





EXTRUDED - ANODIZED BRONZE/ANODIZED BLACK



EXTRUDED 300MM - ANODIZED BLACK/ANODIZED SILVER BRONZE

## Extruded 300mm LED GE



1X LED ARRAY INCL. | 8.5W

! SUSPENSION KIT NOT INCLUDED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW





	2700K	3000K
	40°	40°
ano black - ano black	13520020	13520120
ano black - ano bronze	13520021	13520121
ano black - ano champagne	13520023	13520123
ano black - ano silver bronze	13520025	13520125
ano bronze - ano black	13520026	13520126
ano bronze - ano bronze	13520027	13520127
ano champagne - ano black	13520031	13520131
ano champagne - ano champagne	13520034	13520134
white matt - white matt	13520036	13520136

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white matt - white matt)

	350mA	500mA
2700K / 40°	549lm / 5.7W	740lm / 8.5W
3000K / 40°	561lm / 5.7W	756lm / 8.5W

WARM DIM

## Extruded 300mm LED warm dim GE



1X LED ARRAY INCL. | 6W

! SUSPENSION KIT NOT INCLUDED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW



	1800K - 3000K
	45°
ano black - ano black	13520220
ano black - ano bronze	13520221
ano black - ano champagne	13520223
ano black - ano silver bronze	13520225
ano bronze - ano black	13520226
ano bronze - ano bronze	13520227
ano champagne - ano black	13520231
ano champagne - ano champagne	13520234
white matt - white matt	13520236

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white matt - white matt)

@3000K / 45°	418lm / 6W
--------------	------------

## INSTALLATION ACCESSORIES

	EXTRUDED SUSPENSION KIT 2M SEMI-RECESSED GE	EXTRUDED SUSPENSION KIT 2M SURFACE GE	EXTRUDED SUSPENSION KIT 2M SURFACE GI				
			TRAILING EDGE DIMMABLE WARM DIM	1-10V	DALI	CASAMBI	
black struc	13523032	13523132	13523232	13523632	13523332	13523432	13523532
white matt	13523036	13523136	13523236	13523636	13523336	13523436	13523536



EXTRUDED - ANODIZED BLACK/ANODIZED BRONZE





EXTRUDED 600MM - ANODIZED BLACK/ANODIZED CHAMPAGNE



EXTRUDED 600MM - ANODIZED CHAMPAGNE/ANODIZED BLACK

## Extruded 600mm LED GE



1X LED ARRAY INCL. 8.5W

! SUSPENSION KIT NOT INCLUDED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW




	2700K	3000K
	40°	40°
ano black - ano black	13520320	13520420
ano black - ano bronze	13520321	13520421
ano black - ano champagne	13520323	13520423
ano black - ano silver bronze	13520325	13520425
ano bronze - ano black	13520326	13520426
ano bronze - ano bronze	13520327	13520427
ano champagne - ano black	13520331	13520431
ano champagne - ano champagne	13520334	13520434
white matt - white matt	13520336	13520436

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white matt - white matt)

	350mA	500mA
2700K / 40°	549lm / 5.7W	740lm / 8.5W
3000K / 40°	561lm / 5.7W	756lm / 8.5W

WARM DIM

## Extruded 600mm LED warm dim GE



1X LED ARRAY INCL. 6W

! SUSPENSION KIT NOT INCLUDED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW




	1800K - 3000K
	45°
ano black - ano black	13520520
ano black - ano bronze	13520521
ano black - ano champagne	13520523
ano black - ano silver bronze	13520525
ano bronze - ano black	13520526
ano bronze - ano bronze	13520527
ano champagne - ano black	13520531
ano champagne - ano champagne	13520534
white matt - white matt	13520536

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white matt - white matt)

@3000K / 45°	418lm / 6W
--------------	------------

## INSTALLATION ACCESSORIES

	EXTRUDED SUSPENSION KIT 2M SEMI-RECESSED GE	EXTRUDED SUSPENSION KIT 2M SURFACE GE	EXTRUDED SUSPENSION KIT 2M SURFACE GI				
			TRAILING EDGE DIMMABLE WARM DIM	1-10V	DALI	CASAMBI	
black struc	13523032	13523132	13523232	13523632	13523332	13523432	13523532
white matt	13523036	13523136	13523236	13523636	13523336	13523436	13523536

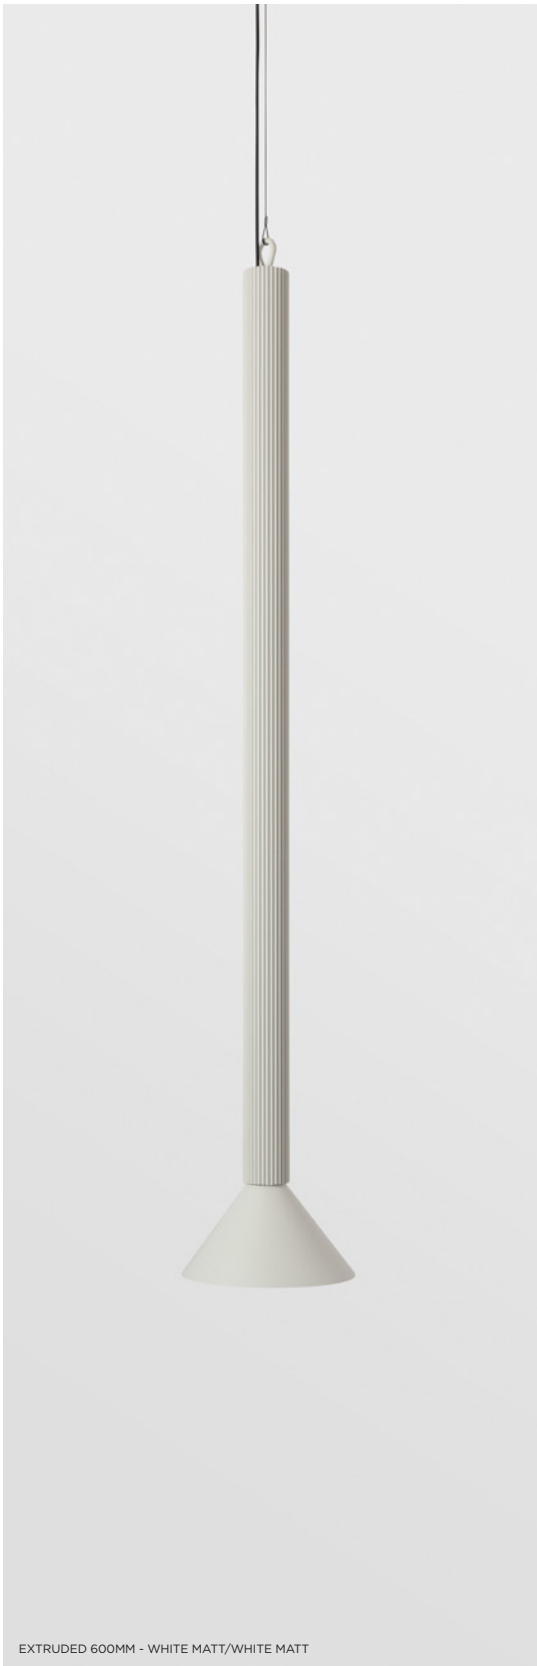


EXTRUDED 600MM - WHITE MATT/WHITE MATT



EXTRUDED 900MM - ANODIZED BLACK/ANODIZED BLACK

## Extruded 900mm LED GE



1X LED ARRAY INCL. 8.5W

! SUSPENSION KIT NOT INCLUDED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW




	2700K	3000K
	40°	40°
ano black - ano black	13520620	13520720
ano black - ano bronze	13520621	13520721
ano black - ano champagne	13520623	13520723
ano black - ano silver bronze	13520625	13520725
ano bronze - ano black	13520626	13520726
ano bronze - ano bronze	13520627	13520727
ano champagne - ano black	13520631	13520731
ano champagne - ano champagne	13520634	13520734
white matt - white matt	13520636	13520736

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white matt - white matt)

	350mA	500mA
2700K / 40°	549lm / 5.7W	740lm / 8.5W
3000K / 40°	561lm / 5.7W	756lm / 8.5W

WARM DIM

## Extruded 900mm LED warm dim GE



1X LED ARRAY INCL. 6W

! SUSPENSION KIT NOT INCLUDED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW



	1800K - 3000K
	45°
ano black - ano black	13520820
ano black - ano bronze	13520821
ano black - ano champagne	13520823
ano black - ano silver bronze	13520825
ano bronze - ano black	13520826
ano bronze - ano bronze	13520827
ano champagne - ano black	13520831
ano champagne - ano champagne	13520834
white matt - white matt	13520836

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white matt - white matt)

@3000K / 45°	418lm / 6W
--------------	------------

## INSTALLATION ACCESSORIES

	EXTRUDED SUSPENSION KIT 2M SEMI-RECESSED GE	EXTRUDED SUSPENSION KIT 2M SURFACE GE	EXTRUDED SUSPENSION KIT 2M SURFACE GI				
			TRAILING EDGE DIMMABLE WARM DIM	1-10V	DALI	CASAMBI	
black struc	13523032	13523132	13523232	13523632	13523332	13523432	13523532
white matt	13523036	13523136	13523236	13523636	13523336	13523436	13523536






**Extruded** suspension kit 2m semi-recessed GE









LUMINAIRE NOT INCL.

DRIVER > SEE DRIVER MATRIX


black strut	13523032
white matt	13523036

**Extruded** suspension kit 2m surface GE









LUMINAIRE NOT INCL.

DRIVER > SEE DRIVER MATRIX


black strut	13523132
white matt	13523136

**Extruded** suspension kit 2m surface GI







LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED (WARM DIM 350mA)

TRAILING EDGE DIMMABLE		WARM DIM
black strut	13523232	13523632
white matt	13523236	13523636
1-10V		
black strut	13523332	
white matt	13523336	
DALI		
black strut	13523432	
white matt	13523436	
CASAMBI		
black strut	13523532	
white matt	13523536	



FLAT MOON 650



FLAT MOON ECLIPS 650 SUSPENSION (TRIANGLE)



# FLAT MOON

*Contemporary architectural projects love a minimalist, slim lighting design. Modular L.I. offers a LED PCB solution for a homogeneous light surface.*

*In Flat moon, this solution creates a stylish, reduced height fixture (78 mm) that distributes a soft, yet functional light. Office-compliant when combined with one of the prismatic diffusers, it is also a perfect fit for public spaces, hotels, restaurants or retail environments.*


## **A piece of the night sky in your space**

Bring the breathtaking subtlety of a lunar eclipse indoors, in the form of our Flat moon eclips lighting fixture.

This enchanting ring-shaped luminaire distributes soft yet functional light. Its lumen output is lower than Flat moon's, while remaining powerful. As it illuminates without overwhelming, Flat moon eclips is also suitable for residential spaces.

more info? [supermodular.com/en/flat-moon](https://supermodular.com/en/flat-moon)  
[supermodular.com/en/flat-moon-eclips](https://supermodular.com/en/flat-moon-eclips)

## Flat moon 450 ceiling down LED GI



1X MED-POWER LED INCL | 25.9W

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

13289000 FLAT MOON PRISMATIC DIFFUSER 450/470

13289100 FLAT MOON ICE PRISMATIC DIFFUSER 450/470




DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13290332	13290432	13290532
white struc	13290309	13290409	13290509

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13290032	13290132	13290232
white struc	13290009	13290109	13290209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 110°	2599lm / 29.4W
3000K / 110°	2546lm / 29.4W
4000K / 110°	2860lm / 29.4W

## Flat moon 450 suspension down LED GI



1X MED-POWER LED INCL | 25.9W

! SUSPENSION KIT NOT INCLUDED

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

13309009 FLAT MOON 450 LED COVERPLATE WHITE STRUC

13309032 FLAT MOON 450 LED COVERPLATE BLACK STRUC

11061809 SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - WHITE STRUC

11061832 SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - BLACK STRUC

11061909 SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - WHITE STRUC

11061932 SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - BLACK STRUC

11066009 SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC

11066032 SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC

11066109 SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC

11066132 SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC

### OPTICAL ACCESSORIES

13289000 FLAT MOON PRISMATIC DIFFUSER 450/470

13289100 FLAT MOON ICE PRISMATIC DIFFUSER 450/470





DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13300332	13300432	13300532
white struc	13300309	13300409	13300509

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13300032	13300132	13300232
white struc	13300009	13300109	13300209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 110°	2599lm / 29.4W
3000K / 110°	2545lm / 29.4W
4000K / 110°	2860lm / 29.4W

# Flat moon 450 suspension up/down LED GI



1X MED-POWER LED INCL. 40W

! SUSPENSION KIT NOT INCLUDED

CONNECTED > SEE GOODIES

## INSTALLATION ACCESSORIES

11061809	SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - BLACK STRUC
11062409	SUSPENSION KIT 4M - 9X0.75 (3 CABLES) - WHITE STRUC
11062432	SUSPENSION KIT 4M - 9X0.75 (3 CABLES) - BLACK STRUC
11066009	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066032	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066109	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066132	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066209	SUSPENSION KIT 4M / 9X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066232	SUSPENSION KIT 4M / 9X0.75 TRIANGLE (3 CABLES) BLACK STRUC

## OPTICAL ACCESSORIES

13289000	FLAT MOON PRISMATIC DIFFUSER 450/470
13289100	FLAT MOON ICE PRISMATIC DIFFUSER 450/470



DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13300932	13301032	13301132
white struc	13300909	13301009	13301109



1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13300632	13300732	13300832
white struc	13300609	13300709	13300809

## LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K / 110°	3720lm / 45.4W
3000K / 110°	3573lm / 45.4W
4000K / 110°	4102lm / 45.4W

## Flat moon 650 ceiling down LED GI



1X MED-POWER LED INCL. 62W

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

13289200 FLAT MOON PRISMATIC DIFFUSER 650/670

13289300 FLAT MOON ICE PRISMATIC DIFFUSER 650/670





DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13292332	13292432	13292532
white struc	13292309	13292409	13292509

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K / 110°	6430lm / 70W
3000K / 110°	6232lm / 70W
4000K / 110°	7077lm / 70W

## Flat moon 650 suspension down LED GI



1X MED-POWER LED INCL. 62W

! SUSPENSION KIT NOT INCLUDED

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

13309109 FLAT MOON 650 LED COVERPLATE WHITE STRUC

13309132 FLAT MOON 650 LED COVERPLATE BLACK STRUC

11061809 SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - WHITE STRUC

11061832 SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - BLACK STRUC

11061909 SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - WHITE STRUC

11061932 SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - BLACK STRUC

11066009 SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC

11066032 SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC

11066109 SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC

11066132 SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC

### OPTICAL ACCESSORIES

13289200 FLAT MOON PRISMATIC DIFFUSER 650/670

13289300 FLAT MOON ICE PRISMATIC DIFFUSER 650/670




DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13304332	13304432	13304532
white struc	13304309	13304409	13304509

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K / 110°	6430lm / 70W
3000K / 110°	6232lm / 70W
4000K / 110°	7077lm / 70W

# Flat moon 650 suspension up/down LED GI



1X MED-POWER LED INCL. 85W

! SUSPENSION KIT NOT INCLUDED

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

11061809	SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - BLACK STRUC
11062409	SUSPENSION KIT 4M - 9X0.75 (3 CABLES) - WHITE STRUC
11062432	SUSPENSION KIT 4M - 9X0.75 (3 CABLES) - BLACK STRUC
11066009	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066032	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066109	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066132	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066209	SUSPENSION KIT 4M / 9X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066232	SUSPENSION KIT 4M / 9X0.75 TRIANGLE (3 CABLES) BLACK STRUC

### OPTICAL ACCESSORIES

13289200	FLAT MOON PRISMATIC DIFFUSER 650/670
13289300	FLAT MOON ICE PRISMATIC DIFFUSER 650/670




DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13304932	13305032	13305132
white struc	13304909	13305009	13305109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 110°	8426lm / 98W
3000K / 110°	8061lm / 98W
4000K / 110°	9288lm / 98W

## Flat moon 950 ceiling down LED GI



1X MED-POWER LED INCL. 129W

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

13289400 FLAT MOON PRISMATIC DIFFUSER 950/970

13289500 FLAT MOON ICE PRISMATIC DIFFUSER 950/970




DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13294332	13294432	13294532
white struc	13294309	13294409	13294509

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K / 110°	13988lm / 138W
3000K / 110°	13559lm / 138W
4000K / 110°	15397lm / 138W

## Flat moon 950 suspension down LED GI



1X MED-POWER LED INCL. 129W

! SUSPENSION KIT NOT INCLUDED

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

13309209 FLAT MOON 950 LED COVERPLATE WHITE STRUC

13309232 FLAT MOON 950 LED COVERPLATE BLACK STRUC

11061809 SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - WHITE STRUC

11061832 SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - BLACK STRUC

11061909 SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - WHITE STRUC

11061932 SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - BLACK STRUC

11066009 SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC

11066032 SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC

11066109 SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC

11066132 SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC

### OPTICAL ACCESSORIES

13289400 FLAT MOON PRISMATIC DIFFUSER 950/970

13289500 FLAT MOON ICE PRISMATIC DIFFUSER 950/970



DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13305532	13305632	13305732
white struc	13305509	13305609	13305709

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K / 110°	13988lm / 138W
3000K / 110°	13559lm / 138W
4000K / 110°	15397lm / 138W



## Flat moon 950 suspension up/down LED GI



1X MED-POWER LED INCL. 175W

! SUSPENSION KIT NOT INCLUDED

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

11061809	SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - BLACK STRUC
11062409	SUSPENSION KIT 4M - 9X0.75 (3 CABLES) - WHITE STRUC
11062432	SUSPENSION KIT 4M - 9X0.75 (3 CABLES) - BLACK STRUC
11066009	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066032	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066109	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066132	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066209	SUSPENSION KIT 4M / 9X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066232	SUSPENSION KIT 4M / 9X0.75 TRIANGLE (3 CABLES) BLACK STRUC

### OPTICAL ACCESSORIES

13289400	FLAT MOON PRISMATIC DIFFUSER 950/970
13289500	FLAT MOON ICE PRISMATIC DIFFUSER 950/970





DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13308132	13308232	13308332
white struc	13308109	13308209	13308309

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)	2700K / 110°	18605lm / 192W
	3000K / 110°	17794lm / 192W
	4000K / 110°	20509lm / 192W

## Flat moon 470 recessed LED GI



1X MED-POWER LED INCL. 25.9W

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

13289000 FLAT MOON PRISMATIC DIFFUSER 450/470

13289100 FLAT MOON ICE PRISMATIC DIFFUSER 450/470





DALI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13280332	13280432	13280532
white struc	13280309	13280409	13280509

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13280032	13280132	13280232
white struc	13280009	13280109	13280209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 110°	2599lm / 30.5W
3000K / 110°	2545lm / 30.5W
4000K / 110°	2860lm / 30.5W

## Flat moon 670 recessed LED GI



1X MED-POWER LED INCL. 62W

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

13289200 FLAT MOON PRISMATIC DIFFUSER 650/670

13289300 FLAT MOON ICE PRISMATIC DIFFUSER 650/670





DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13282332	13282432	13282532
white struc	13282309	13282409	13282509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 110°	6430lm / 70W
3000K / 110°	6232lm / 70W
4000K / 110°	7077lm / 70W

## Flat moon 970 recessed LED GI



1X MED-POWER LED INCL. 129W

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

13289400 FLAT MOON PRISMATIC DIFFUSER 950/970

13289500 FLAT MOON ICE PRISMATIC DIFFUSER 950/970




DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13283332	13283432	13283532
white struc	13283309	13283409	13283509

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K / 110°	13988lm / 138W
3000K / 110°	13559lm / 138W
4000K / 110°	15397lm / 138W

## Flat moon eclips 650 ceiling down LED GI



LED MODULE INCL. 36W

CONNECTED > SEE GOODIES



1-10V	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	-	-	13362232
white struc	-	-	-
DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13362332	13362432	13362532
white struc	13362309	13362409	13362509

### LUMINAIRE OUTPUT & POWER CONSUMPTION


(white struc)

<sup>(1)</sup> DALI/PUSHDIM

<sup>(2)</sup> 1-10V

2700K	2709lm / <sup>(1)</sup> 43W / <sup>(2)</sup> 44W
3000K	2625lm / <sup>(1)</sup> 43W / <sup>(2)</sup> 44W
4000K	2981lm / <sup>(1)</sup> 43W / <sup>(2)</sup> 44W

## Flat moon eclips 650 suspension down LED GI



LED MODULE INCL. 36W

! SUSPENSION KIT NOT INCLUDED

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

11061809	SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - BLACK STRUC
11066009	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066032	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066109	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066132	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC




DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13372332	13372432	13372532
white struc	13372309	13372409	13372509

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K	2709lm / 43W
3000K	2625lm / 43W
4000K	2981lm / 43W

## Flat moon eclips 950 ceiling down LED GI



LED MODULE INCL. 67W

CONNECTED > SEE GOODIES





DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13363332	13363432	13363532
white struc	13363309	13363409	13363509

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K	5624lm / 77W
3000K	5451lm / 77W
4000K	6191lm / 77W

## Flat moon eclips 950 suspension down LED GI



LED MODULE INCL. 67W

! SUSPENSION KIT NOT INCLUDED

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

11061809	SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X0.75 (3 CABLES) - BLACK STRUC
11066009	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066032	SUSPENSION KIT 4M / 3X0.75 TRIANGLE (3 CABLES) BLACK STRUC
11066109	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) WHITE STRUC
11066132	SUSPENSION KIT 4M / 5X0.75 TRIANGLE (3 CABLES) BLACK STRUC




DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13373332	13373432	13373532
white struc	13373309	13373409	13373509

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K	5624lm / 77W
3000K	5451lm / 77W
4000K	6191lm / 77W

## Flat moon eclips 670 recessed LED GI



LED MODULE INCL. 36W

CONNECTED > SEE GOODIES





DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13382332	13382432	13382532
white struc	13382309	13382409	13382509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K	2709lm / 43W
3000K	2625lm / 43W
4000K	2981lm / 43W

## Flat moon eclips 970 recessed LED GI



LED MODULE INCL. 67W

CONNECTED > SEE GOODIES



DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc	13383332	13383432	13383532
white struc	13383309	13383409	13383509

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K	5624lm / 77W
3000K	5451lm / 77W
4000K	6191lm / 77W



HOLLOW 115 TRIMLESS



HOLLOW 125



HOLLOW 115 TRIMLESS





# HOLLOW

**Design** — James van Vossel

more info? [supermodular.com/en/hollow](http://supermodular.com/en/hollow)



*For designer James van Vossel, it was time to rethink pure, simple forms. That's when the tube came in. Lit or dark, open or closed. Hollow is the luminaire that works with you. Adjustable and versatile. For spaces that welcome intrigue and personality. It's the light companion you were waiting for.*

## Design that pops

One design, invisible and visible. It can hide, be one with the environment, showing nothing but glowing cavities. It can stick out playfully, casting light in an ocean of space. Hollow is a surprise and won't be revealed until you touch.


## Present, not present

Rediscover light with Hollow's marvellous, unusual adjustability. Hollow's smooth rotation system slides open to let you choose a 90°, 60° or 45° angle, or anything else in between. Powerful beam, soft glow, discreet light.

## Colours to caress

Experiment with colours and use the cup's inner glow as an additional light source. Gold for a warm, cosy mood maker. White, for a decisive indirect light effect. Black, for a stronger presence, but with softer, indirect light.

# Hollow 125 LED GE



1X LED ARRAY INCL. 8.5W

**DRIVER** > SEE PRODUCT PAGE ON WEBSITE

**CONNECTED** > SEE GOODIES

**INSTALLATION ACCESSORIES** > SEE RIGHT PAGE

**10889830** CONBOX 192X190X130X256

**12292830** GYPSUM FIBREBOARD 190X190





	2700K / CRI90+	3000K / CRI90+
	30°	30°
black struc - black struc	12171056	12171156
black struc - gold	12171032	12171132
black struc - white struc	12171047	12171147
gold - gold	12171087	12171187
white struc - white struc	12171009	12171109

## LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - white struc)

	350mA	500mA
2700K / 30°	346lm / 5.7W	467lm / 8.5W
3000K / 30°	353lm / 5.7W	476lm / 8.5W

## Hollow 115 trimless LED GE



1X LED ARRAY INCL. 8.5W

! MUST BE USED WITH RECESSED RING

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW

10889830 CONBOX 192X190X130X256

14204030 RECESSED RING Ø146

12292830 GYPSUM FIBREBOARD 190X190



	2700K / CRI90+	3000K / CRI90+
	30°	30°
black struc - black struc	12170056	12170156
black struc - gold	12170032	12170132
black struc - white struc	12170047	12170147
gold - gold	12170087	12170187
white struc - white struc	12170009	12170109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - white struc)

	350mA	500mA
2700K / 30°	346lm / 5.7W	467lm / 8.5W
3000K / 30°	353lm / 5.7W	476lm / 8.5W

### INSTALLATION ACCESSORIES FOR PLASTERED FALSE CEILINGS

HOLLOW 115	PLASTERED FINISH
	HOLLOW 115 TRIMLESS
	14204030 - RECESSED RING Ø146 

### INSTALLATION ACCESSORIES FOR STRUCTURAL CEILINGS (CONCRETE, STALTON, ...)

HOLLOW 115 / 125	10889830 CONBOX 190X192X130X256 	+	PLASTERED FINISH	
			HOLLOW 115 TRIMLESS	HOLLOW 125
			12292830 GYPSUM FIBREBOARD 190X190 	12292830 GYPSUM FIBREBOARD 190X190 
14204030 - RECESSED RING Ø146 				




# IZAR

**Design** — Gerd Couckhuys

*Izar is based on a futuristic puzzle system whose basic shape - a three-pointed, rounded star - can be used either alone or in combination with other Izars. However you use it, it's impossible not to use Izar creatively in a space. For wall or ceiling mounting or use with the suspension set.*

more info? [supermodular.com/en/izar](http://supermodular.com/en/izar)

**izar** LED GI



1X LED INCL. 30W

CONNECTED > SEE GOODIES

**INSTALLATION ACCESSORIES**

11061809	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - WHITE STRUC
11061832	SUSPENSION KIT 4M - 3X 0.75 (3 CABLES) - BLACK STRUC
11061909	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - WHITE STRUC
11061932	SUSPENSION KIT 4M - 5X 0.75 (3 CABLES) - BLACK STRUC
11064009	SUSPENSION KIT REC. 4M - 3X 0.75 (3 CABLES) - WHSTR/WHSTR
11064058	SUSPENSION KIT REC. 4M - 3X 0.75 (3 CABLES) - WHSTR/BLSTR
11064059	SUSPENSION KIT REC. 4M - 3X 0.75 (3 CABLES) - WHSTR/ALU
11064109	SUSPENSION KIT REC. 4M - 5X 0.75 (3 CABLES) - WHSTR/WHSTR
11064158	SUSPENSION KIT REC. 4M - 5X 0.75 (3 CABLES) - WHSTR/BLSTR
11064159	SUSPENSION KIT REC. 4M - 5X 0.75 (3 CABLES) - WHSTR/ALU
11340409	SUSPENSION SET 4M (3 CABLES) - WHITE STRUC (NO POWER FEED INCL.)

**ELECTRICAL**

11340738	IZAR ELECTRICAL CONNECTION WHITE STRUC
----------	--



NOT DIMMABLE	3000K / CRI80
	115°
shiny white	11340801
1-10V	3000K / CRI80
	115°
shiny white	11345801
DALI/PUSHDIM	3000K / CRI80
	115°
shiny white	11346801

**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
(shiny white)

3000K	1447lm / 32W
-------	--------------

01 — CEILING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR

06 — PROFILES

07 — GOODIES



K72



K77 ADJUSTABLE



# K

more info? [supermodular.com/en/k](https://supermodular.com/en/k)  
[supermodular.com/en/k72](https://supermodular.com/en/k72)  
[supermodular.com/en/k77-adjustable](https://supermodular.com/en/k77-adjustable)  
[supermodular.com/en/k120](https://supermodular.com/en/k120)  
[supermodular.com/en/k-set](https://supermodular.com/en/k-set)

SEE ALSO



CEILING - P79



CEILING - P219

*Our iconic K family set the foundation for many architectural downlighters. The classic, beautiful brightness of this spotlight portfolio makes K an ideal candidate for residential, retail and hospitality environments.*



## Decorative simplicity

Every project needs a basic spotlight for general lighting. K is our suggestion for those who like to keep things simple. Available in different diameters, a flat or sloping edge and in white structure, black structure or donkey grey structure, K integrates easily into any room. Choose the directional model for a greater interplay of light. Available with halogen and LED.

## Combining contradictions

Bring an extra touch of fun to a K family picnic. Create an installation of 2x, 3x, or 4x recessed K72 downlighters combined with playful Pupils sticking out of the ceiling. By pairing Pupil with spots, you can create a new fixture with both fixed and adjustable light sources and illuminate special places in high-end residences, hospitality environments and small boutiques

## K72 IP55 LED GE



1X LED ARRAY INCL. 9.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

K-SET > SEE BELOW (MORE INFO SEE PAGES 78-83)

### INSTALLATION ACCESSORIES

10490330 CONBOX 112X172X100X236

12291330 GYPKIT 170X112 - Ø65





	2700K / CRI90+		
	15°	25°	40°
black struc	14040032	14040132	14040232
donkey grey struc	14040071	14040171	14040271
white struc	14040009	14040109	14040209
	3000K / CRI90+		
	15°	25°	40°
black struc	14040332	14040432	14040532
donkey grey struc	14040371	14040471	14040571
white struc	14040309	14040409	14040509
	4000K / CRI90+		
	15°	25°	40°
black struc	14040632	14040732	14040832
donkey grey struc	14040671	14040771	14040871
white struc	14040609	14040709	14040809

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

	350mA	500mA
2700K / 25°	511lm / 6.2W	687lm / 9.2W
3000K / 25°	532lm / 6.2W	714lm / 9.2W
4000K / 25°	582lm / 6.2W	731lm / 9.2W

## K72 IP55 LED RG



1X LED ARRAY INCL. 9.2W

K-SET > SEE BELOW (MORE INFO SEE PAGES 78-83)

### INSTALLATION ACCESSORIES

10490330 CONBOX 112X172X100X236

12291330 GYPKIT 170X112 - Ø65



TRAILING EDGE DIMMABLE	2700K / CRI90+		
	15°	25°	40°
black struc	14041032	14041132	14041232
donkey grey struc	14041071	14041171	14041271
white struc	14041009	14041109	14041209
TRAILING EDGE DIMMABLE	3000K / CRI90+		
	15°	25°	40°
black struc	14041332	14041432	14041532
donkey grey struc	14041371	14041471	14041571
white struc	14041309	14041409	14041509
TRAILING EDGE DIMMABLE	4000K / CRI90+		
	15°	25°	40°
black struc	14041632	14041732	14041832
donkey grey struc	14041671	14041771	14041871
white struc	14041609	14041709	14041809

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K / 25°	687lm / 12W
3000K / 25°	714lm / 12W
4000K / 25°	731lm / 12W

### K-SET 72

14042032 K-SET 72 1X BLACK STRUC

14042071 K-SET 72 1X DONKEY GREY STRUC

14042009 K-SET 72 1X WHITE STRUC

14042132 K-SET 72 2X BLACK STRUC

14042171 K-SET 72 2X DONKEY GREY STRUC

14042109 K-SET 72 2X WHITE STRUC

14042232 K-SET 72 3X BLACK STRUC

14042271 K-SET 72 3X DONKEY GREY STRUC

14042209 K-SET 72 3X WHITE STRUC



14042332 K-SET 72 4SQX BLACK STRUC

14042371 K-SET 72 4SQX DONKEY GREY STRUC

14042309 K-SET 72 4SQX WHITE STRUC



## K77 adjustable LED GE



1X LED ARRAY INCL. 9.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

K-SET > SEE BELOW (MORE INFO SEE PAGES 78-83)

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70





	2700K / CRI90+		
	15°	25°	40°
black strut	14050032	14050132	14050232
donkey grey strut	14050071	14050171	14050271
white strut	14050009	14050109	14050209
	3000K / CRI90+		
	15°	25°	40°
black strut	14050332	14050432	14050532
donkey grey strut	14050371	14050471	14050571
white strut	14050309	14050409	14050509
	4000K / CRI90+		
	15°	25°	40°
black strut	14050632	14050732	14050832
donkey grey strut	14050671	14050771	14050871
white strut	14050609	14050709	14050809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white strut)

	350mA	500mA
2700K / 25°	511lm / 6.2W	687lm / 9.2W
3000K / 25°	532lm / 6.2W	714lm / 9.2W
4000K / 25°	582lm / 6.2W	731lm / 9.2W

## K77 adjustable LED RG



1X LED ARRAY INCL. 9.2W

K-SET > SEE BELOW (MORE INFO SEE PAGES 78-83)

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70



	2700K / CRI90+		
	15°	25°	40°
TRAILING EDGE DIMMABLE			
black strut	14051032	14051132	14051232
donkey grey strut	14051071	14051171	14051271
white strut	14051009	14051109	14051209
TRAILING EDGE DIMMABLE			
	3000K / CRI90+		
	15°	25°	40°
black strut	14051332	14051432	14051532
donkey grey strut	14051371	14051471	14051571
white strut	14051309	14051409	14051509
TRAILING EDGE DIMMABLE			
	4000K / CRI90+		
	15°	25°	40°
black strut	14051632	14051732	14051832
donkey grey strut	14051671	14051771	14051871
white strut	14051609	14051709	14051809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white strut)

	2700K / 25°	687lm / 12W
	3000K / 25°	714lm / 12W
	4000K / 25°	731lm / 12W

### K-SET 77

14052032 K-SET 77 1X BLACK STRUC

14052071 K-SET 77 1X DONKEY GREY STRUC

14052009 K-SET 77 1X WHITE STRUC

14052132 K-SET 77 2X BLACK STRUC

14052171 K-SET 77 2X DONKEY GREY STRUC

14052109 K-SET 77 2X WHITE STRUC

14052232 K-SET 77 3X BLACK STRUC

14052271 K-SET 77 3X DONKEY GREY STRUC

14052209 K-SET 77 3X WHITE STRUC

14052332 K-SET 77 4SQX BLACK STRUC

14052371 K-SET 77 4SQX DONKEY GREY STRUC

14052309 K-SET 77 4SQX WHITE STRUC





K120 ADJUSTABLE



K120 ADJUSTABLE

## K120 adjustable LED GE



1X LED ARRAY INCL. 17.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216903 SPREADLENS Ø80

10212802 HONEYCOMB Ø80 BLACK

10217002 CROSS BLADE Ø80 BLACK



Friends of  
**hue**  
LIGHTING



500mA

IP20

GWT  
960°

0.39KG




	2700K / CRI90+		
	15°	25°	40°
black struc	13340032	13340132	13340232
donkey grey struc	13340071	13340171	13340271
white struc	13340009	13340109	13340209
	3000K / CRI90+		
	15°	25°	40°
black struc	13341032	13341132	13341232
donkey grey struc	13341071	13341171	13341271
white struc	13341009	13341109	13341209
	4000K / CRI90+		
	15°	25°	40°
black struc	13342032	13342132	13342232
donkey grey struc	13342071	13342171	13342271
white struc	13342009	13342109	13342209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	1238lm / 11.7W	1679lm / 17.2W	2198lm / 25W
3000K / 25°	1277lm / 11.7W	1732lm / 17.2W	2276lm / 25W
4000K / 25°	1380lm / 11.7W	1872lm / 17.2W	2460lm / 25W



## K-0 80 GU10



1X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190-Ø70



### OPTICAL ACCESSORIES

10280102 BLRING Ø50 HIGH BLACK



RESISTIVE DIMMABLE	
alu	10274805
black	10274802
white struc	10274801

## K-0 80 MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190-Ø70



### OPTICAL ACCESSORIES

10280102 BLRING Ø50 HIGH BLACK



alu	10270005
black	10270002
white struc	10270001

## K-1 89 GU10



1X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290230 GYPKIT 190X190-Ø80



### OPTICAL ACCESSORIES

10280102 BLRING Ø50 HIGH BLACK



RESISTIVE DIMMABLE	
alu	10274905
black	10274902
white struc	10274901

## K-1 89 MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290230 GYPKIT 190X190-Ø80



### OPTICAL ACCESSORIES

10280102 BLRING Ø50 HIGH BLACK



alu	10270105
black	10270102
white struc	10270101

## K-2 80 GU10



1X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190-Ø70



### OPTICAL ACCESSORIES

10280102 BLRING Ø50 HIGH BLACK



RESISTIVE DIMMABLE	
alu	10275205
black	10275202
white struc	10275209

## K-2 80 MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190-Ø70



### OPTICAL ACCESSORIES

10280102 BLRING Ø50 HIGH BLACK



alu	10270205
black	10270202
white struc	10270201

## K-3 89 GU10



1X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290230 GYPKIT 190X190-Ø80



### OPTICAL ACCESSORIES

10280102 BLRING Ø50 HIGH BLACK



RESISTIVE DIMMABLE	
alu	10275305
black	10275302
white struc	10275309

## K-3 89 MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290230 GYPKIT 190X190-Ø80

### OPTICAL ACCESSORIES

10280102 BLRING Ø50 HIGH BLACK



alu	10270305
black	10270302
white struc	10270301



K-SET 72  
K72



K-SET 77  
K77





# K-SET

more info? [supermodular.com/en/k-set](http://supermodular.com/en/k-set)

SEE ALSO



CEILING - P69



CEILING - P219

*Our iconic K family set the foundation for many architectural downlighters. The classic, beautiful brightness of this spotlight portfolio makes K an ideal candidate for residential, retail and hospitality environments. To give designers even more options for this already popular design, we added a mask accessory to the party. Rolling on with flair, K-set is the fashion plate of ceilings.*

## K's Choice...s

Made to cuddle K72 and K77 spots, K-set's simple, square or rectangular shape is easy to like. Available in units of 1x, 2x, 3x and 4x. All masks are available in white, black and donkey grey structure, opening up playful options for designers.

## Application made easy


K-set offers the possibility of a recessed application for ceilings in new renovation projects. The plates are provided with torsion springs, making it a better installation in acoustic structures. And in case of applications with 2x, 3x, 4SQx, K-set makes installation easier by requiring 1 hole instead of many small ones. K-set 72's IP55 rating even allows it to light up a high-end bathroom or wellness area.

## Combining contradictions

Bring an extra touch of fun to a K family picnic. Create an installation of 2x, 3x, or 4x recessed K72 downlighters combined with playful Pupils sticking out of the ceiling.

## K-set 72 1x

0.22KG





LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-72 AND PUPIL

black struc	14042032
donkey grey struc	14042071
white struc	14042009

## K-set 72 2x

0.34KG




LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-72 AND PUPIL


black struc	14042132
donkey grey struc	14042171
white struc	14042109

### K-set 72 3x




LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-72 AND PUPIL




black struc	14042232
donkey grey struc	14042271
white struc	14042209

### K-set 72 4SQx



LUMINAIRE NOT INCL.


! TO BE COMBINED WITH K-72 AND PUPIL



black struc	14042332
donkey grey struc	14042371
white struc	14042309

## K-set 77 1x

0.20KG





LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-77

black struc	14052032
donkey grey struc	14052071
white struc	14052009

## K-set 77 2x

0.30KG




LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-77


black struc	14052132
donkey grey struc	14052171
white struc	14052109

### K-set 77 3x




LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-77




black struc	14052232
donkey grey struc	14052271
white struc	14052209

### K-set 77 4SQx



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH K-77



black struc	14052332
donkey grey struc	14052371
white struc	14052309



PLACEBO DOWN FOR KOMPAS  
PLACEBO GLASS BALL DOWN Ø155MM  
PLACEBO BEANIE  
KOMPAS CEILING BASE



PLACEBO DOWN FOR KOMPAS  
PLACEBO GLASS BALL DOWN Ø155MM  
PLACEBO BEANIE  
KOMPAS CEILING BASE & HOOLAHOOOP



KOMPAS CEILING BASE & HOOLAHOOOP

# KOMPAS & HOOLAHOOP

Design — Jeffrey Huyghe

*Kompas is an answer many interior professionals have been looking for. Many lights for the whole room, on just one power source. Our attractive circles invite your imagination to compose a unique chandelier. You'll be hard-pressed to choose which pendants to use in this party of light!*

## Create your chandelier with Kompas

Kompas is a ceiling base made to give you a ring of possibilities. Use its connection points to add pendants. Keep it subtle with just a few or choose a combination of architectural lights - dare we say up to 12? Position them how you prefer, around the edge of the base. The result will be a truly unique and playful chandelier.

## Hoolahoop will expand your ideas

Make your chandelier even more expressive by adding a ring around Kompas. Hoolahoop shows an impressive volume and helps you extend the reach of your luminaires. This gives you the option of expanding your circle of light by having the different light sources hanging at greater intervals and at different heights.

## Play with light and colours

A perfect solution for spaces with limited electrical points. All you need is one connection point and you can choose whether you want it with or without integrated dimmable LED driver. Our circles are available in white or black structure, and you can add a rich splash of colours with any of the pendant lights that fit on Kompas.


more info? [supermodular.com/en/kompas](http://supermodular.com/en/kompas)



KOMPAS CEILING BASE




## Kompas ceiling base ø340 GI

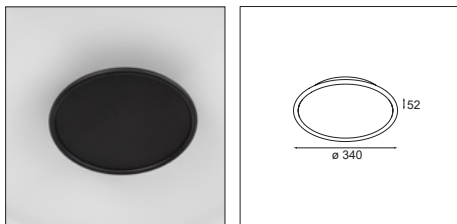

LUMINAIRE NOT INCL.

! MUST BE USED WITH:  
 MARBUL SUSPENDED FOR KOMPAS > SEE PAGES 88-91  
 MINUDE SUSPENDED FOR KOMPAS > SEE PAGES 92-93  
 PLACEBO DOWN/UP FOR KOMPAS > SEE PAGES 94-99  
 SMART BALL SUSPENDED FOR KOMPAS > SEE PAGES 100-101  
 SMART TUBED SUSPENDED FOR KOMPAS > SEE PAGES 102-105  
 TULIP BLOOM/BLOSSOM FOR KOMPAS > SEE PAGES 106-107

### DECORATIVE ACCESSORIES



13572009 HOOLAHOOP Ø1000 WHITE STRUC

13572032 HOOLAHOOP Ø1000 BLACK STRUC




TRAILING EDGE DIMMABLE	350mA		500mA	
	30W	60W	30W	60W
black struc	13570832	13570032	13571132	13570332
white struc	13570809	13570009	13571109	13570309

1-10V	350mA		500mA	
	50W	100W	50W	100W
black struc	13570932	13570132	13571232	13570432
white struc	13570909	13570109	13571209	13570409

DALI	350mA		500mA	
	50W	100W	50W	100W
black struc	13571032	13570232	13571332	13570532
white struc	13571009	13570209	13571309	13570509

CASAMBI	350mA		500mA	
	50W	100W	50W	100W
black struc	13571632	13571432	13571732	13571532
white struc	13571609	13571409	13571709	13571509

## Kompas ceiling base ø340 GE

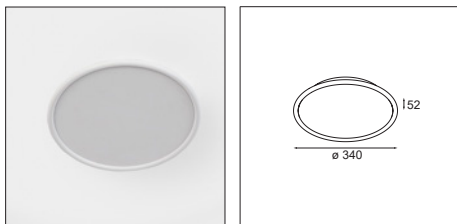

LUMINAIRE NOT INCL. | MAX. 12X 35W

! MUST BE USED WITH:  
 MARBUL SUSPENDED FOR KOMPAS > SEE PAGES 88-91  
 MINUDE SUSPENDED FOR KOMPAS > SEE PAGES 92-93  
 PLACEBO DOWN/UP FOR KOMPAS > SEE PAGES 94-99  
 SMART BALL SUSPENDED FOR KOMPAS > SEE PAGES 100-101  
 SMART TUBED SUSPENDED FOR KOMPAS > SEE PAGES 102-105  
 TULIP BLOOM/BLOSSOM FOR KOMPAS > SEE PAGES 106-107



### DECORATIVE ACCESSORIES

13572009 HOOLAHOOP Ø1000 WHITE STRUC


13572032 HOOLAHOOP Ø1000 BLACK STRUC



black struc	13570632
white struc	13570609

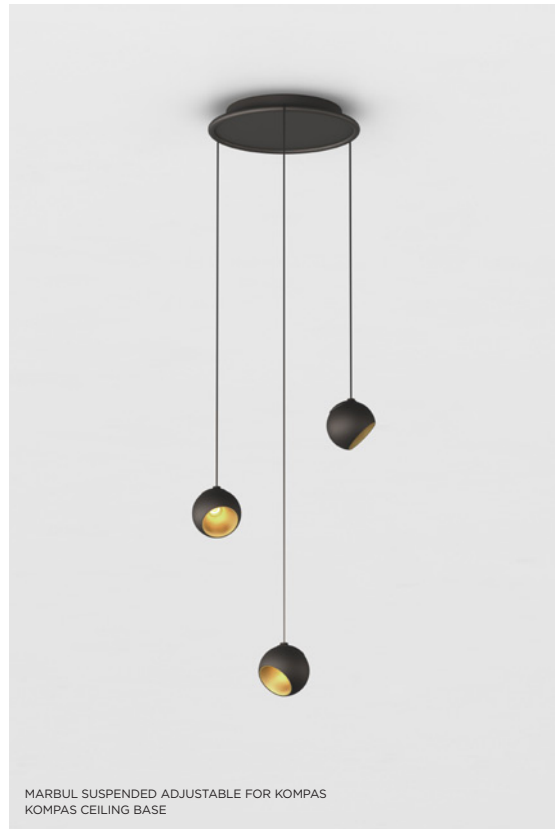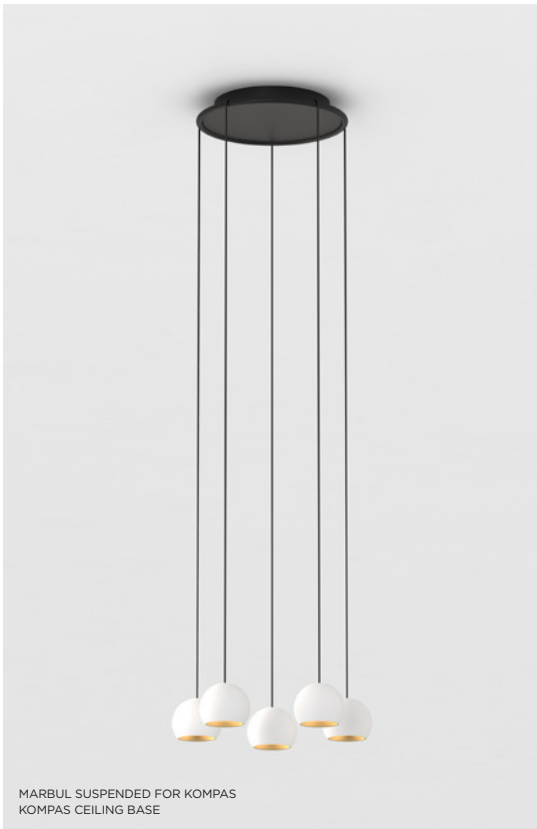

## Marbul suspended LED for Kompas GE

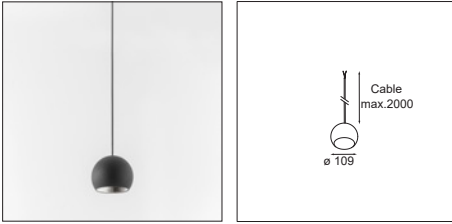

1X LED ARRAY INCL. 8.9W

- ! MUST BE COMBINED WITH KOMPAS CEILING BASE  
(SEE MATRIX PAGES 108-109)
- ! MUST BE COMBINED WITH MAGNETIC REFLECTOR
- ! LONGER SUSPENSION CABLE ON REQUEST

**KOMPAS CEILING BASE > SEE PAGE 87**

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

## WARM DIM

## Marbul suspended LED warm dim for Kompas GE



1X LED ARRAY INCL. 12W

- ! MUST BE COMBINED WITH KOMPAS CEILING BASE  
(SEE MATRIX PAGES 108-109)
- ! MUST BE COMBINED WITH MAGNETIC REFLECTOR
- ! LONGER SUSPENSION CABLE ON REQUEST

**KOMPAS CEILING BASE > SEE PAGE 87**

### OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD



	2700K / CRI90+	3000K / CRI90+
black struc	14232632	14232732
white struc	14232609	14232709

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25° alu	703lm / 9.3W	964lm / 13.8W
3000K / 25° alu	748lm / 9.3W	1026lm / 13.8W




	1800K - 3000K / CRI90+
black struc	14232832
white struc	14232809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25° alu	955lm / 12W
------------------	-------------

**Marbul** suspended adjustable LED  
for Kompas GE



1X LED ARRAY INCL. 8.9W

! MUST BE COMBINED WITH KOMPAS CEILING BASE  
(SEE MATRIX PAGES 108-109)  
! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
! LONGER SUSPENSION CABLE ON REQUEST

**KOMPAS CEILING BASE > SEE PAGE 87**

**OPTICAL ACCESSORIES**


10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

	500mA	IP20	GWT 960°	0.83KG	
--	-------	------	-------------	--------	--

	2700K / CRI90+	3000K / CRI90+
black struc	13481632	13481732
white struc	13481609	13481709

**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
(white struc)

	350mA	500mA
2700K / 25° alu	703lm / 9.3W	964lm / 13.8W
3000K / 25° alu	748lm / 9.3W	1026lm / 13.8W

**WARM DIM****Marbul** suspended adjustable LED warm dim for Kompas GE

1X LED ARRAY INCL. 12W

- ! MUST BE COMBINED WITH KOMPAS CEILING BASE (SEE MATRIX PAGES 108-109)
- ! MUST BE COMBINED WITH MAGNETIC REFLECTOR
- ! LONGER SUSPENSION CABLE ON REQUEST

**KOMPAS CEILING BASE > SEE PAGE 87****OPTICAL ACCESSORIES**

<b>10219330</b>	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
<b>10219430</b>	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
<b>10219830</b>	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
<b>10219630</b>	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

	350mA	IP20	GWT 960°	0.83KG	
--	-------	------	----------	--------	--

	<b>1800K - 3000K / CRI90+</b>
<b>black struc</b>	<b>13481832</b>
<b>white struc</b>	<b>13481809</b>

**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
(white struc)@3000K / 25° alu **955lm / 12W**

01 — CEILING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR

06 — PROFILES

07 — GOODIES




MINUDE SUSPENDED FOR KOMPAS  
KOMPAS CEILING BASE & HOOLAHOOP



MINUDE SUSPENDED FOR KOMPAS  
KOMPAS CEILING BASE

# Minude 45 suspended LED for Kompas GE

	500mA	IP20	GWT 960°	0.28KG	
--	-------	------	----------	--------	--



1X LED ARRAY INCL. 8.5W

! MUST BE COMBINED WITH KOMPAS CEILING BASE  
(SEE MATRIX PAGES 108-109)

KOMPAS CEILING BASE > SEE PAGE 87

	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11465281	11465381
ano bronze	11465282	11465382
ano champagne	11465241	11465341
ano silver bronze	11465284	11465384
black struc	11465232	11465332
white struc	11465209	11465309

## LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)


	350mA	500mA
2700K / 30°	498lm / 5.6W	686lm / 8.1W
3000K / 30°	498lm / 5.6W	686lm / 8.1W

01 — CEILING  
02 — JACK  
03 — TRACK  
04 — WALL  
05 — EXTERIOR  
06 — PROFILES  
07 — GOODIES





## Placebo down LED for Kompas GE

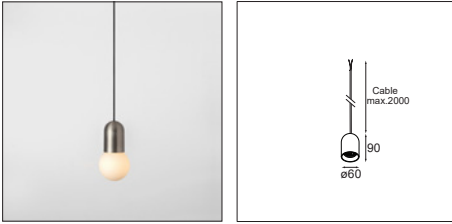

1X LED ARRAY INCL. 6.3W

! MUST BE COMBINED WITH KOMPAS CEILING BASE (SEE MATRIX PAGES 108-109)  
! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
! CAN BE COMBINED WITH PLACEBO SHADES  
! LONGER SUSPENSION CABLE ON REQUEST

**KOMPAS CEILING BASE > SEE PAGE 87**

**PLACEBO SHADES > SEE PAGE 98**

### OPTICAL ACCESSORIES

12624038	PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT
12624238	PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT
12626038	PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT
12626238	PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT




	2700K / CRI90+	3000K / CRI90+
ano black	13582003	13582103
ano bronze	13582082	13582182
ano champagne	13582041	13582141
ano silver bronze	13582084	13582184
black struc	13582032	13582132
white struc	13582009	13582109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (glass ball ø155)

2700K	608lm / 6.3W
3000K	625lm / 6.3W

## WARM DIM

## Placebo down LED warm dim for Kompas GE

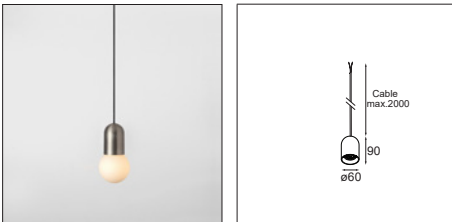

1X LED ARRAY INCL. 6.3W

! MUST BE COMBINED WITH KOMPAS CEILING BASE (SEE MATRIX PAGES 108-109)  
! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
! CAN BE COMBINED WITH PLACEBO SHADES  
! LONGER SUSPENSION CABLE ON REQUEST

**KOMPAS CEILING BASE > SEE PAGE 87**

**PLACEBO SHADES > SEE PAGE 98**

### OPTICAL ACCESSORIES

12624038	PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT
12624238	PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT
12626038	PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT
12626238	PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT



	1800K - 3000K / CRI90+
ano black	13582503
ano bronze	13582582
ano champagne	13582541
ano silver bronze	13582584
black struc	13582532
white struc	13582509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (glass ball ø155)

@3000K	365lm / 7.4W
--------	--------------



PLACEBO DOWN FOR KOMPAS  
PLACEBO GLASS BALL DOWN Ø90/Ø155MM  
KOMPAS CEILING BASE & HOOLAHOOP



PLACEBO DOWN FOR KOMPAS  
PLACEBO GLASS BALL DOWN Ø155MM  
KOMPAS CEILING BASE & HOOLAHOOP



PLACEBO DOWN FOR KOMPAS  
PLACEBO GLASS BALL DOWN Ø155MM  
KOMPAS CEILING BASE




PLACEBO DOWN FOR KOMPAS  
PLACEBO GLASS BALL DOWN Ø155MM  
PLACEBO DOULI  
KOMPAS CEILING BASE



PLACEBO DOWN FOR KOMPAS  
PLACEBO GLASS BALL DOWN Ø155MM  
PLACEBO DOULI

## Placebo up LED for Kompas GE



1X LED ARRAY INCL. 6.3W

! MUST BE COMBINED WITH KOMPAS CEILING BASE (SEE MATRIX PAGES 108-109)  
 ! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
 LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
 ! CAN BE COMBINED WITH PLACEBO SHADES  
 ! LONGER SUSPENSION CABLE ON REQUEST

**KOMPAS CEILING BASE > SEE PAGE 87**

**PLACEBO SHADES > SEE BELOW**

### OPTICAL ACCESSORIES

12623038	PLACEBO GLASS TUBE UP (46MM) WHITE MATT
12623238	PLACEBO GLASS TUBE UP (130MM) WHITE MATT
12625038	PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT
12625238	PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT

	2700K / CRI90+	3000K / CRI90+
ano black	13582203	13582303
ano bronze	13582282	13582382
ano champagne	13582241	13582341
ano silver bronze	13582284	13582384
black struc	13582232	13582332
white struc	13582209	13582309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (glass ball ø155)


	2700K	3000K
	608lm / 6.3W	625lm / 6.3W

### PLACEBO SHADES

<b>BEANIE</b>				<b>DOULI</b>				<b>SOMBRERO</b>			
white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne
12628038	12628083	12628018	12628017	12629038	12629083	12629018	12629017	12627038	12627083	12627018	12627017

WARM DIM

### Placebo up LED warm dim for Kompas GE



1X LED ARRAY INCL. 6.3W

- ! MUST BE COMBINED WITH KOMPAS CEILING BASE (SEE MATRIX PAGES 108-109)
- ! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);
- LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY
- ! CAN BE COMBINED WITH PLACEBO SHADES
- ! LONGER SUSPENSION CABLE ON REQUEST

KOMPAS CEILING BASE > SEE PAGE 87

PLACEBO SHADES > SEE LEFT PAGE

#### OPTICAL ACCESSORIES

12623038	PLACEBO GLASS TUBE UP (46MM) WHITE MATT
12623238	PLACEBO GLASS TUBE UP (130MM) WHITE MATT
12625038	PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT
12625238	PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT

	350mA	IP20	GWT 650°	0.50KG	▲
--	-------	------	----------	--------	---

	1800K - 3000K / CRI90+
ano black	13582403
ano bronze	13582482
ano champagne	13582441
ano silver bronze	13582484
black struc	13582432
white struc	13582409

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (glass ball ø155)

@3000K

365lm / 9W



SMART BALL SUSPENDED 82 FOR KOMPAS  
SMART LOTIS 82  
KOMPAS CEILING BASE




SMART BALL SUSPENDED 115 FOR KOMPAS  
SMART CAKE 115  
KOMPAS CEILING BASE



SMART BALL SUSPENDED 82 FOR KOMPAS  
SMART KUP 82  
KOMPAS CEILING BASE & HOOLAHOOP

### Smart ball suspended 82 for Kompas GE



LUMINAIRE NOT INCL.


- ! MUST BE COMBINED WITH KOMPAS CEILING BASE (SEE MATRIX PAGES 108-109)
- ! MUST BE COMBINED WITH SMART 82
- ! LONGER SUSPENSION CABLE ON REQUEST

**KOMPAS CEILING BASE > SEE PAGE 87**

**SMART COMBINATIONS > SEE PAGES 320-329**

black struc	11570532
white struc	11570509

### Smart ball suspended 115 for Kompas GE



LUMINAIRE NOT INCL.

- ! MUST BE COMBINED WITH KOMPAS CEILING BASE (SEE MATRIX PAGES 108-109)
- ! MUST BE COMBINED WITH SMART 115
- ! LONGER SUSPENSION CABLE ON REQUEST

**KOMPAS CEILING BASE > SEE PAGE 87**

**SMART COMBINATIONS > SEE PAGES 320-329**

black struc	11571532
white struc	11571509



SMART TUBED SUSPENDED 48 FOR KOMPAS  
SMART CAKE 48  
KOMPAS CEILING BASE




SMART TUBED SUSPENDED 48 FOR KOMPAS  
SMART LOTIS 48  
KOMPAS CEILING BASE



SMART TUBED SUSPENDED 82 X-LARGE FOR KOMPAS  
SMART KUP 82  
KOMPAS CEILING BASE & HOOLAHOOP



### Smart tubed suspended 48 1x LED for Kompas GE



LUMINAIRE NOT INCL.


! MUST BE COMBINED WITH KOMPAS CEILING BASE  
(SEE MATRIX PAGES 108-109)  
! MUST BE COMBINED WITH SMART 48

**KOMPAS CEILING BASE > SEE PAGE 87**

**SMART COMBINATIONS > SEE PAGES 320-329**

black struc	12903232
white struc	12903209

### Smart tubed suspended 82 large LED for Kompas GE



LUMINAIRE NOT INCL.


! MUST BE COMBINED WITH KOMPAS CEILING BASE  
(SEE MATRIX PAGES 108-109)  
! MUST BE COMBINED WITH SMART 82  
! LONGER SUSPENSION CABLE ON REQUEST

**KOMPAS CEILING BASE > SEE PAGE 87**

**SMART COMBINATIONS > SEE PAGES 320-329**

black struc	12843532
white struc	12843509

### Smart tubed suspended 82 X-large LED for Kompas GE



LUMINAIRE NOT INCL.

! MUST BE COMBINED WITH KOMPAS CEILING BASE  
(SEE MATRIX PAGES 108-109)  
! MUST BE COMBINED WITH SMART 82  
! LONGER SUSPENSION CABLE ON REQUEST

**KOMPAS CEILING BASE > SEE PAGE 87**


**SMART COMBINATIONS > SEE PAGES 320-329**

black struc	12843632
white struc	12843609



SMART TUBED SUSPENDED 115 FOR KOMPAS  
SMART CAKE 115  
KOMPAS CEILING BASE & HOOLAHOOP

## Smart tubed suspended 115 LED for Kompas GE



LUMINAIRE NOT INCL.

! MUST BE COMBINED WITH KOMPAS CEILING BASE  
 (SEE MATRIX PAGES 108-109)  
 ! MUST BE COMBINED WITH SMART 115  
 ! LONGER SUSPENSION CABLE ON REQUEST

**KOMPAS CEILING BASE > SEE PAGE 87**

**SMART COMBINATIONS > SEE PAGES 320-329**



black struc	13141632
white struc	13141609

01 — CEILING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR

06 — PROFILES

07 — GOODIES



TULIP BLOSSOM FOR KOMPAS  
KOMPAS CEILING BASE




TULIP BLOSSOM/BLOOM FOR KOMPAS  
KOMPAS CEILING BASE & HOOLAHOOP



TULIP BLOSSOM/BLOOM FOR KOMPAS  
KOMPAS CEILING BASE & HOOLAHOOP

## Tulip bloom for Kompas E27



LAMP EXCL. E27 MAX. 35W

! MUST BE COMBINED WITH KOMPAS CEILING BASE  
(SEE MATRIX PAGES 108-109)


CONNECTED > SEE GOODIES

KOMPAS CEILING BASE > SEE PAGE 87



black struc	12663032
black struc - gold	12663091
white struc	12663009
white struc - gold	12663089

## Tulip blossom for Kompas E27



LAMP EXCL. E27 MAX. 35W

! MUST BE COMBINED WITH KOMPAS CEILING BASE  
(SEE MATRIX PAGES 108-109)

CONNECTED > SEE GOODIES

KOMPAS CEILING BASE > SEE PAGE 87



black struc	12663132
black struc - gold	12663191
white struc	12663109
white struc - gold	12663189

KOMPAS MATRIX | TRAILING EDGE DIMMABLE

Fixture for Kompas		Extra	30W TRE				60W TRE			
			350mA		500mA		350mA		500mA	
			Max Fixtures Total	Max Fixtures Per LED Driver In Series	Max Fixtures Total	Max Fixtures Per LED Driver In Series	Max Fixtures Total	Max Fixtures Per LED Driver In Series	Max Fixtures Total	Max Fixtures Per LED Driver In Series
MONOCOLOUR	Marbul Susp Fix		3	1	3	1	6	1	6	1
	Marbul Susp Adj									
	Minude		3	1	3	1	6	1	6	1
	Placebo Down	+ optional shade	3	1	not compatible use 350mA version		6	1	not compatible use 350mA version	
	Placebo Up		3	1	6	1	not compatible use 350mA version			
	Smart Ball 82	+ Smart 82	3	1	3	1	6	1	6	1
		+ Smart 82 Adjustable								
	Smart Ball 115	+ Smart 115	-	-	-	-	-	-	-	-
		+ Smart 115 Adj	3	1	3	1	6	1	6	1
	Smart Tubed Suspension 48 GE	+ Smart 48	12	min 5 max 6	12	min 4 max 6	use 30W version		use 30W version	
		+ Smart 48+	6	min 2 max 2	6	min 2 max 2	12	min 2 max 2	12	min 2 max 2
	Smart Tubed Suspension 82 large GE	+ Smart 82	3	1	3	1	6	1	6	1
		+ Smart 82 Adj								
	Smart Tubed Suspension 82 XL GE	+ Smart 82	3	1	3	1	6	1	6	1
+ Smart 82 Adj										
Smart Tubed Suspension 115 GE	+ Smart 115	-	-	-	-	-	-	-	-	
	+ Smart 115 Adj	3	1	3	1	6	1	6	1	
WARM DIM	Marbul Susp Fix Warm Dim		-	-	not compatible use 350mA version		-	-	not compatible use 350mA version	
	Marbul Susp Adj Warm Dim									
	Placebo Down Warm Dim	+ optional shade	3	1			6	1		
	Placebo Up Warm Dim									
	Smart Ball 82	+ Smart 82 Warm Dim	3	1			6	1		
		+ Smart 82 Adj Warm Dim								
	Smart Ball 115	+ Smart 115 Adj Warm Dim	-	-			-	-		
	Smart Tubed Suspension 48 GE	+ Smart 48 Warm Dim	-	-			-	-		
	Smart Tubed Suspension 82 large GE	+ Smart 82 Warm Dim	3	1			6	1		
		+ Smart 82 Adj Warm Dim								
Smart Tubed Suspension 82 XL GE	+ Smart 82 Warm Dim	3	1	6	1					
	+ Smart 82 Adj Warm Dim									
Smart Tubed Suspension 115 GE	+ Smart 115 Adj Warm Dim	-	-	-	-					

KOMPAS MATRIX | GE

Fixture for Kompas	Max Fixtures Total
Tulip Bloom	12
Tulip Blossom	

Fixture for Kompas		Extra	50W DALI / 1-10V / CASAMBI				100W DALI / 1-10V / CASAMBI								
			350mA		500mA		350mA		500mA						
			Max Fixtures Total	Max Fixtures Per LED Output In Series	Max Fixtures Total	Max Fixtures Per LED Output In Series	Max Fixtures Total	Max Fixtures Per LED Output In Series	Max Fixtures Total	Max Fixtures Per LED Output In Series					
MONOCOLOUR	Marbul Susp Fix		6	3	4	2	12	3	8	2					
	Marbul Susp Adj														
	Minude		6	3	4	2	12	3	8	2					
	Placebo Down		+ optional shade	6	3	not compatible use 350mA version		12	3	not compatible use 350mA version					
	Placebo Up			6	3			12	3						
	Smart Ball 82		+ Smart 82	6	3	4	2	12	3	8	2				
			+ Smart 82 Adjustable												
	Smart Ball 115		+ Smart 115	2	1	2	1	4	1	4	1				
			+ Smart 115 Adj	6	3	4	2	12	3	8	2				
	Smart Tubed Suspension 48 GE		+ Smart 48	12	6	12	6	use 50W version		use 50W version					
			+ Smart 48+	12	6	10	5					12	5		
	Smart Tubed Suspension 82 large GE		+ Smart 82	6	3	4	2	12	3	8	2				
			+ Smart 82 Adj												
	Smart Tubed Suspension 82 XL GE		+ Smart 82	6	3	4	2	12	3	8	2				
	+ Smart 82 Adj														
Smart Tubed Suspension 115 GE	+ Smart 115	2	1	2	1	4	1	4	1						
	+ Smart 115 Adj	6	3	4	2	12	3	8	2						
WARM DIM	Marbul Susp Fix Warm Dim		2	1	not compatible use 350mA version		4	1	not compatible use 350mA version						
	Marbul Susp Adj Warm Dim														
	Placebo Down Warm Dim		+ optional shade	4			2	12			3	8	2		
	Placebo Up Warm Dim														
	Smart Ball 82		+ Smart 82 Warm Dim	6			3	4			1	12	3		
			+ Smart 82 Adj Warm Dim												
	Smart Ball 115		+ Smart 115 Adj Warm Dim	2			1	-			-	4	1	-	-
	Smart Tubed Suspension 48 GE		+ Smart 48 Warm Dim	-			-	-			-	-	-	-	-
	Smart Tubed Suspension 82 large GE		+ Smart 82 Warm Dim	6			3	12			3	12	3		
			+ Smart 82 Adj Warm Dim												
Smart Tubed Suspension 82 XL GE	+ Smart 82 Warm Dim	6	3	12	3	12	3								
	+ Smart 82 Adj Warm Dim														
Smart Tubed Suspension 115 GE	+ Smart 115 Adj Warm Dim	2	1	4	1	4	1								



LOTIS 82 (FOR LED / GU10 FOR LED / LED HUE) - WHITE STRUCTURE



LOTIS 82 (FOR LED / GU10 FOR LED / LED HUE) - SILVER BRONZE BRUSHED



LOTIS 82 (FOR LED / GU10 FOR LED / LED HUE) - CHAMPAGNE BRUSHED



LOTIS 82 (FOR LED / GU10 FOR LED / LED HUE) - GOLD BRUSHED



LOTIS 82 (FOR LED / GU10 FOR LED / LED HUE) - BLACK BRUSHED



LOTIS 82 (FOR LED / GU10 FOR LED / LED HUE) - BLACK STRUCTURE



LOTIS 82 (GU10 FOR LED / LED HUE) - BRONZE BRUSHED





# (ASY) LOTIS

*Lotis is the recessed spotlight where it all began. The hallmark of this luminaire is its deeply recessed, fine-edged cone that unveils the light source. Known for its effortless design and high functionality, Lotis comes with different light sources and smart lighting options, and in several colours.*

## Light on the wall

Asy lotis has all the features of a typical Lotis family member with one additional benefit: asymmetry. The light shines down at an angle of 28°, creating an attractive wash effect on the wall.

## A splash of new colours...

Lotis 82 offers several finishes to add a splash of colour to your design. The original white structure, the new black structure and the new wet painted and brushed bronze, silver bronze, black, champagne and gold. The wet painted colours with visible brushed lines showing an authentic, strong architectural look & feel. Perfect for matching with other Modular families such as Thimble or Minude. The new colours are available for 3 types of Lotis 82.



## ... for 3 Lotis 82 family members

With Lotis 82 GU10, a GU10 lamp of your choice needs to be added. The Lotis 82 GU10 for smart lighting variant comes with an included Hue bulb. You can choose between Tunable White or 2700K white. Finally, Lotis 82 for LED, with our M-LED 50 module, offers warm dim, 3 beam angles: medium, spot, flood, 4 colour temperatures: 2700K, 3000K, 3500K, 4000K and a more powerful lumen output.

more info? [supermodular.com/en/lotis](https://supermodular.com/en/lotis)

WARM DIM

### Lotis 82 for LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

#### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190-Ø76



alu	13080005
black	13080002
gold	13080046
white struc	13080009



#### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc - M-LED 50 alu)

	350mA	500mA
2700K / 25°	406lm / 6.2W	521lm / 9.2W
3000K / 25°	430lm / 6.2W	577lm / 9.2W
3500K / 25°	446lm / 6.2W	600lm / 9.2W
4000K / 25°	459lm / 6.2W	616lm / 9.2W

WARM DIM

### Lotis 82 for LED GE (NEW)



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

#### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190-Ø76



black (brushed)	13080602
black struc	13080632
bronze (brushed)	13080618
champagne (brushed)	13080617
gold (brushed)	13080646
silver bronze (brushed)	13080606
white struc	13080609

#### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc - M-LED 50 alu)

	350mA	500mA
2700K / 25°	406lm / 6.2W	521lm / 9.2W
3000K / 25°	430lm / 6.2W	577lm / 9.2W
3500K / 25°	446lm / 6.2W	600lm / 9.2W
4000K / 25°	459lm / 6.2W	616lm / 9.2W

#### M-LED



14060005 M-LED 50 2700K 15° GE ALU

14060105 M-LED 50 2700K 25° GE ALU

14060205 M-LED 50 2700K 40° GE ALU

14060305 M-LED 50 3000K 15° GE ALU

14060405 M-LED 50 3000K 25° GE ALU

14060505 M-LED 50 3000K 40° GE ALU

14060605 M-LED 50 3500K 15° GE ALU

14060705 M-LED 50 3500K 25° GE ALU

14060805 M-LED 50 3500K 40° GE ALU

14060905 M-LED 50 4000K 15° GE ALU

14061005 M-LED 50 4000K 25° GE ALU

14061105 M-LED 50 4000K 40° GE ALU



14061205 M-LED 50 1800-3000K 15° GE ALU

14061305 M-LED 50 1800-3000K 25° GE ALU

14061405 M-LED 50 1800-3000K 40° GE ALU

WARM DIM

### Lotis 82 concrete for LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE





black

13080102

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - M-LED 50 alu)

	350mA	500mA
2700K / 25°	406lm / 6.2W	521lm / 9.2W
3000K / 25°	430lm / 6.2W	577lm / 9.2W
3500K / 25°	446lm / 6.2W	600lm / 9.2W
4000K / 25°	459lm / 6.2W	616lm / 9.2W

## Lotis 82 LED Hue retrofit (NEW)



1X LED GU10 INCL. | 5.2W

### INSTALLATION ACCESSORIES



10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190-Ø76



HUE DIMMABLE	2200K - 6500K TUNABLE WHITE	2700K
	MEDIUM	MEDIUM
black (brushed)	13080502	13080402
black struc	13080532	13080432
bronze (brushed)	13080518	13080418
champagne (brushed)	13080517	13080417
gold (brushed)	13080546	13080446
silver bronze (brushed)	13080506	13080406
white struc	13080509	13080409

## Lotis 82 GU10 for LED (NEW)



1X LED GU10 (NOT INCL.)

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES



10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190-Ø76



black (brushed)	13080302
black struc	13080332
bronze (brushed)	13080318
champagne (brushed)	13080317
gold (brushed)	13080346
silver bronze (brushed)	13080306
white struc	13080309

## Lotis 82 LED retrofit



1X LED GU10 INCL. | GU10 | 5.5W

### INSTALLATION ACCESSORIES



10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190-Ø76



LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu	11450005
black	11450002
gold	11450046
white struc	11450009

## Lotis 82 GU10



1X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES



10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190-Ø76



RESISTIVE DIMMABLE	
alu	10881005
black	10881002
gold	10881046
white struc	10881009

## Lotis 82 concrete GU10



1X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES



RESISTIVE DIMMABLE	
black	12561002

## Lotis 82 MR16 GE





12V

IP20

GWT  
960°

0.10KG



1X QR-CBC 51 | GX5.3 | MAX. 50W

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190-Ø76

alu	10880105
black	10880102
gold	10880146
white struc	10880109

## Lotis 82 concrete MR16 GE





12V

IP20

GWT  
960°

0.15KG





1X QR-CBC 51 | GX5.3 | MAX. 50W

black	12560002
white struc	12560009

WARM DIM

### Lotis 86 IP55 for LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

#### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290230 GYPKIT 190X190-Ø80





alu struc	13090028
black struc	13090008
white struc	13090009

#### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc - M-LED 50 alu)

	350mA	500mA
2700K / 25°	451lm / 6.2W	580lm / 9.2W
3000K / 25°	478lm / 6.2W	642lm / 9.2W
3500K / 25°	496lm / 6.2W	667lm / 9.2W
4000K / 25°	525lm / 6.2W	704lm / 9.2W

### Lotis 86 IP55 LED retrofit



1X LED GU10 INCL. | GU10 | 5.5W

#### INSTALLATION ACCESSORIES

12290230 GYPKIT 190X190-Ø80



LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu struc	11456228
black struc	11456208
white struc	11456238

#### M-LED



14060005 M-LED 50 2700K 15° GE ALU

14060105 M-LED 50 2700K 25° GE ALU

14060205 M-LED 50 2700K 40° GE ALU

14060305 M-LED 50 3000K 15° GE ALU

14060405 M-LED 50 3000K 25° GE ALU

14060505 M-LED 50 3000K 40° GE ALU

14060605 M-LED 50 3500K 15° GE ALU

14060705 M-LED 50 3500K 25° GE ALU

14060805 M-LED 50 3500K 40° GE ALU

14060905 M-LED 50 4000K 15° GE ALU

14061005 M-LED 50 4000K 25° GE ALU



14061105 M-LED 50 4000K 40° GE ALU

14061205 M-LED 50 1800-3000K 15° GE ALU

14061305 M-LED 50 1800-3000K 25° GE ALU

14061405 M-LED 50 1800-3000K 40° GE ALU

## Lotis 86 IP55 MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W



### INSTALLATION ACCESSORIES

12290230 GYPKIT190X190-Ø80



alu struc	10883528
black struc	10883508
white struc	10883538

## Lotis 86 IP55 GU10



1X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

12290230 GYPKIT190X190-Ø80




RESISTIVE DIMMABLE	
alu struc	10883628
black struc	10883608
white struc	10883638



WARM DIM

### Lotis 97 adjustable for LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

#### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290330 GYPKIT 190X190-Ø92





alu	13100005
black	13100002
white struc	13100009

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - M-LED 50 alu)

	350mA	500mA
2700K / 25°	506lm / 6.2W	651lm / 9.2W
3000K / 25°	536lm / 6.2W	721lm / 9.2W
3500K / 25°	562lm / 6.2W	755lm / 9.2W
4000K / 25°	559lm / 6.2W	752lm / 9.2W

WARM DIM

### Lotis 97 concrete adjustable for LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW



black	13100102
white struc	13100109

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - M-LED 50 alu)

	350mA	500mA
2700K / 25°	506lm / 6.2W	651lm / 9.2W
3000K / 25°	536lm / 6.2W	721lm / 9.2W
3500K / 25°	562lm / 6.2W	755lm / 9.2W
4000K / 25°	559lm / 6.2W	752lm / 9.2W



#### M-LED



- 14060005 M-LED 50 2700K 15° GE ALU
- 14060105 M-LED 50 2700K 25° GE ALU
- 14060205 M-LED 50 2700K 40° GE ALU
- 14060305 M-LED 50 3000K 15° GE ALU
- 14060405 M-LED 50 3000K 25° GE ALU
- 14060505 M-LED 50 3000K 40° GE ALU
- 14060605 M-LED 50 3500K 15° GE ALU
- 14060705 M-LED 50 3500K 25° GE ALU

- 14060805 M-LED 50 3500K 40° GE ALU
- 14060905 M-LED 50 4000K 15° GE ALU
- 14061005 M-LED 50 4000K 25° GE ALU
- 14061105 M-LED 50 4000K 40° GE ALU
- 14061205 M-LED 50 1800-3000K 15° GE ALU
- 14061305 M-LED 50 1800-3000K 25° GE ALU
- 14061405 M-LED 50 1800-3000K 40° GE ALU

## Lotis 97 adjustable GU10



1X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES



INSTALLATION ACCESSORIES

12290330 GYPKIT190X190-Ø92



RESISTIVE DIMMABLE	
alu	10881305
black	10881302
white struc	10881309

## Lotis 97 concrete adjustable GU10



1X QPAR 16 | GU10 | MAX. 50W



\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES



RESISTIVE DIMMABLE	
black	12571002
white struc	12571009

### Lotis 97 adjustable MR16 GE



1X QR-CBC 51 | GX5.3 | MAX. 50W


#### INSTALLATION ACCESSORIES

12290330 GPKIT190X190-Ø92



alu	10881205
black	10881202
white struc	10881209

### Lotis 97 concrete adjustable MR16 GE




1X QR-CBC 51 | GX5.3 | MAX. 50W



black	12570002
white struc	12570009

### Lotis 230 AR111 GE



1X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111



black	10880202
-------	----------




ASU LOTIS 82




ASU LOTIS 97 ADJUSTABLE

## Asy lotis 82 LED retrofit



1X LED GU10 INCL. 5.5W



### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256


12290830 GYPKIT 190X190-Ø76




LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu	11450105
black	11450102
white struc	11450109

### WARM DIM

## Asy lotis 82 for LED GE



1X LED (NOT INCL.)



! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190-Ø76

### OPTICAL ACCESSORIES

10213103 SOFLENS Ø44




black	13080202
white struc	13080209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - M-LED 50 alu)

	350mA	500mA
2700K / 25°	432lm / 6.2W	555lm / 9.2W
3000K / 25°	457lm / 6.2W	614lm / 9.2W
3500K / 25°	475lm / 6.2W	639lm / 9.2W
4000K / 25°	491lm / 6.2W	659lm / 9.2W

### M-LED



14060005 M-LED 50 2700K 15° GE ALU

14060105 M-LED 50 2700K 25° GE ALU

14060205 M-LED 50 2700K 40° GE ALU

14060305 M-LED 50 3000K 15° GE ALU

14060405 M-LED 50 3000K 25° GE ALU

14060505 M-LED 50 3000K 40° GE ALU

14060605 M-LED 50 3500K 15° GE ALU

14060705 M-LED 50 3500K 25° GE ALU

14060805 M-LED 50 3500K 40° GE ALU

14060905 M-LED 50 4000K 15° GE ALU

14061005 M-LED 50 4000K 25° GE ALU


14061105 M-LED 50 4000K 40° GE ALU

14061205 M-LED 50 1800-3000K 15° GE ALU


14061305 M-LED 50 1800-3000K 25° GE ALU

14061405 M-LED 50 1800-3000K 40° GE ALU

## Asy lotis 82 MR16 GE



1X QR-CBC 51 | GX5.3 | 50W



### INSTALLATION ACCESSORIES


10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190-Ø76




alu	10880505
black	10880502
white struc	10880509

## Asy lotis 82 GU10



1X QPAR 16 | GU10 | 50W



CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190-Ø76

### OPTICAL ACCESSORIES


10211903 SPREADLENS Ø50

10213003 SOFLENS Ø50




RESISTIVE DIMMABLE	
alu	10880605
black	10880602
white struc	10880609

## Asy lotis 97 adjustable MR16 GE




1X QR-CBC 51 | GX5.3 | 50W



### INSTALLATION ACCESSORIES


12290330 GYPKIT 190X190-Ø92



alu	10881405
black	10881402
white struc	10881409

WARM DIM

### Asy lotis 97 adjustable for LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

#### INSTALLATION ACCESSORIES

12290330 GYPKIT 190X190-Ø92

#### OPTICAL ACCESSORIES

10213103 SOFTLENS Ø44





alu	13100205
black	13100202
white struc	13100209

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - M-LED 50 alu)

	350mA	500mA
2700K / 25°	459lm / 6.2W	590lm / 9.2W
3000K / 25°	487lm / 6.2W	654lm / 9.2W
3500K / 25°	505lm / 6.2W	679lm / 9.2W
4000K / 25°	524lm / 6.2W	703lm / 9.2W

### Asy lotis 97 adjustable GU10



1X OPAR 16 | GU10 | 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

#### INSTALLATION ACCESSORIES

12290330 GYPKIT 190X190-Ø92

#### OPTICAL ACCESSORIES


10211903 SPREADLENS Ø50

10213003 SOFTLENS Ø50



RESISTIVE DIMMABLE	
alu	10881505
black	10881502
white struc	10881509

#### M-LED



14060005	M-LED 50 2700K 15° GE ALU
14060105	M-LED 50 2700K 25° GE ALU
14060205	M-LED 50 2700K 40° GE ALU
14060305	M-LED 50 3000K 15° GE ALU
14060405	M-LED 50 3000K 25° GE ALU
14060505	M-LED 50 3000K 40° GE ALU
14060605	M-LED 50 3500K 15° GE ALU
14060705	M-LED 50 3500K 25° GE ALU

14060805	M-LED 50 3500K 40° GE ALU
14060905	M-LED 50 4000K 15° GE ALU
14061005	M-LED 50 4000K 25° GE ALU
14061105	M-LED 50 4000K 40° GE ALU
14061205	M-LED 50 1800-3000K 15° GE ALU
14061305	M-LED 50 1800-3000K 25° GE ALU
14061405	M-LED 50 1800-3000K 40° GE ALU



LOTIS SQUARE



LOTIS SQUARE







# LOTIS SQUARE

*Lotis square is a compact, square version of our successful round Lotis series. The bulb sits deep down in a conical cup, which means it is less visible. Besides the regular version, there is also an IP version for use in damp rooms or outdoor environments. Also available in a Lotis square for LED version, using our M-LED 50 module. This allows you to choose from a large range of lighting colours and three different beam angles (spot, medium or flood).*

more info? [supermodular.com/en/lotis-square](https://supermodular.com/en/lotis-square)

WARM DIM

### Lotis square for LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

#### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12291130 GYPKIT 190X190X78X78





black	12619002
white struc	12619009

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - M-LED 50 alu)

	350mA	500mA
2700K / 25°	442lm / 6.2W	568lm / 9.2W
3000K / 25°	469lm / 6.2W	630lm / 9.2W
3500K / 25°	487lm / 6.2W	655lm / 9.2W
4000K / 25°	510lm / 6.2W	685lm / 9.2W

WARM DIM

### Lotis square IP55 for LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 50

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

#### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12291230 GYPKIT 190X190X84X84



black struc	12619108
white struc	12619109

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - M-LED 50 alu)

	350mA	500mA
2700K / 25°	460lm / 6.2W	591lm / 9.2W
3000K / 25°	487lm / 6.2W	655lm / 9.2W
3500K / 25°	506lm / 6.2W	681lm / 9.2W
4000K / 25°	533lm / 6.2W	715lm / 9.2W

#### M-LED



14060005 M-LED 50 2700K 15° GE ALU

14060105 M-LED 50 2700K 25° GE ALU

14060205 M-LED 50 2700K 40° GE ALU

14060305 M-LED 50 3000K 15° GE ALU

14060405 M-LED 50 3000K 25° GE ALU

14060505 M-LED 50 3000K 40° GE ALU

14060605 M-LED 50 3500K 15° GE ALU

14060705 M-LED 50 3500K 25° GE ALU

14060805 M-LED 50 3500K 40° GE ALU

14060905 M-LED 50 4000K 15° GE ALU

14061005 M-LED 50 4000K 25° GE ALU

14061105 M-LED 50 4000K 40° GE ALU



14061205 M-LED 50 1800-3000K 15° GE ALU

14061305 M-LED 50 1800-3000K 25° GE ALU

14061405 M-LED 50 1800-3000K 40° GE ALU

REQUIRED PARTS

## Lotis square MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

### INSTALLATION ACCESSORIES



10889830 CONBOX 190X192X130X256

12291130 GYPKIT 190X190X78X78



black	12611002
white struc	12611009

## Lotis square GU10



1X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES



10889830 CONBOX 190X192X130X256

12291130 GYPKIT 190X190X78X78



RESISTIVE DIMMABLE	
black	12610002
white struc	12610009

# Lotis square IP55 MR16 GE



1X QR-C 51 | GX5.3 | MAX. 50W



## INSTALLATION ACCESSORIES

**10889830** CONBOX 190X192X130X256

**12291230** GYPKIT 190X190X84X84

black struc	12615008
white struc	12615009

# Lotis square IP55 GU10



1X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12291230 GYPKIT 190X190X84X84

230V

R

IP55

GWT  
960°

0.28KG

RESISTIVE DIMMABLE	
black struc	12614008
white struc	12614009



LOTIS TUBED SURFACE



LOTIS TUBED SUSPENSION



# LOTIS TUBED

SEE ALSO



WALL - P539





EXTERIOR - P604

*Lotis tubed is the surface-mounted version of the standard Lotis recessed spot. The coloured cylinder houses the Lotis spot. Lotis tubed is available in different heights, from 130 mm (surface mounted) to 190 mm (suspended). Combining both versions creates depth in your rooms and spices up your interior. Lotis tubed allows you to play with colours: go for contrasting black, white and gold finishes, or choose a more uniform look instead.*

more info? [supermodular.com/en/lotis-tubed](https://supermodular.com/en/lotis-tubed)

### Lotis tubed surface LED retrofit



1X LED GU10 INCL. 5.5W





LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black struc - gold	11450232
black struc - white struc	11450237
white struc - black	11450229
white struc - gold	11450289
white struc - white struc	11450209

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25°

346lm / 5.5W

### Lotis tubed surface MR16 GE





1X QR-CBC 51 | GU 5.3 | MAX. 50W



black struc - gold	10882932
black struc - white struc	10882937
white struc - black	10882929
white struc - gold	10882989
white struc - white struc	10882909

### Lotis tubed surface GU10



1X QPAR 16 | GU10 | MAX. 35W




RESISTIVE DIMMABLE	
black struc - gold	10883032
black struc - white struc	10883037
white struc - black	10883029
white struc - gold	10883089
white struc - white struc	10883009

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES



## Lotis tubed suspension LED retrofit



1X LED GU10 INCL. | GU10 | 5.5W




LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black struc - gold	11458332
black struc - white struc	11458337
white struc - black	11458329
white struc - gold	11458389
white struc - white struc	11458309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25°

346lm / 5.5W

## Lotis tubed suspension GU10



1X QPAR 16 | GU10 | MAX. 35W



\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES



RESISTIVE DIMMABLE	
black struc - gold	10883132
black struc - white struc	10883137
white struc - black	10883129
white struc - gold	10883189
white struc - white struc	10883109

## Lotis tubed recessed MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W




white struc - white struc	10883409
---------------------------	----------



MARBUL - ALU REFLECTOR



MARBUL RECESSED - ALU REFLECTOR

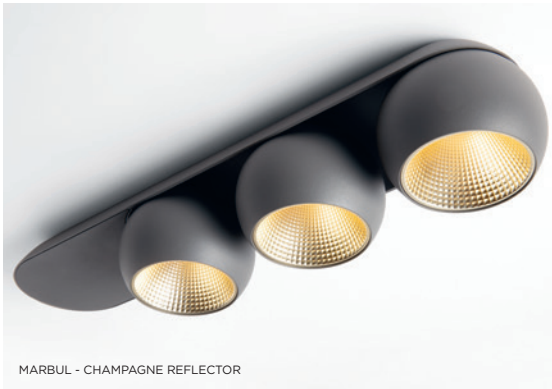

MARBUL - CHAMPAGNE REFLECTOR



MARBUL RECESSED - GOLD REFLECTOR



MARBUL SUSPENSION ADJUSTABLE - CHAMPAGNE REFL.



MARBUL SUSPENSION - GOLD REFLECTOR



MARBUL SUSPENSION ADJUSTABLE - ALU REFLECTOR




# MARBUL

Design — Jeffrey Huyghe

more info? [supermodular.com/en/marbul](http://supermodular.com/en/marbul)  
[supermodular.com/en/marbul-recessed](http://supermodular.com/en/marbul-recessed)  
[supermodular.com/en/marbul-suspension](http://supermodular.com/en/marbul-suspension)

SEE ALSO



CEILING - P85



TRACK 48V - P417



TRACK 230V - P477



HENRY VAN  
DE VELDE  
AWARDS 15  
WINNER



*Marbul is an ideal choice for residential, hospitality and retail projects. Direct light with a simple twist of the lamp units, each with its own dedicated LED module.*

*With Marbul also available for our Pista 48V and 230V track systems, and our Kompas ceiling base, the family is getting more versatile. All Marbuls include the option to interchange magnetic reflectors in aluminium, champagne or gold colours. Add warm dim technology to fine tune the mood even more.*

## Asymmetry rules

The elegant surface-mounted luminaires enable you to direct light with a simple twist of each lamp unit. Thanks to Marbul's streamlined driver box, the 1, 2 or 3 spheres appear to float against the ceiling. The unique magnetic cover plate keeps screws and wires neatly out of sight.


## All-round sophistication

Marbul recessed is characterized by a thin trim of 5mm through which 1 or 2 spheres appear to gently hang from the ceiling, without any visible attachments. Each lamp unit is highly adjustable and can be rotated 360°, and inclined approximately 45°.

## Adding more dynamism to an original

Marbul suspension comes with a particularly thin, matte black cable and a fixed or adjustable sphere. Choose a gold, champagne or aluminium reflector to pimp your desired light effect. The adjustable version features a small cap that can be used to incline the sphere by approximately 45° to highlight specific elements in a room, and the cable itself can be rotated 360°.

## Marbul 1x LED GI



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD



TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	11500032	11500332
donkey grey struc	11500076	11500376
white struc	11500009	11500309

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black struc	11500132	11500432
donkey grey struc	11500176	11500476
white struc	11500109	11500409


DALI	2700K / CRI90+	3000K / CRI90+
black struc	11500232	11500532
donkey grey struc	11500276	11500576
white struc	11500209	11500509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25° alu	634lm / 8.5W
3000K / 25° alu	718lm / 8.5W

WARM DIM

## Marbul 1x LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

### OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD




TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
black struc	11500632
donkey grey struc	11500676
white struc	11500609

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25° alu	955lm / 15W
------------------	-------------

## Marbul 2x LED GI



2X LED ARRAY INCL. | 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD



TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	11501032	11501332
donkey grey struc	11501076	11501376
white struc	11501009	11501309


1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black struc	11501132	11501432
donkey grey struc	11501176	11501476
white struc	11501109	11501409

DALI	2700K / CRI90+	3000K / CRI90+
black struc	11501232	11501532
donkey grey struc	11501276	11501576
white struc	11501209	11501509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - lumen values per lamp module)

2700K / 25° alu	634lm / 15W
3000K / 25° alu	718lm / 15W

## Marbul 3x LED GI



3X LED ARRAY INCL. | 4W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

OPTICAL ACCESSORIES > SEE ABOVE



TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	11502032	11502332
donkey grey struc	11502076	11502376
white struc	11502009	11502309



1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black struc	11502132	11502432
donkey grey struc	11502176	11502476
white struc	11502109	11502409

DALI	2700K / CRI90+	3000K / CRI90+
black struc	11502232	11502532
donkey grey struc	11502276	11502576
white struc	11502209	11502509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - lumen values per lamp module)

2700K / 25° alu	481lm / 15W
3000K / 25° alu	544lm / 15W

## Marbul recessed 115 1x LED GE



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

### INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108





	2700K / CRI90+	3000K / CRI90+
black struc	14222032	14222132
donkey grey struc	14222076	14222176
white struc	14222009	14222109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25° alu	634lm / 6W	852lm / 8.9W
3000K / 25° alu	718lm / 6W	964lm / 8.9W

WARM DIM

## Marbul recessed 115 1x LED warm dim GE



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

### INSTALLATION ACCESSORIES

10889830	CONBOX 190X192X130X256
12290530	GYPKIT 190X190 - Ø108





	1800K - 3000K / CRI90+
black struc	14222432
donkey grey struc	14222476
white struc	14222409

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25° alu	955lm / 12W
------------------	-------------

## Marbul recessed 115 2x LED GE



2X LED ARRAY INCL. 8.9W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

### INSTALLATION ACCESSORIES

10390130	CONBOX 183X312X122X247
12291530	GYPKIT 310X212 - 2XØ108 R54X120




	2700K / CRI90+	3000K / CRI90+
black struc	14222332	14222332
donkey grey struc	14222276	14222376
white struc	14222209	14222309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - values per lamp module)

	350mA	500mA
2700K / 25° alu	634lm / 6W	852lm / 8.9W
3000K / 25° alu	718lm / 6W	964lm / 8.9W

WARM DIM

## Marbul recessed 115 2x LED warm dim GE



2X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

### INSTALLATION ACCESSORIES

10390130	CONBOX 183X312X122X247
12291530	GYPKIT 310X212 - 2XØ108 R54X120





	1800K - 3000K / CRI90+
black struc	14222532
donkey grey struc	14222576
white struc	14222509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - values per lamp module)

@3000K / 25° alu	955lm / 12W
------------------	-------------

## Marbul suspension LED GE



1X LED ARRAY INCL. 9.3W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD





	2700K / CRI90+	3000K / CRI90+
black struc	14236032	14236332
donkey grey struc	14236076	14236376
white struc	14236009	14236309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25° alu	703lm / 9.3W	964lm / 13.8W
3000K / 25° alu	748lm / 9.3W	1026lm / 13.8W

WARM DIM

## Marbul suspension LED warm dim GE



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD





	1800K - 3000K / CRI90+
black struc	14236632
donkey grey struc	14236676
white struc	14236609

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25° alu	955lm / 12W
------------------	-------------



## Marbul suspension LED GI



1X LED ARRAY INCL. 9.3W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
! LONGER SUSPENSION CABLE ON REQUEST



CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

WARM DIM

## Marbul suspension LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
! LONGER SUSPENSION CABLE ON REQUEST

### OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD



TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	14230032	14230332
donkey grey struc	14230076	14230376
white struc	14230009	14230309

DALI	2700K / CRI90+	3000K / CRI90+
black struc	14232032	14232332
donkey grey struc	14232076	14232376
white struc	14232009	14232309

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black struc	14231032	14231332
donkey grey struc	14231076	14231376
white struc	14231009	14231309

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K / 25° alu	703lm / 11W
3000K / 25° alu	748lm / 11W





TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
black struc	14236732
donkey grey struc	14236776
white struc	14236709

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

@3000K / 25° alu	955lm / 15W
------------------	-------------

## Marbul suspension adjustable LED GE



1X LED ARRAY INCL. 9.3W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD





	2700K / CRI90+	3000K / CRI90+
black struc	14237032	14237332
donkey grey struc	14237076	14237376
white struc	14237009	14237309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25° alu	703lm / 9.3W	964lm / 13.8W
3000K / 25° alu	748lm / 9.3W	1026lm / 13.8W

WARM DIM

## Marbul suspension adjustable LED warm dim GE



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD




	1800K - 3000K / CRI90+
black struc	14239232
donkey grey struc	14239276
white struc	14239209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25° alu	955lm / 12W
------------------	-------------

## Marbul suspension adjustable LED GI



1X LED ARRAY INCL. 9.3W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
! LONGER SUSPENSION CABLE ON REQUEST


CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

WARM DIM

## Marbul suspension adjustable LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
! LONGER SUSPENSION CABLE ON REQUEST

### OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD



TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	14233032	14233332
donkey grey struc	14233076	14233376
white struc	14233009	14233309

DALI	2700K / CRI90+	3000K / CRI90+
black struc	14235032	14235332
donkey grey struc	14235076	14235376
white struc	14235009	14235309

1-10V/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black struc	14234032	14234332
donkey grey struc	14234076	14234376
white struc	14234009	14234309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25° alu	703lm / 11W
3000K / 25° alu	748lm / 11W



TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
black struc	14239332
donkey grey struc	14239376
white struc	14239309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25° alu	955lm / 15W
------------------	-------------



MARCEL



MARCEL



# MARCEL

more info? [supermodular.com/en/marcel](http://supermodular.com/en/marcel)

*Marcel meets every customer's requirements for a highly efficient retail lighting solution. Its ease-of-installation, adjustability and the endless possibilities procured by different LED sources and different lamp versions (1, 2 or 3 lamps) make Marcel an extremely versatile fixture.*

## Focus on the essentials

Marcel presents a stylish frame, fitted with adjustable lamp units. In the single lamp version, the frame is square shaped, while the two and three lamp versions have a rectangular shape. The refined, directional downlight will be used mainly in retail applications, as a functional lighting solution. It's perfect for situations that require both high efficiency and low consumption.



## Plug-and-play installation

Marcel's installation is just as quick and easy as changing its lighting effect (by interchangeable reflectors or add-on anti glare, spread lens, etc.), thanks to our smart installation system. By simply tightening two screws, the installation flanges fold out and secure the fixture to the ceiling.

## Only one light push

The right lighting mood is of the utmost importance in a shop. Marcel makes it easy to change the lighting effect to suit the circumstances and setting in your retail space. The brackets and unique tilting mechanism allow you to direct the light source the way you want, and you won't need a ladder; the tip of a broomstick will do the trick! Just touch the border of the lamp's housing and redirect the lamp as desired in one single action.

## Marcel 1x LED GE



1X LED ARRAY INCL. 17.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10212700 TRANSPARENT GLASS Ø79

10212703 SPREADLENS Ø79

10212702 HONEYCOMB Ø79

11949730 REFLECTOR LED Ø80 FLOOD

11949830 REFLECTOR LED Ø80 MEDIUM

11949930 REFLECTOR LED Ø80 SPOT




	2700K / CRI90+		
	15°	25°	40°
<b>black struc</b>	14091032	14091132	14091232
<b>white struc</b>	14091009	14091109	14091209
	3000K / CRI90+		
	15°	25°	40°
<b>black struc</b>	14091332	14091432	14091532
<b>white struc</b>	14091309	14091409	14091509
	4000K / CRI90+		
	15°	25°	40°
<b>black struc</b>	14091632	14091732	14091832
<b>white struc</b>	14091609	14091709	14091809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	1335lm / 11.7W	1811lm / 17.2W	2380lm / 25W
3000K / 25°	1383lm / 11.7W	1877lm / 17.2W	2466lm / 25W
4000K / 25°	1496lm / 11.7W	2029lm / 17.2W	2667lm / 25W

## Marcel 2x LED GE



2X LED ARRAY INCL. 17.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10212700 TRANSPARENT GLASS Ø79

10212703 SPREADLENS Ø79

10212702 HONEYCOMB Ø79

11949730 REFLECTOR LED Ø80 FLOOD

11949830 REFLECTOR LED Ø80 MEDIUM

11949930 REFLECTOR LED Ø80 SPOT



	2700K / CRI90+		
	15°	25°	40°
<b>black struc</b>	14092032	14092132	14092232
<b>white struc</b>	14092009	14092109	14092209
	3000K / CRI90+		
	15°	25°	40°
<b>black struc</b>	14092332	14092432	14092532
<b>white struc</b>	14092309	14092409	14092509
	4000K / CRI90+		
	15°	25°	40°
<b>black struc</b>	14092632	14092732	14092832
<b>white struc</b>	14092609	14092709	14092809


### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - values per lamp module)

	350mA	500mA	700mA
2700K / 25°	1335lm / 11.7W	1811lm / 17.2W	2380lm / 25W
3000K / 25°	1383lm / 11.7W	1877lm / 17.2W	2466lm / 25W
4000K / 25°	1496lm / 11.7W	2029lm / 17.2W	2667lm / 25W

## Marcel 3x LED GE



3X LED ARRAY INCL. | 17.2W



DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10212700 TRANSPARENT GLASS Ø79

10212703 SPREADLENS Ø79

10212702 HONEYCOMB Ø79

11949730 REFLECTOR LED Ø80 FLOOD

11949830 REFLECTOR LED Ø80 MEDIUM

11949930 REFLECTOR LED Ø80 SPOT



	2700K / CRI90+		
	15°	25°	40°
black struc	14093032	14093132	14093232
white struc	14093009	14093109	14093209
	3000K / CRI90+		
	15°	25°	40°
black struc	14093332	14093432	14093532
white struc	14093309	14093409	14093509
	4000K / CRI90+		
	15°	25°	40°
black struc	14093632	14093732	14093832
white struc	14093609	14093709	14093809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - values per lamp module)

	350mA	500mA	700mA
2700K / 25°	1335lm / 11.7W	1811lm / 17.2W	2380lm / 25W
3000K / 25°	1383lm / 11.7W	1877lm / 17.2W	2466lm / 25W
4000K / 25°	1496lm / 11.7W	2029lm / 17.2W	2667lm / 25W



MEDARD 42 SEMI-RECESSED



MEDARD 42 RECESSED



MEDARD 70 STRETCHED SEMI-RECESSED 2X



MEDARD 70 RECESSED



MEDARD 70



MEDARD 70 STRETCHED





# MÉDARD

Design — Bleijh

more info? [supermodular.com/en/medard](https://supermodular.com/en/medard)  
[supermodular.com/en/medard-recessed](https://supermodular.com/en/medard-recessed)

SEE ALSO



JACK - P391



TRACK 48V - P427  
TRACK 230V - P482



*It's the stick insect that inspired the Dutch design agency Bleijh for the creation of Médard. Highly flexible thanks to its orientable head, Médard can sit still as a standalone on a desk, or on the ceiling. In its miniature form, it looks graceful on its own, on a ceiling or as part of our Pista track or our redesigned Modupoint LED jack system. Médard even comes with a stretched neck supporting 1 or 2 light units.*

## Table, ceiling, wall or track?

First, it was one sleek design. Modularity and fun ensued. From a table lamp, to more subtle surface-mounted and recessed ceiling applications. Add lovely wall versions and a playful variant, or plug it in our easy-to-install Modupoint ceiling base with or without extender sticks, and you've got yourself full-blown modularity.


## Matching sizes, matching rings

Médard 42 is the minimalistic member of the family, gracing walls or ceilings as a standalone, or sliding playfully as a smaller spot for our Pista track (48V) and our redesigned Modupoint. Médard 70 is a solid eye-catcher as a track spot (230V). And of equal diameter, Médard ceiling beautifies spaces as a surface-mounted and recessed luminaire.

## More lights, more spaces

Médard opens itself up to welcome more light. Médard stretched comes in two adjustable tube lengths: 300mm and 500mm and can support two light units. What's the opposite of stretched? Médard's distinctive and charming rounded edge is all you see with Médard recessed (ø42 and ø70). The matte black inner ring, same in all variants, combats glare and promotes a homogenous look.

## Médard 42 semi-recessed LED GE



1X LED ARRAY INCL. | 11.5W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES




	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13432032	13432132	13432232	13432332
white struc	13432009	13432109	13432209	13432309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	509lm / 5.6W	702lm / 8.1W	948lm / 11.5W
3000K / 25°	509lm / 5.6W	702lm / 8.1W	948lm / 11.5W

WARM DIM

## Médard 42 semi-recessed LED warm dim GE



1X LED ARRAY INCL. | 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES




	1800K - 3000K / CRI90+	
	35°	45°
black struc	13432432	13432532
white struc	13432409	13432509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35° 367lm / 6W

## Médard 70 semi-recessed LED GE



1X LED ARRAY INCL. 16.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10490330 CONBOX 112X172X100X236

12291330 GYPKIT 170X112-065




	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	12736032	12736132	12736232	12736332
white struc	12736009	12736109	12736209	12736309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	936lm / 11W	1285lm / 16.2W
3000K / 25°	920lm / 11W	1261lm / 16.2W

WARM DIM

## Médard 70 semi-recessed LED warm dim GE



1X LED ARRAY INCL. 12W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10490330 CONBOX 112X172X100X236

12291330 GYPKIT 170X112-065




	1800K - 3000K / CRI90+	
	25°	40°
black struc	12734432	12734532
white struc	12734409	12734509


### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°	802lm / 12W
--------------	-------------

## Médard 70 ceiling LED GI



1X LED ARRAY INCL. | 11W



TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	12732632	12732832	12734132	12734332
white struc	12732609	12732809	12734109	12734309


### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)


2700K / 25°	936lm / 13W
3000K / 25°	920lm / 13W

WARM DIM

## Médard 70 ceiling LED warm dim GI



1X LED ARRAY INCL. | 12W




TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+	
	25°	40°
black struc	12732332	12732432
white struc	12732309	12732409

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

@3000K / 25°	802lm / 13.5W
--------------	---------------

## Médard 70 stretched 1x LED GI



1X LED ARRAY INCL. 11W




TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	11650032	11650132	11650232	11650332
white struc	11650009	11650109	11650209	11650309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25°	936lm / 13W
3000K / 25°	920lm / 13W

WARM DIM

## Médard 70 stretched 1x LED warm dim GI



1X LED ARRAY INCL. 12W





TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+	
	25°	40°
black struc	11650432	11650532
white struc	11650409	11650509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°	802lm / 13.5W
--------------	---------------

## Médard 70 stretched 2x LED GI



2X LED ARRAY INCL. | 11W





TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	11651032	11651132	11651232	11651332
white struc	11651009	11651109	11651209	11651309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25°	936lm / 26W
3000K / 25°	920lm / 26W

WARM DIM

## Médard 70 stretched 2x LED warm dim GI



2X LED ARRAY INCL. | 12W





TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+	
	25°	40°
black struc	11651432	11651532
white struc	11651409	11651509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°	802lm / 27W
--------------	-------------

## Médard 70 stretched semi-recessed 1x LED GE



1X LED ARRAY INCL. | 16.2W



	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	11652032	11652132	11652232	11652332
white struc	11652009	11652109	11652209	11652309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)



	350mA	500mA
2700K / 25°	936lm / 11W	1285lm / 16.2W
3000K / 25°	920lm / 11W	1261lm / 16.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES



## Médard recessed 42 LED GE



1X LED MODULE INCL. 4.4W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12293130 GYPKIT 100X120-Ø40





	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	11550032	11550132	11550232	11550332
white struc	11550009	11550109	11550209	11550309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	259lm / 3W	349lm / 4.3W
3000K / 25°	259lm / 3W	349lm / 4.3W

WARM DIM

## Médard recessed 42 LED warm dim GE



1X LED MODULE INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12293130 GYPKIT 100X120-Ø40





	1800K - 3000K / CRI90+	
	35°	40°
black struc	11550432	11550532
white struc	11550409	11550509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35°	341lm / 6W
--------------	------------



## Médard recessed 70 LED GE



1X LED MODULE INCL. 9.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES





	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	11551032	11551132	11551232	11551332
white struc	11551009	11551109	11551209	11551309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K/25°	430lm/6.2W	578lm/9.2W	742lm/13.4W
3000K/25°	447lm/6.2W	600lm/9.2W	772lm/13.4W

WARM DIM

## Médard recessed 70 LED warm dim GE



1X LED MODULE INCL. 12W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES



	1800K - 3000K / CRI90+	
	25°	40°
black struc	11551432	11551532
white struc	11551409	11551509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K/25° 701lm/12W




## Médard LED retrofit



1X LED GU10 INCL. 5.5W

! CABLE (5M) INCLUDED  
! ON/OFF SWITCH INCLUDED



	230V		IP20	GWT 960°	2.75KG	▼
--	------	--	------	----------	--------	---

	2700K / CRI80
	25°
black struc	12730032
white struc	12730009

01 — CEILING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR

06 — PROFILES

07 — GOODIES



MINUDE 45 ADJUSTABLE - ANODIZED SILVER BRONZE



MINUDE 45 ADJUSTABLE JACK - WHITE STRUCTURE



MINUDE 45 SUSPENSION - ANODIZED CHAMPAGNE




MINUDE 45 SUSPENSION - ANODIZED BLACK



# MINUDE

more info? [supermodular.com/en/minude](http://supermodular.com/en/minude)

SEE ALSO



CEILING - P85



JACK - P397



TRACK 48V - P433



*Our miniature spot is an extremely simple cylinder-shaped light fixture with a lot to show. Endless applications, a variety of rich colours, phenomenal yogic flexibility. A deep-recessed light source for a glare-free light effect. To express a refined and minimalistic look & feel on walls or low ceiling executions, on high ceilings in its stand-alone suspended variant. Or go for more than one Minude, on our Pista track or Modupoint LED jack system, or combined with Kompas and Hoolahoop. This little spot will make a big impression.*

## Pure form, rich colours

The pure cylindrical shape with a thin, sharp edge and curved inner side hovers stylishly from a thin 2m matte black cable. Showing off its 6 rich colours – black ano, champagne ano, bronze ano, silver bronze ano – achieved by anodization, and two additional colours, powder painted black and white structure. All variants have a matte black back side.

## Quality lens and light


Minude's light quality will not be outshined by its minimalist design, however. Its beautifully concentrated light beam projected from a deep-recessed LED light source, provides a pleasant light output. Its sophisticated lens technology is well protected by the inner edge snuggling right up to the glass lens.



MINUDE 45 ADJUSTABLE - ANODIZED BRONZE




MINUDE 45 ADJUSTABLE - ANODIZED CHAMPAGNE

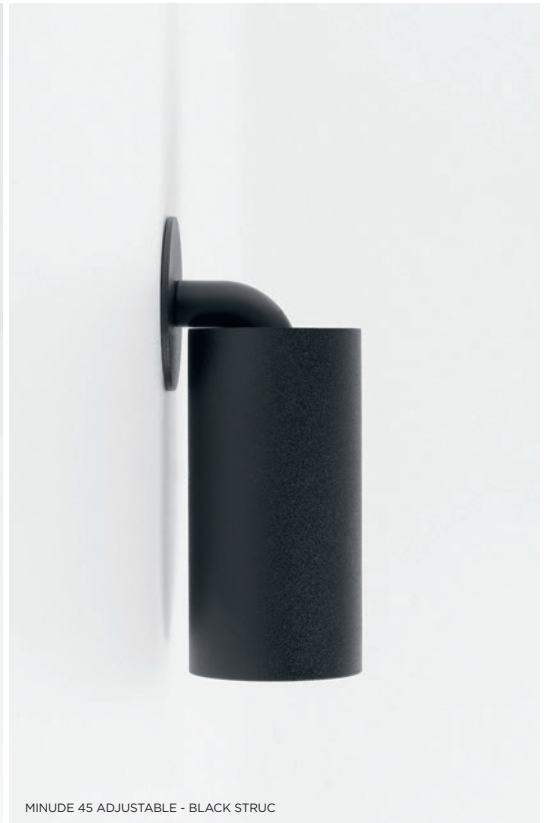

MINUDE 45 ADJUSTABLE - BLACK STRUC

## Minude 45 adjustable semi-recessed 1x LED GE



1X LED ARRAY INCL. | 8.1W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12293130 GYPKIT 100X120-Ø40



	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11461081	11461181
ano bronze	11461082	11461182
ano champagne	11461041	11461141
ano silver bronze	11461084	11461184
black struc	11461032	11461132
white struc	11461009	11461109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 30°	498lm / 5.6W	686lm / 8.1W
3000K / 30°	498lm / 5.6W	686lm / 8.1W




MINUDE 45 SUSPENSION - SILVER BRONZE




MINUDE 45 SUSPENSION - WHITE STRUCTURE



MINUDE 45 SUSPENSION - ANODIZED BRONZE

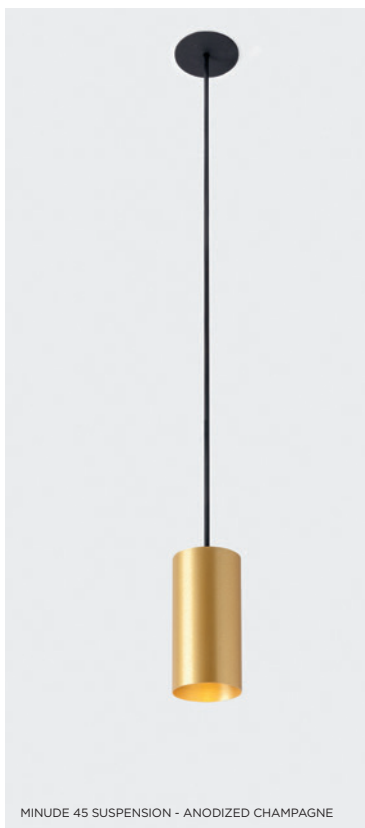


MINUDE 45 SUSPENSION - ANODIZED CHAMPAGNE

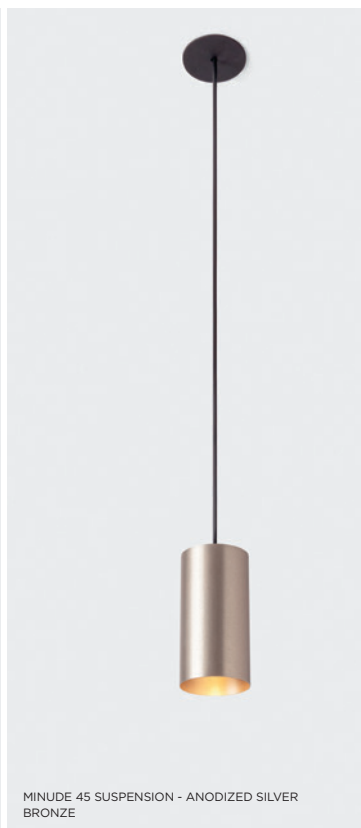


MINUDE 45 SUSPENSION - ANODIZED SILVER BRONZE



# Minude 45 suspension LED GE



1X LED ARRAY INCL. 8.1W




	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11465081	11465181
ano bronze	11465082	11465182
ano champagne	11465041	11465141
ano silver bronze	11465084	11465184
black struc	11465032	11465132
white struc	11465009	11465109

## LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 30°	498lm / 5.6W	686lm / 8.1W
3000K / 30°	498lm / 5.6W	686lm / 8.1W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

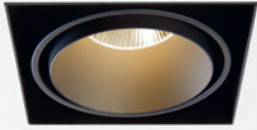

MINI MULTIPLE TRIMLESS WITH SMART KUP FRONTRING



MINI MULTIPLE 3X WITH M-LED 70



MINI MULTIPLE TRIMLESS 2X WITH M-LED 70



MINI MULTIPLE 4X WITH M-LED 70



MULTIPLE TRIMLESS 2X WITH M-LED 111



MULTIPLE 1X WITH M-LED 111



# (MINI) MULTIPLE

more info? [supermodular.com/en/mini-multiple](https://supermodular.com/en/mini-multiple)  
[supermodular.com/en/mini-multiple-trimless](https://supermodular.com/en/mini-multiple-trimless)  
[supermodular.com/en/multiple](https://supermodular.com/en/multiple)  
[supermodular.com/en/multiple-trimless](https://supermodular.com/en/multiple-trimless)

*More than twenty-five years after its initial launch, Multiple is still a much coveted luminaire series and the flagship solution in our architectural lighting portfolio.*

## Highly versatile

The technology is on full display and allows all Multiple luminaires to fit well into both a minimalist and an industrial-chic environment. The light source can be directed at any angle thanks to the gimbaled system.



The Multiple family consists of four models, with slight differences as to size and finish. All four models are available for LED, by combining the Multiple (trimless) and Mini multiple (trimless) with our M-LED 111 and M-LED 70 modules.

The LED series offers you an extensive range of lighting colours and three different beam angles.

Connect Mini multiple (trimless) for Smart rings with Smart by adding the frontrings to your recessed spot.

WARM DIM

### Mini multiple for 1x LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

#### INSTALLATION ACCESSORIES

10400130 CONBOX 122X257X147X186

10420130 GYPKIT 255X152X110X110




alu - black	13130005
white struc	13130009

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	571lm / 6.2W	734lm / 9.2W
3000K / 25°	605lm / 6.2W	813lm / 9.2W
4000K / 25°	649lm / 6.2W	871lm / 9.2W

WARM DIM

### Mini multiple for 2x LED GE



2X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

#### INSTALLATION ACCESSORIES

10400230 CONBOX 257X222X147X321

10420230 GYPKIT 240X287X210X110



alu - black	13130105
white struc	13130109

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	571lm / 6.2W	734lm / 9.2W
3000K / 25°	605lm / 6.2W	813lm / 9.2W
4000K / 25°	649lm / 6.2W	871lm / 9.2W


#### M-LED

14070002	M-LED 70 2700K 15° GE BLACK MATT	14070402	M-LED 70 3000K 25° GE BLACK MATT	14070802	M-LED 70 4000K 40° GE BLACK MATT
14070009	M-LED 70 2700K 15° GE WHITE STRUC	14070409	M-LED 70 3000K 25° GE WHITE STRUC	14070809	M-LED 70 4000K 40° GE WHITE STRUC
14070102	M-LED 70 2700K 25° GE BLACK MATT	14070502	M-LED 70 3000K 40° GE BLACK MATT	14070902	M-LED 70 1800-3000K 15° GE BLACK MATT
14070109	M-LED 70 2700K 25° GE WHITE STRUC	14070509	M-LED 70 3000K 40° GE WHITE STRUC	14070909	M-LED 70 1800-3000K 15° GE WHITE STRUC
14070202	M-LED 70 2700K 40° GE BLACK MATT	14070602	M-LED 70 4000K 15° GE BLACK MATT	14071002	M-LED 70 1800-3000K 25° GE BLACK MATT
14070209	M-LED 70 2700K 40° GE WHITE STRUC	14070609	M-LED 70 4000K 15° GE WHITE STRUC	14071009	M-LED 70 1800-3000K 25° GE WHITE STRUC
14070302	M-LED 70 3000K 15° GE BLACK MATT	14070702	M-LED 70 4000K 25° GE BLACK MATT	14071102	M-LED 70 1800-3000K 40° GE BLACK MATT
14070309	M-LED 70 3000K 15° GE WHITE STRUC	14070709	M-LED 70 4000K 25° GE WHITE STRUC	14071109	M-LED 70 1800-3000K 40° GE WHITE STRUC

REQUIRED PARTS

WARM DIM

### Mini multiple for 3x LED GE



3X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

#### INSTALLATION ACCESSORIES

10400330 CONBOX 257X327X147X321

10420330 GYPKIT 345X287X315X110




alu - black	13130205
white struc	13130209

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	571lm / 6.2W	734lm / 9.2W
3000K / 25°	605lm / 6.2W	813lm / 9.2W
4000K / 25°	649lm / 6.2W	871lm / 9.2W

WARM DIM

### Mini multiple for 4x LED GE



4X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

#### INSTALLATION ACCESSORIES

10400430 CONBOX 357X222X147X421

10420430 GYPKIT 240X387X210X210





alu - black	13130305
white struc	13130309

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	571lm / 6.2W	734lm / 9.2W
3000K / 25°	605lm / 6.2W	813lm / 9.2W
4000K / 25°	649lm / 6.2W	871lm / 9.2W

## Mini multiple 1x LED retrofit



1X LED GU10 INCL | 5.5W

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10400130 CONBOX 122X257X147X186

10420130 GYPKIT 255X152X110X110




LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu - black	11430005
white struc	11430009

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - values per lamp)

2700K / 25° 389lm / 5.5W

## Mini multiple 2x LED retrofit



2X LED GU10 INCL | 5.5W

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10400230 CONBOX 257X222X147X321

10420230 GYPKIT 240X287X210X110





LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu - black	11430105
white struc	11430109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - values per lamp)

2700K / 25° 389lm / 5.5W

## Mini multiple 3x LED retrofit



3X LED GU10 INCL. 5.5W


CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10400330 CONBOX 257X327X147X321

10420330 GYPKIT 345X287X315X110

## Mini multiple 4x LED retrofit



4X LED GU10 INCL. 5.5W

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10400430 CONBOX 357X222X147X421

10420430 GYPKIT 240X387X210X210





LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu - black	11430205
white struc	11430209
<b>LUMINAIRE OUTPUT &amp; POWER CONSUMPTION</b> (white struc - values per lamp)	
2700K / 25°	389lm / 5.5W



LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
alu - black	11430305
white struc	11430309
<b>LUMINAIRE OUTPUT &amp; POWER CONSUMPTION</b> (white struc - values per lamp)	
2700K / 25°	389lm / 5.5W

## Mini multiple 1x MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

### INSTALLATION ACCESSORIES



10400130 CONBOX 122X257X147X186

10420130 GYPKIT 255X152X110X110



alu - black	10370705
white struc	10370709

## Mini multiple 2x MR16 GE



2X QR-CBC 51 | GU 5.3 | MAX. 50W

### INSTALLATION ACCESSORIES

10400230 CONBOX 257X222X147X321



10420230 GYPKIT 240X287X210X110



alu - black	10370805
white struc	10370809



## Mini multiple 3x MR16 GE



3X QR-CBC 51 | GU 5.3 | MAX. 50W

### INSTALLATION ACCESSORIES



10400330 CONBOX 257X327X147X321

10420330 GYPKIT 345X287X315X110



alu - black	10370905
white struc	10370909

## Mini multiple 4x MR16 GE



4X QR-CBC 51 | GU 5.3 | MAX. 50W

### INSTALLATION ACCESSORIES



10400430 CONBOX 357X222X147X421

10420430 GYPKIT 240X387X210X210



alu - black	10371005
white struc	10371009

## Mini multiple 1x GU10



1X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES



10400130 CONBOX 122X257X147X186

10420130 GYPKIT 255X152X110X110



RESISTIVE DIMMABLE	
alu - black	10351205
white struc	10351209

## Mini multiple 2x GU10



2X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES



10400230 CONBOX 257X222X147X321

10420230 GYPKIT 240X287X210X110



RESISTIVE DIMMABLE	
alu - black	10351305
white struc	10351309

## Mini multiple 3x GU10



3X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES



10400330 CONBOX 257X327X147X321

10420330 GYPKIT 345X287X315X110



RESISTIVE DIMMABLE	
alu - black	10351405
white struc	10351409

## Mini multiple 4x GU10



4X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES



10400430 CONBOX 357X222X147X421

10420430 GYPKIT 240X387X210X210



RESISTIVE DIMMABLE	
alu - black	10351505
white struc	10351509

## Mini multiple for Smart rings 1x LED GE



1X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE BELOW

INSTALLATION ACCESSORIES

10400130 CONBOX 122X257X147X186

10420130 GYPKIT 255X152X110X110





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
alu - black	12524005	12524105	12524205
white struc	12524009	12524109	12524209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	526lm / 6.2W	707lm / 9.2W
3000K / 25°	547lm / 6.2W	735lm / 9.2W
4000K / 25°	599lm / 6.2W	753lm / 9.2W

## Mini multiple for Smart rings 2x LED GE



2X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE BELOW

INSTALLATION ACCESSORIES

10400230 CONBOX 257X222X147X321

10420230 GYPKIT 240X287X210X110



	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
alu - black	12525005	12525105	12525205
white struc	12525009	12525109	12525209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	526lm / 6.2W	707lm / 9.2W
3000K / 25°	547lm / 6.2W	735lm / 9.2W
4000K / 25°	599lm / 6.2W	753lm / 9.2W

### SMART FRONTRINGS

12553002 SMART FLAT FRONTRING 25° BLACK

12553009 SMART FLAT FRONTRING 25° WHITE STRUC

12553102 SMART FLAT FRONTRING 40° BLACK

12553109 SMART FLAT FRONTRING 40° WHITE STRUC

12553202 SMART FLAT FRONTRING 15° BLACK

12553209 SMART FLAT FRONTRING 15° WHITE STRUC

12554002 SMART CAKE FRONTRING 25° BLACK

12554009 SMART CAKE FRONTRING 25° WHITE STRUC

12554102 SMART CAKE FRONTRING 40° BLACK

12554109 SMART CAKE FRONTRING 40° WHITE STRUC

12554202 SMART CAKE FRONTRING 15° BLACK

12554209 SMART CAKE FRONTRING 15° WHITE STRUC

12555002 SMART LOTIS FRONTRING 25° BLACK

12555009 SMART LOTIS FRONTRING 25° WHITE STRUC

12555102 SMART LOTIS FRONTRING 40° BLACK

12555109 SMART LOTIS FRONTRING 40° WHITE STRUC

12555202 SMART LOTIS FRONTRING 15° BLACK

12555209 SMART LOTIS FRONTRING 15° WHITE STRUC

12556002 SMART KUP FRONTRING 25° BLACK

12556009 SMART KUP FRONTRING 25° WHITE STRUC



12556102 SMART KUP FRONTRING 40° BLACK

12556109 SMART KUP FRONTRING 40° WHITE STRUC

12556202 SMART KUP FRONTRING 15° BLACK

12556209 SMART KUP FRONTRING 15° WHITE STRUC

## Mini multiple for Smart rings 3x LED GE



3X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10400330 CONBOX 257X327X147X321

10420330 GYPKIT 345X287X315X110





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
alu - black	12526005	12526105	12526205
white struc	12526009	12526109	12526209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	526lm / 6.2W	707lm / 9.2W
3000K / 25°	547lm / 6.2W	735lm / 9.2W
4000K / 25°	599lm / 6.2W	753lm / 9.2W

## Mini multiple for Smart rings 4x LED GE



4X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10400430 CONBOX 357X222X147X421

10420430 GYPKIT 240X387X210X210





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
alu - black	12527005	12527105	12527205
white struc	12527009	12527109	12527209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)



	350mA	500mA
2700K / 25°	526lm / 6.2W	707lm / 9.2W
3000K / 25°	547lm / 6.2W	735lm / 9.2W
4000K / 25°	599lm / 6.2W	753lm / 9.2W

## SMART FRONTRINGS

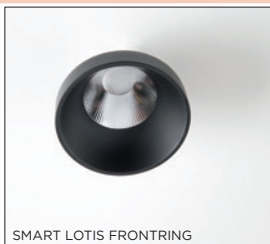

WARM DIM

### Mini multiple trimless for 1x LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10440130 CONBOX 137X158X130X215

10460130 RECESSED FRAME MINI MULTIPLE TRIMLESS 1X





black	13131002
white struc	13131009

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	571lm / 6.2W	734lm / 9.2W
3000K / 25°	605lm / 6.2W	813lm / 9.2W
4000K / 25°	649lm / 6.2W	871lm / 9.2W

WARM DIM

### Mini multiple trimless for 2x LED GE



2X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

INSTALLATION ACCESSORIES

10440230 CONBOX 237X158X130X315

10460230 RECESSED FRAME MINI MULTIPLE TRIMLESS 2X



black	13131102
white struc	13131109

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	571lm / 6.2W	734lm / 9.2W
3000K / 25°	605lm / 6.2W	813lm / 9.2W
4000K / 25°	649lm / 6.2W	871lm / 9.2W


#### M-LED

14070002	M-LED 70 2700K 15° GE BLACK MATT	14070402	M-LED 70 3000K 25° GE BLACK MATT	14070802	M-LED 70 4000K 40° GE BLACK MATT
14070009	M-LED 70 2700K 15° GE WHITE STRUC	14070409	M-LED 70 3000K 25° GE WHITE STRUC	14070809	M-LED 70 4000K 40° GE WHITE STRUC
14070102	M-LED 70 2700K 25° GE BLACK MATT	14070502	M-LED 70 3000K 40° GE BLACK MATT	14070902	M-LED 70 1800-3000K 15° GE BLACK MATT
14070109	M-LED 70 2700K 25° GE WHITE STRUC	14070509	M-LED 70 3000K 40° GE WHITE STRUC	14070909	M-LED 70 1800-3000K 15° GE WHITE STRUC
14070202	M-LED 70 2700K 40° GE BLACK MATT	14070602	M-LED 70 4000K 15° GE BLACK MATT	14071002	M-LED 70 1800-3000K 25° GE BLACK MATT
14070209	M-LED 70 2700K 40° GE WHITE STRUC	14070609	M-LED 70 4000K 15° GE WHITE STRUC	14071009	M-LED 70 1800-3000K 25° GE WHITE STRUC
14070302	M-LED 70 3000K 15° GE BLACK MATT	14070702	M-LED 70 4000K 25° GE BLACK MATT	14071102	M-LED 70 1800-3000K 40° GE BLACK MATT
14070309	M-LED 70 3000K 15° GE WHITE STRUC	14070709	M-LED 70 4000K 25° GE WHITE STRUC	14071109	M-LED 70 1800-3000K 40° GE WHITE STRUC

REQUIRED PARTS

WARM DIM

### Mini multiple trimless for 3x LED GE



3X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

#### INSTALLATION ACCESSORIES

10440730 CONBOX 342X158X130X420

10460730 RECESSED FRAME MINI MULTIPLE TRIMLESS 3X




black	13131202
white struc	13131209

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	571lm / 6.2W	734lm / 9.2W
3000K / 25°	605lm / 6.2W	813lm / 9.2W
4000K / 25°	649lm / 6.2W	871lm / 9.2W

WARM DIM

### Mini multiple trimless for 4x LED GE



4X LED (NOT INCL.)

! MUST BE USED WITH M-LED 70

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

#### INSTALLATION ACCESSORIES

10440430 CONBOX 237X258X130X315

10460430 RECESSED FRAME MINI MULTIPLE TRIMLESS 4X





black	13131302
white struc	13131309

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	571lm / 6.2W	734lm / 9.2W
3000K / 25°	605lm / 6.2W	813lm / 9.2W
4000K / 25°	649lm / 6.2W	871lm / 9.2W

## Mini multiple trimless 1x LED retrofit



1X LED GU10 INCL. 5.5W



CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10440130 CONBOX 137X158X130X215

10460130 RECESSED FRAME MINI MULTIPLE TRIMLESS 1X

## Mini multiple trimless 2x LED retrofit



2X LED GU10 INCL. 5.5W

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10440230 CONBOX 237X158X130X315

10460230 RECESSED FRAME MINI MULTIPLE TRIMLESS 2X





LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black	11440002
white struc	11440009
<b>LUMINAIRE OUTPUT &amp; POWER CONSUMPTION</b> (white struc - values per lamp)	
2700K / 25°	389lm / 5.5W



LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black	11440102
white struc	11440109
<b>LUMINAIRE OUTPUT &amp; POWER CONSUMPTION</b> (white struc - values per lamp)	
2700K / 25°	389lm / 5.5W



## Mini multiple trimless 3x LED retrofit



3X LED GU10 INCL. 5.5W



CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10440730 CONBOX 342X158X130X420

10460730 RECESSED FRAME MINI MULTIPLE TRIMLESS 3X

## Mini multiple trimless 4x LED retrofit



4X LED GU10 INCL. 5.5W

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10440430 CONBOX 237X258X130X315

10460430 RECESSED FRAME MINI MULTIPLE TRIMLESS 4X



LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black	11440202
white struc	11440209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - values per lamp)

2700K / 25° 389lm / 5.5W





LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black	11440302
white struc	11440309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - values per lamp)

2700K / 25° 389lm / 5.5W

## Mini multiple trimless 1x MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

### INSTALLATION ACCESSORIES

10440130 CONBOX 137X158X130X215

10460130 RECESSED FRAME MINI MULTIPLE TRIMLESS 1X



12V

IP20

GWT  
960°

0.72KG





black

10380702

white struc

10380709

## Mini multiple trimless 2x MR16 GE



2X QR-CBC 51 | GU 5.3 | MAX. 50W

### INSTALLATION ACCESSORIES

10440230 CONBOX 237X158X130X315

10460230 RECESSED FRAME MINI MULTIPLE TRIMLESS 2X



12V

IP20

GWT  
960°

1.01KG





black

10380802

white struc

10380809

### Mini multiple trimless 3x MR16 GE



3X QR-CBC 51 | GU 5.3 | MAX. 50W

#### INSTALLATION ACCESSORIES



10440730 CONBOX 342X158X130X420

10460730 RECESSED FRAME MINI MULTIPLE TRIMLESS 3X



black	10382002
white struc	10382009

### Mini multiple trimless 4x MR16 GE



4X QR-CBC 51 | GU 5.3 | MAX. 50W

#### INSTALLATION ACCESSORIES



10440430 CONBOX 237X258X130X315

10460430 RECESSED FRAME MINI MULTIPLE TRIMLESS 4X



black	10381002
white struc	10381009

## Mini multiple trimless 1x GU10



1X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES



10440130 CONBOX 137X158X130X215

10460130 RECESSED FRAME MINI MULTIPLE TRIMLESS 1X



RESISTIVE DIMMABLE	
black	10381502
white struc	10381509

## Mini multiple trimless 2x GU10



2X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES



10440230 CONBOX 237X158X130X315

10460230 RECESSED FRAME MINI MULTIPLE TRIMLESS 2X



RESISTIVE DIMMABLE	
black	10381602
white struc	10381609

## Mini multiple trimless 3x GU10



3X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES



10440730 CONBOX 342X158X130X420

10460730 RECESSED FRAME MINI MULTIPLE TRIMLESS 3X



RESISTIVE DIMMABLE	
black	10382202
white struc	10382209

## Mini multiple trimless 4x GU10



4X QPAR 16 | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES



10440430 CONBOX 237X258X130X315

10460430 RECESSED FRAME MINI MULTIPLE TRIMLESS 4X



RESISTIVE DIMMABLE	
black	10381902
white struc	10381909

## Mini multiple trimless for Smart rings 1x LED GE



1X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS  
! MUST BE USED WITH RECESSED FRAME

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE BELOW

INSTALLATION ACCESSORIES

10440130 CONBOX 137X158X130X215

10460130 RECESSED FRAME MINI MULTIPLE TRIMLESS 1X





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black	12535002	12535102	12535202
white struc	12535009	12535109	12535209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	526lm / 6.2W	707lm / 9.2W
3000K / 25°	547lm / 6.2W	735lm / 9.2W
4000K / 25°	599lm / 6.2W	753lm / 9.2W

## Mini multiple trimless for Smart rings 2x LED GE



2X LED ARRAY INCL. 9.2W

! MUST BE USED WITH SMART FRONTRINGS  
! MUST BE USED WITH RECESSED FRAME

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE BELOW

INSTALLATION ACCESSORIES

10440230 CONBOX 237X158X130X315

10460230 RECESSED FRAME MINI MULTIPLE TRIMLESS 2X



	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black	12536002	12536102	12536202
white struc	12536009	12536109	12536209



### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	526lm / 6.2W	707lm / 9.2W
3000K / 25°	547lm / 6.2W	735lm / 9.2W
4000K / 25°	599lm / 6.2W	753lm / 9.2W

### SMART FRONTRINGS

12553002	SMART FLAT FRONTRING 25° BLACK	12554102	SMART CAKE FRONTRING 40° BLACK	12555202	SMART LOTIS FRONTRING 15° BLACK
12553009	SMART FLAT FRONTRING 25° WHITE STRUC	12554109	SMART CAKE FRONTRING 40° WHITE STRUC	12555209	SMART LOTIS FRONTRING 15° WHITE STRUC
12553102	SMART FLAT FRONTRING 40° BLACK	12554202	SMART CAKE FRONTRING 15° BLACK	12556002	SMART KUP FRONTRING 25° BLACK
12553109	SMART FLAT FRONTRING 40° WHITE STRUC	12554209	SMART CAKE FRONTRING 15° WHITE STRUC	12556009	SMART KUP FRONTRING 25° WHITE STRUC
12553202	SMART FLAT FRONTRING 15° BLACK	12555002	SMART LOTIS FRONTRING 25° BLACK	12556102	SMART KUP FRONTRING 40° BLACK
12553209	SMART FLAT FRONTRING 15° WHITE STRUC	12555009	SMART LOTIS FRONTRING 25° WHITE STRUC	12556109	SMART KUP FRONTRING 40° WHITE STRUC
12554002	SMART CAKE FRONTRING 25° BLACK	12555102	SMART LOTIS FRONTRING 40° BLACK	12556202	SMART KUP FRONTRING 15° BLACK
12554009	SMART CAKE FRONTRING 25° WHITE STRUC	12555109	SMART LOTIS FRONTRING 40° WHITE STRUC	12556209	SMART KUP FRONTRING 15° WHITE STRUC

## Mini multiple trimless for Smart rings 3x LED GE



3X LED ARRAY INCL. | 9.2W

! MUST BE USED WITH SMART FRONTRINGS  
! MUST BE USED WITH RECESSED FRAME

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10440730 CONBOX 342X158X130X420

10460730 RECESSED FRAME MINI MULTIPLE TRIMLESS 3X





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black	12537002	12537102	12537202
white struc	12537009	12537109	12537209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	526lm / 6.2W	707lm / 9.2W
3000K / 25°	547lm / 6.2W	735lm / 9.2W
4000K / 25°	599lm / 6.2W	753lm / 9.2W

## Mini multiple trimless for Smart rings 4x LED GE



4X LED ARRAY INCL. | 9.2W

! MUST BE USED WITH SMART FRONTRINGS  
! MUST BE USED WITH RECESSED FRAME

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

SMART FRONTRING > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10440430 CONBOX 237X258X130X315

10460430 RECESSED FRAME MINI MULTIPLE TRIMLESS 4X






	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black	12538002	12538102	12538202
white struc	12538009	12538109	12538209



### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	526lm / 6.2W	707lm / 9.2W
3000K / 25°	547lm / 6.2W	735lm / 9.2W
4000K / 25°	599lm / 6.2W	753lm / 9.2W

### SMART FRONTRINGS

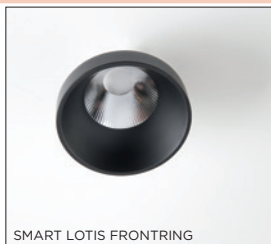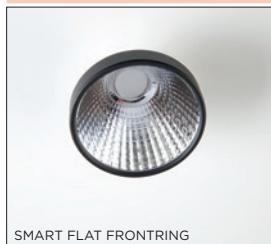

## Multiple for 1x LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

### INSTALLATION ACCESSORIES

10390130 CONBOX 183X312X122X247

10410130 GYPKIT 310X212X170X170





alu - black	13170005
white struc	13170009

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA	700mA
2700K / 25°	920lm / 11W	1256lm / 16.25W	1625lm / 23.6W
3000K / 25°	904lm / 11W	1233lm / 16.25W	1596lm / 23.6W
4000K / 25°	1053lm / 11W	1437lm / 16.25W	1860lm / 23.6W

## Multiple for 2x LED GE



2X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

### INSTALLATION ACCESSORIES

10390230 CONBOX 228X387X122X292

10410230 GYPKIT 385X257X325X170



alu - black	13170105
white struc	13170109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA	700mA
2700K / 25°	920lm / 11W	1256lm / 16.25W	1625lm / 23.6W
3000K / 25°	904lm / 11W	1233lm / 16.25W	1596lm / 23.6W
4000K / 25°	1053lm / 11W	1437lm / 16.25W	1860lm / 23.6W

### M-LED

11298002 M-LED 111 2700K 15° GE BLACK MATT

11298009 M-LED 111 2700K 15° GE WHITE STRUC

11298024 M-LED 111 2700K 15° GE BRUSHED ALU

11298102 M-LED 111 2700K 25° GE BLACK MATT

11298109 M-LED 111 2700K 25° GE WHITE STRUC

11298124 M-LED 111 2700K 25° GE BRUSHED ALU

11298202 M-LED 111 2700K 40° GE BLACK MATT

11298209 M-LED 111 2700K 40° GE WHITE STRUC

11298224 M-LED 111 2700K 40° GE BRUSHED ALU

11298302 M-LED 111 3000K 15° GE BLACK MATT

11298309 M-LED 111 3000K 15° GE WHITE STRUC

11298324 M-LED 111 3000K 15° GE BRUSHED ALU

11298402 M-LED 111 3000K 25° GE BLACK MATT

11298409 M-LED 111 3000K 25° GE WHITE STRUC

11298424 M-LED 111 3000K 25° GE BRUSHED ALU

11298502 M-LED 111 3000K 40° GE BLACK MATT

11298509 M-LED 111 3000K 40° GE WHITE STRUC

11298524 M-LED 111 3000K 40° GE BRUSHED ALU

11298602 M-LED 111 4000K 15° GE BLACK MATT

11298609 M-LED 111 4000K 15° GE WHITE STRUC

11298624 M-LED 111 4000K 15° GE BRUSHED ALU

11298702 M-LED 111 4000K 25° GE BLACK MATT

11298709 M-LED 111 4000K 25° GE WHITE STRUC

11298724 M-LED 111 4000K 25° GE BRUSHED ALU


11298802 M-LED 111 4000K 40° GE BLACK MATT

11298809 M-LED 111 4000K 40° GE WHITE STRUC

11298824 M-LED 111 4000K 40° GE BRUSHED ALU



## Multiple for 3x LED GE



3X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

### INSTALLATION ACCESSORIES

10390330 CONBOX 228X532X122X292

10410330 GYPKIT 530X257X470X170





alu - black	13170205
white struc	13170209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	920lm / 11W	1256lm / 16.25W
3000K / 25°	904lm / 11W	1233lm / 16.25W
4000K / 25°	1053lm / 11W	1437lm / 16.25W

## Multiple for 4x LED GE



4X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

### INSTALLATION ACCESSORIES

10390430 CONBOX 382X387X122X446

10410430 GYPKIT 385X412X325X325





alu - black	13170305
white struc	13170309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	920lm / 11W	1256lm / 16.25W
3000K / 25°	904lm / 11W	1233lm / 16.25W
4000K / 25°	1053lm / 11W	1437lm / 16.25W

## Multiple 1x AR111 GE



1X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE BELOW


### INSTALLATION ACCESSORIES

10390130 CONBOX 183X312X122X247

10410130 GYPKIT 310X212X170X170

alu - black	10350105
white struc	10350109

## Multiple 2x AR111 GE



2X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE BELOW

### INSTALLATION ACCESSORIES

10390230 CONBOX 228X387X122X292


10410230 GYPKIT 385X257X325X170

alu - black	10350205
white struc	10350209

## M-LED

11298002	M-LED 111 2700K 15° GE BLACK MATT	11298302	M-LED 111 3000K 15° GE BLACK MATT	11298602	M-LED 111 4000K 15° GE BLACK MATT
11298009	M-LED 111 2700K 15° GE WHITE STRUC	11298309	M-LED 111 3000K 15° GE WHITE STRUC	11298609	M-LED 111 4000K 15° GE WHITE STRUC
11298024	M-LED 111 2700K 15° GE BRUSHED ALU	11298324	M-LED 111 3000K 15° GE BRUSHED ALU	11298624	M-LED 111 4000K 15° GE BRUSHED ALU
11298102	M-LED 111 2700K 25° GE BLACK MATT	11298402	M-LED 111 3000K 25° GE BLACK MATT	11298702	M-LED 111 4000K 25° GE BLACK MATT
11298109	M-LED 111 2700K 25° GE WHITE STRUC	11298409	M-LED 111 3000K 25° GE WHITE STRUC	11298709	M-LED 111 4000K 25° GE WHITE STRUC
11298124	M-LED 111 2700K 25° GE BRUSHED ALU	11298424	M-LED 111 3000K 25° GE BRUSHED ALU	11298724	M-LED 111 4000K 25° GE BRUSHED ALU
11298202	M-LED 111 2700K 40° GE BLACK MATT	11298502	M-LED 111 3000K 40° GE BLACK MATT	11298802	M-LED 111 4000K 40° GE BLACK MATT
11298209	M-LED 111 2700K 40° GE WHITE STRUC	11298509	M-LED 111 3000K 40° GE WHITE STRUC	11298809	M-LED 111 4000K 40° GE WHITE STRUC
11298224	M-LED 111 2700K 40° GE BRUSHED ALU	11298524	M-LED 111 3000K 40° GE BRUSHED ALU	11298824	M-LED 111 4000K 40° GE BRUSHED ALU

## Multiple 3x AR111 GE



3X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE LEFT PAGE

### INSTALLATION ACCESSORIES


10390330 CONBOX 228X532X122X292

10410330 GYPKIT 530X257X470X170



alu - black	10350305
white struc	10350309

## Multiple 4x AR111 GE



4X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE LEFT PAGE

### INSTALLATION ACCESSORIES



10390430 CONBOX 382X387X122X446

10410430 GYPKIT 385X412X325X325



alu - black	10350405
white struc	10350409

## Multiple trimless for 1x LED GE



1X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

### INSTALLATION ACCESSORIES

10430130 CONBOX 194X215X120X272

10450130 RECESSED FRAME MULTIPLETRIMLESS 1X





black	13171002
white struc	13171009

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA	700mA
2700K / 25°	920lm / 11W	1256lm / 16.25W	1625lm / 23.6W
3000K / 25°	904lm / 11W	1233lm / 16.25W	1596lm / 23.6W
4000K / 25°	1053lm / 11W	1437lm / 16.25W	1860lm / 23.6W

## Multiple trimless for 2x LED GE



2X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE BELOW

### INSTALLATION ACCESSORIES

10430230 CONBOX 349X215X120X427

10450230 RECESSED FRAME MULTIPLETRIMLESS 2X



black	13171102
white struc	13171109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA	700mA
2700K / 25°	920lm / 11W	1256lm / 16.25W	1625lm / 23.6W
3000K / 25°	904lm / 11W	1233lm / 16.25W	1596lm / 23.6W
4000K / 25°	1053lm / 11W	1437lm / 16.25W	1860lm / 23.6W

### M-LED

11298002 M-LED 111 2700K 15° GE BLACK MATT

11298009 M-LED 111 2700K 15° GE WHITE STRUC

11298024 M-LED 111 2700K 15° GE BRUSHED ALU

11298102 M-LED 111 2700K 25° GE BLACK MATT

11298109 M-LED 111 2700K 25° GE WHITE STRUC

11298124 M-LED 111 2700K 25° GE BRUSHED ALU

11298202 M-LED 111 2700K 40° GE BLACK MATT

11298209 M-LED 111 2700K 40° GE WHITE STRUC

11298224 M-LED 111 2700K 40° GE BRUSHED ALU

11298302 M-LED 111 3000K 15° GE BLACK MATT

11298309 M-LED 111 3000K 15° GE WHITE STRUC

11298324 M-LED 111 3000K 15° GE BRUSHED ALU

11298402 M-LED 111 3000K 25° GE BLACK MATT

11298409 M-LED 111 3000K 25° GE WHITE STRUC

11298424 M-LED 111 3000K 25° GE BRUSHED ALU

11298502 M-LED 111 3000K 40° GE BLACK MATT

11298509 M-LED 111 3000K 40° GE WHITE STRUC

11298524 M-LED 111 3000K 40° GE BRUSHED ALU

11298602 M-LED 111 4000K 15° GE BLACK MATT

11298609 M-LED 111 4000K 15° GE WHITE STRUC

11298624 M-LED 111 4000K 15° GE BRUSHED ALU

11298702 M-LED 111 4000K 25° GE BLACK MATT

11298709 M-LED 111 4000K 25° GE WHITE STRUC



11298724 M-LED 111 4000K 25° GE BRUSHED ALU

11298802 M-LED 111 4000K 40° GE BLACK MATT

11298809 M-LED 111 4000K 40° GE WHITE STRUC

11298824 M-LED 111 4000K 40° GE BRUSHED ALU

## Multiple trimless for 3x LED GE



3X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10430330 CONBOX 492X215X120X570

10450330 RECESSED FRAME MULTIPLETRIMLESS 3X





black	13171202
white struc	13171209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	920lm / 11W	1256lm / 16.25W
3000K / 25°	904lm / 11W	1233lm / 16.25W
4000K / 25°	1053lm / 11W	1437lm / 16.25W

## Multiple trimless for 4x LED GE



4X LED (NOT INCL.)

! MUST BE USED WITH M-LED 111

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

M-LED > SEE LEFT PAGE

INSTALLATION ACCESSORIES

10430430 CONBOX 349X370X120X427

10450430 RECESSED FRAME MULTIPLETRIMLESS 4X





black	13171302
white struc	13171309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - value per lamp module)

	350mA	500mA
2700K / 25°	920lm / 11W	1256lm / 16.25W
3000K / 25°	904lm / 11W	1233lm / 16.25W
4000K / 25°	1053lm / 11W	1437lm / 16.25W

## Multiple trimless 1x AR111 GE



1X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE BELOW

### INSTALLATION ACCESSORIES



10430130 CONBOX 194X215X120X272

10450130 RECESSED FRAME MULTIPLETRIMLESS 1X



black	10360102
white struc	10360109

## Multiple trimless 2x AR111 GE



2X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE BELOW

### INSTALLATION ACCESSORIES

10430230 CONBOX 349X215X120X427

10450230 RECESSED FRAME MULTIPLETRIMLESS 2X



black	10360202
white struc	10360209

### M-LED

11298002 M-LED 111 2700K 15° GE BLACK MATT

11298009 M-LED 111 2700K 15° GE WHITE STRUC

11298024 M-LED 111 2700K 15° GE BRUSHED ALU

11298102 M-LED 111 2700K 25° GE BLACK MATT

11298109 M-LED 111 2700K 25° GE WHITE STRUC

11298124 M-LED 111 2700K 25° GE BRUSHED ALU

11298202 M-LED 111 2700K 40° GE BLACK MATT

11298209 M-LED 111 2700K 40° GE WHITE STRUC

11298224 M-LED 111 2700K 40° GE BRUSHED ALU

11298302 M-LED 111 3000K 15° GE BLACK MATT

11298309 M-LED 111 3000K 15° GE WHITE STRUC

11298324 M-LED 111 3000K 15° GE BRUSHED ALU

11298402 M-LED 111 3000K 25° GE BLACK MATT

11298409 M-LED 111 3000K 25° GE WHITE STRUC

11298424 M-LED 111 3000K 25° GE BRUSHED ALU

11298502 M-LED 111 3000K 40° GE BLACK MATT

11298509 M-LED 111 3000K 40° GE WHITE STRUC

11298524 M-LED 111 3000K 40° GE BRUSHED ALU

11298602 M-LED 111 4000K 15° GE BLACK MATT

11298609 M-LED 111 4000K 15° GE WHITE STRUC

11298624 M-LED 111 4000K 15° GE BRUSHED ALU

11298702 M-LED 111 4000K 25° GE BLACK MATT

11298709 M-LED 111 4000K 25° GE WHITE STRUC


11298724 M-LED 111 4000K 25° GE BRUSHED ALU

11298802 M-LED 111 4000K 40° GE BLACK MATT

11298809 M-LED 111 4000K 40° GE WHITE STRUC

11298824 M-LED 111 4000K 40° GE BRUSHED ALU

## Multiple trimless 3x AR111 GE



3X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE LEFT PAGE

### INSTALLATION ACCESSORIES


10430330 CONBOX 492X215X120X570

10450330 RECESSED FRAME MULTIPLETRIMLESS 3X



black	10360302
white struc	10360309

## Multiple trimless 4x AR111 GE



4X QR-LP 111 | G53 | MAX. 50W

! CAN BE COMBINED WITH M-LED 111

M-LED > SEE LEFT PAGE


### INSTALLATION ACCESSORIES

10430430 CONBOX 349X370X120X427

10450430 RECESSED FRAME MULTIPLETRIMLESS 4X



white struc	10360409
-------------	----------

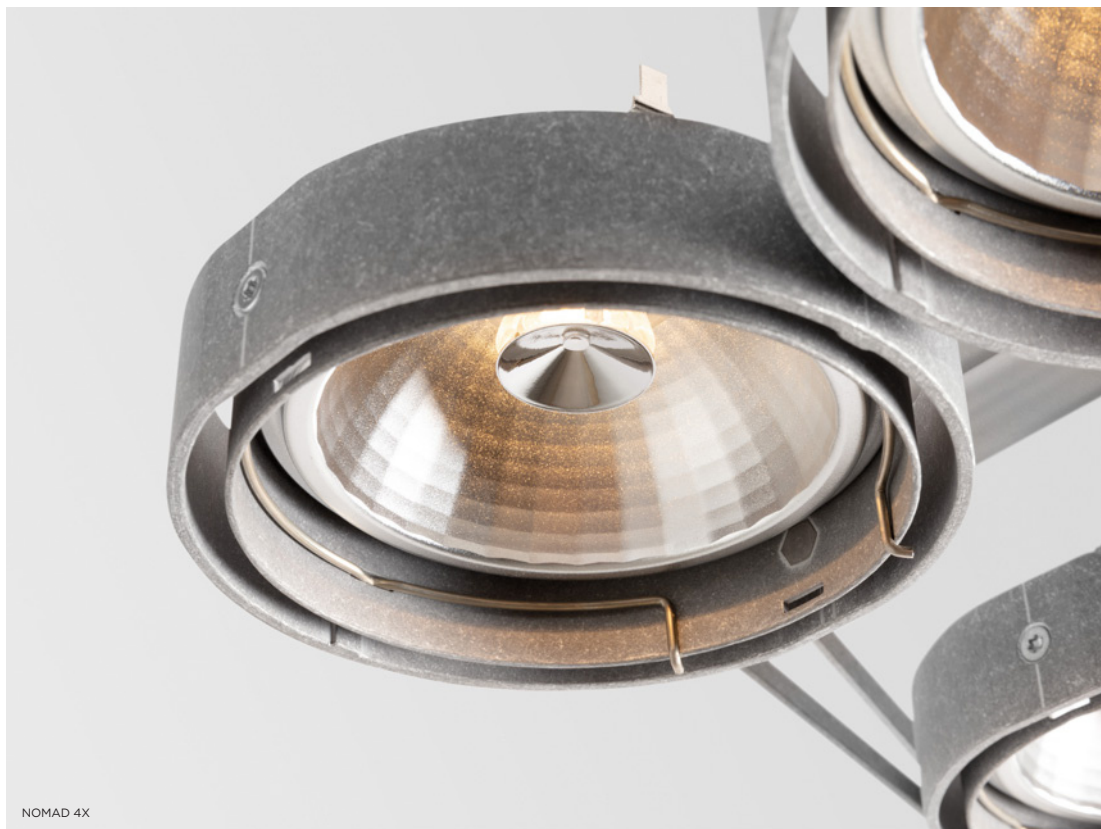

NOMAD 4X



NOMAD 2X GI



NOMAD 4X GI





# NOMAD



*If you're in for industrial design with a retro touch, revisit Nomad. More precisely, Nomad LED.*

## **Timeless passe-partout**

Arguably Modulars flagship product, Nomad never settles. It is loyal, however. Sporting tiny drivers, and a LED unit that looks exactly like the luminaire's first halogen bulb, Nomad LED respects the original design to perfection. Available in fittings of 2x and 4x light units, in white structure, black or aluminium, with or without integrated gear. The sweetheart of architects is ready for your next project.

more info? [supermodular.com/en/nomad](http://supermodular.com/en/nomad)

## Nomad 2x LED AR111 GE



2X LED MODULE INCL. 12W

\* 250mA PER AR111 LED LAMP

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES





	2700K / CRI90+	
	20°	45°
alu	12352005	12352105
black	12352002	12352102
white struc	12352009	12352109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - values per lamp module)

2700K / 20° 822lm / 12W

## Nomad 2x LED AR111 GI



2X LED MODULE INCL. 12W

CONNECTED > SEE GOODIES





1-10V	2700K / CRI90+	
	20°	45°
alu	12350005	12350105
black	12350002	12350102
white struc	12350009	12350109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - lumen values per lamp module)

2700K / 20° 822lm / 25W

## Nomad 2x for LED AR111 GI



2X LED AR111 (NOT INCL.)

! ADVISED TO USE 70008066 (2700K) / 70008067 (2000K-3000K)  
OR ANY OTHER AR111 12V RETROFIT LED LAMP





TRAILING EDGE DIMMABLE	
alu	12352205
black	12352202
white struc	12352209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - lumen values per lamp module)

735lm / 15W

## Nomad 4x LED AR111 GE



4X LED MODULE INCL. 12W

\* 250mA PER AR111 LED LAMP

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES





	2700K / CRI90+	
	20°	45°
alu	12353005	12353105
black	12353002	12353102
white struc	12353009	12353109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - values per lamp module)

2700K / 20° 822lm / 12W

## Nomad 4x LED AR111 GI



4X LED MODULE INCL. 12W

CONNECTED > SEE GOODIES





1-10V	2700K / CRI90+	
	20°	45°
alu	12351005	12351105
black	12351002	12351102
white struc	12351009	12351109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - lumen values per lamp module)

2700K / 20° 822lm / 48W

## Nomad 4x for LED AR111 GI



4X LED AR111 (NOT INCL.)

! ADVISED TO USE 70008066 (2700K) / 70008067 (2000K-3000K)  
OR ANY OTHER AR111 12V RETROFIT LED LAMP




TRAILING EDGE DIMMABLE	
alu	12353205
black	12353202
white struc	12353209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - lumen values per lamp module)

735lm / 15W

## Nomad 111 2x LED GE



2X LED ARRAY INCL. 16.25W

! BASE FLANGE OPTIONAL

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10203005 BASE FLANGE Ø90 H3 - ALU

10203009 BASE FLANGE Ø90 H3 - WHITE STRUC

10203032 BASE FLANGE Ø90 H3 - BLACK STRUC

10204005 BASE FLANGE TUBE Ø90 H20 - ALU

10204009 BASE FLANGE TUBE Ø90 H20 - WHITE STRUC

10204032 BASE FLANGE TUBE Ø90 H20 - BLACK STRUC





	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
alu	12023005	12023105	12023205	12023305	12023405	12023505	12023605	12023705	12023805
black	12023002	12023102	12023202	12023302	12023402	12023502	12023602	12023702	12023802
white struc	12023009	12023109	12023209	12023309	12023409	12023509	12023609	12023709	12023809

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc - values per lamp module)

	350mA	500mA	700mA
2700K / 25°	920lm / 11W	1256lm / 16.25W	1625lm / 23.6W
3000K / 25°	904lm / 11W	1233lm / 16.25W	1596lm / 23.6W
4000K / 25°	1053lm / 11W	1437lm / 16.25W	1860lm / 23.6W

## Nomad 111 4x LED GE



4X LED ARRAY INCL. 16.25W

! BASE FLANGE OPTIONAL

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10203005 BASE FLANGE Ø90 H3 - ALU

10203009 BASE FLANGE Ø90 H3 - WHITE STRUC

10203032 BASE FLANGE Ø90 H3 - BLACK STRUC

10204005 BASE FLANGE TUBE Ø90 H20 - ALU

10204009 BASE FLANGE TUBE Ø90 H20 - WHITE STRUC

10204032 BASE FLANGE TUBE Ø90 H20 - BLACK STRUC





	2700K / CRI90+			3000K / CRI90+			4000K / CRI90+		
	15°	25°	40°	15°	25°	40°	15°	25°	40°
alu	12024005	12024105	12024205	12024305	12024405	12024505	12024605	12024705	12024805
black	12024002	12024102	12024202	12024302	12024402	12024502	12024602	12024702	12024802
white struc	12024009	12024109	12024209	12024309	12024409	12024509	12024609	12024709	12024809

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc - values per lamp module)

	350mA	500mA	700mA
2700K / 25°	920lm / 11W	1256lm / 16.25W	1625lm / 23.6W
3000K / 25°	904lm / 11W	1233lm / 16.25W	1596lm / 23.6W
4000K / 25°	1053lm / 11W	1437lm / 16.25W	1860lm / 23.6W

## Nomad 2x GU10



2X QPAR 16-20 | GU10 | 50-75W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

! BASE FLANGE OPTIONAL

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10203005 BASE FLANGE Ø90 H3 - ALU

10203009 BASE FLANGE Ø90 H3 - WHITE STRUC

10203032 BASE FLANGE Ø90 H3 - BLACK STRUC

10204005 BASE FLANGE TUBE Ø90 H20 - ALU



10204009 BASE FLANGE TUBE Ø90 H20 - WHITE STRUC

10204032 BASE FLANGE TUBE Ø90 H20 - BLACK STRUC



RESISTIVE DIMMABLE	
alu	10202105
black	10202102

## Nomad 4x GU10



4X QPAR 16-20 | GU10 | 50-75W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

! BASE FLANGE OPTIONAL

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10203005 BASE FLANGE Ø90 H3 - ALU

10203009 BASE FLANGE Ø90 H3 - WHITE STRUC

10203032 BASE FLANGE Ø90 H3 - BLACK STRUC

10204005 BASE FLANGE TUBE Ø90 H20 - ALU



10204009 BASE FLANGE TUBE Ø90 H20 - WHITE STRUC

10204032 BASE FLANGE TUBE Ø90 H20 - BLACK STRUC



RESISTIVE DIMMABLE	
alu	10202205
black	10202202

## Nomad 2x PAR30



2X QPAR 30 | E27 | MAX. 75W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN PAR30 LAMP

! BASE FLANGE OPTIONAL

### INSTALLATION ACCESSORIES

10203005 BASE FLANGE Ø90 H3 - ALU

10203009 BASE FLANGE Ø90 H3 - WHITE STRUC

10203032 BASE FLANGE Ø90 H3 - BLACK STRUC

10204005 BASE FLANGE TUBE Ø90 H20 - ALU


10204009 BASE FLANGE TUBE Ø90 H20 - WHITE STRUC

10204032 BASE FLANGE TUBE Ø90 H20 - BLACK STRUC



RESISTIVE DIMMABLE	
alu	10201505
white struc	10201509

## Nomad 4x PAR30



4X QPAR 30 | E27 | MAX. 75W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN PAR30 LAMP

! BASE FLANGE OPTIONAL

### INSTALLATION ACCESSORIES

10203005 BASE FLANGE Ø90 H3 - ALU

10203009 BASE FLANGE Ø90 H3 - WHITE STRUC

10203032 BASE FLANGE Ø90 H3 - BLACK STRUC

10204005 BASE FLANGE TUBE Ø90 H20 - ALU



10204009 BASE FLANGE TUBE Ø90 H20 - WHITE STRUC

10204032 BASE FLANGE TUBE Ø90 H20 - BLACK STRUC



RESISTIVE DIMMABLE	
alu	10201605
white struc	10201609

## Nomad 2x AR111 GE



2X QR-LP 111 | G53 | MAX. 50W

! BASE FLANGE OPTIONAL  
! CAN BE COMBINED WITH M-LED 111

M-LED > SEE BELOW

### INSTALLATION ACCESSORIES

10203005 BASE FLANGE Ø90 H3 - ALU


10203009 BASE FLANGE Ø90 H3 - WHITE STRUC

10203032 BASE FLANGE Ø90 H3 - BLACK STRUC

10204005 BASE FLANGE TUBE Ø90 H20 - ALU



10204009 BASE FLANGE TUBE Ø90 H20 - WHITE STRUC

10204032 BASE FLANGE TUBE Ø90 H20 - BLACK STRUC



alu	10200905
black	10200902
white struc	10200909

## Nomad 4x AR111 GE



4X QR-LP 111 | G53 | MAX. 50W

! BASE FLANGE OPTIONAL  
! CAN BE COMBINED WITH M-LED 111

M-LED > SEE BELOW

### INSTALLATION ACCESSORIES

10203005 BASE FLANGE Ø90 H3 - ALU


10203009 BASE FLANGE Ø90 H3 - WHITE STRUC

10203032 BASE FLANGE Ø90 H3 - BLACK STRUC

10204005 BASE FLANGE TUBE Ø90 H20 - ALU

10204009 BASE FLANGE TUBE Ø90 H20 - WHITE STRUC

10204032 BASE FLANGE TUBE Ø90 H20 - BLACK STRUC



alu	10201005
black	10201002
white struc	10201009

### M-LED

11298002 M-LED 111 2700K 15° GE BLACK MATT

11298009 M-LED 111 2700K 15° GE WHITE STRUC

11298024 M-LED 111 2700K 15° GE BRUSHED ALU

11298102 M-LED 111 2700K 25° GE BLACK MATT

11298109 M-LED 111 2700K 25° GE WHITE STRUC

11298124 M-LED 111 2700K 25° GE BRUSHED ALU

11298202 M-LED 111 2700K 40° GE BLACK MATT

11298209 M-LED 111 2700K 40° GE WHITE STRUC

11298224 M-LED 111 2700K 40° GE BRUSHED ALU

11298302 M-LED 111 3000K 15° GE BLACK MATT

11298309 M-LED 111 3000K 15° GE WHITE STRUC

11298324 M-LED 111 3000K 15° GE BRUSHED ALU

11298402 M-LED 111 3000K 25° GE BLACK MATT

11298409 M-LED 111 3000K 25° GE WHITE STRUC

11298424 M-LED 111 3000K 25° GE BRUSHED ALU

11298502 M-LED 111 3000K 40° GE BLACK MATT

11298509 M-LED 111 3000K 40° GE WHITE STRUC

11298524 M-LED 111 3000K 40° GE BRUSHED ALU

11298602 M-LED 111 4000K 15° GE BLACK MATT

11298609 M-LED 111 4000K 15° GE WHITE STRUC

11298624 M-LED 111 4000K 15° GE BRUSHED ALU

11298702 M-LED 111 4000K 25° GE BLACK MATT

11298709 M-LED 111 4000K 25° GE WHITE STRUC


11298724 M-LED 111 4000K 25° GE BRUSHED ALU

11298802 M-LED 111 4000K 40° GE BLACK MATT

11298809 M-LED 111 4000K 40° GE WHITE STRUC

11298824 M-LED 111 4000K 40° GE BRUSHED ALU

SEE ALSO



WALL - P545




# NOMAD MINIMAL

*Our classic Nomad is an example of lighting at its most refined and versatile. If you wish to make the industrial look a little more homely, simply choose Nomad minimal and enhance the luminaire with a shade.*

more info? [supermodular.com/en/nomad-minimal](http://supermodular.com/en/nomad-minimal)



## Nomad minimal tall E27



1X A 60 E27 MAX. 70W


\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN E27 LAMP

! NOMAD MINIMAL/ANIMAL SHADE OPTIONAL  
! DISK OPTIONAL

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10203605	NOMAD MINIMAL E27 DISK ALU
10203801	MINIMAL SHADE - MEDIUM (Ø200) - WHITE
10203802	MINIMAL SHADE - MEDIUM (Ø200) - BLACK
10203813	MINIMAL SHADE - MEDIUM (Ø200) - RED
10203837	MINIMAL SHADE - MEDIUM (Ø200) - BLACK/GOLD
10203901	MINIMAL SHADE - LARGE (Ø250) - WHITE
10203902	MINIMAL SHADE - LARGE (Ø250) - BLACK
10203913	MINIMAL SHADE - LARGE (Ø250) - RED
10203937	MINIMAL SHADE - LARGE (Ø250) - BLACK/GOLD
10203924	ANIMAL SHADE - LARGE (Ø250) - ZEBRA/WHITE



RESISTIVE DIMMABLE	
alu	10203505



PLACEBO DOWN WITH GLASS TUBE 130MM DOWN - ANO BRONZE  
PLACEBO UP WITH GLASS TUBE 130MM UP - ANO BRONZE



PLACEBO DOWN WITH GLASS BALL Ø155MM DOWN - ANO BLACK  
PLACEBO UP WITH GLASS BALL Ø90MM UP - ANO BLACK



PLACEBO UP WITH GLASS BALL Ø155MM UP - ANO CHAMPAGNE  
PLACEBO DOULI - WHITE MATT



PLACEBO DOWN WITH GLASS TUBE 46MM DOWN - ANO SILVER BRONZE



# PLACEBO

Design — Jeffrey Huyghe

more info? [supermodular.com/en/placebo](http://supermodular.com/en/placebo)

SEE ALSO



CEILING - P85



TRACK 48V - P453

*Born out of the mystic mind of Jeffrey Huyghe, Placebo quickly became a large product family. Placebo is shapes, sizes, up and down lighting, and stylish shades to dress it up. Also available as a pendant for our 48V track system Pista, and our ceiling bases Kompas and Hoolahoop, Placebo becomes a multitude of playful general lighting.*

## Playful Placebo effect

8 models to start from. Imagine a row or flock of changing Placebos, above a dining room table or a long counter space. Alternating between up and down lights, a tube shape or a ball shape. Go for Placebo with warm dim, tune down the intensity of your light and enjoy a change of colour temperature to a warmer, cosy light.

## A feast of mix & match

All of Placebo's LED units are available in white and black structure, anodised champagne, bronze, silver bronze and black. Decide on a finish, then move on to choosing a tube or a ball shape, each in 2 sizes, with an up or down light effect. Add volume and presence to your Placebo expression with any of our 3 shades, Douli, Beanie and Sombrero. And watch the light effects they create!

## Complexity in disguise

Deceptively simple in appearance, this pendant light hides intriguing features. How can both up and down lights look so identical? Hint: the up light reveals a small hole at the top of the glass. So why then, can't we see the cable through the glass? A 3-layered, hand blown glass does the trick.



PLACEBO DOWN WITH GLASS TUBE 46MM DOWN - BLACK STRUC  
PLACEBO SOMBRERO - BLACK MATT



PLACEBO DOWN WITH GLASS BALL Ø90MM DOWN - ANO SILVER BRONZE




PLACEBO DOWN WITH GLASS BALL Ø155MM DOWN - BLACK STRUC  
PLACEBO DOULI - BLACK MATT



PLACEBO DOWN WITH GLASS TUBE 130MM DOWN - BLACK STRUC  
PLACEBO SOMBRERO - BRONZE

## Placebo down LED GE



1X LED MODULE INCL. 6.3W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
! LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE BELOW

### OPTICAL ACCESSORIES

12624038	PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT
12624238	PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT
12626038	PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT
12626238	PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT




	2700K / CRI90+	3000K / CRI90+
ano black	12622181	12622381
ano bronze	12622182	12622382
ano champagne	12622141	12622341
ano silver bronze	12622184	12622384
black struc	12622132	12622332
white struc	12622109	12622309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (glass ball ø155)

	2700K	608lm / 6.3W
	3000K	625lm / 6.3W

## WARM DIM

## Placebo down LED warm dim GE



1X LED MODULE INCL. 7.4W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
! LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE BELOW

### OPTICAL ACCESSORIES

12624038	PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT
12624238	PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT
12626038	PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT
12626238	PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT



	1800K - 3000K / CRI90+
ano black	12622581
ano bronze	12622582
ano champagne	12622541
ano silver bronze	12622584
black struc	12622532
white struc	12622509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (glass ball ø155)

	@3000K	365lm / 7.4W
--	--------	--------------

## PLACEBO SHADES

BEANIE				DOULI				SOMBREIRO			
white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne
12628038	12628083	12628018	12628017	12629038	12629083	12629018	12629017	12627038	12627083	12627018	12627017



PLACEBO DOWN WITH GLASS BALL Ø155MM DOWN - BLACK STRUC  
PLACEBO DOULI - BLACK MATT



PLACEBO DOWN WITH GLASS TUBE 130MM DOWN  
PLACEBO BEANIE - WHITE MATT




PLACEBO DOWN WITH GLASS BALL Ø155MM DOWN  
PLACEBO SOMBRERO - CHAMPAGNE



PLACEBO DOWN WITH GLASS BALL Ø90MM DOWN - ANO CHAMPAGNE  
PLACEBO DOWN WITH GLASS BALL Ø155MM DOWN - ANO CHAMPAGNE

## Placebo down LED GI



1X LED MODULE INCL. 6.3W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
! LONGER SUSPENSION CABLE ON REQUEST

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE PAGE 211

### OPTICAL ACCESSORIES

12624038	PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT
12624238	PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT
12626038	PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT
12626238	PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT



TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
ano black	12621081	12621381
ano bronze	12621082	12621382
ano champagne	12621041	12621341
ano silver bronze	12621084	12621384
black struc	12621032	12621332
white struc	12621009	12621309

1-10V	2700K / CRI90+	3000K / CRI90+
ano black	12621181	12621481
ano bronze	12621182	12621482
ano champagne	12621141	12621441
ano silver bronze	12621184	12621484
black struc	12621132	12621432
white struc	12621109	12621409


DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
ano black	12621281	12621581
ano bronze	12621282	12621582
ano champagne	12621241	12621541
ano silver bronze	12621284	12621584
black struc	12621232	12621532
white struc	12621209	12621509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (glass ball ø155)

2700K	608lm / 9W
3000K	625lm / 9W

WARM DIM

## Placebo down LED warm dim GI



1X LED MODULE INCL. 7.4W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
! LONGER SUSPENSION CABLE ON REQUEST

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE PAGE 211

### OPTICAL ACCESSORIES

12624038	PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT
12624238	PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT
12626038	PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT
12626238	PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT



TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
ano black	12621681
ano bronze	12621682
ano champagne	12621641
ano silver bronze	12621684
black struc	12621632
white struc	12621609

### LUMINAIRE OUTPUT & POWER CONSUMPTION (glass ball ø155)

@3000K	365lm / 9W
--------	------------



PLACEBO UP WITH GLASS BALL Ø90MM UP - ANO SILVER BRONZE  
PLACEBO BEANIE - BLACK MATT



PLACEBO UP WITH GLASS TUBE 130MM UP - ANO BLACK





PLACEBO UP WITH GLASS BALL Ø155MM UP - ANO CHAMPAGNE  
PLACEBO BEANIE - WHITE MATT



PLACEBO UP WITH GLASS TUBE 130MM UP - ANO BRONZE  
PLACEBO DOULI - BRONZE



## Placebo up LED GE



1X LED MODULE INCL. 6.3W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
! LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE BELOW

### OPTICAL ACCESSORIES

12623038	PLACEBO GLASS TUBE UP (46MM) WHITE MATT
12623238	PLACEBO GLASS TUBE UP (130MM) WHITE MATT
12625038	PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT
12625238	PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT





	2700K / CRI90+	3000K / CRI90+
ano black	12622081	12622281
ano bronze	12622082	12622282
ano champagne	12622041	12622241
ano silver bronze	12622084	12622284
black struc	12622032	12622232
white struc	12622009	12622209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (glass ball ø155)

	2700K	3000K
	608lm / 6.3W	625lm / 6.3W

## WARM DIM

## Placebo up LED warm dim GE



1X LED MODULE INCL. 7.4W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
! LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
! LONGER SUSPENSION CABLE ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE BELOW

### OPTICAL ACCESSORIES

12623038	PLACEBO GLASS TUBE UP (46MM) WHITE MATT
12623238	PLACEBO GLASS TUBE UP (130MM) WHITE MATT
12625038	PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT
12625238	PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT



	1800K - 3000K / CRI90+
ano black	12622481
ano bronze	12622482
ano champagne	12622441
ano silver bronze	12622484
black struc	12622432
white struc	12622409

### LUMINAIRE OUTPUT & POWER CONSUMPTION (glass ball ø155)

@3000K	365lm / 9W
--------	------------

## PLACEBO SHADES

BEANIE				DOULI				SOMBREIRO			
white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne
12628038	12628083	12628018	12628017	12629038	12629083	12629018	12629017	12627038	12627083	12627018	12627017



PLACEBO UP WITH GLASS TUBE 46MM UP - ANO BRONZE



PLACEBO UP WITH GLASS BALL Ø130MM UP - ANO BLACK  
PLACEBO BEANIE - BLACK MATT




PLACEBO UP WITH GLASS BALL Ø90MM UP - ANO BLACK  
PLACEBO BEANIE - BRONZE



PLACEBO UP WITH GLASS TUBE 130MM UP - ANO CHAMPAGNE  
PLACEBO DOULI - CHAMPAGNE

## Placebo up LED GI



1X LED MODULE INCL. 6.3W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
! LONGER SUSPENSION CABLE ON REQUEST

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE PAGE 211

### OPTICAL ACCESSORIES

12623038	PLACEBO GLASS TUBE UP (46MM) WHITE MATT
12623238	PLACEBO GLASS TUBE UP (130MM) WHITE MATT
12625038	PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT
12625238	PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT



TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
ano black	12620081	12620381
ano bronze	12620082	12620382
ano champagne	12620041	12620341
ano silver bronze	12620084	12620384
black struc	12620032	12620332
white struc	12620009	12620309

1-10V	2700K / CRI90+	3000K / CRI90+
ano black	12620181	12620481
ano bronze	12620182	12620482
ano champagne	12620141	12620441
ano silver bronze	12620184	12620484
black struc	12620132	12620432
white struc	12620109	12620409


DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
ano black	12620281	12620581
ano bronze	12620282	12620582
ano champagne	12620241	12620541
ano silver bronze	12620284	12620584
black struc	12620232	12620532
white struc	12620209	12620509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (glass ball ø155)

2700K	608lm / 9W
3000K	625lm / 9W

WARM DIM

## Placebo up LED warm dim GI



1X LED MODULE INCL. 7.4W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
! LONGER SUSPENSION CABLE ON REQUEST

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE PAGE 211

### OPTICAL ACCESSORIES

12623038	PLACEBO GLASS TUBE UP (46MM) WHITE MATT
12623238	PLACEBO GLASS TUBE UP (130MM) WHITE MATT
12625038	PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT
12625238	PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT



TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
ano black	12620681
ano bronze	12620682
ano champagne	12620641
ano silver bronze	12620684
black struc	12620632
white struc	12620609

### LUMINAIRE OUTPUT & POWER CONSUMPTION (glass ball ø155)

@3000K	365lm / 9W
--------	------------




PUPIL



PUPIL 2X  
K72  
K-SET



SEE ALSO



CEILING - P69



CEILING - P79

# PUPIL

Design — Bleijh

*Nothing short of the unexpected, Pupil is full of surprises and contradictions. Using nature as his muse, Dutch designer Basten Leijh created this organic, quirky shape: the downlighter that does the opposite. Nonconformity and functionality blend beautifully in this family, and there's even more to it than meets the eye.*

## A design that stands out

Small and curvy, the oval shape ends abruptly, cut off at an angle. An organic design inspired by the curious eyes of a crab, Pupil is not for a discreet expression. It demands attention. Unlike most recessed downlights, it playfully sticks out of the ceiling.

## Straight that isn't straight

The asymmetry and adjustability of Pupil create optical puzzles that will make expressions have expressions. The light beam and the position of the housing simply can't agree. For a light beam pointing straight down, tilt the housing slightly up. For a 30° beam angle, point the housing straight down. Tilt the body 30°, and you have 60° light orientability for a wall-wash effect.

## Fitting in

Just as this new design fits perfectly with the miniaturization trend, Pupil fits right in the palm of your hand. Pupil's playful design is additionally complemented by a brilliant show of modularity. It works wonders with our established, iconic K family, our first-ever adventure into technical architectural lighting. Thanks to K-set 72's openings, Pupil settles in snugly inside as alternative to a K-72 spot. Or, a duo, trio or even a quartet of Pupils, all in one plate!

more info? [supermodular.com/en/pupil](http://supermodular.com/en/pupil)





PUPIL WITH HONEYCOMB



PUPIL WITH SNOOT

## Pupil 72 LED GE



1X LED ARRAY INCL. 6.4W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

K-SET > SEE BELOW (MORE INFO SEE PAGES 78-83)

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK





	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	11490032	11490332	11490132	11490432
white struc	11490009	11490309	11490109	11490409

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	275lm / 3W	370lm / 4.3W	478lm / 6.4W
3000K / 25°	275lm / 3W	370lm / 4.3W	478lm / 6.4W

## WARM DIM

## Pupil 72 LED warm dim GE



1X LED ARRAY INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

K-SET > SEE BELOW (MORE INFO SEE PAGES 78-83)

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK



	1800K - 3000K / CRI90+	
	35°	40°
black struc	11490232	11490532
white struc	11490209	11490509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35° 381lm / 6W

### K-SET 72

14042032 K-SET 72 1X BLACK STRUC

14042071 K-SET 72 1X DONKEY GREY STRUC

14042009 K-SET 72 1X WHITE STRUC

14042132 K-SET 72 2X BLACK STRUC

14042171 K-SET 72 2X DONKEY GREY STRUC

14042109 K-SET 72 2X WHITE STRUC

14042232 K-SET 72 3X BLACK STRUC

14042271 K-SET 72 3X DONKEY GREY STRUC

14042209 K-SET 72 3X WHITE STRUC

14042332 K-SET 72 4SQX BLACK STRUC

14042371 K-SET 72 4SQX DONKEY GREY STRUC

14042309 K-SET 72 4SQX WHITE STRUC




QBINI ROUND IN  
QBINI TRIMLESS FRAME



QBINI ADJUSTABLE WITH SNOOT  
QBINI FRAME



QBINI ASY  
QBINI FRAME

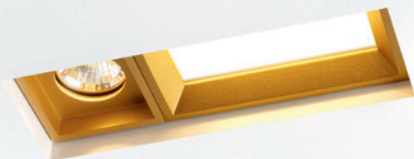

QBINI SQUARE IN  
QBINI GENERAL  
QBINI TRIMLESS FRAME



QBINI SQUARE IN  
QBINI SURFACE BOX GE



QBINI ROUND IN  
QBINI SURFACE BOX GE



QBINI GENERAL  
QBINI SURFACE BOX GE



QBINI SQUARE IN  
QBINI SURFACE BOX GI





# QBINI

Design — Florent Coirier

more info? [supermodular.com/en/qbini](http://supermodular.com/en/qbini)  
[supermodular.com/en/qbini-frame](http://supermodular.com/en/qbini-frame)  
[supermodular.com/en/qbini-trimless-frame](http://supermodular.com/en/qbini-trimless-frame)  
[supermodular.com/en/qbini-surface-box](http://supermodular.com/en/qbini-surface-box)



*A portmanteau of ‘cubic’ and ‘mini’, Qbini introduces modular, miniature, recessed and surface mounted LED lighting solutions to residential, hospitality and retail spaces. Available in many shapes, frames, colours and with accessories, Qbini combines choice with exclusive design and high-quality lighting technology.*

## Small in size, great in light quality

Our smallest recessed portfolio at 44mm square, Qbini makes installation simple, no screws required. Despite being a source of illumination, each Qbini unit has a tactile, precisely-machined appeal that fits in the palm of your hand.


## Endless combinations

As a recessed application, Qbini can be combined with 2 different frames: with or without a trim. Both of them are available in 1x, 2x, 3x or 4x lamp configurations. Its surface-mounted box (gear included or gear excluded) allows you to choose from all existing Qbini lights. Mix, match and create!

## Patented precision

Qbini’s patented press-in, press-out technology makes it a breeze to install. The family’s small size, cutting-edge design and dual positioning options (recessed or deep recessed) add a modern yet cosy touch to any intimate space.

## Qbini asy LED GE



1X LED ARRAY INCL. 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK




	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	11470032	11470332	11470132	11470432
gold	11470046	11470346	11470146	11470446
white struc	11470009	11470309	11470109	11470409

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	317lm / 3W	428lm / 4.3W
3000K / 25°	317lm / 3W	428lm / 4.3W

## WARM DIM

## Qbini asy LED warm dim GE



1X LED ARRAY INCL. 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK




	1800K - 3000K / CRI90+	
	35°	45°
black struc	11470632	11470732
gold	11470646	11470746
white struc	11470609	11470709

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35° 343lm / 4W

## Qbini general downlight LED GE (2x)

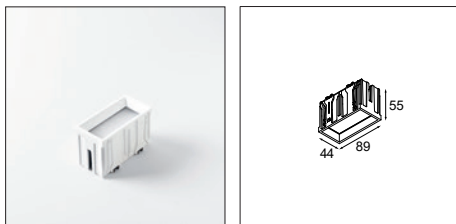

1X LED LINE INCL. 6W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**




	2700K / CRI90+	3000K / CRI90+
black struc	11480032	11480132
gold	11480046	11480146
white struc	11480009	11480109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K	402lm / 4.2W	560lm / 6W
3000K	402lm / 4.2W	560lm / 6W

## Qbini general downlight LED GE (4x)

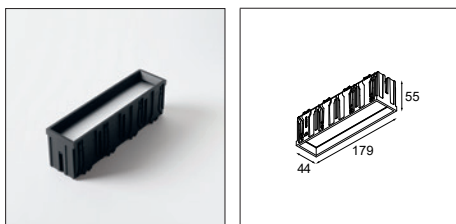

1X LED LINE INCL. 12W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**




	2700K / CRI90+	3000K / CRI90+
black struc	11480332	11480432
gold	11480346	11480446
white struc	11480309	11480409

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K	896lm 8.4W	1247lm 12W
3000K	896lm 8.4W	1247lm 12W

## Qbini adjustable LED GE



1X LED ARRAY INCL. 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK




	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	14160132	14160232	14160432	14160532	14160732	14160832
gold	14160146	14160246	14160446	14160546	14160746	14160846
white struc	14160109	14160209	14160409	14160509	14160709	14160809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	301lm / 3W	402lm / 4.3W
3000K / 25°	325lm / 3W	433lm / 4.3W
4000K / 25°	330lm / 3W	440lm / 4.3W

## WARM DIM

## Qbini adjustable LED warm dim GE



1X LED ARRAY INCL. 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK




	1800K - 3000K / CRI90+	
	35°	45°
black struc	14160332	14160632
gold	14160346	14160646
white struc	14160309	14160609

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35°	304lm / 4W
--------------	------------

## Qbini round in LED GE



1X LED ARRAY INCL. 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK




	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	14101232	14101132	14102232	14102132	14103232	14103132
gold	14101246	14101146	14102246	14102146	14103246	14103146
white struc	14101209	14101109	14102209	14102109	14103209	14103109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	290lm / 3W	387lm / 4.3W
3000K / 25°	313lm / 3W	417lm / 4.3W
4000K / 25°	318lm / 3W	424lm / 4.3W

## WARM DIM

## Qbini round in LED warm dim GE



1X LED ARRAY INCL. 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK




	1800K - 3000K / CRI90+	
	35°	45°
black struc	14104232	14104132
gold	14104246	14104146
white struc	14104209	14104109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35° 291lm / 4W

## Qbini round out LED GE

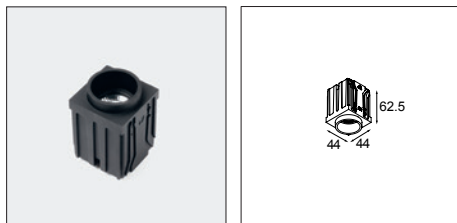

1X LED ARRAY INCL 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK




	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	14111232	14111132	14112232	14112132	14113232	14113132
gold	14111246	14111146	14112246	14112146	14113246	14113146
white struc	14111209	14111109	14112209	14112109	14113209	14113109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	257lm / 3W	343lm / 4.3W
3000K / 25°	277lm / 3W	370lm / 4.3W
4000K / 25°	282lm / 3W	376lm / 4.3W

## WARM DIM

## Qbini round out LED warm dim GE

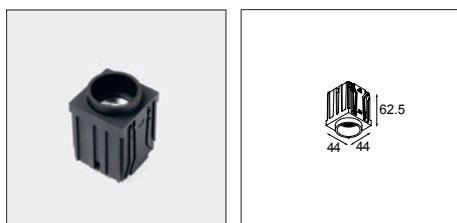

1X LED ARRAY INCL 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK



	1800K - 3000K / CRI90+	
	35°	45°
black struc	14114232	14114132
gold	14114246	14114146
white struc	14114209	14114109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35° 255lm / 4W

## Qbini round tapered LED GE



1X LED ARRAY INCL 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK



	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	14141232	14141132	14142232	14142132	14143232	14143132
gold	14141246	14141146	14142246	14142146	14143246	14143146
white struc	14141209	14141109	14142209	14142109	14143209	14143109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	257lm 3W	343lm 4.3W
3000K / 25°	277lm 3W	370lm 4.3W
4000K / 25°	282lm 3W	376lm 4.3W

## WARM DIM

## Qbini round tapered LED warm dim GE



1X LED ARRAY INCL 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK



	1800K - 3000K / CRI90+	
	35°	45°
black struc	14144232	14144132
gold	14144246	14144146
white struc	14144209	14144109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35° 255lm / 4W

## Qbini square in LED GE



1X LED ARRAY INCL. 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK



	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	14121232	14121132	14122232	14122132	14123232	14123132
gold	14121246	14121146	14122246	14122146	14123246	14123146
white struc	14121209	14121109	14122209	14122109	14123209	14123109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	293lm / 3W	391lm / 4.3W
3000K / 25°	316lm / 3W	421lm / 4.3W
4000K / 25°	321lm / 3W	428lm / 4.3W

## WARM DIM

## Qbini square in LED warm dim GE



1X LED ARRAY INCL. 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK




	1800K - 3000K / CRI90+	
	35°	45°
black struc	14124232	14124132
gold	14124246	14124146
white struc	14124209	14124109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35° 295lm / 4W



## Qbini square out LED GE



1X LED ARRAY INCL 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK




	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	14131232	14131132	14132232	14132132	14133232	14133132
gold	14131246	14131146	14132246	14132146	14133246	14133146
white struc	14131209	14131109	14132209	14132109	14133209	14133109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	268lm / 3W	357lm / 4.3W
3000K / 25°	288lm / 3W	384lm / 4.3W
4000K / 25°	293lm / 3W	391lm / 4.3W

## WARM DIM

## Qbini square out LED warm dim GE



1X LED ARRAY INCL 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK




	1800K - 3000K / CRI90+	
	35°	45°
black struc	14134232	14134132
gold	14134246	14134146
white struc	14134209	14134109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35° 266lm / 4W

## Qbini square tapered LED GE



1X LED ARRAY INCL 4.3W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK




	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	14151232	14151132	14152232	14152132	14153232	14153132
gold	14151246	14151146	14152246	14152146	14153246	14153146
white struc	14151209	14151109	14152209	14152109	14153209	14153109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	268lm / 3W	357lm / 4.3W
3000K / 25°	288lm / 3W	384lm / 4.3W
4000K / 25°	293lm / 3W	391lm / 4.3W

WARM DIM

## Qbini square tapered LED warm dim GE



1X LED ARRAY INCL 4W

! MUST BE USED WITH QBINI (TRIMLESS) FRAME OR QBINI SURFACE BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

**QBINI (TRIMLESS) FRAME > SEE PAGE 235**

**QBINI SURFACE BOX > SEE PAGE 233, 235**

### OPTICAL ACCESSORIES

14191032 HONEYCOMB Ø26

14192032 SNOOT Ø26 BLACK

14193032 CROSSBLADE Ø26 BLACK




	1800K - 3000K / CRI90+	
	35°	45°
black struc	14154232	14154132
gold	14154246	14154146
white struc	14154209	14154109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35°	266lm / 4W
--------------	------------

## Qbini surface box 2x LED GI



LUMINAIRE NOT INCLUDED



Friends of hue



230V



IP20



### TRAILING EDGE DIMMABLE

black struc	13120232
white struc	13120209

### DALI


black struc	13120432
white struc	13120409

### 1-10V/PUSHDIM

black struc	13120332
white struc	13120309

WARM DIM

## Qbini surface box 2x LED warm dim GI



LUMINAIRE NOT INCLUDED



230V




IP20



### TRAILING EDGE DIMMABLE

black struc	13120532
white struc	13120509

## Qbini surface box 1x LED GE




LUMINAIRE NOT INCLUDED



black struc	13120032
white struc	13120009

## Qbini surface box 2x LED GE



LUMINAIRE NOT INCLUDED



black struc	13120132
white struc	13120109




QBINI ROUND IN  
QBINI BLIND COVER  
QBINI TRIMLESS FRAME



QBINI SQUARE OUT  
QBINI FRAME



QBINI SQUARE TAPERED  
QBINI FRAME

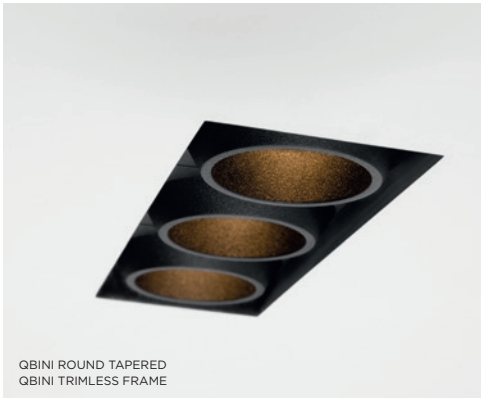

QBINI ROUND TAPERED  
QBINI TRIMLESS FRAME



QBINI SQUARE IN  
QBINI SURFACE BOX GI



QBINI ASY  
QBINI SURFACE BOX GE




QBINI SQUARE TAPERED  
QBINI SURFACE BOX GE




QBINI GENERAL  
QBINI SURFACE BOX GI

## QBINI SURFACE BOX




SURFACE BOX 1X LED GE

13120009 WHITE STRUC  
13120032 BLACK STRUC



SURFACE BOX 2X LED GE

13120109 WHITE STRUC  
13120132 BLACK STRUC




SURFACE BOX 2X LED GI

13120209 TRE DIM WHITE STRUC  
13120232 TRE DIM BLACK STRUC  
13120409 DALI WHITE STRUC  
13120432 DALI BLACK STRUC  
13120309 1-10V/PUSHDIM WHITE STRUC  
13120332 1-10V/PUSHDIM BLACK STRUC

13120509 WARM DIM TRE DIM WHITE STRUC  
13120532 WARM DIM TRE DIM BLACK STRUC


## QBINI (TRIMLESS) FRAME



QBINI FRAME 1X

14171009 WHITE STRUC  
14171032 BLACK STRUC  
14171046 GOLD


12291630 GYPKIT 190X190X56X56  
10889830 CONBOX 192X190X130



QBINI FRAME 2X

14172009 WHITE STRUC  
14172032 BLACK STRUC  
14172046 GOLD


12291730 GYPKIT 190X190X101X56  
10889830 CONBOX 192X190X130



QBINI FRAME 3X

14173009 WHITE STRUC  
14173032 BLACK STRUC  
14173046 GOLD


12291830 GYPKIT 240X287X145X56  
10400230 CONBOX 257X222X147



QBINI FRAME 4X

14174009 WHITE STRUC  
14174032 BLACK STRUC  
14174046 GOLD


12291930 GYPKIT 345X287X190X56  
10400330 CONBOX 257X327X147



QBINI TRIMLESS FRAME 1X

14180009 WHITE  
14180032 BLACK


12292030 GYPKIT 190X190 · Ø83  
10889830 CONBOX 192X190X130



QBINI TRIMLESS FRAME 2X

14180109 WHITE  
14180132 BLACK


12292130 GYPKIT 190X190 · R41.5X45  
10889830 CONBOX 192X190X130



QBINI TRIMLESS FRAME 3X

14180209 WHITE  
14180232 BLACK

12292230 GYPKIT 240X287 · R41.5X89  
10400230 CONBOX 257X222X147




QBINI TRIMLESS FRAME 4X

14180309 WHITE  
14180332 BLACK

12292330 GYPKIT 345X287 · R41.5X133  
10400330 CONBOX 257X327X147

## QBINI BLIND COVER



QBINI BLIND COVER

14261009 WHITE STRUC  
14261032 BLACK STRUC  
14261046 GOLD



REKTOR



REKTOR RECESSED



# REKTOR

Design — Couvreur-Devos

more info? [supermodular.com/en/rektor](http://supermodular.com/en/rektor)  
[supermodular.com/en/rektor-recessed](http://supermodular.com/en/rektor-recessed)

SEE ALSO



TRACK 230V - P485



*With a name derived from the Latin word for “ruler”, the Rektor range of LED lighting has every quality of a leader. Winner of the 2014 Henry Van de Velde design award, Rektor showcases the distinguished effects of right angles and accented light direction.*

## Hidden ingenuity

The unique feature of Rektor is that all the technical workings are concealed within the fixture.

The innovative tilting technology allows you to rotate the LED head 360°, as well as adjust it upwards or downwards up to 90°. All without a single visible wire.


## Rektor in many applications

Rektor comes available surface-mounted with a sleek driver box, or recessed, hiding the driver box completely in the ceiling or wall. Rektor’s refined industrial, rectangular design is also an option for our 230V track system, making it an even more attractive and relevant choice for retail and hospitality spaces.

## Rektor LED GI



1X LED ARRAY INCL. 16.25W



230V



IP20



1.38KG



TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc - black struc	12826056	12826156	12828056	12828156
black struc - brushed alu	12826062	12826162	12828062	12828162
black struc - chrome	12826064	12826164	12828064	12828164
black struc - smoked bronze	12826067	12826167	12828067	12828167
white struc - brushed alu	12826061	12826161	12828061	12828161
white struc - chrome	12826063	12826163	12828063	12828163
white struc - smoked bronze	12826066	12826166	12828066	12828166
white struc - white struc	12826009	12826109	12828009	12828109

1-10V/PUSHDIM	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc - black struc	12825056	12825156	12827056	12827156
black struc - brushed alu	12825062	12825162	12827062	12827162
black struc - chrome	12825064	12825164	12827064	12827164
black struc - smoked bronze	12825067	12825167	12827067	12827167
white struc - brushed alu	12825061	12825161	12827061	12827161
white struc - chrome	12825063	12825163	12827063	12827163
white struc - smoked bronze	12825066	12825166	12827066	12827166
white struc - white struc	12825009	12825109	12827009	12827109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - white struc)

2700K / 25°

1257lm / 19W

3000K / 25°

1233lm / 19W


CONNECTED > SEE GOODIES

WARM DIM

## Rektor LED warm dim GI



1X LED ARRAY INCL. 12W



230V



R.C



1.38KG



TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+	
	25°	40°
black struc - black struc	12826256	12826356
black struc - brushed alu	12826262	12826362
black struc - chrome	12826264	12826364
black struc - smoked bronze	12826267	12826367
complete white struc	12826209	12826309
white struc - brushed alu	12826261	12826361
white struc - chrome	12826263	12826363
white struc - smoked bronze	12826266	12826366

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - white struc)

@3000K / 25°

881lm / 13.5W


CONNECTED > SEE GOODIES



## Rektor 2x LED GI



2X LED ARRAY INCL. 11W



CONNECTED > SEE GOODIES



TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc - black struc	14246056	14246156	14248056	14248156
black struc - brushed alu	14246062	14246162	14248062	14248162
black struc - chrome	14246064	14246164	14248064	14248164
black struc - smoked bronze	14246067	14246167	14248067	14248167
white struc - brushed alu	14246061	14246161	14248061	14248161
white struc - chrome	14246063	14246163	14248063	14248163
white struc - smoked bronze	14246066	14246166	14248066	14248166
white struc - white struc	14246009	14246109	14248009	14248109

1-10V/PUSHDIM	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc - black struc	14245056	14245156	14247056	14247156
black struc - brushed alu	14245062	14245162	14247062	14247162
black struc - chrome	14245064	14245164	14247064	14247164
black struc - smoked bronze	14245067	14245167	14247067	14247167
white struc - brushed alu	14245061	14245161	14247061	14247161
white struc - chrome	14245063	14245163	14247063	14247163
white struc - smoked bronze	14245066	14245166	14247066	14247166
white struc - white struc	14245009	14245109	14247009	14247109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - white struc - lumen values per lamp module)


2700K / 25°	916lm / 25.7W
3000K / 25°	900lm / 25.7W

WARM DIM

## Rektor 2x LED warm dim Gi



2X LED ARRAY INCL. 12W



CONNECTED > SEE GOODIES




TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+	
	25°	40°
black struc - black struc	14249056	14249156
black struc - brushed alu	14249062	14249162
black struc - chrome	14249064	14249164
black struc - smoked bronze	14249067	14249167
complete white struc	14249009	14249109
white struc - brushed alu	14249061	14249161
white struc - chrome	14249063	14249163
white struc - smoked bronze	14249066	14249166


### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - white struc - lumen values per lamp module)

@3000K / 25°	881lm / 27W
--------------	-------------

# Rektor recessed LED GE



1X LED ARRAY INCL. 16.25W



	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	12821032	12821132	12822032	12822132
white struc	12821009	12821109	12822009	12822109

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10490330 CONBOX 112X172X100X236



12291330 GYPKIT 170X112-Ø65

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	916lm / 11W	1257lm / 16.25W
3000K / 25°	900lm / 11W	1234lm / 16.25W

WARM DIM

### Rektor recessed LED warm dim GE



1X LED ARRAY INCL. 12W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES



	1800K - 3000K / CRI90+	
	25°	40°
black struc	12821232	12821332
white struc	12821209	12821309

**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
(white struc)

@3000K / 25° 881lm / 12W





# SCOTTY

Design — Couvreur-Devos

*Anyone who hears Scotty, will immediately think of the phrase 'Beam me up'. This luminaire certainly lives up to its name. The powerful beam of LED light simply reels you in to admire the architectural design. The light shines straight downwards, which prevents it from shining directly into your eyes. As a result of its refined design, Scotty will blend seamlessly with the rest of your interior. Don't forget to discover its travel companion Spock.*

more info? [supermodular.com/en/scotty](http://supermodular.com/en/scotty)

# Scotty 270 LED GE



1X LED DISC INCL

! FOR TRIMLESS INSTALLATION: MUST BE USED WITH RECESSED RING

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES **OUTLET**

11799530 CONBOX 375X335X111 PLASTER FINISH TRIMLESS

11799730 CONBOX 375X335X125 CONCRETE FINISH TRIMLESS

11799430 RECESSED RING Ø288 H125



	2700K / CRI80		3000K / CRI80	
	30°	55°	30°	55°
white struc	-	11790509	11790009	-

## LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 30°	888lm / 14.2W	1144lm / 21W
3000K / 30°	933lm / 14.2W	1201lm / 21W



SEMIH 86



SEMIH 61 WITH GOLD REFLECTOR



SEMIH 61 WITH LENS



# SEMIH

Design — Jeffrey Huyghe

more info? [supermodular.com/en/semih](https://supermodular.com/en/semih)  
[supermodular.com/en/semih-61](https://supermodular.com/en/semih-61)

SEE ALSO



TRACK 230 - P489



*Inspired by the yin-yang symbol, a sinuous 2mm S-shaped line divides Semih in two equal, complementary parts: the hard, solid part mounted to the ceiling and the soft, round lamp housing emitting light. Semih is exceptionally easy to install, thanks to strong mounting magnets. Available in two sizes, Semih is an award-winning luminaire with positive, directed energy.*

## Flexibility par excellence

Semih's flexibility is an integral part of its design. Closed, it's a sober downlighter with an air of mystery. As the bottom part slowly twists open, it reveals a soft light that flows with movement illuminating the surroundings. Turn it horizontally up to 355°, and tilt it vertically up to 70° on either side.


## Two sizes, many spaces

Semih comes in two sizes, ø86 and ø61. The original Semih, whose size and performing light were originally designed for multifunctionality in retail and hospitality, offers various types of light accents. Semih 61's application opens itself further to residential settings and small boutiques, where more subtle lighting is suitable. Semih 61 also fits on our 230V track rail system.

## Installation made easy

Installing Semih is a breeze, requiring no visible screws. Just mount the ceiling panel to the ceiling and let the powerful magnets do their job. The reflectors are also clicked on a magnetic inner panel, facilitating replacement. What's more, as all the gear is integrated into the fixture, Semih can easily be connected to 230V standard wiring during renovation works.

## Semih 61 ceiling LED GI



1X LED MODULE INCL. 8.1W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR OR LENS

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10218030	MAGNETIC REFLECTOR Ø57 LED 15° ALU
10218130	MAGNETIC REFLECTOR Ø57 LED 25° ALU
10218230	MAGNETIC REFLECTOR Ø57 LED 40° ALU
10218630	MAGNETIC REFLECTOR Ø57 LED 40° CHAMPAGNE
10218430	MAGNETIC REFLECTOR Ø57 LED 40° GOLD
10217003	LENS Ø57 LED 30°
10213802	SNOUT Ø57 BLACK (ONLY IN COMBINATION WITH LENS)




TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black strut	13440032	13440132
white strut	13440009	13440109
1-10V	2700K / CRI90+	3000K / CRI90+
black strut	13440232	13440332
white strut	13440209	13440309
DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black strut	13440432	13440532
white strut	13440409	13440509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white strut)

2700K / 25° alu	704lm / 11W
3000K / 25° alu	704lm / 11W
3000K / 25° lens	658lm / 11W

WARM DIM

## Semih 61 ceiling LED warm dim GI



1X LED MODULE INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

### OPTICAL ACCESSORIES

10218730	MAGNETIC REFLECTOR Ø57 LED WARM DIM 25° ALU
10218830	MAGNETIC REFLECTOR Ø57 LED WARM DIM 40° ALU
10219230	MAGNETIC REFLECTOR Ø57 LED WARM DIM 50° CHAMPAGNE
10219030	MAGNETIC REFLECTOR Ø57 LED WARM DIM 50° GOLD



TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
black strut	13440632
white strut	13440609

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white strut)


@3000K / 25° alu	928lm / 15W
------------------	-------------



## Semih 86 LED GI



1X LED ARRAY INCL. 16.2W



CONNECTED > SEE GOODIES



TRAILING EDGE DIMMABLE	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	13180032	13180132	13180232	13180332	13180432	13180532
white struc	13180009	13180109	13180209	13180309	13180409	13180509

DALI	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	13182032	13182132	13182232	13182332	13182432	13182532
white struc	13182009	13182109	13182209	13182309	13182409	13182509

1-10V/PUSHDIM	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	13181032	13181132	13181232	13181332	13181432	13181532
white struc	13181009	13181109	13181209	13181309	13181409	13181509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)


2700K / 25°	1448lm / 19W
3000K / 25°	1520lm / 19W

WARM DIM

## Semih 86 LED warm dim GI



1X LED ARRAY INCL. 12W



TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+	
	25°	
black struc	13180632	
white struc	13180609	

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°	757lm / 13.5W
--------------	---------------



SHELLBY 176 TRIMLESS



SHELLBY 184



# SHELLBY

Design — Jeffrey Huiyge

*Shellby for general lighting and Shellby for creating mood. A clash of functions, yet the exceptional coexistence of purpose. Sun or moon? Definitely both. Powerful from above, it indisputably lights and energizes daily activities. Softer and a little to the side, it inspires calm and warmth. Shellby's playful and asymmetrical design lets you experiment with aesthetic effects that will charm the entire room.*

## General light and mood

Our Shellby is quite unique. It offers general lighting by day, and turns into a lovely mood-maker by night.

Dim it, with or without integrated warm dim, on ceilings or on walls, it's your light story to tell.

## Many Shellbies

Express your space with more than one Shellby. Its asymmetrical, deep-recessed design and seemingly floating sphere add to its playfulness, and enable you to create all kinds of artistic patterns and configurations.

## A personal touch of colour

Shellby skin is a decorative inlay made to easily click in Shellby's inner cup. Add a warm, cozy touch to your space by choosing from 4 anodized colours: silver bronze, bronze, champagne and gold. And for a seashell look, experiment with our new pearly white colour. As the light is on, pearly white gives a neutral white look & feel. Off, its unique finish will change to shades of purple, blue, green, and more, as you walk around the luminaire.

more info? [supermodular.com/en/shellby](https://supermodular.com/en/shellby)



SHELLBY 184  
SHELLBY SKIN ANO SILVER BRONZE





SHELLBY 184



SHELLBY SKIN PEARLY WHITE  
SHELLBY SKIN ANO SILVER BRONZE  
SHELLBY SKIN ANO CHAMPAGNE  
SHELLBY SKIN ANO GOLD  
SHELLBY SKIN ANO BRONZE

## Shellby 184 LED GE



1X LED ARRAY INCL. 8.5W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE PAGE 255

12182030 CONBOX 280X350X100X380

12293030 GYPSUM FIBREBOARD 290X280

### OPTICAL ACCESSORIES

12183041 SHELLBY SKIN ANO CHAMPAGNE

12183042 SHELLBY SKIN ANO GOLD

12183082 SHELLBY SKIN ANO BRONZE

12183084 SHELLBY SKIN ANO SILVER BRONZE

12183092 SHELLBY SKIN PEARLY WHITE





	2700K / CRI90+	3000K / CRI90+
black struc	12180032	12180132
white struc	12180009	12180109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K	375lm / 5.7W	505lm / 8.5W	655lm / 12.4W
3000K	383lm / 5.7W	516lm / 8.5W	668lm / 12.4W

## WARM DIM

## Shellby 184 LED warm dim GE



1X LED ARRAY INCL. 12W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE PAGE 255

12182030 CONBOX 280X350X100X380

12293030 GYPSUM FIBREBOARD 290X280

### OPTICAL ACCESSORIES

12183041 SHELLBY SKIN ANO CHAMPAGNE

12183042 SHELLBY SKIN ANO GOLD

12183082 SHELLBY SKIN ANO BRONZE

12183084 SHELLBY SKIN ANO SILVER BRONZE

12183092 SHELLBY SKIN PEARLY WHITE




	1800K - 3000K / CRI90+
black struc	12180232
white struc	12180209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)


@3000K	508lm / 12W
--------	-------------



SHELLBY 176 TRIMLESS


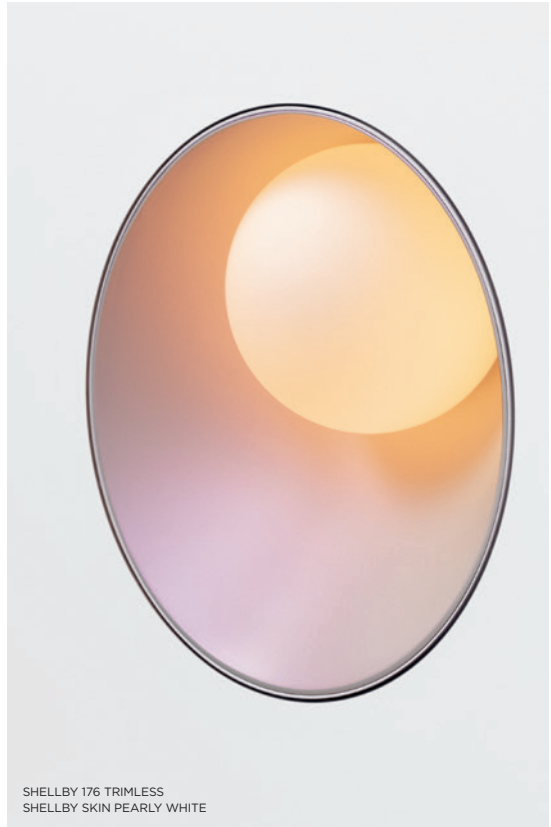


SHELLBY 176 TRIMLESS  
SHELLBY SKIN PEARLY WHITE

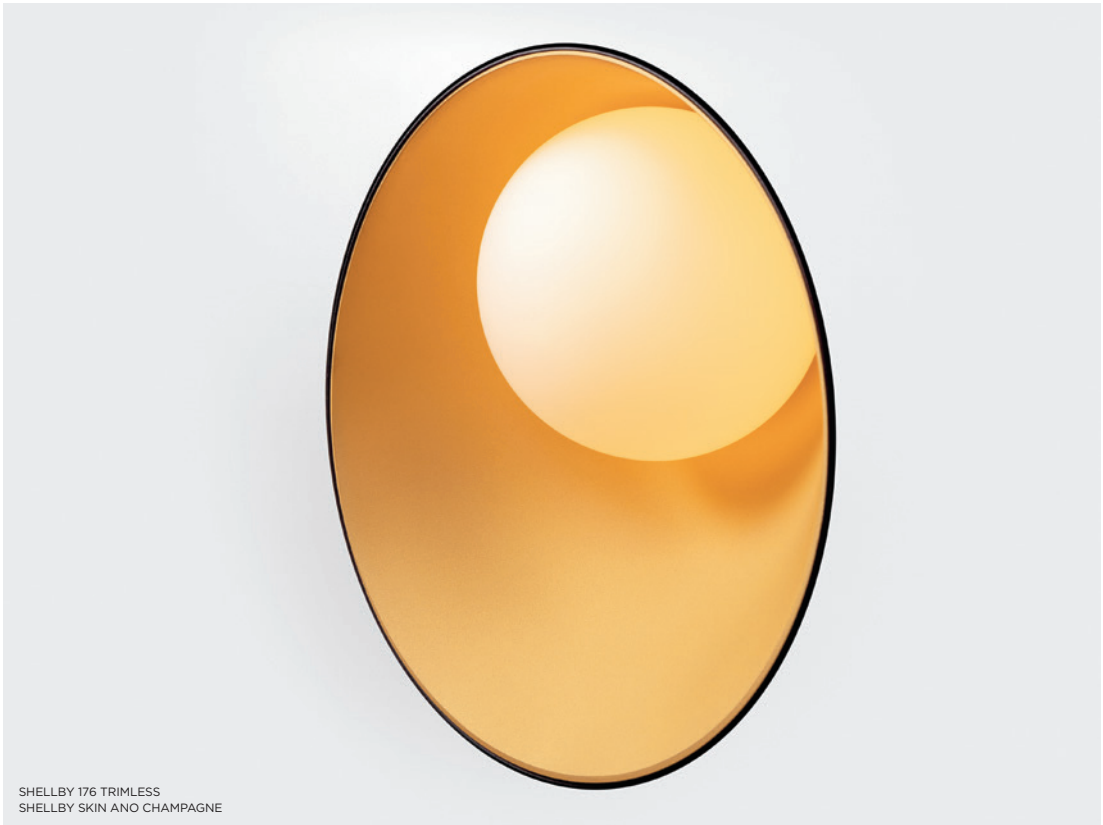

SHELLBY 176 TRIMLESS  
SHELLBY SKIN ANO CHAMPAGNE

## Shellby 176 trimless LED GE



1X LED ARRAY INCL. 8.5W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE PAGE 255

12182030 CONBOX 280X350X100X380

12292930 GYPKITTRIMLESS 290X280 - Ø177

12182130 CONCRETE KIT 290X280 - Ø177

12293030 GYPSUM FIBREBOARD 290X280

12182230 RECESSED RING Ø177

12182330 CONCRETE RING Ø177 STAND CONCRETE BOXES

### OPTICAL ACCESSORIES

12183041 SHELLBY SKIN ANO CHAMPAGNE

12183042 SHELLBY SKIN ANO GOLD



12183082 SHELLBY SKIN ANO BRONZE

12183084 SHELLBY SKIN ANO SILVER BRONZE

12183092 SHELLBY SKIN PEARLY WHITE

### WARM DIM

## Shellby 176 trimless LED warm dim GE



1X LED ARRAY INCL. 12W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE PAGE 255

12182030 CONBOX 280X350X100X380

12292930 GYPKITTRIMLESS 290X280 - Ø177

12182130 CONCRETE KIT 290X280 - Ø177

12293030 GYPSUM FIBREBOARD 290X280

12182230 RECESSED RING Ø177

12182330 CONCRETE RING Ø177 STAND CONCRETE BOXES

OPTIONAL ACCESSORIES > SEE ABOVE

REQUIRED PARTS BASED ON CEILING TYPE



	2700K / CRI90+	3000K / CRI90+
black struc	12181032	12181132
white struc	12181009	12181109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)


	350mA	500mA	700mA
2700K	375lm / 5.7W	505lm / 8.5W	655lm / 12.4W
3000K	383lm / 5.7W	516lm / 8.5W	668lm / 12.4W



	1800K - 3000K / CRI90+
black struc	12181232
white struc	12181209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

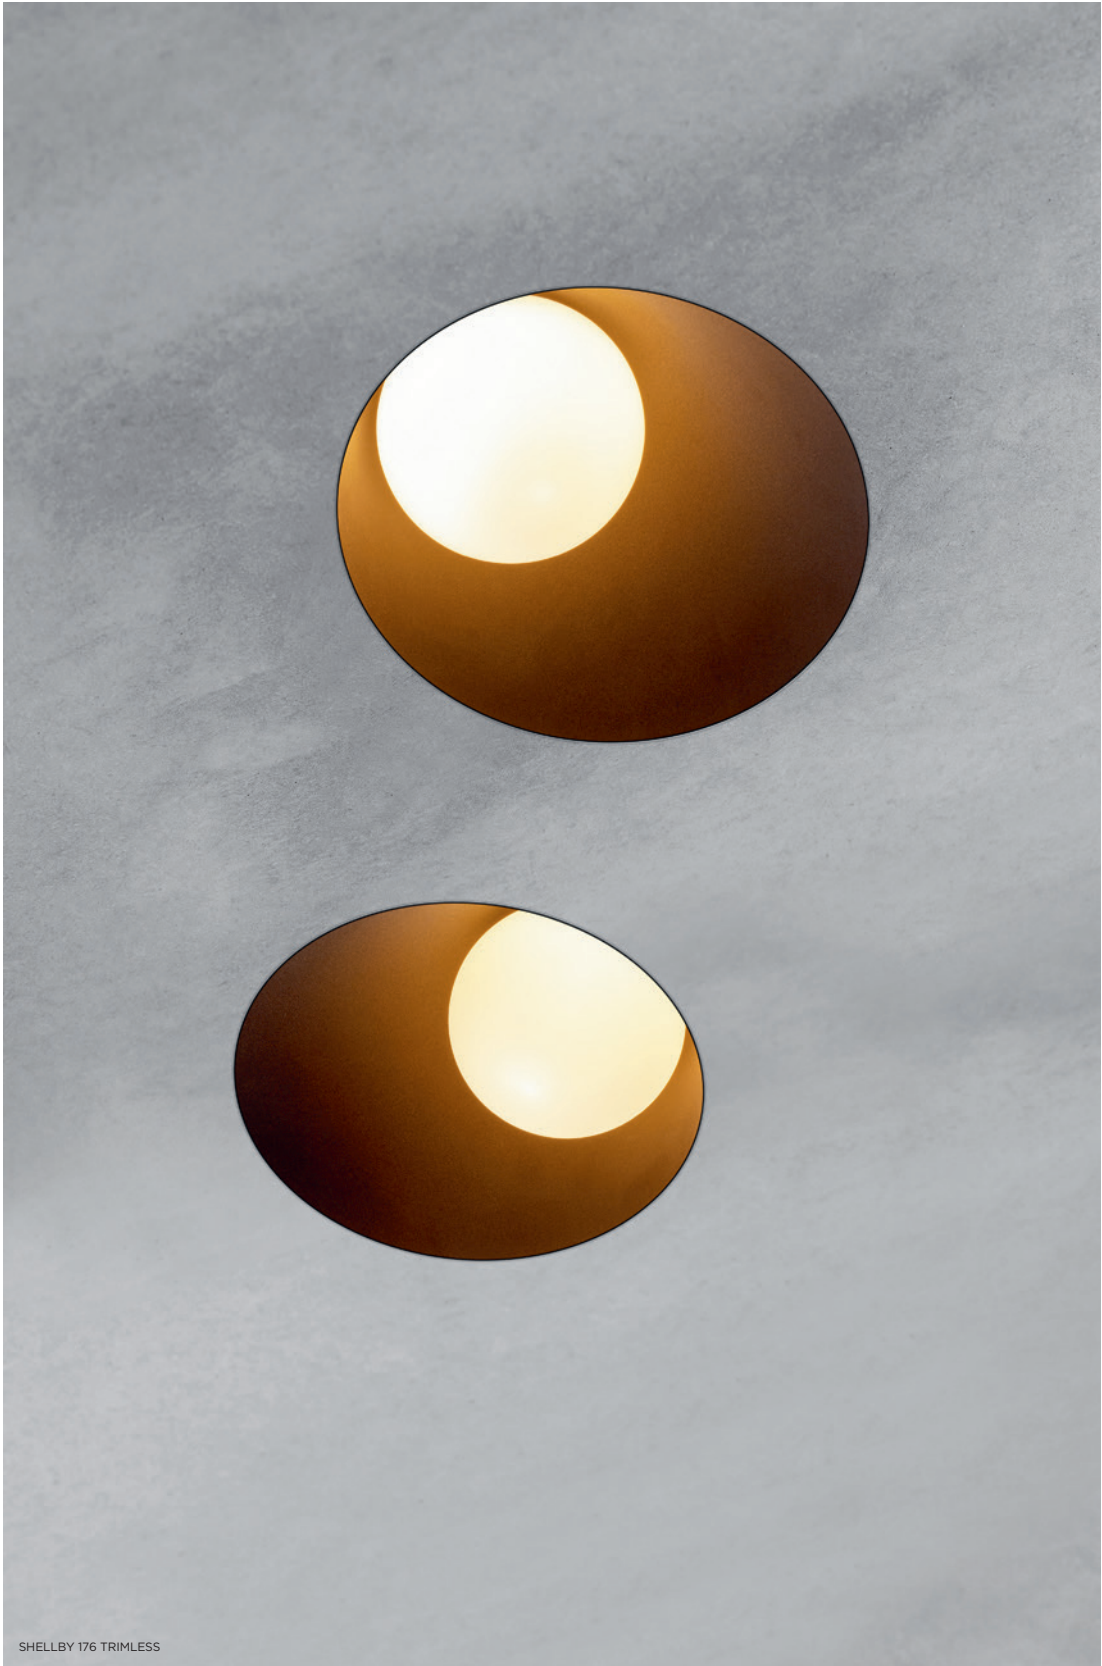

@3000K	508lm / 12W
--------	-------------







SHELLBY 184  
SHELLBY SKIN ANO BRONZE





#### INSTALLATION ACCESSORIES FOR PLASTERED FALSE CEILINGS

SHELLBY 176	PLASTERED FINISH
	SHELLBY 176
	<b>12182230</b> RECESSED RING Ø177   ø 200 h 100

#### INSTALLATION ACCESSORIES FOR STANDARD CONCRETE BOXES

SHELLBY 176	EXPOSED CONCRETE FINISH
	SHELLBY 176
	<b>12182330</b> CONCRETE RING Ø177 STAND CONCRETE BOXES   ø 200 h 100

#### INSTALLATION ACCESSORIES FOR STRUCTURAL CEILINGS (CONCRETE, STALTON, ...)

SHELLBY 176/184	<b>12182030</b> CONBOX 280x350x100x380 	+	PLASTERED FINISH		EXPOSED CONCRETE FINISH
			SHELLBY 176/184	SHELLBY 176	SHELLBY 176
			<b>12293030</b> GYPSUM FIBREBOARD 290x280 	<b>12292930</b> GYPKIT TRIMLESS 290x280 - Ø177 	<b>12182130</b> CONCRETE KIT 290x280 - Ø177 





# SLIDE

*Slide is one of Modular L.I.'s icons. Its name refers to the light gliding out from the luminaire, channelled by the stunning inner body, and creating a softer and smooth lighting experience.*

## **Sliding beam of light**

Slide owes its popularity to its deeply embedded light source. It is available in donkey grey structure with a black inner body or in an entirely white structure version.

## Slide IP55 LED GE



1X LED ARRAY INCL. 9.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290330 GYPKIT 190X190-Ø92




	2700K / CRI90+	3000K / CRI90+
	25°	25°
donkey grey struc - black	10486174	10486374
white struc	10486109	10486309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	387lm / 6.2W	498lm / 9.2W
3000K / 25°	410lm / 6.2W	551lm / 9.2W

## Slide IP55 LED RG



1X LED ARRAY INCL. 9.2W

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290330 GYPKIT 190X190-Ø92



TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
	25°	25°
donkey grey struc - black	10486574	10486774
white struc	10486509	10486709

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25°	498lm / 12W
3000K / 25°	551lm / 12W



SMART CAKE 82



SMART KUP 115



SMART LOTIS 115



SMART CAKE 82 ADJUSTABLE



SMART KUP 82 ADJUSTABLE



SMART LOTIS 82 ADJUSTABLE



# SMART CAKE/KUP/LOTIS

more info? [supermodular.com/en/smart-cake](https://supermodular.com/en/smart-cake)  
[supermodular.com/en/smart-kup](https://supermodular.com/en/smart-kup)  
[supermodular.com/en/smart-lotis](https://supermodular.com/en/smart-lotis)

*Designers can stay up all night trying all sorts of things with Smart, our most versatile range of architectural lighting. Mix and match, from a mosaic of shapes, sizes, colours and mounting options, and create a playful installation while maintaining a consistent look and feel. The Smart choice for any application.*

## 3 designs that multiply

Smart's 3 designs are a party for designers. Double the fun, Lotis, Cake and Kup come in fixed and adjustable versions. Adding colour to fun, all variations come in black structure, white structure and a warm, golden finish, and can further be combined with all Smart accessories.



## Limitless combinations

Play with shapes and depth. Smart mask is the opportunity to play with round lights in a square or rectangular shape. Smart box adds dimension by protruding from the ceiling, hugging any of the 3 designs. Smart tubed, suspended, surface-mounted on wall or ceiling, gives depths to the circular design, emitting down/up light. Smart tubed 82 easily slides in our 230V track rail.

## Join the ball

Smart ball flaunts a bubbly, spherical shape, in two sizes: Smart ball 82 and Smart ball 115. In white or black structure, it hangs gracefully from a thin matte black suspension cable. As with the other accessories, combine Smart ball with a differently coloured light in any of the 3 designs, for a little contrast and fun. Smart is also warm-dim compatible.

## Smart cake 48 + IP55 LED GE



1X LED ARRAY INCL. 3W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120 - Ø45





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
<b>black struc</b>	12872132	12872032	12872232
<b>gold</b>	12872146	12872046	12872246
<b>white struc</b>	12872109	12872009	12872209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	152lm / 3W	206lm / 4.3W
3000K / 25°	152lm / 3W	206lm / 4.3W
4000K / 25°	164lm / 3W	222lm / 4.3W

## Smart cake 48 LED GE



1X HIGH POWER LED INCL. 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120 - Ø45





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
<b>black struc</b>	12870132	12870032	12870232
<b>gold</b>	12870146	12870046	12870246
<b>white struc</b>	12870109	12870009	12870209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	71lm / 1W	101lm / 1.5W
3000K / 25°	75lm / 1W	106lm / 1.5W
4000K / 25°	83lm / 1W	117lm / 1.5W

## Smart cake 48 IP55 LED GE



1X HIGH POWER LED INCL. | 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120 - 045





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	12871132	12871032	12871232
gold	12871146	12871046	12871246
white struc	12871109	12871009	12871209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	67lm / 1W	94lm / 1.5W
3000K / 25°	71lm / 1W	99lm / 1.5W
4000K / 25°	78lm / 1W	110lm / 1.5W

WARM DIM

## Smart cake 48 IP55 LED warm dim GE



1X LED ARRAY INCL. | 4W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120 - 045





	1800K - 3000K / CRI90+
	25°
black struc	12871332
gold	12871346
white struc	12871309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°	121lm / 4W
--------------	------------

## Smart cake 82 LED GE



1X LED ARRAY INCL | 9.2W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70

12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82





	2700K / CRI90+		
	15°	25°	40°
black struc	12411632	12411032	12411232
gold	12411646	12411046	12411246
white struc	12411609	12411009	12411209
	3000K / CRI90+		
	15°	25°	40°
black struc	12411732	12411432	12411532
gold	12411746	12411446	12411546
white struc	12411709	12411409	12411509
	4000K / CRI90+		
	15°	25°	40°
black struc	12411832	12411132	12411332
gold	12411846	12411146	12411346
white struc	12411809	12411109	12411309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	513lm / 6.2W	<b>689lm / 9.2W</b>	885lm / 13.4W
3000K / 25°	533lm / 6.2W	<b>716lm / 9.2W</b>	920lm / 13.4W
4000K / 25°	583lm / 6.2W	<b>733lm / 9.2W</b>	943lm / 13.4W

WARM DIM

## Smart cake 82 LED warm dim GE



1X LED ARRAY INCL | 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70

12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82





	1800K - 3000K / CRI90+	
	25°	40°
black struc	12413132	12413232
gold	12413146	12413246
white struc	12413109	12413209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°	<b>452lm / 6W</b>
--------------	-------------------



## Smart cake 82 IP55 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70

12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82





	2700K / CRI90+		
	15°	25°	40°
	black struc	12412632	12412032
gold	12412646	12412046	12412146
white struc	12412609	12412009	12412109
	3000K / CRI90+		
	15°	25°	40°
	black struc	12412732	12412332
gold	12412746	12412346	12412446
white struc	12412709	12412309	12412409
	4000K / CRI90+		
	15°	25°	40°
	black struc	12412832	12412532
gold	12412846	12412546	12412246
white struc	12412809	12412509	12412209

### /LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	444lm / 6.2W	596lm / 9.2W	766lm / 13.4W
3000K / 25°	462lm / 6.2W	619lm / 9.2W	797lm / 13.4W
4000K / 25°	505lm / 6.2W	635lm / 9.2W	816lm / 13.4W

WARM DIM

## Smart cake 82 IP55 LED warm dim GE



1X LED ARRAY INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70

12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82





	1800K - 3000K / CRI90+	
	25°	40°
black struc	12414132	12414232
gold	12414146	12414246
white struc	12414109	12414209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25° 400lm / 6W

## Smart cake 82 adjustable LED GE



1X LED ARRAY INCL. 9.2W

! 3500 ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190 - Ø76

12500230 SMART RECESSED RING 82





	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	13320132	13320232	13321132	13321232	13322132	13322232
gold	13320146	13320246	13321146	13321246	13322146	13322246
white struc	13320109	13320209	13321109	13321209	13322109	13322209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	420lm / 6.3W	546lm / 9.2W
3000K / 25°	442lm / 6.3W	574lm / 9.2W
4000K / 25°	471lm / 6.3W	612lm / 9.2W

WARM DIM

## Smart cake 82 adjustable LED warm dim GE



1X LED ARRAY INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190 - Ø76

12500230 SMART RECESSED RING 82





	1800K - 3000K / CRI90+	
	35°	45°
black struc	13323132	13323232
gold	13323146	13323246
white struc	13323109	13323209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35°	414lm / 6W
--------------	------------

## Smart cake 82 GU10 GE for tube/box



1X LED GU10 EXCL. INCL.



SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES



black struc	12420232
gold	12420246
white struc	12420209

## Smart cake 82 GU10



1X LED GU10 INCL. GU10 MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190-Ø70


12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82



RESISTIVE DIMMABLE	
black struc	12420132
gold	12420146
white struc	12420109

# Smart cake 82 MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

## INSTALLATION ACCESSORIES

**10889830** CONBOX 190X192X130X256



**12290130** GYPKIT 190X190 - Ø70

**12291030** GYPKIT 210X190-2XØ70 R35-88

**12500230** SMART RECESSED RING 82

black struc	12420032
white struc	12420009

## Smart cake 115 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100





	2700K / CRI90+			
	15°	25°	40°	65°
black struc	12741232	12741032	12741332	12740032
gold	12741246	12741046	12741346	12740046
white struc	12741209	12741009	12741309	12740009
	3000K / CRI90+			
	15°	25°	40°	65°
black struc	12741432	12741532	12741632	12740132
gold	12741446	12741546	12741646	12740146
white struc	12741409	12741509	12741609	12740109
	4000K / CRI90+			
	15°	25°	40°	65°
black struc	12741732	12741132	12741832	12740232
gold	12741746	12741146	12741846	12740246
white struc	12741709	12741109	12741809	12740209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	1019lm / 11W	1397lm / 16.25W	1858lm / 23.6W
3000K / 25°	1000lm / 11W	1372lm / 16.25W	1825lm / 23.6W
4000K / 25°	1166lm / 11W	1599lm / 16.25W	2127lm / 23.6W

## Smart cake 115 IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100





	2700K / CRI90+			
	15°	25°	40°	65°
black struc	12742232	12742032	12742332	12740332
gold	12742246	12742046	12742346	12740346
white struc	12742209	12742009	12742309	12740309
	3000K / CRI90+			
	15°	25°	40°	65°
black struc	12742432	12742532	12742632	12740432
gold	12742446	12742546	12742646	12740446
white struc	12742409	12742509	12742609	12740409
	4000K / CRI90+			
	15°	25°	40°	65°
black struc	12742732	12742132	12742832	12740532
gold	12742746	12742146	12742846	12740546
white struc	12742709	12742109	12742809	12740509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	983lm / 11W	1348lm / 16.25W	1793lm / 23.6W
3000K / 25°	965lm / 11W	1323lm / 16.25W	1760lm / 23.6W
4000K / 25°	1125lm / 11W	1543lm / 16.25W	2052lm / 23.6W

## Smart cake 115 diffuse IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	85°	85°	85°
black struc	12743032	12743532	12743132
gold	12743046	12743546	12743146
white struc	12743009	12743509	12743109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 85°	694lm / 11W	952lm / 16.25W	1266lm / 23.6W
3000K / 85°	682lm / 11W	934lm / 16.25W	1243lm / 23.6W
4000K / 85°	794lm / 11W	1089lm / 16.25W	1449lm / 23.6W

## Smart cake 115 adjustable LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100




	2700K / CRI90+		
	15°	25°	40°
black struc	12771232	12771032	12771332
gold	12771246	12771046	12771346
white struc	12771209	12771009	12771309
	3000K / CRI90+		
	15°	25°	40°
black struc	12771432	12771532	12771632
gold	12771446	12771546	12771646
white struc	12771409	12771509	12771609
	4000K / CRI90+		
	15°	25°	40°
black struc	12771732	12771132	12771832
gold	12771746	12771146	12771846
white struc	12771709	12771109	12771809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	471lm / 6.2W	632lm / 9.2W	812lm / 13.4W
3000K / 25°	489lm / 6.2W	657lm / 9.2W	844lm / 13.4W
4000K / 25°	535lm / 6.2W	673lm / 9.2W	865lm / 13.4W

WARM DIM

### Smart cake 115 adjustable LED warm dim GE



1X LED ARRAY INCL. | 12W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

#### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100





	1800K - 3000K / CRI90+	
	25°	40°
black struc	12773132	12773232
gold	12773146	12773246
white struc	12773109	12773209

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°

766lm / 12W

### Smart cake 115 adjustable GU10



1X LED GU10 INCL. | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

#### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256



12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100



RESISTIVE DIMMABLE	
black struc	12772032
gold	12772046
white struc	12772009

# Smart cake 160 IP55 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES





	2700K / CRI90+		
	15°	25°	40°
black struc	13004032	13004332	13004632
white struc	13004009	13004309	13004609
	3000K / CRI90+		
	15°	25°	40°
black struc	13004132	13004432	13004732
white struc	13004109	13004409	13004709
	4000K / CRI90+		
	15°	25°	40°
black struc	13004232	13004532	13004832
white struc	13004209	13004509	13004809

## LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	500mA	700mA	900mA	1050mA	1200mA	1400mA
2700K / 25°	1702lm / 16W	2318lm / 23.5W	2877lm / 30.8W	3327lm / 36.3W	<b>3737lm / 42W</b>	4303lm / 49.7W
3000K / 25°	1765lm / 16W	2404lm / 23.5W	2983lm / 30.8W	3450lm / 36.3W	<b>3876lm / 42W</b>	4462lm / 49.7W
4000K / 25°	1908lm / 16W	2598lm / 23.5W	3225lm / 30.8W	3730lm / 36.3W	<b>4189lm / 42W</b>	4823lm / 49.7W



Smart cake 160 diffuse IP55 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	75°	75°	75°
<b>black struc</b>	<b>13005032</b>	<b>13005132</b>	<b>13005232</b>
<b>white struc</b>	<b>13005009</b>	<b>13005109</b>	<b>13005209</b>

LUMINAIRE OUTPUT & POWER CONSUMPTION  
(white struc)

	500mA	700mA	900mA	1050mA	1200mA	1400mA
2700K / 75°	1385lm / 16W	1886lm / 23.5W	2341lm / 30.8W	2707lm / 36.3W	<b>3040lm / 42W</b>	3500lm / 49.7W
3000K / 75°	1436lm / 16W	1955lm / 23.5W	2427lm / 30.8W	2807lm / 36.3W	<b>3153lm / 42W</b>	3630lm / 49.7W
4000K / 75°	1552lm / 16W	2114lm / 23.5W	2624lm / 30.8W	3034lm / 36.3W	<b>3408lm / 42W</b>	3924lm / 49.7W

## Smart kup 48 + IP55 LED GE



1X LED ARRAY INCL. 3W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120 - Ø45





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
<b>black struc</b>	12882132	12882032	12882232
<b>gold</b>	12882146	12882046	12882246
<b>white struc</b>	12882109	12882009	12882209

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

	350mA	500mA
	2700K / 25°	231lm / 3W
3000K / 25°	231lm / 3W	312lm / 4.3W
4000K / 25°	249lm / 3W	336lm / 4.3W

## Smart kup 48 LED GE



1X HIGH POWER LED INCL. 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120 - Ø45





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
<b>black struc</b>	12880132	12880032	12880232
<b>gold</b>	12880146	12880046	12880246
<b>white struc</b>	12880109	12880009	12880209

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

	350mA	500mA
	2700K / 25°	84lm / 1W
3000K / 25°	89lm / 1W	125lm / 1.5W
4000K / 25°	98lm / 1W	138lm / 1.5W

## Smart kup 48 IP55 LED GE



1X HIGH POWER LED INCL. | 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120 - 045





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	12881132	12881032	12881232
gold	12881146	12881046	12881246
white struc	12881109	12881009	12881209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	81lm / 1W	114lm / 1.5W
3000K / 25°	85lm / 1W	120lm / 1.5W
4000K / 25°	94lm / 1W	132lm / 1.5W

WARM DIM

## Smart kup 48 IP55 LED warm dim GE



1X LED ARRAY INCL. | 4W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120 - 045





	1800K - 3000K / CRI90+
	25°
black struc	12881332
gold	12881346
white struc	12881309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°	184lm / 4W
--------------	------------

## Smart kup 82 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70

12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82





	2700K / CRI90+		
	15°	25°	40°
black struc	12471632	12471032	12471232
gold	12471646	12471046	12471246
white struc	12471609	12471009	12471209
	3000K / CRI90+		
	15°	25°	40°
black struc	12471732	12471432	12471532
gold	12471746	12471446	12471546
white struc	12471709	12471409	12471509
	4000K / CRI90+		
	15°	25°	40°
black struc	12471832	12471132	12471332
gold	12471846	12471146	12471346
white struc	12471809	12471109	12471309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	554lm / 6.2W	744lm / 9.2W	956lm / 13.4W
3000K / 25°	576lm / 2W	773lm / 9.2W	994lm / 13.4W
4000K / 25°	630lm / 6.2W	792lm / 9.2W	1018lm / 13.4W

WARM DIM

## Smart kup 82 LED warm dim GE



1X LED ARRAY INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70

12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82





	1800K - 3000K / CRI90+	
	25°	40°
black struc	12473132	12473232
gold	12473146	12473246
white struc	12473109	12473209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°	485lm / 6W
--------------	------------

## Smart kup 82 IP55 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70

12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82





	2700K / CRI90+		
	15°	25°	40°
black struc	12472632	12472032	12472132
gold	12472646	12472046	12472146
white struc	12472609	12472009	12472109
	3000K / CRI90+		
	15°	25°	40°
black struc	12472732	12472332	12472432
gold	12472746	12472346	12472446
white struc	12472709	12472309	12472409
	4000K / CRI90+		
	15°	25°	40°
black struc	12472832	12472532	12472232
gold	12472846	12472546	12472246
white struc	12472809	12472509	12472209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	529lm / 6.2W	710lm / 9.2W	912lm / 13.4W
3000K / 25°	550lm / 6.2W	738lm / 9.2W	949lm / 13.4W
4000K / 25°	601lm / 6.2W	756lm / 9.2W	972lm / 13.4W

WARM DIM

## Smart kup 82 IP55 LED warm dim GE



1X LED ARRAY INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70

12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82





	1800K - 3000K / CRI90+	
	25°	40°
black struc	12474132	12474232
gold	12474146	12474246
white struc	12474109	12474209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25° 444lm / 6W

## Smart kup 82 adjustable LED GE



1X LED ARRAY INCL. 9.2W

! 3500 ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190 - Ø76

12500230 SMART RECESSED RING 82





	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	13330132	13330232	13331132	13331232	13332132	13332232
gold	13330146	13330246	13331146	13331246	13332146	13332246
white struc	13330109	13330209	13331109	13331209	13332109	13332209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	525lm / 6.3W	682lm / 9.2W
3000K / 25°	552lm / 6.3W	717lm / 9.2W
4000K / 25°	589lm / 6.3W	765lm / 9.2W

WARM DIM

## Smart kup 82 adjustable LED warm dim GE



1X LED ARRAY INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190 - Ø76

12500230 SMART RECESSED RING 82





	1800K - 3000K / CRI90+	
	35°	45°
black struc	13333132	13333232
gold	13333146	13333246
white struc	13333109	13333209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35°	498lm / 6W
--------------	------------

## Smart kup 82 GU10 GE for tube/box



1X LED GU10 EXCL. INCL.



SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES



black struc	12480232
gold	12480246
white struc	12480209

## Smart kup 82 GU10



1X LED GU10 INCL. GU10 MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190-Ø70



12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82



RESISTIVE DIMMABLE	
black struc	12480132
gold	12480146
white struc	12480109

## Smart kup 115 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100





	2700K / CRI90+			
	15°	25°	40°	65°
black struc	12761232	12761032	12761332	12760032
gold	12761246	12761046	12761346	12760046
white struc	12761209	12761009	12761309	12760009
	3000K / CRI90+			
	15°	25°	40°	65°
black struc	12761432	12761532	12761632	12760132
gold	12761446	12761546	12761646	12760146
white struc	12761409	12761509	12761609	12760109
	4000K / CRI90+			
	15°	25°	40°	65°
black struc	12761732	12761132	12761832	12760232
gold	12761746	12761146	12761846	12760246
white struc	12761709	12761109	12761809	12760209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K/25°	1065lm/11W	1461lm/16.25W	1943lm/23.6W
3000K/25°	1046lm/11W	1434lm/16.25W	1908lm/23.6W
4000K/25°	1219lm/11W	1672lm/16.25W	2224lm/23.6W

## Smart kup 115 IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100





	2700K / CRI90+			
	15°	25°	40°	65°
black struc	12762232	12762032	12762332	12760332
gold	12762246	12762046	12762346	12760346
white struc	12762209	12762009	12762309	12760309
	3000K / CRI90+			
	15°	25°	40°	65°
black struc	12762432	12762532	12762632	12760432
gold	12762446	12762546	12762646	12760446
white struc	12762409	12762509	12762609	12760409
	4000K / CRI90+			
	15°	25°	40°	65°
black struc	12762732	12762132	12762832	12760532
gold	12762746	12762146	12762846	12760546
white struc	12762709	12762109	12762809	12760509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K/25°	1029lm/11W	1412lm/16.25W	1878lm/23.6W
3000K/25°	1011lm/11W	1386lm/16.25W	1844lm/23.6W
4000K/25°	1178lm/11W	1616lm/16.25W	2150lm/23.6W



## Smart kup 115 diffuse IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	85°	85°	85°
black struc	12763032	12763532	12763132
gold	12763046	12763546	12763146
white struc	12763009	12763509	12763109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 85°	811lm / 11W	1113lm / 16.25W	1480lm / 23.6W
3000K / 85°	797lm / 11W	1092lm / 16.25W	1453lm / 23.6W
4000K / 85°	928lm / 11W	1273lm / 16.25W	1694lm / 23.6W

## Smart kup 115 adjustable LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100





	2700K / CRI90+		
	15°	25°	40°
black struc	12791232	12791032	12791332
gold	12791246	12791046	12791346
white struc	12791209	12791009	12791309
	3000K / CRI90+		
	15°	25°	40°
black struc	12791432	12791532	12791632
gold	12791446	12791546	12791646
white struc	12791409	12791509	12791609
	4000K / CRI90+		
	15°	25°	40°
black struc	12791732	12791132	12791832
gold	12791746	12791146	12791846
white struc	12791709	12791109	12791809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	554lm / 6.2W	744lm / 9.2W	956lm / 13.4W
3000K / 25°	576lm / 6.2W	773lm / 9.2W	994lm / 13.4W
4000K / 25°	630lm / 6.2W	792lm / 9.2W	1018lm / 13.4W

WARM DIM

### Smart kup 115 adjustable LED warm dim GE



1X LED ARRAY INCL. 12W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

#### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100





	1800K - 3000K / CRI90+	
	25°	40°
black struc	12793132	12793232
gold	12793146	12793246
white struc	12793109	12793209

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°

903lm / 12W

### Smart kup 115 adjustable GU10



1X LED GU10 INCL. GU10 MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

#### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256



12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100



RESISTIVE DIMMABLE	
black struc	12792032
gold	12792046
white struc	12792009

## Smart kup 160 IP55 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES





	2700K / CRI90+			
	15°	25°	40°	60°
<b>black struc</b>	13024032	13024332	13024632	13026032
<b>white struc</b>	13024009	13024309	13024609	13026009
	3000K / CRI90+			
	15°	25°	40°	60°
<b>black struc</b>	13024132	13024432	13024732	13026132
<b>white struc</b>	13024109	13024409	13024709	13026109
	4000K / CRI90+			
	15°	25°	40°	60°
<b>black struc</b>	13024232	13024532	13024832	13026232
<b>white struc</b>	13024209	13024509	13024809	13026209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	500mA	700mA	900mA	1050mA	1200mA	1400mA
2700K / 25°	1801lm / 16W	2453lm / 23.5W	3044lm / 30.8W	3521lm / 36.3W	<b>3955lm / 42W</b>	4553lm / 49.7W
3000K / 25°	1868lm / 16W	2543lm / 23.5W	3157lm / 30.8W	3651lm / 36.3W	<b>4101lm / 42W</b>	4721lm / 49.7W
4000K / 25°	2019lm / 16W	2749lm / 23.5W	3413lm / 30.8W	3947lm / 36.3W	<b>4433lm / 42W</b>	5104lm / 49.7W

## Smart kup 160 diffuse IP55 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	80°	80°	80°
<b>black struc</b>	13025032	13025132	13025232
<b>white struc</b>	13025009	13025109	13025209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	500mA	700mA	900mA	1050mA	1200mA	1400mA
2700K / 80°	1494lm / 16W	2034lm / 23.5W	2525lm / 30.8W	2920lm / 36.3W	<b>3280lm / 42W</b>	3776lm / 49.7W
3000K / 80°	1549lm / 16W	2110lm / 23.5W	2618lm / 30.8W	3028lm / 36.3W	<b>3401lm / 42W</b>	3916lm / 49.7W
4000K / 80°	1675lm / 16W	2280lm / 23.5W	2830lm / 30.8W	3273lm / 36.3W	<b>3676lm / 42W</b>	4233lm / 49.7W

## Smart asy lotis 48 + IP55 LED GE



1X LED ARRAY INCL. 3W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120-045





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	12892132	12892032	12892232
gold	12892146	12892046	12892246
white struc	12892109	12892009	12892209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (25° white struc)

	350mA	500mA
2700K / 25°	206lm / 3W	279lm / 4.3W
3000K / 25°	206lm / 3W	279lm / 4.3W
4000K / 25°	222lm / 3W	300lm / 4.3W

## Smart asy lotis 48 LED GE



1X HIGH POWER LED INCL. 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120-045





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	12890132	12890032	12890232
gold	12890146	12890046	12890246
white struc	12890109	12890009	12890209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (25° white struc)

	350mA	500mA
2700K / 25°	82lm / 1W	116lm / 1.5W
3000K / 25°	87lm / 1W	122lm / 1.5W
4000K / 25°	96lm / 1W	135lm / 1.5W

## Smart asy lotis 48 IP55 LED GE



1X HIGH POWER LED INCL. | 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120-045





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	12891132	12891032	12891232
gold	12891146	12891046	12891246
white struc	12891109	12891009	12891209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (25° white struc)

	350mA	500mA
2700K / 25°	78lm / 1W	110lm / 1.5W
3000K / 25°	83lm / 1W	116lm / 1.5W
4000K / 25°	91lm / 1W	128lm / 1.5W

WARM DIM

## Smart asy lotis 48 IP55 LED warm dim GE



1X LED ARRAY INCL. | 4W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120-045





	1800K - 3000K / CRI90+
	25°
black struc	12891332
gold	12891346
white struc	12891309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°	160lm / 4W
--------------	------------

## Smart lotis 48 + IP55 LED GE



1X LED ARRAY INCL. 3W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120 - Ø45





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	12862132	12862032	12862232
gold	12862146	12862046	12862246
white struc	12862109	12862009	12862209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	224lm / 3W	303lm / 4.3W
3000K / 25°	224lm / 3W	303lm / 4.3W
4000K / 25°	241lm / 3W	326lm / 4.3W

## Smart lotis 48 LED GE



1X HIGH POWER LED INCL. 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120 - Ø45





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	12860132	12860032	12860232
gold	12860146	12860046	12860246
white struc	12860109	12860009	12860209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	84lm / 1W	119lm / 1.5W
3000K / 25°	89lm / 1W	125lm / 1.5W
4000K / 25°	98lm / 1W	138lm / 1.5W

## Smart lotis 48 IP55 LED GE



1X HIGH POWER LED INCL. | 1.5W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120 - 045





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black struc	12861132	12861032	12861232
gold	12861146	12861046	12861246
white struc	12861109	12861009	12861209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	81lm / 1W	114lm / 1.5W
3000K / 25°	85lm / 1W	120lm / 1.5W
4000K / 25°	94lm / 1W	132lm / 1.5W

WARM DIM

## Smart lotis 48 IP55 LED warm dim GE



1X LED ARRAY INCL. | 4W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889530 CONBOX 100X123X80X187

12290730 GYPKIT 100X120 - 045





	1800K - 3000K / CRI90+
	25°
black struc	12861332
gold	12861346
white struc	12861309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°	180lm / 4W
--------------	------------

## Smart lotis 82 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70

12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82





	2700K / CRI90+		
	15°	25°	40°
black struc	12441632	12441032	12441232
gold	12441646	12441046	12441246
white struc	12441609	12441009	12441209
	3000K / CRI90+		
	15°	25°	40°
black struc	12441732	12441432	12441532
gold	12441746	12441446	12441546
white struc	12441709	12441409	12441509
	4000K / CRI90+		
	15°	25°	40°
black struc	12441832	12441132	12441332
gold	12441846	12441146	12441346
white struc	12441809	12441109	12441309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	554lm / 6.2W	744lm / 9.2W	956lm / 13.4W
3000K / 25°	576lm / 6.2W	773lm / 9.2W	994lm / 13.4W
4000K / 25°	630lm / 6.2W	792lm / 9.2W	1018lm / 13.4W

WARM DIM

## Smart lotis 82 LED warm dim GE



1X LED ARRAY INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70

12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82



	1800K - 3000K / CRI90+	
	25°	40°
black struc	12443132	12443232
gold	12443146	12443246
white struc	12443109	12443209



### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°

485lm / 6W



## Smart lotis 82 IP55 LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70

12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82





	2700K / CRI90+		
	15°	25°	40°
black struc	12442632	12442032	12442132
gold	12442646	12442046	12442146
white struc	12442609	12442009	12442109
	3000K / CRI90+		
	15°	25°	40°
black struc	12442732	12442332	12442432
gold	12442746	12442346	12442446
white struc	12442709	12442309	12442409
	4000K / CRI90+		
	15°	25°	40°
black struc	12442832	12442532	12442232
gold	12442846	12442546	12442246
white struc	12442809	12442509	12442209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	529lm / 6.2W	710lm / 9.2W	912lm / 13.4W
3000K / 25°	550lm / 6.2W	738lm / 9.2W	949lm / 13.4W
4000K / 25°	601lm / 6.2W	756lm / 9.2W	972lm / 13.4W

WARM DIM

## Smart lotis 82 IP55 LED warm dim GE



1X LED ARRAY INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70

12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82





	1800K - 3000K / CRI90+	
	25°	40°
black struc	12444132	12444232
gold	12444146	12444246
white struc	12444109	12444209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°	444lm / 6W
--------------	------------

## Smart lotis 82 adjustable LED GE



1X LED ARRAY INCL. 9.2W

! 3500 ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190-Ø76

12500230 SMART RECESSED RING 82





	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black struc	13310132	13310232	13311132	13311232	13312132	13312232
gold	13310146	13310246	13311146	13311246	13312146	13312246
white struc	13310109	13310209	13311109	13311209	13312109	13312209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	525lm / 6.3W	682lm / 9.2W
3000K / 25°	552lm / 6.3W	717lm / 9.2W
4000K / 25°	589lm / 6.3W	765lm / 9.2W

WARM DIM

## Smart lotis 82 adjustable LED warm dim GE



1X LED ARRAY INCL. 6W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290830 GYPKIT 190X190-Ø76

12500230 SMART RECESSED RING 82





	1800K - 3000K / CRI90+	
	35°	45°
black struc	13313132	13313232
gold	13313146	13313246
white struc	13313109	13313209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

1800K - 3000K / 35°	498lm / 6W
---------------------	------------

## Smart lotis 82 GU10 GE for tube/box



1X LED GU10 EXCL. INCL.



SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES



black struc	12450232
gold	12450246
white struc	12450209

## Smart lotis 82 GU10



1X LED GU10 INCL. GU10 MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190-Ø70


12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82



RESISTIVE DIMMABLE	
black struc	12450132
gold	12450146
white struc	12450109

## Smart lotis 82 MR16 GE



1X QR-CBC 51 | GU 5.3 | MAX. 50W

### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290130 GYPKIT 190X190 - Ø70

12291030 GYPKIT 210X190-2XØ70 R35-88

12500230 SMART RECESSED RING 82



12V

IP20

GWT  
960°



0.10KG



black struc

12450032

## Smart lotis 115 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100





	2700K / CRI90+			
	15°	25°	40°	65°
black struc	12751232	12751032	12751332	12750032
gold	12751246	12751046	12751346	12750046
white struc	12751209	12751009	12751309	12750009
	3000K / CRI90+			
	15°	25°	40°	65°
black struc	12751432	12751532	12751632	12750132
gold	12751446	12751546	12751646	12750146
white struc	12751409	12751509	12751609	12750109
	4000K / CRI90+			
	15°	25°	40°	65°
black struc	12751732	12751132	12751832	12750232
gold	12751746	12751146	12751846	12750246
white struc	12751709	12751109	12751809	12750209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K/25°	1065lm/11W	1461lm/16.25W	1943lm/23.6W
3000K/25°	1046lm/11W	1434lm/16.25W	1908lm/23.6W
4000K/25°	1219lm/11W	1672lm/16.25W	2224lm/23.6W

## Smart lotis 115 IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100





	2700K / CRI90+			
	15°	25°	40°	65°
black struc	12752232	12752032	12752332	12750332
gold	12752246	12752046	12752346	12750346
white struc	12752209	12752009	12752309	12750309
	3000K / CRI90+			
	15°	25°	40°	65°
black struc	12752432	12752532	12752632	12750432
gold	12752446	12752546	12752646	12750446
white struc	12752409	12752509	12752609	12750409
	4000K / CRI90+			
	15°	25°	40°	65°
black struc	12752732	12752132	12752832	12750532
gold	12752746	12752146	12752846	12750546
white struc	12752709	12752109	12752809	12750509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K/25°	1029lm/11W	1412lm/16.25W	1878lm/23.6W
3000K/25°	1011lm/11W	1386lm/16.25W	1844lm/23.6W
4000K/25°	1178lm/11W	1616lm/16.25W	2150lm/23.6W

## Smart lotis 115 diffuse IP54 LED GE



1X LED ARRAY INCL. 16.25W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100





	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	85°	85°	85°
black struc	12753032	12753532	12753132
gold	12753046	12753546	12753146
white struc	12753009	12753509	12753109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 85°	816lm / 11W	1119lm / 16.25W	1489lm / 23.6W
3000K / 85°	801lm / 11W	1099lm / 16.25W	1462lm / 23.6W
4000K / 85°	934lm / 11W	1281lm / 16.25W	1704lm / 23.6W

## Smart lotis 115 adjustable LED GE



1X LED ARRAY INCL. 9.2W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100





	2700K / CRI90+		
	15°	25°	40°
black struc	12781232	12781032	12781332
gold	12781246	12781046	12781346
white struc	12781209	12781009	12781309
	3000K / CRI90+		
	15°	25°	40°
black struc	12781432	12781532	12781632
gold	12781446	12781546	12781646
white struc	12781409	12781509	12781609
	4000K / CRI90+		
	15°	25°	40°
black struc	12781732	12781132	12781832
gold	12781746	12781146	12781846
white struc	12781709	12781109	12781809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	554lm / 6.2W	744lm / 9.2W	956lm / 13.4W
3000K / 25°	576lm / 6.2W	773lm / 9.2W	994lm / 13.4W
4000K / 25°	630lm / 6.2W	792lm / 9.2W	1018lm / 13.4W

WARM DIM

### Smart lotis 115 adjustable LED warm dim GE



1X LED ARRAY INCL. | 12W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

#### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256

12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100





	1800K - 3000K / CRI90+	
	25°	40°
black struc	12783132	12783232
gold	12783146	12783246
white struc	12783109	12783209

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°

903lm / 12W

### Smart lotis 115 adjustable GU10



1X LED GU10 INCL. | GU10 | MAX. 50W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES

#### INSTALLATION ACCESSORIES

10889830 CONBOX 190X192X130X256



12290530 GYPKIT 190X190 - Ø108

12810230 RECESSED RING Ø127 H100



RESISTIVE DIMMABLE	
black struc	12782032
gold	12782046
white struc	12782009

# Smart lotis 160 IP55 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES





2700K / CRI90+				
	15°	25°	40°	60°
black struc	13014032	13014332	13014632	13016032
white struc	13014009	13014309	13014609	13016009
3000K / CRI90+				
	15°	25°	40°	60°
black struc	13014132	13014432	13014732	13016132
white struc	13014109	13014409	13014709	13016109
4000K / CRI90+				
	15°	25°	40°	60°
black struc	13014232	13014532	13014832	13016232
white struc	13014209	13014509	13014809	13016209

## LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	500mA	700mA	900mA	1050mA	1200mA	1400mA
2700K / 25°	1801lm / 16W	2453lm / 23.5W	3044lm / 30.8W	3521lm / 36.3W	<b>3955lm / 42W</b>	4553lm / 49.7W
3000K / 25°	1868lm / 16W	2543lm / 23.5W	3157lm / 30.8W	3651lm / 36.3W	<b>4101lm / 42W</b>	4721lm / 49.7W
4000K / 25°	2019lm / 16W	2749lm / 23.5W	3413lm / 30.8W	3947lm / 36.3W	<b>4433lm / 42W</b>	5104lm / 49.7W



## Smart lotis 160 diffuse IP55 LED GE



1X LED ARRAY INCL. 42W

! 3500K ON REQUEST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

CONNECTED > SEE GOODIES



	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	80°	80°	80°
<b>black struc</b>	<b>13015032</b>	<b>13015132</b>	<b>13015232</b>
<b>white struc</b>	<b>13015009</b>	<b>13015109</b>	<b>13015209</b>

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	500mA	700mA	900mA	1050mA	1200mA	1400mA
2700K / 80°	1494lm / 16W	2034lm / 23.5W	2525lm / 30.8W	2920lm / 36.3W	<b>3280lm / 42W</b>	3776lm / 49.7W
3000K / 80°	1549lm / 16W	2110lm / 23.5W	2618lm / 30.8W	3028lm / 36.3W	<b>3401lm / 42W</b>	3916lm / 49.7W
4000K / 80°	1675lm / 16W	2280lm / 23.5W	2830lm / 30.8W	3273lm / 36.3W	<b>3676lm / 42W</b>	4233lm / 49.7W



SMART MASK 48  
SMART LOTIS 48



SMART MASK 115  
SMART CAKE 115



SMART MASK 115  
SMART KUP ADJUSTABLE 115



# SMART ACCESSORIES

---

## MASK

more info? [supermodular.com/en/smart-mask](https://supermodular.com/en/smart-mask)

SEE ALSO




CEILING - P259

*Although most spotlights are round, there is an increasing demand for a rectangular or square accent on the ceiling. The Smart mask, which consists of a square or rectangle with one or two recesses for the spotlights, responds perfectly to this trend. Smart masks are available in black, white or gold.*

### Smart mask 48 1x

0.07KG




LUMINAIRE NOT INCL

black struc	13350032
gold	13350046
white struc	13350009

### Smart mask 48 2x

0.12KG





LUMINAIRE NOT INCL

black struc	13350132
gold	13350146
white struc	13350109

### Smart mask 82 1x

0.10KG




LUMINAIRE NOT INCL

black struc	12500032
gold	12500046
white struc	12500009

### Smart mask 82 2x



0.15KG



LUMINAIRE NOT INCL

black struc	12500132
gold	12500146
white struc	12500109

Smart mask 115 1x




LUMINAIRE NOT INCL.



black struc	12810032
gold	12810046
white struc	12810009

Smart mask 115 2x




LUMINAIRE NOT INCL.



black struc	12810132
gold	12810146
white struc	12810109

Smart mask 160 1x



LUMINAIRE NOT INCL.



black struc	13040032
white struc	13040009



SMART BALL SUSPENSION 82 GI - WHITE STRUC  
SMART KUP - GOLD



SMART BALL SUSPENSION 115 GE - BLACK STRUC  
SMART LOTIS - WHITE STRUC



# SMART ACCESSORIES

## BALL SUSPENSION

*Our Smart family dares to do a lot. Forms, sizes, colours, lighting options. We can now confidently say, it also got balls. Smart balls. Adding to the established versatility of this popular family, this new suspended accessory is compatible with any of the existing Smart designs. The Smart choice for residential, hospitality and boutique applications. Combine Smart ball with Kompas and Hoolahoop and create your own unique chandelier.*


### What the sphere holds

Our new accessory flaunts a bubbly, spherical shape, available in two sizes: Smart ball 82 and Smart ball 115. In white or black structure, it hangs gracefully from a thin matte black suspension cable. Smart ball is sold as an empty accessory and can be combined with a differently-coloured light. Leaving designers with the delightful choice of which colour to pick for Kup, Lotis, or Cake: white structure or black structure, or a rich, golden finish.

### Conspicuous vs subtle

With its gear integrated, Smart ball offers Tre dim, 1-10V/ Pushdim and DALI systems. It can be surface-mounted on the ceiling with the support of a graceful cylinder shape of matching colour. The gear excluded version proposes a more minimalistic expression with nothing but a thin, round ceiling plate to show. It can be combined with warm dim technology.

SEE ALSO





CEILING - P85



CEILING - P259

## Smart ball suspension 82 GE



LUMINAIRE NOT INCL.

! LONGER SUSPENSION CABLE ON REQUEST


DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329



black struc	11570032
white struc	11570009

## Smart ball suspension 82 GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED


SMART COMBINATIONS > SEE PAGES 320-329



TRAILING EDGE DIMMABLE	
black struc	11570132
white struc	11570109
DALI	
black struc	11570332
white struc	11570309
1-10V/PUSHDIM	
black struc	11570232
white struc	11570209

WARM DIM

## Smart ball suspension 82 warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 82 WARM DIM

! 350MA DRIVER INCLUDED


SMART COMBINATIONS > SEE PAGES 320-329



TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	11570432
white struc	11570409



## Smart ball suspension 115 GE



LUMINAIRE NOT INCL.

! LONGER SUSPENSION CABLE ON REQUEST


DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329



black struc	11571032
white struc	11571009

## Smart ball suspension 115 GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329




TRAILING EDGE DIMMABLE	
black struc	11571132
white struc	11571109

DALI	
black struc	11571332
white struc	11571309

1-10V/PUSHDIM	
black struc	11571232
white struc	11571209

WARM DIM

## Smart ball suspension 115 warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 115 WARM DIM

! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329



TRAILING EDGE DIMMABLE		1800K - 3000K
black struc		11571432
white struc		11571409



SMART SURFACE BOX  
SMART MASK  
SMART LOTIS 82 WARM DIM



SMART SURFACE BOX  
SMART MASK  
SMART KUP 115 ADJUSTABLE



# SMART ACCESSORIES

## — SURFACE BOX

SEE ALSO




CEILING - P259

*If you cannot recess spotlights into the ceiling but would love 'to go Smart', use the Smart surface box – a square or rectangular box mounted on the ceiling that houses one or two spotlights. To accommodate the larger Smart 115 directional spotlights, we also offer a larger Smart surface box.*

more info? [supermodular.com/en/smart-surface-box](https://supermodular.com/en/smart-surface-box)

## Smart surface box 82 1x LED GE



LUMINAIRE NOT INCL.

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK


12500009 SMART MASK 82 1X - WHITE STRUC

12500032 SMART MASK 82 1X - BLACK STRUC

12500046 SMART MASK 82 1X - GOLD

black struc	12516032
white struc	12516009

## Smart surface box 82 1x LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE


TRAILING EDGE DIMMABLE	
black struc	12514032
white struc	12514009

DALI	
black struc	12514232
white struc	12514209

1-10V/PUSHDIM	
black struc	12514132
white struc	12514109

WARM DIM

## Smart surface box 82 1x LED warm dim GI



LUMINAIRE NOT INCL.


! TO BE COMBINED WITH SMART 82 WARM DIM  
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	12514332
white struc	12514309

## Smart surface box 82 2x LED GE



LUMINAIRE NOT INCL.

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

### SMART MASK

12500109 SMART MASK 82 2X - WHITE STRUC


12500132 SMART MASK 82 2X - BLACK STRUC

12500146 SMART MASK 82 2X - GOLD



black struc	12516132
white struc	12516109

## Smart surface box 82 2x LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE




TRAILING EDGE DIMMABLE	
black struc	12515032
white struc	12515009

DALI	
black struc	12515232
white struc	12515209

1-10V/PUSHDIM	
black struc	12515132
white struc	12515109

WARM DIM

## Smart surface box 82 2x LED warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 82 WARM DIM  
! 350MA DRIVER INCLUDED


SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE



TRAILING EDGE DIMMABLE		1800K - 3000K
black struc	12515332	
white struc	12515309	

## Smart surface box 115 1x LED GE



LUMINAIRE NOT INCL.

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

### SMART MASK



12810009 SMART MASK 115 1X - WHITE STRUC

12810032 SMART MASK 115 1X - BLACK STRUC

12810046 SMART MASK 115 1X - GOLD

black struc	12802032
white struc	12802009

## Smart surface box 115 1x LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE



TRAILING EDGE DIMMABLE	
black struc	12800032
white struc	12800009

DALI	
black struc	12800232
white struc	12800209

1-10V/PUSHDIM	
black struc	12800132
white struc	12800109

WARM DIM

## Smart surface box 115 1x LED warm dim GI



LUMINAIRE NOT INCL.



! TO BE COMBINED WITH SMART 115 ADJUSTABLE WARM DIM  
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE

TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	12800332
white struc	12800309

## Smart surface box 115 2x LED GE



LUMINAIRE NOT INCL.

DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGES 320-329

### SMART MASK

12810109 SMART MASK 115 2X - WHITE STRUC



12810132 SMART MASK 115 2X - BLACK STRUC

12810146 SMART MASK 115 2X - GOLD



black struc	12802132
white struc	12802109

## Smart surface box 115 2x LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE





TRAILING EDGE DIMMABLE	
black struc	12801032
white struc	12801009

DALI	
black struc	12801232
white struc	12801209

1-10V/PUSHDIM	
black struc	12801132
white struc	12801109

WARM DIM

## Smart surface box 115 2x LED warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 115 ADJUSTABLE WARM DIM  
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329

SMART MASK > SEE ABOVE



TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	12801332
white struc	12801309



SMART SURFACE TUBED 82 XL  
SMART LOTIS 82



SMART SURFACE TUBED 115  
SMART CAKE ADJUSTABLE 115



SMART TUBED SUSPENSION 82 LARGE GI  
SMART KUP 82



SMART TUBED SUSPENSION 115 GE  
SMART KUP 115





# SMART ACCESSORIES

## SURFACE TUBED TUBED SUSPENSION

SEE ALSO



CEILING - P85



CEILING - P259





WALL - P555

*You'd rather install a cylindrical than a square or rectangular surface box? The Smart surface tubed is available in a small (86 mm), large (130 mm) and x-large (190 mm) version. What's more, the large and x-large models also come in suspended versions. Combine the sizes and models to make playful creations on the ceiling. In combination with our Kompas and Hoolahoop ceiling bases, Smart tubed suspension is part of your own unique chandelier.*

more info? [supermodular.com/en/smart-surface-tubed](http://supermodular.com/en/smart-surface-tubed)

### Smart surface tubed 48 1x LED GE



LUMINAIRE NOT INCL.

\* ONLY WHEN COMBINED WITH SMART 48 LED IP55


SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE



black struc	12900032
white struc	12900009

### Smart surface tubed 82 small LED GE



LUMINAIRE NOT INCL.

\* ONLY WHEN COMBINED WITH SMART 82 LED IP55



SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE



alu brushed	12841024
black struc	12841032
white struc	12841009

### Smart surface tubed 82 large LED GE



LUMINAIRE NOT INCL.

\* ONLY WHEN COMBINED WITH SMART 82 LED IP55


SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE



alu brushed	12845024
black struc	12845032
white struc	12845009

## Smart surface tubed 82 X-large LED GE



LUMINAIRE NOT INCL.

\* ONLY WHEN COMBINED WITH SMART 82 LED IP55

<sup>(1)</sup> WHEN USED WITH SMART 82 GU10 FOR TUBE

<sup>(2)</sup> WHEN USED WITH SMART 82 LED GE



SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE



black struc	12843332
white struc	12843309

## Smart surface tubed 82 large LED GI



LUMINAIRE NOT INCL.

\* ONLY WHEN COMBINED WITH SMART 82 LED IP55

! 500mA DRIVER INCLUDED



SMART COMBINATIONS > SEE PAGES 320-329



alu brushed	12844024
black struc	12844032
white struc	12844009

WARM DIM.

## Smart surface tubed 82 large LED warm dim GI



LUMINAIRE NOT INCL.

\* ONLY WHEN COMBINED WITH SMART 82 IP55 LED WARM DIM

! TO BE COMBINED WITH SMART 82 WARM DIM


! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329



TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	12844132
white struc	12844109

## Smart surface tubed 82 X-large LED GI



LUMINAIRE NOT INCL.

\* ONLY WHEN COMBINED WITH SMART 82 LED IP55

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329



Friends of  
hue



230V



IP54\*

GWT  
960°


1.28KG



TRAILING EDGE DIMMABLE	
black struc	12843032
brushed alu	12843024
white struc	12843009
DALI	
black struc	12843232
brushed alu	12843224
white struc	12843209
1-10V/PUSHDIM	
black struc	12843132
brushed alu	12843124
white struc	12843109

WARM DIM

## Smart surface tubed 82 X-large LED warm dim GI



LUMINAIRE NOT INCL.

\* ONLY WHEN COMBINED WITH SMART 82 IP55 LED WARM DIM

! TO BE COMBINED WITH SMART 82 WARM DIM  
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329



230V



IP55\*


GWT  
960°

1.15KG



TRAILING EDGE DIMMABLE	
	1800K - 3000K
black struc	12843432
white struc	12843409

## Smart surface tubed 115 LED GE



LUMINAIRE NOT INCL.

\* ONLY WHEN COMBINED WITH SMART 115 LED IP54


SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE



black struc	13140432
white struc	13140409

## Smart surface tubed 115 LED GI



LUMINAIRE NOT INCL.

\* ONLY WHEN COMBINED WITH SMART 115 LED IP54

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329




TRAILING EDGE DIMMABLE	
black struc	13140132
brushed alu	13140124
white struc	13140109

DALI	
black struc	13140332
brushed alu	13140324
white struc	13140309

1-10V/PUSHDIM	
black struc	13140232
brushed alu	13140224
white struc	13140209

WARM DIM

## Smart surface tubed 115 LED warm dim GI



LUMINAIRE NOT INCL.


! TO BE COMBINED WITH SMART 115 ADJUSTABLE WARM DIM  
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329



TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	13140532
white struc	13140509

### Smart tubed suspension 48 LED GE



LUMINAIRE NOT INCL.



SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE



black struc	12902132
white struc	12902109

### Smart tubed suspension 48 LED GI



LUMINAIRE NOT INCL.



! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329



TRAILING EDGE DIMMABLE	
black struc	12902032
white struc	12902009

### Smart tubed suspension 82 large LED GE



LUMINAIRE NOT INCL.

! LONGER SUSPENSION CABLE ON REQUEST


SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE



black struc	12842832
white struc	12842809

## Smart tubed suspension 82 X-large LED GE



LUMINAIRE NOT INCL.

! LONGER SUSPENSION CABLE ON REQUEST


SMART COMBINATIONS > SEE PAGES 320-329

DRIVER > SEE PRODUCT PAGE ON WEBSITE



black struc	12842932
white struc	12842909

## Smart tubed suspension 82 large LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED


SMART COMBINATIONS > SEE PAGES 320-329



black struc	12842032
brushed alu	12842024
white struc	12842009

WARM DIM

## Smart tubed suspension 82 large LED warm dim GI





LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 82 WARM DIM  
! 350MA DRIVER INCLUDED



TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	12842132
white struc	12842109

### Smart tubed suspension 82 X-large LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329



230V



IP20

GWT 960°



1.58KG



TRAILING EDGE DIMMABLE	
black struc	12842232
brushed alu	12842224
white struc	12842209
DALI	
black struc	12842432
brushed alu	12842424
white struc	12842409
1-10V/PUSHDIM	
black struc	12842332
brushed alu	12842324
white struc	12842309

WARM DIM

### Smart tubed suspension 82 X-large LED warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 82 WARM DIM  
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329



230V



IP20


GWT 960°

1.46KG



TRAILING EDGE DIMMABLE		1800K - 3000K
black struc		12841932
white struc		12841909

### Smart tubed suspension 115 LED GE



LUMINAIRE NOT INCL.

! LONGER SUSPENSION CABLE ON REQUEST

SMART COMBINATIONS > SEE PAGES 320-329


DRIVER > SEE PRODUCT PAGE ON WEBSITE



black struc	13141432
white struc	13141409



### Smart tubed suspension 115 LED GI



LUMINAIRE NOT INCL.

! 500mA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGES 320-329




TRAILING EDGE DIMMABLE	
black struc	13141132
brushed alu	13141124
white struc	13141109

DALI	
black struc	13141332
brushed alu	13141324
white struc	13141309

1-10V/PUSHDIM	
black struc	13141232
brushed alu	13141224
white struc	13141209

WARM DIM

### Smart tubed suspension 115 LED warm dim GI



LUMINAIRE NOT INCL.






! TO BE COMBINED WITH SMART 115 ADJUSTABLE WARM DIM  
! 350MA DRIVER INCLUDED



TRAILING EDGE DIMMABLE		1800K - 3000K
black struc		13141532
white struc		13141509

# Smart combinations & accessories

## SMART 48/48+ - MASK, SURFACE TUBED, TUBED SUSPENSION & TUBED WALL

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	MASK 1X/2X 	SURFACE TUBED Ø48 	TUBED SUSPENSION Ø48 GE 	TUBED SUSPENSION Ø48 GI 	TUBED WALL Ø48 GE 1X/2X 
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20 IP55 <sup>(2)</sup>	LED	●	●	●	●	●
				LED warm dim		●	●	●	●
Smart asy lotis	○ ● ●	fix	IP20 IP55	LED	●	■	■	■	■
				LED warm dim		■	■	■	■

### SMART MASK 48

1x	black struc	13350032
	gold	13350046
	white struc	13350009
2x	black struc	13350132
	gold	13350146
	white struc	13350109

### SMART SURFACE TUBED 48

black struc	12900032
white struc	12900009

### SMART TUBED SUSPENSION 48



	GE	GI TRAILING EDGE DIMMABLE
black struc	12902132	12902032
white struc	12902109	12902009

### SMART TUBED WALL 48

1x LED	black struc	12901032
	white struc	12901009
2x LED	black struc	12901132
	white struc	12901109

<sup>(2)</sup> Combination with Smart surface tubed and Smart tubed wall is IP54, combination with Smart tubed suspension is IP20

## SMART 48/48+ - SURFACE TUBED TRACK 48V, TUBED SUSPENSION TRACK 48V

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	SURFACE TUBED TRACK 48V Ø48 GI 1X/2X	TUBED SUSPENSION TRACK 48V Ø48 GI
						
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20	LED	Ⓜ	Ⓜ
				LED warm dim		
Smart asy lotis	○ ● ●	fix	IP20	LED		
				LED warm dim		

### SMART SURFACE TUBED 48 TRACK 48V GI




		1-10V	DALI
1x LED	black struc	12904032	12904132
	white struc	12904009	12904109
2x LED	black struc	12904232	12904332
	white struc	12904209	12904309

### SMART TUBED SUSPENSION 48 TRACK 48V GI

		1-10V	DALI
	black struc	12903032	12903132
	white struc	12903009	12903109

# Smart combinations & accessories

## SMART 82 - MASK & SURFACE BOX

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	MASK 1X/2X	SURFACE BOX GE 1X/2X	SURFACE BOX GI 1X/2X
							
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20 IP55 <sup>(2)</sup>	LED LED warm dim	●	●	●
			IP20	GU10 GU10 for tube/box <sup>(1)</sup>		●	●
		adj.	IP20	LED LED warm dim		●	●
						●	●
						●	●
						●	●

### SMART MASK 82

1x	black struc	12500032
	gold	12500046
	white struc	12500009
2x	black struc	12500132
	gold	12500146
	white struc	12500109

### SMART SURFACE BOX 82





































	GE	Gi (500MA)			Gi (350MA)	
		TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	TRAILING EDGE DIMMABLE	
1x LED	black struc	12516032	12514032	12514132	12514232	12514332
	white struc	12516009	12514009	12514109	12514209	12514309
2x LED	black struc	12516132	12515032	12515132	12515232	12515332
	white struc	12516109	12515009	12515109	12515209	12515309

! DO NOT FORGET TO ORDER SMART MASK

<sup>(1)</sup> When retrofitting Smart with Hue technology, note that only Hue Ambiance GU10 lamps (70000168) fit in Smart tubes and boxes




<sup>(2)</sup> Combination with Smart surface tubed and Smart tubed wall is IP54, combination with Smart tubed suspension is IP20

## SMART 82 - SURFACE TUBED

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	SURFACE TUBED Ø82 S GE	SURFACE TUBED Ø82 L GE	SURFACE TUBED Ø82 XL GE	SURFACE TUBED Ø82 L GI		SURFACE TUBED Ø82 XL GI	
										WARM DIM	WARM DIM
Smart cake Smart kup Smart lotis	  	fix	IP20 IP55 <sup>(2)</sup>	LED							
				LED warm dim							
			IP20	GU10							
				GU10 for tube/box <sup>(1)</sup>							
		adj.	IP20	LED							
				LED warm dim							

### SMART SURFACE TUBED 82

	GE			GI (500MA)				GI (350MA)	
	SMALL	LARGE	X-LARGE	LARGE	X-LARGE		DALI	LARGE	X-LARGE
				NOT DIMMABLE	TRAILING EDGE DIMMABLE	1-10V/PUSHDIM		TRAILING EDGE DIMMABLE	TRAILING EDGE DIMMABLE
black struc	12841032	12845032	12843332	12844032	12843032	12843132	12843232	12844132	12843432
brushed alu	12841024	12845024		12844024	12843024	12843124	12843224		
white struc	12841009	12845009	12843309	12844009	12843009	12843109	12843209	12844109	12843409

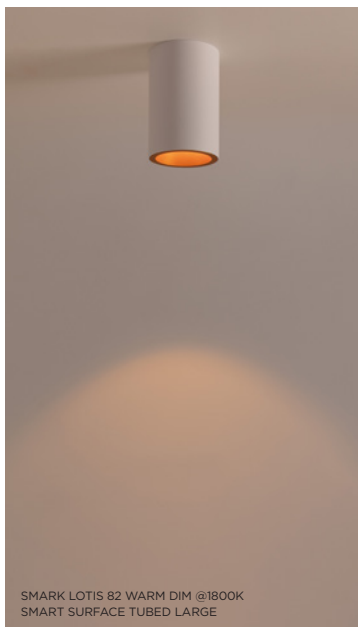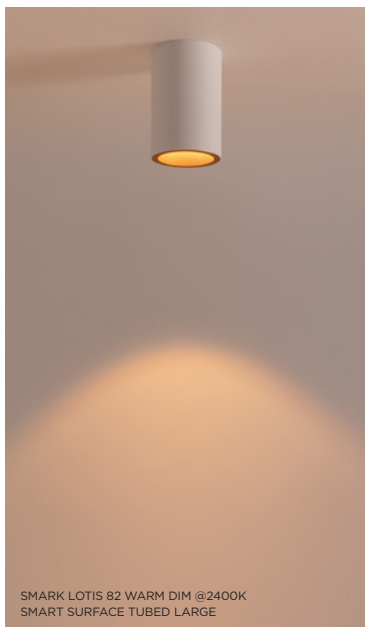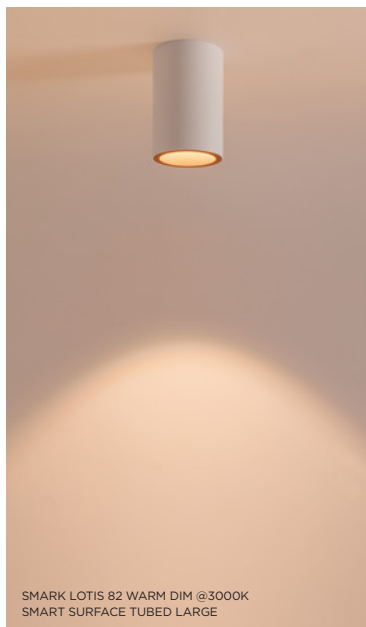

# Smart combinations & accessories

## SMART 82 - TUBED SUSPENSION

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	TUBED SUSPENSION Ø82 L GE	TUBED SUSPENSION Ø82 XL GE	TUBED SUSPENSION Ø82 L GI	TUBED SUSPENSION Ø82 XL GI
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20	LED				
				LED warm dim				
				GU10				
				GU10 for tube/box <sup>(1)</sup>				
		adj.	IP20	LED				
				LED warm dim				

### SMART TUBED SUSPENSION 82

	GE		GI (500MA)				GI (350MA)	
	LARGE	X-LARGE	LARGE	X-LARGE		LARGE	X-LARGE	
			NOT DIMMABLE	TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	TRAILING EDGE DIMMABLE	TRAILING EDGE DIMMABLE
black struc	12842832	12842932	12842032	12842232	12842332	12842432	12842132	12841932
brushed alu			12842024	12842224	12842324	12842424		
white struc	12842809	12842909	12842009	12842209	12842309	12842409	12842109	12841909

## SMART 82 - TUBED SUSPENSION TRACK

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	TUBED SUSPENSION TRACK Ø82 L GI	TUBED SUSPENSION TRACK Ø82 XL GI
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20	LED		
				LED warm dim		
				GU10		
				GU10 for tube/box <sup>(1)</sup>		
		adj.	IP20	LED		
				LED warm dim		

### SMART TUBED SUSPENSION TRACK 82

	LARGE	X-LARGE	
	TRAILING EDGE DIMMABLE	TRAILING EDGE DIMMABLE	DALI
black struc	12842532	12842632	12842732
brushed alu	12842524	12842624	12842724
white struc	12842509	12842609	12842709

<sup>(1)</sup> When retrofitting Smart with Hue technology, note that only Hue Ambiance GU10 lamps (70000168) fit in Smart tubes and boxes

## SMART 82 - TUBED WALL

DESIGN	COLOUR	FIX/ ADJ.	IP-RATE	TECHNOLOGY	TUBED WALL Ø82 S GE	TUBED WALL Ø82 L GE	TUBED WALL Ø82 XL GE	TUBED WALL Ø82 L GI	TUBED WALL Ø82 XL GI	
Smart cake Smart kup Smart lotis	  	fix	IP20	LED				WARM DIM	WARM DIM	
				LED warm dim						
				GU10						
				GU10 for tube/box <sup>(1)</sup>						
		adj.	IP20	LED						
				LED warm dim						










### SMART TUBED WALL 82

		GE			GI (500MA)				GI (350MA)	
		SMALL	LARGE	X-LARGE	LARGE NOT DIMMABLE	X-LARGE			LARGE	X-LARGE
						TRAILING EDGE DIMMABLE	1-10V/ PUSHDIM	DALI		
1x LED	black struc	12846632	12846432	12846032	12846532	12846132	12846232	12846332	12846832	12846932
	white struc	12846609	12846409	12846009	12846509	12846109	12846209	12846309	12846809	12846909
2x LED	black struc			12846732						
	white struc			12846709						

<sup>(1)</sup> When retrofitting Smart with Hue technology, note that only Hue Ambiance GU10 lamps (70000168) fit in Smart tubes

# Smart combinations & accessories

## SMART 82 - BALL SUSPENSION

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	BALL SUSPENSION Ø82 GE	BALL SUSPENSION Ø82 GI		
							<b>WARM DIM</b>	
Smart cake Smart kup Smart lotis		fix	IP20 IP55 <sup>(2)</sup>	LED				
				LED warm dim				
			IP20	GU10				
				GU10 for tube/box <sup>(1)</sup>				
		adj.	IP20	LED				
				LED warm dim				

### SMART BALL SUSPENSION 82

	GE	GI (500MA)			GI (350MA)
		TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	TRAILING EDGE DIMMABLE <b>WARM DIM</b>
black struc	11570032	11570132	11570232	11570332	11570432
white struc	11570009	11570109	11570209	11570309	11570409

<sup>(2)</sup> Only combination with Smart surface tubed is IP54



## SMART 115 - MASK & SURFACE BOX

DESIGN	COLOUR	FIX/ADJ.	IP-RATE	TECHNOLOGY	MASK 1X/2X	SURFACE BOX GE 1X/2X	SURFACE BOX GI 1X/2X	
Smart cake Smart kup Smart lotis		fix	IP20 IP54 <sup>(2)</sup>	LED				
		adj.	IP20	LED				
				LED warm dim				
				GU10				

### SMART MASK 115

1x	black struc	12810032
	gold	12810046
	white struc	12810009
2x	black struc	12810132
	gold	12810146
	white struc	12810109










### SMART SURFACE BOX 115

	GE	GI (500MA)			GI (350MA)	
		TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	TRAILING EDGE DIMMABLE	
1x LED	black struc	12802032	12800032	12800132	12800232	12800332
	white struc	12802009	12800009	12800109	12800209	12800309
2x LED	black struc	12802132	12801032	12801132	12801232	12801332
	white struc	12802109	12801009	12801109	12801209	12801309

! DO NOT FORGET TO ORDER SMART MASK

# Smart combinations & accessories










## SMART 115 - SURFACE TUBED

DESIGN	COLOR	FIX/ADJ.	IP-RATE	TECHNOLOGY	SURFACE TUBED Ø115 GE	SURFACE TUBED Ø115 GI	WARM DIM
							
Smart cake Smart kup Smart lotis		fix	IP20 IP54 <sup>(2)</sup>	LED			
				LED warm dim			
		adj.	IP20	LED			
				GU10			

### SMART SURFACE TUBED 115

	GE	GI (500MA)			
		TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	TRAILING EDGE DIMMABLE
black struc	13140432	13140132	13140232	13140332	13140532
brushed alu		13140124	13140224	13140324	
white struc	13140409	13140109	13140209	13140309	13140509

## SMART 115 - TUBED SUSPENSION

DESIGN	COLOR	FIX/ADJ.	IP-RATE	TECHNOLOGY	TUBED SUSPENSION Ø115 GE	TUBED SUSPENSION Ø115 GI	WARM DIM
							
Smart cake Smart kup Smart lotis		fix	IP20 IP54 <sup>(2)</sup>	LED			
				LED warm dim			
		adj.	IP20	LED			
				GU10			

### SMART TUBED SUSPENSION 115

	GE	GI (500MA)			
		TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	TRAILING EDGE DIMMABLE
black struc	13141432	13141132	13141232	13141332	13141532
brushed alu		13141124	13141224	13141324	
white struc	13141409	13141109	13141209	13141309	13141509

<sup>(2)</sup> Only combination with Smart surface tubed is IP54

## SMART 115 - BALL SUSPENSION

DESIGN	COLOR	FIX/ADJ.	IP-RATE	TECHNOLOGY	BALL SUSPENSION Ø115 GE	BALL SUSPENSION Ø115 GI		
							WARM DIM	
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20 IP54 <sup>(2)</sup>	LED				
		adj.	IP20	LED				
	LED warm dim							
	GU10							

### SMART BALL SUSPENSION 115

	GE	GI (500MA)			
		TRAILING EDGE DIMMABLE	1-10V/PUSHDIM	DALI	TRAILING EDGE DIMMABLE WARM DIM
black struc	11571032	11571132	11571232	11571332	11571432
white struc	11571009	11571109	11571209	11571309	11571409

## SMART 160 - MASK

DESIGN	COLOR	FIX/ADJ.	IP-RATE	TECHNOLOGY	MASK 1X
Smart cake Smart kup Smart lotis	○ ●	fix	IP54	LED	

### SMART MASK 160

black struc	13040032
white struc	13040009

SEE ALSO



TRACK 230V - P502



# STOVE

**Design** — Couvreur-Devos



*A luminaire that is both sleek and playful. Its name wasn't chosen randomly: from below, you can clearly see the outline of a stove, with the asymmetric foot as the flue.*

## Heart-warming geometry

Stove is the result of pure geometry and has been perfected down to the smallest detail. The unusual thing about Stove is the two pivot points, which make this spotlight a particularly versatile and highly directional light source.

more info? [supermodular.com/en/stove](http://supermodular.com/en/stove)

## Stove LED GE



1X LED ARRAY INCL. | 16.2W

! CAN BE USED WITH GEAR ACCESS COVER PLATE

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

11932009 GEAR ACCESS COVERPLATE (CUTOUT SIZE Ø127 H130)

10203009 BASE FLANGE Ø90 H3 - WHITE STRUC

10203032 BASE FLANGE Ø90 H3 - BLACK STRUC

10204009 BASE FLANGE TUBE Ø90 H20 - WHITE STRUC

10204032 BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

### OPTICAL ACCESSORIES

11949730 REFLECTOR LED Ø80 FLOOD

11949930 REFLECTOR LED Ø80 SPOT





	2700K / CRI90+
	25°
black struc	11870132
white struc	11870109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	940lm / 11W	1290lm / 16.2W

## Stove LED GI



1X LED ARRAY INCL. | 11W

### INSTALLATION ACCESSORIES

10203009 BASE FLANGE Ø90 H3 - WHITE STRUC

10203032 BASE FLANGE Ø90 H3 - BLACK STRUC

10204009 BASE FLANGE TUBE Ø90 H20 - WHITE STRUC

10204032 BASE FLANGE TUBE Ø90 H20 - BLACK STRUC

### OPTICAL ACCESSORIES

11949730 REFLECTOR LED Ø80 FLOOD

11949930 REFLECTOR LED Ø80 SPOT



TRAILING EDGE DIMMABLE	2700K / CRI90+
	25°
black struc	11873132
white struc	11873109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25°	940lm / 13.5W
-------------	---------------





# TETRIX

*We had a bit of a game in mind when we designed our recessed spot, Tetrix. Playing with pieces, fitting them together in all kinds of intricate ways. Easy to play with, and for everyone. Tetrix invites you to give it your personal touch with design options and accessories. It's versatile, fits everywhere, and is a breeze to install.*

## It all fits together

Tetrix is a new family of recessed downlighters with many possibilities. Compose your Tetrix with a choice of design, colour, installation and accessory. Create your personal style and combination by simply playing with everything. All components can be clicked into another interchangeably.


## Plenty of playful

Tetrix offers a choice of lighting accessories, adding visual comfort, aesthetics, fun and individuality to each design. Try honeycomb and snoot, already part of our Qbini family, or our light cones in two sizes.

## Connected, easy install, everywhere

Turn Tetrix (gear excluded) into a smart lighting solution by linking a remote driver of your choice with a Hue or Casambi module. Tetrix's installation is easy peasy, with a recessed ring of adjustable height, or an installation ring with flange. An IP55 rating for all LED dedicated designs, including the adjustable version, and an option for using a GU10 socket, truly makes Tetrix for everywhere.

# 5 Designs

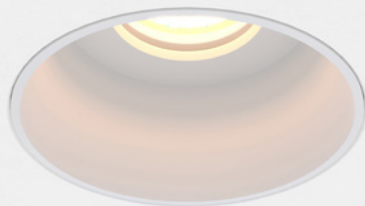

TETRIX STRAIGHT - TRIMLESS




TETRIX OBLIQUE - TRIMLESS



TETRIX ADJUSTABLE - TRIMLESS




TETRIX CONE - TRIMLESS




TETRIX PINHOLE - TRIMLESS



# Installation accessories

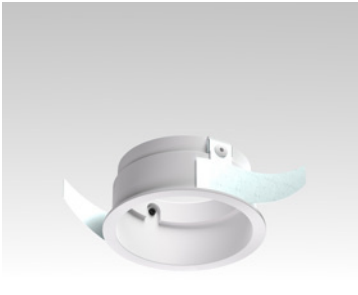

FRAME ROUND (FLANGE)

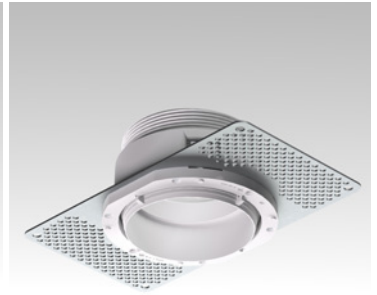

RECESSED RING Ø62 (TRIMLESS)

# Optical accessories



HONEYCOMB Ø33



LIGHT CONE Ø44



LIGHT CONE Ø64



SNOOT Ø32




LIGHT CONE Ø44




LIGHT CONE Ø64



SNOOT Ø32

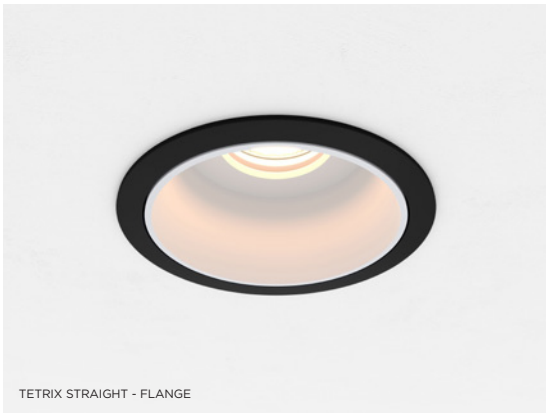


TETRIX STRAIGHT - FLANGE

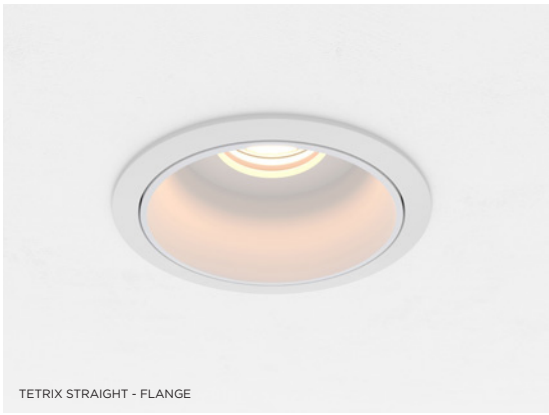

TETRIX STRAIGHT - FLANGE



TETRIX STRAIGHT - TRIMLESS

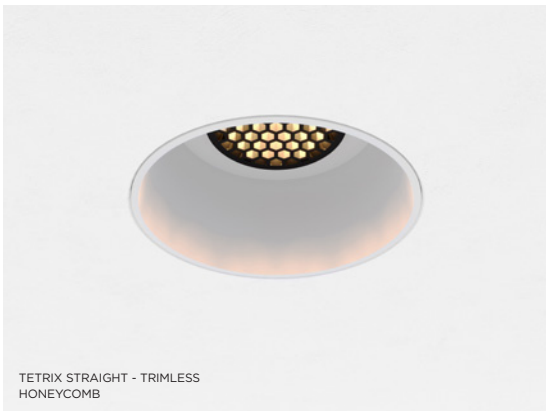

TETRIX STRAIGHT - TRIMLESS  
HONEYCOMB



TETRIX STRAIGHT - FLANGE  
SNOOT




TETRIX STRAIGHT - FLANGE  
LIGHT CONE Ø44



TETRIX STRAIGHT - FLANGE  
LIGHT CONE Ø64

## Tetrix Straight 62 IP55 LED GE



1X LED ARRAY INCL. 7.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE PAGE 339

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62
13515530	CONCRETE KIT 150X150 - Ø62
13515630	CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES
12293230	GYPKITTRIMLESS 150X150 - Ø62
12293330	GYPKITTRIMLESS 300X150 - 2X Ø62
11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYP SUM FIBREBOARD 150X150
12292730	GYP SUM FIBREBOARD 300X150

### OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515038	SNOOT Ø32MM WHITE MATT
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC
13515238	LC Ø44MM WHITE MATT
13515332	LC Ø64MM BLACK STRUC
13515338	LC Ø64MM WHITE MATT

### OPTICAL ACCESSORIES



	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black chrome	13511080	13511180	13511280	13511380	13511480	13511580
black matt	13511083	13511183	13511283	13511383	13511483	13511583
white matt	13511038	13511138	13511238	13511338	13511438	13511538

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white matt)

	350mA	500mA
2700K / 25°	472lm 5W	635lm 7.2W
3000K / 25°	506lm 5W	635lm 7.2W
4000K / 25°	541lm 5W	635lm 7.2W

## Tetrix Straight 62 GU10 for LED





230V

IP20

GWT  
850°

0.08KG



1X LED GU10 (NOT INCL.) | GU10

black chrome	13511680
black matt	13511683
white matt	13511638


### INSTALLATION ACCESSORIES

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62
13515530	CONCRETE KIT 150X150 - Ø62
13515630	CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES
12293230	GYPKITTRIMLESS 150X150 - Ø62
12293330	GYPKITTRIMLESS 300X150 - 2X Ø62
11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYP SUM FIBREBOARD 150X150
12292730	GYP SUM FIBREBOARD 300X150


### OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515038	SNOOT Ø32MM WHITE MATT
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC
13515238	LC Ø44MM WHITE MATT
13515332	LC Ø64MM BLACK STRUC
13515338	LC Ø64MM WHITE MATT

### OPTICAL ACCESSORIES



## Tetrix Straight 62 LED Hue retrofit

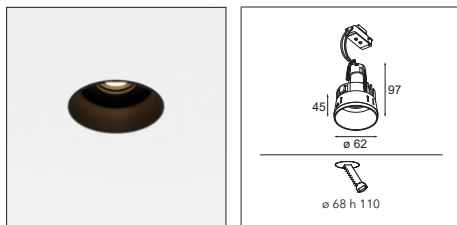

1X LED GU10 INCL. | GU10 | 5.2W

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

13510038 TETRIX FRAME ROUND 74 WHITE MATT

13510083 TETRIX FRAME ROUND 74 BLACK MATT

13515430 RECESSED RING Ø62

13515530 CONCRETE KIT 150X150 - Ø62

13515630 CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES

12293230 GYPKIT TRIMLESS 150X150 - Ø62

12293330 GYPKIT TRIMLESS 300X150 - 2X Ø62

11624030 CONBOX 140X250X100X210

11624130 CONBOX 140X400X100X210

12292630 GYPSUM FIBREBOARD 150X150

12292730 GYPSUM FIBREBOARD 300X150

### OPTICAL ACCESSORIES

13515032 SNOOT Ø32MM BLACK STRUCTURE

13515038 SNOOT Ø32MM WHITE MATT

13515132 HONEYCOMB Ø33MM BLACK STRUCTURE

13515232 LC Ø44MM BLACK STRUC

13515238 LC Ø44MM WHITE MATT











13515332 LC Ø64MM BLACK STRUC


13515338 LC Ø64MM WHITE MATT



HUE DIMMABLE	2200K - 6500K / CRI80	2700K / CRI80
		45°
black chrome	13511880	13511780
black matt	13511883	13511783
white matt	13511838	13511738

### INSTALLATION ACCESSORIES



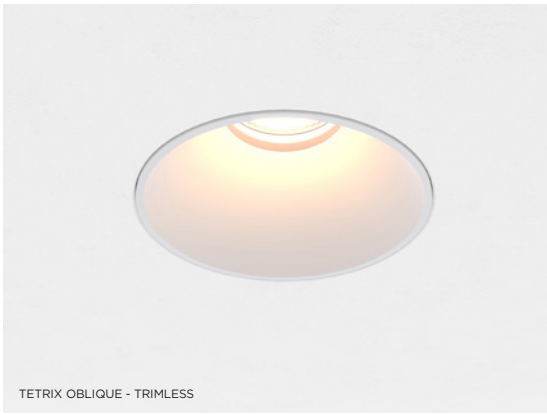


TETRIX OBLIQUE - TRIMLESS




TETRIX OBLIQUE - TRIMLESS



TETRIX OBLIQUE - FLANGE

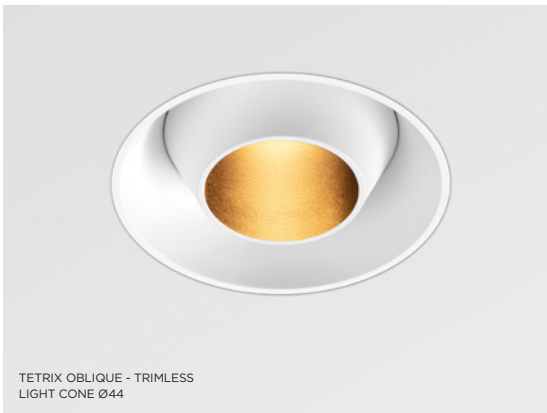

TETRIX OBLIQUE - TRIMLESS  
LIGHT CONE Ø44

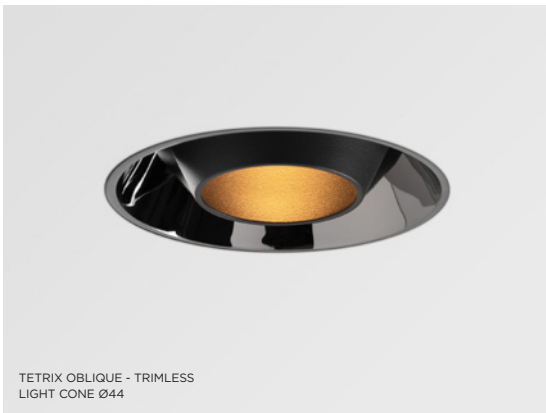

TETRIX OBLIQUE - TRIMLESS  
LIGHT CONE Ø44




TETRIX OBLIQUE - TRIMLESS  
SNOOT



TETRIX OBLIQUE - FLANGE  
HONEYCOMB

## Tetrix Oblique 62 IP55 LED GE

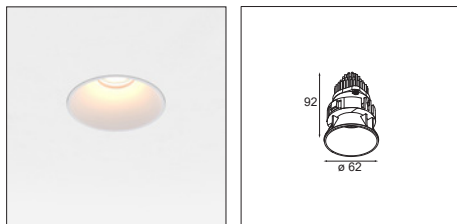

1X LED ARRAY INCL. 7.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES


INSTALLATION ACCESSORIES > SEE PAGE 343

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62
13515530	CONCRETE KIT 150X150 - Ø62
13515630	CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES
12293230	GYPKITTRIMLESS 150X150 - Ø62
12293330	GYPKITTRIMLESS 300X150 - 2X Ø62
11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYPSPUM FIBREBOARD 150X150
12292730	GYPSPUM FIBREBOARD 300X150

### OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515038	SNOOT Ø32MM WHITE MATT
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC
13515238	LC Ø44MM WHITE MATT

### OPTICAL ACCESSORIES


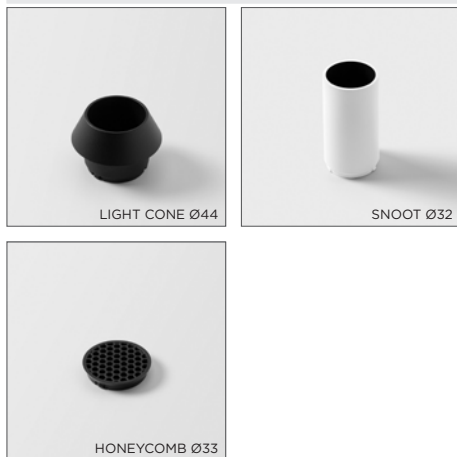


	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black chrome	13512080	13512180	13512280	13512380	13512480	13512580
black matt	13512083	13512183	13512283	13512383	13512483	13512583
white matt	13512038	13512138	13512238	13512338	13512438	13512538

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white matt)

	350mA	500mA
2700K / 25°	477lm 5W	642lm 7.2W
3000K / 25°	511lm 5W	642lm 7.2W
4000K / 25°	547lm 5W	642lm 7.2W

## Tetrix Oblique 62 GU10 for LED



1X LED GU10 (NOT INCL.) | GU10

black chrome	13512680
black matt	13512683
white matt	13512638


### INSTALLATION ACCESSORIES

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62
13515530	CONCRETE KIT 150X150 - Ø62
13515630	CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES
12293230	GYPKITTRIMLESS 150X150 - Ø62
12293330	GYPKITTRIMLESS 300X150 - 2X Ø62
11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYPSTUM FIBREBOARD 150X150
12292730	GYPSTUM FIBREBOARD 300X150

### OPTICAL ACCESSORIES


13515032	SNOOT Ø32MM BLACK STRUCTURE
13515038	SNOOT Ø32MM WHITE MATT
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC
13515238	LC Ø44MM WHITE MATT

### OPTICAL ACCESSORIES





## Tetrix Oblique 62 LED Hue retrofit

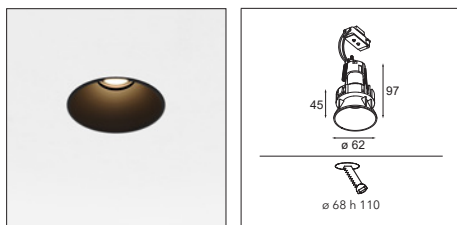

1X LED GU10 INCL. | GU10 | 5.2W

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

**13510038** TETRIX FRAME ROUND 74 WHITE MATT

**13510083** TETRIX FRAME ROUND 74 BLACK MATT

**13515430** RECESSED RING Ø62

**13515530** CONCRETE KIT 150X150 - Ø62

**13515630** CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES

**12293230** GYPKIT TRIMLESS 150X150 - Ø62

**12293330** GYPKIT TRIMLESS 300X150 - 2X Ø62

**11624030** CONBOX 140X250X100X210

**11624130** CONBOX 140X400X100X210

**12292630** GYPSUM FIBREBOARD 150X150

**12292730** GYPSUM FIBREBOARD 300X150

### OPTICAL ACCESSORIES

**13515032** SNOOT Ø32MM BLACK STRUCTURE

**13515038** SNOOT Ø32MM WHITE MATT

**13515132** HONEYCOMB Ø33MM BLACK STRUCTURE


**13515232** LC Ø44MM BLACK STRUC

**13515238** LC Ø44MM WHITE MATT



HUE DIMMABLE	2200K - 6500K / CRI80	2700K / CRI80
		45°
black chrome	13512880	13512780
black matt	13512883	13512783
white matt	13512838	13512738

### INSTALLATION ACCESSORIES

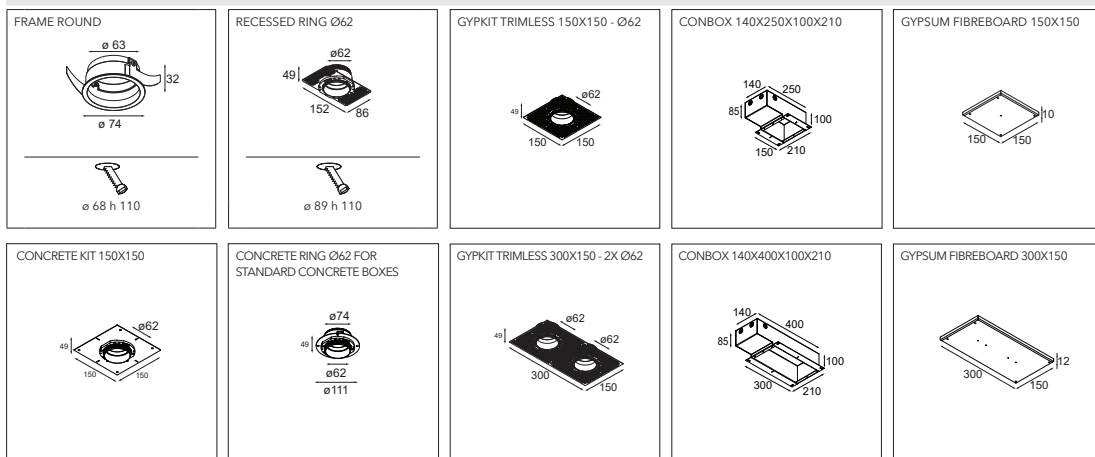



TETRIX CONE - TRIMLESS



TETRIX CONE - TRIMLESS



TETRIX CONE - FLANGE



TETRIX CONE - TRIMLESS



TETRIX CONE - TRIMLESS  
SNOOT



TETRIX CONE - TRIMLESS  
HONEYCOMB




TETRIX CONE - FLANGE  
LIGHT CONE Ø44



TETRIX CONE - TRIMLESS  
SNOOT

# Tetrix Cone 90 IP55 LED GE



1X LED ARRAY INCL. 7.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES


INSTALLATION ACCESSORIES > SEE PAGE 347

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62
13515530	CONCRETE KIT 150X150 - Ø62
13515630	CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES
12293230	GYPKITTRIMLESS 150X150 - Ø62
12293330	GYPKITTRIMLESS 300X150 - 2X Ø62
11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYPSPUM FIBREBOARD 150X150
12292730	GYPSPUM FIBREBOARD 300X150

## OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515038	SNOOT Ø32MM WHITE MATT
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC
13515238	LC Ø44MM WHITE MATT

## OPTICAL ACCESSORIES




	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black chrome	13513080	13513180	13513280	13513380	13513480	13513580
black matt	13513083	13513183	13513283	13513383	13513483	13513583
white matt	13513038	13513138	13513238	13513338	13513438	13513538

## LUMINAIRE OUTPUT & POWER CONSUMPTION (white matt)

	350mA	500mA
2700K / 25°	477lm 5W	642lm 7.2W
3000K / 25°	511lm 5W	642lm 7.2W
4000K / 25°	547lm 5W	642lm 7.2W

## Tetrix Cone 90 GU10 for LED



1X LED GU10 (NOT INCL.) | GU10

black chrome	13513680
black matt	13513683
white matt	13513638


### INSTALLATION ACCESSORIES

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62
13515530	CONCRETE KIT 150X150 - Ø62
13515630	CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES
12293230	GYPKITTRIMLESS 150X150 - Ø62
12293330	GYPKITTRIMLESS 300X150 - 2X Ø62
11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292630	GYPSTUM FIBREBOARD 150X150
12292730	GYPSTUM FIBREBOARD 300X150


### OPTICAL ACCESSORIES

13515032	SNOOT Ø32MM BLACK STRUCTURE
13515038	SNOOT Ø32MM WHITE MATT
13515132	HONEYCOMB Ø33MM BLACK STRUCTURE
13515232	LC Ø44MM BLACK STRUC
13515238	LC Ø44MM WHITE MATT

### OPTICAL ACCESSORIES



## Tetrix Cone 90 LED Hue retrofit

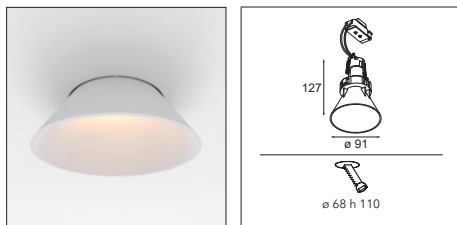

1X LED GU10 INCL. | GU10 | 5.2W

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

13510038 TETRIX FRAME ROUND 74 WHITE MATT

13510083 TETRIX FRAME ROUND 74 BLACK MATT

13515430 RECESSED RING Ø62

13515530 CONCRETE KIT 150X150 - Ø62

13515630 CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES

12293230 GYPKIT TRIMLESS 150X150 - Ø62

12293330 GYPKIT TRIMLESS 300X150 - 2X Ø62

11624030 CONBOX 140X250X100X210

11624130 CONBOX 140X400X100X210

12292630 GYPSUM FIBREBOARD 150X150

12292730 GYPSUM FIBREBOARD 300X150

### OPTICAL ACCESSORIES

13515032 SNOOT Ø32MM BLACK STRUCTURE

13515038 SNOOT Ø32MM WHITE MATT

13515132 HONEYCOMB Ø33MM BLACK STRUCTURE


13515232 LC Ø44MM BLACK STRUC

13515238 LC Ø44MM WHITE MATT



HUE DIMMABLE	2200K - 6500K / CRI80	2700K / CRI80
		45°
black chrome	13513880	13513780
black matt	13513883	13513783
white matt	13513838	13513738

### INSTALLATION ACCESSORIES

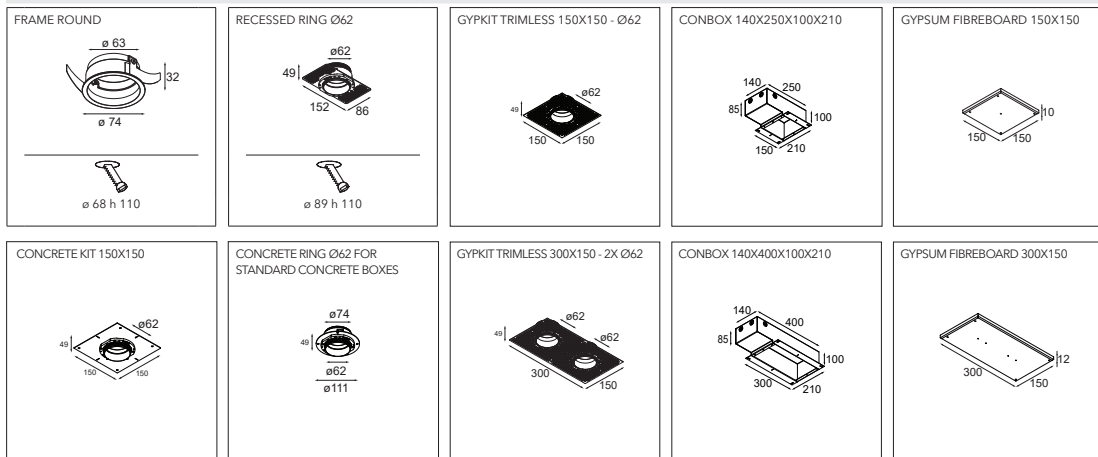



TETRIX ADJUSTABLE - FLANGE



TETRIX ADJUSTABLE - FLANGE



TETRIX ADJUSTABLE - TRIMLESS



TETRIX ADJUSTABLE - TRIMLESS  
SNOOT





TETRIX ADJUSTABLE - TRIMLESS  
SNOOT



TETRIX ADJUSTABLE - FLANGE  
HONEYCOMB

## Tetrix Adjustable 62 IP55 LED GE



1X LED ARRAY INCL. 7.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE PAGE 347

13510038	TETRIX FRAME ROUND 74 WHITE MATT
13510083	TETRIX FRAME ROUND 74 BLACK MATT
13515430	RECESSED RING Ø62

13515530 CONCRETE KIT 150X150 - Ø62

13515630 CONCRETE RING Ø62 FOR STANDARD CONCRETE BOXES

12293230 GYPKITTRIMLESS 150X150 - Ø62

12293330 GYPKITTRIMLESS 300X150 - 2X Ø62

11624030 CONBOX 140X250X100X210

11624130 CONBOX 140X400X100X210

12292630 GYPSUM FIBREBOARD 150X150

12292730 GYPSUM FIBREBOARD 300X150

### OPTICAL ACCESSORIES

13515032 SNOOT Ø32MM BLACK STRUCTURE

13515038 SNOOT Ø32MM WHITE MATT

13515132 HONEYCOMB Ø33MM BLACK STRUCTURE



	2700K / CRI90+		3000K / CRI90+		4000K / CRI90+	
	25°	40°	25°	40°	25°	40°
black chrome	13514080	13514180	13514280	13514380	13514480	13514580
black matt	13514083	13514183	13514283	13514383	13514483	13514583
white matt	13514038	13514138	13514238	13514338	13514438	13514538


### LUMINAIRE OUTPUT & POWER CONSUMPTION (white matt)

	350mA	500mA
2700K / 25°	491lm 5W	660lm 7.2W
3000K / 25°	526lm 5W	660lm 7.2W
4000K / 25°	563lm 5W	660lm 7.2W


### OPTICAL ACCESSORIES



SNOOT Ø32



HONEYCOMB Ø33

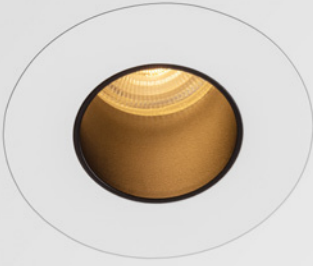

TETRIX PINHOLE - TRIMLESS



TETRIX PINHOLE - FLANGE



TETRIX PINHOLE - TRIMLESS




TETRIX PINHOLE - FLANGE



TETRIX PINHOLE - FLANGE



## Tetrix Pinhole 62 IP55 LED GE

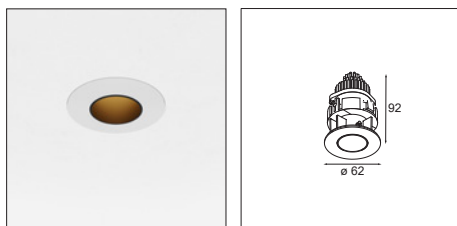

1X LED ARRAY INCL. | 7.2W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE PAGE 347




	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	25°	25°	25°
black matt	13516083	13516283	13516483
white matt	13516038	13516238	13516438

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white matt)

	350mA	500mA
2700K / 25°	343lm 5W	461lm 7.2W
3000K / 25°	367lm 5W	497lm 7.2W
4000K / 25°	393lm 5W	527lm 7.2W

## Tetrix Pinhole 62 GU10 for LED

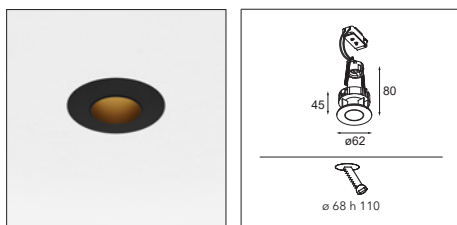

1X LED GU10 (NOT INCL.) | GU10

INSTALLATION ACCESSORIES > SEE PAGE 347



black matt	13516583
white matt	13516538

## Tetrix Pinhole 62 LED Hue retrofit



1X LED GU10 INCL. | GU10 | 5.2W

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE PAGE 347



HUE DIMMABLE	2200K - 6500K / CRI80	2700K / CRI80
	45°	35°
black matt	13516783	13516683
white matt	13516738	13516638



THIMBLE 74 - ANODIZED SILVER BRONZE



THIMBLE 70 TRIMLESS ADJUSTABLE - GOLD



# THIMBLE

Design — Jeffrey Huyghe

*Thimble evokes minimalism, surprise and technology all at once. Subtle curves, slightly revealing colours, high-quality lens and LED. Thimble's clean and seamless execution makes it a quiet yet sophisticated choice for high-end residential or hospitality settings. This versatile, elegant architectural downlight will bring pure form, definition and quality light to any space without stealing all the attention.*

## Bare essentials reveal a sophisticated design



Thimble's composition emphasizes that elegance lies in pure form. A minimalistic, curved design, with a deep-recessed and glare-free light source. Thimble's clean, ultra-thin flange or trimless execution will go unseen in the quietest of spaces.

## A low-key execution with a little more

For light expressions that should be discreet but show that little extra, designers can find the perfect compromise with Thimble's long list of anodized colours. This desired, enhancing effect can be created on any ceiling application.

more info? [supermodular.com/en/thimble](https://supermodular.com/en/thimble)

## Thimble 74 IP55 LED GE



1X LED ARRAY INCL. | 8.1W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

11624030 CONBOX 140X250X100X210

11624130 CONBOX 140X400X100X210

12292630 GYPSUM FIBREBOARD 150X150

12292730 GYPSUM FIBREBOARD 300X150

11624430 CONCRETE RING Ø70 STAND CONCRETE BOXES





	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11620081	11620181
ano bronze	11620082	11620182
ano champagne	11620041	11620141
ano gold	11620042	11620142
ano silver bronze	11620084	11620184
black struc	11620032	11620132
white struc	11620009	11620109

### LUMINAIRE OUTPUT & POWER CONSUMPTION



(white struc)

	350mA	500mA
	2700K / 30°	483lm / 5.6W
3000K / 30°	483lm / 5.6W	667lm / 8.1W

### INSTALLATION ACCESSORIES FOR PLASTERED FALSE CEILINGS


SINGLE THIMBLE	PLASTERED FINISH
	THIMBLE 70 TRIMLESS
	<b>11624330</b> RECESSED RING Ø70 
	

### INSTALLATION ACCESSORIES FOR STANDARD CONCRETE BOXES

SINGLE THIMBLE	EXPOSED CONCRETE FINISH
	THIMBLE 74 THIMBLE 70 TRIMLESS
	<b>11624430</b> CONCRETE RING Ø70 FOR STANDARD CONCRETE BOXES 
	

REQUIRED PARTS BASED ON CEILING TYPE

# Thimble 70 trimless IP55 LED GE

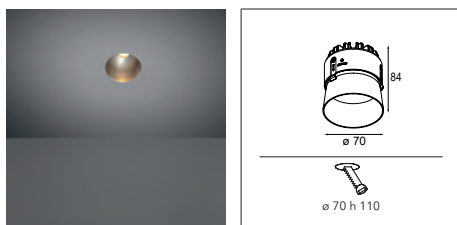

1X LED ARRAY INCL. 8.1W

! INSTALLATION ACCESSORIES REQUIRED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292430	GYPKITTRIMLESS 150X150 - Ø70
12292530	GYPKITTRIMLESS 300X150 - 2X Ø70
11624230	CONCRETE KIT 150X150 - Ø70
12292630	GYPSPUM FIBREBOARD 150X150
12292730	GYPSPUM FIBREBOARD 300X150
11624330	RECESSED RING Ø70
11624430	CONCRETE RING Ø70 STAND CONCRETE BOXES



	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11622081	11622181
ano bronze	11622082	11622182
ano champagne	11622041	11622141
ano gold	11622042	11622142
ano silver bronze	11622084	11622184
black struc	11622032	11622132
white struc	11622009	11622109



### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 30°	483lm / 5.6W	667lm / 8.1W
3000K / 30°	483lm / 5.6W	667lm / 8.1W

### INSTALLATION ACCESSORIES FOR STRUCTURAL CEILINGS (CONCRETE, STALTON, ...)

SINGLE THIMBLE	11624030 CONBOX 140X250X100X210	+	PLASTERED FINISH		EXPOSED CONCRETE FINISH
			THIMBLE 74	THIMBLE 70 TRIMLESS	THIMBLE 74 THIMBLE 70 TRIMLESS
			12292630 GYPSUM FIBREBOARD 150X150 	12292430 GYPKIT TRIMLESS 150X150 - Ø70 	11624230 CONCRETE KIT 150X150 - Ø70 
DOUBLE THIMBLE	11624130 CONBOX 140X400X100X210	+	PLASTERED FINISH		
			THIMBLE 74	THIMBLE 70 TRIMLESS	
			12292730 GYPSUM FIBREBOARD 300X150 	12292530 GYPKIT TRIMLESS 300X150 - 2X Ø70 	

## Thimble 74 adjustable LED GE



1X LED ARRAY INCL. | 8.1W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

11624030 CONBOX 140X250X100X210

11624130 CONBOX 140X400X100X210

12292630 GYPSUM FIBREBOARD 150X150

12292730 GYPSUM FIBREBOARD 300X150

11624430 CONCRETE RING Ø70 STAND CONCRETE BOXES



	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11621081	11621181
ano bronze	11621082	11621182
ano champagne	11621041	11621141
ano gold	11621042	11621142
ano silver bronze	11621084	11621184
black struc	11621032	11621132
white struc	11621009	11621109

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

	350mA	500mA
2700K / 30°	483lm / 5.6W	667lm / 8.1W
3000K / 30°	483lm / 5.6W	667lm / 8.1W

### INSTALLATION ACCESSORIES FOR PLASTERED FALSE CEILINGS


SINGLE THIMBLE	PLASTERED FINISH
	THIMBLE 70 TRIMLESS
	<p>11624330 RECESSED RING Ø70</p>
	<p>ø 95 h 110</p>

### INSTALLATION ACCESSORIES FOR STANDARD CONCRETE BOXES

SINGLE THIMBLE	EXPOSED CONCRETE FINISH
	THIMBLE 74 THIMBLE 70 TRIMLESS
	<p>11624430 CONCRETE RING Ø70 FOR STANDARD CONCRETE BOXES</p>
	<p>ø 86 h 110</p>

REQUIRED PARTS BASED ON CEILING TYPE

# Thimble 70 trimless adjustable LED GE

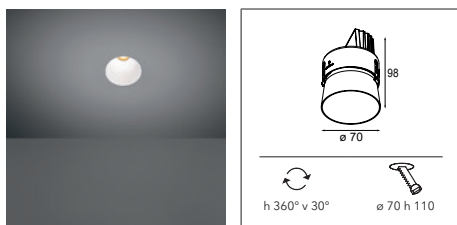

1X LED ARRAY INCL. | 8.1W

! INSTALLATION ACCESSORIES REQUIRED

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

## INSTALLATION ACCESSORIES

11624030	CONBOX 140X250X100X210
11624130	CONBOX 140X400X100X210
12292430	GYPKITTRIMLESS 150X150 - Ø70
12292530	GYPKITTRIMLESS 300X150 - 2X Ø70
11624230	CONCRETE KIT 150X150 - Ø70
12292630	GYPSPUM FIBREBOARD 150X150
12292730	GYPSPUM FIBREBOARD 300X150
11624330	RECESSED RING Ø70
11624430	CONCRETE RING Ø70 STAND CONCRETE BOXES



	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11623081	11623181
ano bronze	11623082	11623182
ano champagne	11623041	11623141
ano gold	11623042	11623142
ano silver bronze	11623084	11623184
black struc	11623032	11623132
white struc	11623009	11623109

## LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 30°	483lm / 5.6W	667lm / 8.1W
3000K / 30°	483lm / 5.6W	667lm / 8.1W

## INSTALLATION ACCESSORIES FOR STRUCTURAL CEILINGS (CONCRETE, STALTON, ...)

SINGLE THIMBLE	11624030 CONBOX 140X250X100X210	+	PLASTERED FINISH		EXPOSED CONCRETE FINISH
			THIMBLE 74	THIMBLE 70 TRIMLESS	THIMBLE 74 THIMBLE 70 TRIMLESS
		+	<b>12292630</b> GYPSPUM FIBREBOARD 150X150 	<b>12292430</b> GYPKIT TRIMLESS 150X150 - Ø70 	<b>11624230</b> CONCRETE KIT 150X150 - Ø70 
DOUBLE THIMBLE	11624130 CONBOX 140X400X100X210	+	PLASTERED FINISH		
		+	THIMBLE 74	THIMBLE 70 TRIMLESS	
		+	<b>12292730</b> GYPSPUM FIBREBOARD 300X150 	<b>12292530</b> GYPKIT TRIMLESS 300X150 - 2X Ø70 	



TULIP BLOOM



TULIP BLOOM  
TULIP BLOSSOM



TULIP BLOOM  
TULIP BLOSSOM





# TULIP

Design — Studio Kees

more info? [supermodular.com/en/tulip](http://supermodular.com/en/tulip)

358 • 359

SEE ALSO



CEILING - P85



TRACK 230V - P505

*An architectural pendant light that comes in two complementary shapes, Blossom and Bloom. Also available with a track adapter to combine with a 230V track rail, and designed to fit E27 light bulbs, Tulip is truly accessible. Combine Tulip with the ceiling bases Kompas and Hoolahoop and create your own unique chandelier. A complementary design that displays both cosy mood light and general light. Full of grace and elegance, Tulip is the couple no one can miss.*

## Designed for each other

Elegant, balanced, made to fit together, Blossom and Bloom. Look closely at the clever design, and you'll notice that the top part of the body is identical in both. From the center line and down, the angles of the cups are complementary. A smooth parallel line emerges between the shapes and enhances the architectural quality of Tulip's design.

## Black, white, golden inside

Tulip invites you to play with its colours. A couple in black or white structure. Experiment with many in one colour or mix them with both. Designers can add a third colour, a stunning gold finish on the inside. An irresistible glow will create a soft, warm ambience with each Tulip.

## Flowers easy to handle


With its E27 socket, Tulip can be paired with LED retrofit bulbs. Go a step further and opt for connected-ready Hue bulbs that enable tunable white, coloured lights, warm dim and lots more. Bright and cool, warmer and ambient. Hue's a natural match to Tulip, as it reflects the rhythms of a flower's reaction to sunlight: open by day, closing at night. And thanks to Tulip's chalice, the bulb remains unseen, leaving its design uninterrupted.



TULIP BLOSSOM (POWERFEED SURFACE)



TULIP BLOSSOM (POWERFEED RECESSED)

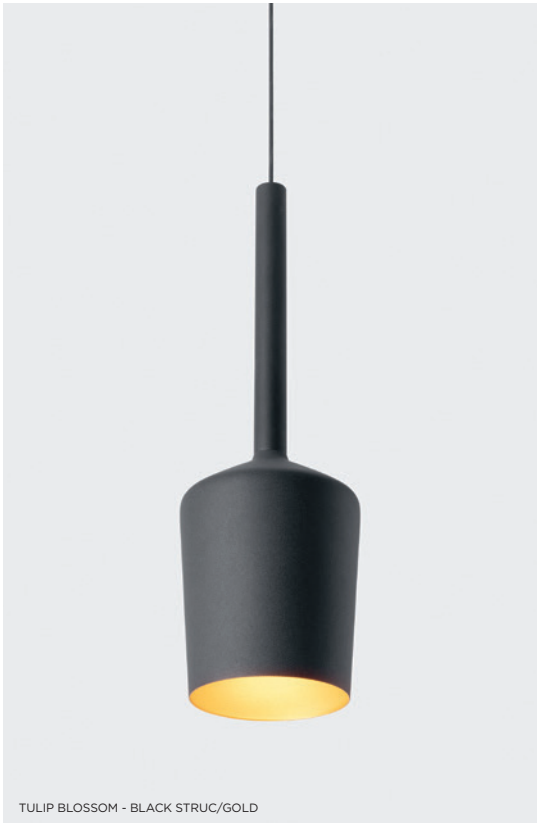


TULIP BLOSSOM - BLACK STRUC/GOLD



TULIP BLOSSOM - WHITE STRUC/GOLD

### Tulip blossom (power feed surface) E27





LAMP EXCL. E27 MAX. 35W

CONNECTED > SEE GOODIES

Friends of hue  
 230V IP20 GWT 960° 0.49KG ▲

black struc	12660132
black struc - gold	12660191
white struc	12660109
white struc - gold	12660189

### Tulip blossom (power feed recessed) E27



LAMP EXCL. E27 MAX. 35W

CONNECTED > SEE GOODIES

Friends of hue  
 230V IP20 GWT 960° 0.48KG ▲

black struc	12661132
black struc - gold	12661191
white struc	12661109
white struc - gold	12661189



TULIP BLOOM (POWERFEED SURFACE)



TULIP BLOOM (POWERFEED RECESSED)




TULIP BLOOM - WHITE STRUC/GOLD



TULIP BLOOM - BLACK STRUC/GOLD

## Tulip bloom (power feed surface) E27



LAMP EXCL. E27 MAX. 35W

CONNECTED > SEE GOODIES



230V

IP20


GWT 960°

0.50KG



black struc	12660032
black struc - gold	12660091
white struc	12660009
white struc - gold	12660089

## Tulip bloom (power feed recessed) E27



LAMP EXCL. E27 MAX. 35W

CONNECTED > SEE GOODIES



230V

IP20

GWT 960°

0.49KG



black struc	12661032
black struc - gold	12661091
white struc	12661009
white struc - gold	12661089



UNITED 2X LED  
UNITED COVER



UNITED ASY



# UNITED

Design — Couvreur-Devos

*Our Good Design Award-winning United luminaire continues to be a testament to the simple beauty of the fluorescent lamp. That being said, this LED-equipped luminaire is anything but ordinary, with a u-shaped housing that is both ceiling and wall-mountable. The light tubes of United are slightly recessed into the housing, emitting light on all sides, including the ends.*

## Sleek wall washer


While both sides of the classic United luminaire are even, United asy features an asymmetric housing that enables its use as a wall-washer fixture illuminating a bookshelf, a piece of art, etc. Both United and United asy are available in 2 lengths (1274mm and 974mm).

## Uniform or contrasting?

You can add an extra cover in white or black, for a uniform or contrasting look across the components of the luminaire. On top of that, adding the cover makes it possible to suspend the luminaire.

more info? [supermodular.com/en/united](http://supermodular.com/en/united)

## United (974mm) 1x LED GI



3X LEDLINE INCL. 4.5W

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

13395009 UNITED COVER(974MM) 1X WHITE STRUC

13395032 UNITED COVER(974MM) 1X BLACK STRUC

11060709 SUSPENSION KIT 4M - 3X0.75 (2 CABLES) - WHITE STRUC

11060732 SUSPENSION KIT 4M - 3X0.75 (2 CABLES) - BLACK STRUC

11061709 SUSPENSION KIT 4M - 5X0.75 (2 CABLES) - WHITE STRUC

11061732 SUSPENSION KIT 4M - 5X0.75 (2 CABLES) - BLACK STRUC





NOT DIMMABLE	2700K / CRI90+	3000K / CRI90+
black	13393002	13394002
white struc	13393009	13394009
1-10V	2700K / CRI90+	3000K / CRI90+
black	13393102	13394102
white struc	13393109	13394109
DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black	13393202	13394202
white struc	13393209	13394209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K	1103lm / 17W
3000K	1183lm / 17W

## United (974mm) 2x LED GI



6X LEDLINE INCL. 4.5W

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

13395109 UNITED COVER(974MM) 2X WHITE STRUC

13395132 UNITED COVER(974MM) 2X BLACK STRUC

11065209 TWIN SUSPENSION KIT 4M 3X0.75 (2 CABLES) - WHITE STRUC

11065232 TWIN SUSPENSION KIT 4M 3X0,75 [2 CABLES] BLACK STRUC

11065409 TWIN SUSPENSION KIT 4M 5X0,75 [2 CABLES] WHITE STRUC

11065432 TWIN SUSPENSION KIT 4M 5X0,75 [2 CABLES] BLACK STRUC




NOT DIMMABLE	2700K / CRI90+	3000K / CRI90+
black	13393302	13394302
white struc	13393309	13394309
1-10V	2700K / CRI90+	3000K / CRI90+
black	13393402	13394402
white struc	13393409	13394409
DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black	13393502	13394502
white struc	13393509	13394509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K	1948lm / 31W
3000K	2089lm / 31W



## United (1274mm) 1x LED GI



4X LEDLINE INCL. 4.5W

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

13392009 UNITED COVER (1274MM) 1X WHITE STRUC

13392032 UNITED COVER (1274MM) 1X BLACK STRUC

11060709 SUSPENSION KIT 4M - 3X0.75 (2 CABLES) - WHITE STRUC

11060732 SUSPENSION KIT 4M - 3X0.75 (2 CABLES) - BLACK STRUC


11061709 SUSPENSION KIT 4M - 5X0.75 (2 CABLES) - WHITE STRUC

11061732 SUSPENSION KIT 4M - 5X0.75 (2 CABLES) - BLACK STRUC



NOT DIMMABLE	2700K / CRI90+	3000K / CRI90+
black	13390002	13391002
white struc	13390009	13391009
1-10V		
black	13390102	13391102
white struc	13390109	13391109
DALI/PUSHDIM		
black	13390202	13391202
white struc	13390209	13391209
<b>LUMINAIRE OUTPUT &amp; POWER CONSUMPTION</b> (white struc)		
2700K		1470lm / 22W
3000K		1576lm / 22W

## United (1274mm) 2x LED GI



8X LEDLINE INCL. 4.5W

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

13392109 UNITED COVER (1274MM) 2X WHITE STRUC

13392132 UNITED COVER (1274MM) 2X BLACK STRUC

11065209 TWIN SUSPENSION KIT 4M 3X0.75 (2 CABLES) - WHITE STRUC

11065232 TWIN SUSPENSION KIT 4M 3X0.75 [2 CABLES] BLACK STRUC


11065409 TWIN SUSPENSION KIT 4M 5X0.75 [2 CABLES] WHITE STRUC

11065432 TWIN SUSPENSION KIT 4M 5X0.75 [2 CABLES] BLACK STRUC



NOT DIMMABLE	2700K / CRI90+	3000K / CRI90+
black	13390302	13391302
white struc	13390309	13391309
1-10V		
black	13390402	13391402
white struc	13390409	13391409
DALI/PUSHDIM		
black	13390502	13391502
white struc	13390509	13391509
<b>LUMINAIRE OUTPUT &amp; POWER CONSUMPTION</b> (white struc)		
2700K		2596lm / 39W
3000K		2784lm / 39W

## United asy (974mm) 1x LED GI



3X LEDLINE INCL. 4.5W

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

13403009	UNITED ASY COVER(974MM) 1X WHITE STRUC
13403032	UNITED ASY COVER(974MM) 1X BLACK STRUC




NOT DIMMABLE	2700K / CRI90+	3000K / CRI90+
black	13402002	13402302
white struc	13402009	13402309
1-10V	2700K / CRI90+	3000K / CRI90+
black	13402102	13402402
white struc	13402109	13402409
DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black	13402202	13402502
white struc	13402209	13402509

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K	1123lm / 17W
3000K	1204lm / 17W

**United asy (1274mm) 1x LED GI**



4X LEDLINE INCL. 4.5W

CONNECTED > SEE GOODIES

**INSTALLATION ACCESSORIES**

<b>13401009</b>	UNITED ASY COVER (1274MM) 1X WHITE STRUC
<b>13401032</b>	UNITED ASY COVER (1274MM) 1X BLACK STRUC



NOT DIMMABLE	2700K / CRI90+	3000K / CRI90+
black	13400002	13400302
white struc	13400009	13400309
1-10V	2700K / CRI90+	3000K / CRI90+
black	13400102	13400402
white struc	13400109	13400409
DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black	13400202	13400502
white struc	13400209	13400509

**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
(white struc)

2700K	1497lm / 22W
3000K	1605lm / 22W



VAEDER



VAEDER SUSPENSION



# VAEDER

Design — Gerd Couckhuyt

more info? [supermodular.com/en/vaeder](http://supermodular.com/en/vaeder)

370 • 371



*With a name derived from the English evade, it is clear from the start that Vaeder will be miles ahead of anything average. This fixture feels equally comfortable in an energy-conscious, ergonomic office environment, and in a home office. Its characteristic honeycomb structure in combination with a wafer-thin diffuser, minimizes glare, whilst its ground-breaking LED technology results in an energy-efficient and high-performing luminaire.*


## Otherworldly

Vaeder is offered as surface mounted or suspended. For surface mounting, it is positioned at a small distance from the ceiling (6 mm), which gives it a lighter look, as if floating against the ceiling. In its pendant version, Vaeder's soft curves create a futuristic fixture that appears to be hovering from another dimension. The fixture's suspension height can be modified using an adjuster system.

## UGR16

Because of its unique design consisting of one LED source and three optical components, this luminaire provides bright and glare-free light with an optimal UGR value of 16. This makes Vaeder a perfect LED alternative to office luminaires with the traditional fluorescent T5/T8 lamps. With optimal results on light distribution, visual comfort and efficacy, this luminaire fully meets the EN 12464-1 office standard.

## Vaeder LED GI



8X LED LINE INCL. 4W

CONNECTED > SEE GOODIES




DALI/PUSHDIM/1-10V	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc - black	14080048	14080148	14080248
black struc - white	14080072	14080172	14080272
donkey grey struc - black	14080075	14080175	14080275
donkey grey struc - white	14080074	14080174	14080274
white struc - black	14080029	14080129	14080229
white struc - white	14080073	14080173	14080273

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - white)

2700K / 65°	2303lm / 36W
3000K / 65°	2245lm / 36W
4000K / 65°	2669lm / 36W

## Vaeder suspension (power feed surface) LED GI



8X LED LINE INCL. 4W

CONNECTED > SEE GOODIES




DALI/PUSHDIM/1-10V	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc - black	14081048	14081148	14081348
black struc - white	14081072	14081172	14081372
donkey grey struc - black	14081075	14081175	14081375
donkey grey struc - white	14081074	14081174	14081374
white struc - black	14081029	14081129	14081329
white struc - white	14081073	14081173	14081373

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - white)

2700K / 65°	2303lm / 36W
3000K / 65°	2245lm / 36W
4000K / 65°	2669lm / 36W

## Vaeder suspension (power feed recessed) LED GI



8X LED LINE INCL. 4W

CONNECTED > SEE GOODIES




DALI/PUSHDIM/1-10V	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
black struc - black	14081548	14081248	14081448
black struc - white	14081572	14081272	14081472
donkey grey struc - black	14081575	14081275	14081475
donkey grey struc - white	14081574	14081274	14081474
white struc - black	14081529	14081229	14081429
white struc - white	14081573	14081273	14081473

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - white)

2700K / 65°	2303lm / 36W
3000K / 65°	2245lm / 36W
4000K / 65°	2669lm / 36W



WINK 82 WITH FLANGE

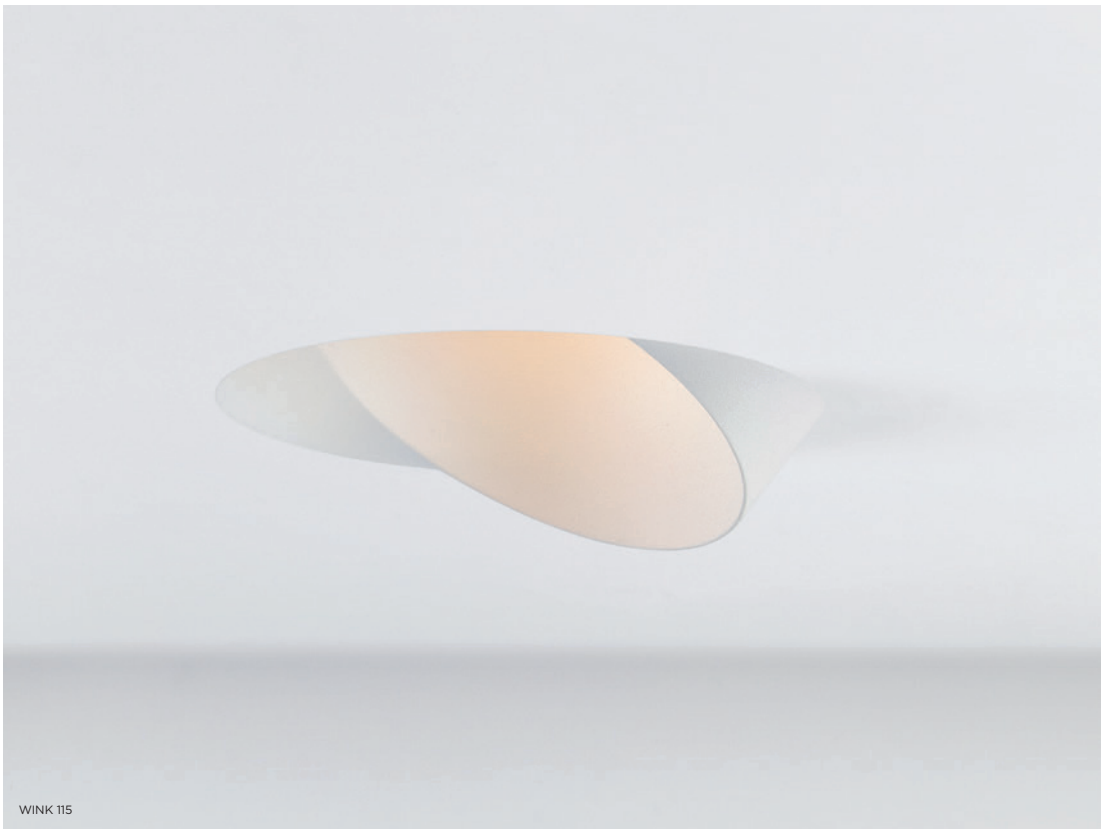

WINK 115





# WINK

Design — Couvreur-Devos



*Wink may be recessed, and therefore discreet, but its technical ingenuity is nothing short of remarkable. So is its sense of humour. As its name suggests, it likes to wink at you. The streamlined design, where elegance meets high-quality finish, results in a fixture that is half-hidden in the ceiling and half peeking out.*

## Down to the last detail

There's also Wink 82, and a Wink accessory: Wink flange. Compatible with all Wink lamps, Wink flange adds an extra accent in the form of a low ring around the spot, rather than a completely seamless installation. Its precision-designed conical shape complements the spot, enabling it to have a quiet conversation with the ceiling. Because of this accessory, Wink can now be also installed in concrete ceilings.

## Refined finishing



Wink generates a symmetrical downwards facing beam of light. Asy Wink, however, emits light asymmetrically. While both look the same, they create a completely different light effect. The asymmetrical light allows you to really emphasise objects on the wall.

## Unique light effect

With its symmetric or asymmetric lighting experience, Wink is perfect for any residential or hospitality project. Its uniform design allows you to combine both versions, in order to create different lighting effects in the same room. Have a go with this versatile lighting solution.

more info? [supermodular.com/en/wink](https://supermodular.com/en/wink)

## Wink asy 82 LED GE





1X LED ARRAY INCL. 9.2W

! MUST BE USED WITH RECESSED RING OR FLANGE  
! LED LIGHT IS INSERTED AT A 30° ANGLE

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES



14203009 WINK 82 FLANGE WHSTR (FALSE/CONCRETE CEILINGS)

14203030 RECESSED RING Ø110 (FALSE CEILINGS)

14203032 WINK 82 FLANGE BLSTR (FALSE/CONCRETE CEILINGS)





	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	14201032	14201132	14201232	14201332	14201432	14201532
white struc	14201009	14201109	14201209	14201309	14201409	14201509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	520lm / 6.2W	698lm / 9.2W
3000K / 25°	541lm / 6.2W	726lm / 9.2W

## Wink asy 82 LED spreadlight GE



1X LED ARRAY INCL. 9.2W

! MUST BE USED WITH RECESSED RING OR FLANGE  
! LED LIGHT IS INSERTED AT A 30° ANGLE

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

14203009 WINK 82 FLANGE WHSTR (FALSE/CONCRETE CEILINGS)

14203030 RECESSED RING Ø110 (FALSE CEILINGS)

14203032 WINK 82 FLANGE BLSTR (FALSE/CONCRETE CEILINGS)





	2700K / CRI90+	3000K / CRI90+
	black struc	14202032
white struc	14202009	14202109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K	432lm / 6.2W	580lm / 9.2W
3000K	449lm / 6.2W	603lm / 9.2W

# Wink 82 LED GE



1X LED ARRAY INCL. | 9.2W

! MUST BE USED WITH RECESSED RING OR FLANGE

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

14203009	WINK 82 FLANGE WHSTR (FALSE/CONCRETE CEILINGS)
14203030	RECESSED RING Ø110 (FALSE CEILINGS)
14203032	WINK 82 FLANGE BLSTR (FALSE/CONCRETE CEILINGS)





	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	14200032	14200132	14200232	14200332	14200432	14200532
white struc	14200009	14200109	14200209	14200309	14200409	14200509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	493lm / 6.2W	662lm / 9.2W
3000K / 25°	512lm / 6.2W	688lm / 9.2W

## Wink asy 115 LED GE





1X LED ARRAY INCL. 16.2W

! MUST BE USED WITH RECESSED RING OR FLANGE  
! LED LIGHT IS INSERTED AT A 30° ANGLE

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES



**13073009** WINK 115 FLANGE WHSTR (FALSE/CONCRETE CEILINGS)

**13073032** WINK 115 FLANGE BLSTR (FALSE/CONCRETE CEILINGS)

**14204030** RECESSED RING Ø146 (FALSE CEILINGS)





	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
<b>black struc</b>	13071032	13071332	13071632	13071132	13071432	13071732
<b>white struc</b>	13071009	13071309	13071609	13071109	13071409	13071709

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	776lm / 11W	<b>1023lm / 16.2W</b>	1283lm / 23.4W
3000K / 25°	893lm / 11W	<b>1177lm / 16.2W</b>	1477lm / 23.4W

## Wink asy 115 LED spreadlight GE



1X LED ARRAY INCL. 16.2W

! MUST BE USED WITH RECESSED RING OR FLANGE  
! LED LIGHT IS INSERTED AT A 30° ANGLE

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

**13073009** WINK 115 FLANGE WHSTR (FALSE/CONCRETE CEILINGS)

**13073032** WINK 115 FLANGE BLSTR (FALSE/CONCRETE CEILINGS)

**14204030** RECESSED RING Ø146 (FALSE CEILINGS)





	2700K / CRI90+	3000K / CRI90+
	<b>black struc</b>	13071932
<b>white struc</b>	13071909	13072009

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K	805lm / 11W	<b>1061lm / 16.2W</b>	1331lm / 23.4W
3000K	791lm / 11W	<b>1042lm / 16.2W</b>	1307lm / 23.4W

# Wink 115 LED GE



1X LED ARRAY INCL. 16.2W

! MUST BE USED WITH RECESSED RING OR FLANGE

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

13073009	WINK 115 FLANGE WHSTR (FALSE/CONCRETE CEILINGS)
13073032	WINK 115 FLANGE BLSTR (FALSE/CONCRETE CEILINGS)
14204030	RECESSED RING Ø146 (FALSE CEILINGS)



	2700K / CRI90+			3000K / CRI90+		
	15°	25°	40°	15°	25°	40°
black struc	13070032	13070332	13070632	13070132	13070432	13070732
white struc	13070009	13070309	13070609	13070109	13070409	13070709

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

	350mA	500mA	700mA
2700K / 25°	833lm / 11W	<b>1142lm / 16.2W</b>	1520lm / 23.4W
3000K / 25°	952lm / 11W	<b>1306lm / 16.2W</b>	1738lm / 23.4W



02



# JACK

# 02

## LED



**MARBULITO<sup>(1)</sup>**  
387



**MARBULITO  
SUSPENSION<sup>(1)</sup>**  
389



**MÉDARD<sup>(1)</sup>**  
393



**MINUDE<sup>(1)</sup>**  
399



**MINUDE  
SUSPENSION<sup>(1)</sup>**  
401

<sup>(1)</sup> to be combined with Ceiling base jack or Modupoint LED



# JACK

12V



DEFINITIF  
411



MARBULITO JACK  
CEILING BASE FOR 2X JACK



MARBULITO JACK SUSPENSION  
CEILING BASE FOR 2X JACK



MARBULITO JACK  
MODUPOINT LED DEEP RECESSED 1X  
MODUPOINT STICK 20CM



# MARBULITO

more info? [supermodular.com/en/marbulito-jack](http://supermodular.com/en/marbulito-jack)

384 • 385

SEE ALSO



TRACK 48V - P423

*As a luminaire component for our newly redesigned Modupoint LED, Marbulito makes a big entrance. Suspended from a long cable, or plugged into the ceiling base – recessed or surface mounted – with a short or longer extender stick. In black or in white structure. You'll be seeing Marbulitos in all kinds of spaces.*

## A play of shapes

Originally designed to reflect miniaturization trends with our Pista track, Marbulito is ideal to play with shapes. Or is it balls? Try 2 or 3 eyes in the ceiling, at all kinds of heights and angles. Deciding won't be so easy.



MARBULITO JACK  
MODUPOINT LED TRIMLESS



MARBULITO JACK  
MODUPOINT LED DEEP RECESSED TRIMLESS 2X



MARBULITO JACK  
MODUPOINT LED



MARBULITO JACK  
CEILING BASE Ø200 FOR 3X JACK





MARBULITO JACK  
CEILING BASE FOR 3X JACK



MARBULITO JACK  
MODUPOINT LED STICK 20CM

# Marbulito jack LED GE



1X LED ARRAY INCL. 4.4W

! MUST BE COMBINED WITH CEILING BASE JACK OR MODUPOINT LED

CONNECTED > SEE GOODIES

CEILING BASE JACK > SEE BELOW

MODUPOINT LED > SEE BELOW

### INSTALLATION ACCESSORIES

13240009 MODUPOINT LED STICK 10CM GE WHITE STRUC

13240032 MODUPOINT LED STICK 10CM GE BLACK STRUC

13240109 MODUPOINT LED STICK 20CM GE WHITE STRUC

13240132 MODUPOINT LED STICK 20CM GE BLACK STRUC

13240209 MODUPOINT LED STICK 30CM GE WHITE STRUC

13240232 MODUPOINT LED STICK 30CM GE BLACK STRUC



	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	13423032	13423132
white struc	13423009	13423109

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K / 28°	322lm / 4.4W
3000K / 28°	322lm / 4.4W

### CEILING BASE JACK > MORE INFO SEE PAGE 408


		CEILING BASE Ø200 GI FOR 3X JACK	CEILING BASE 320X58 GI FOR 2X JACK	CEILING BASE 420X58 GI FOR 3X JACK
TRAILING EDGE DIMMABLE (500mA driver)	black struc	13492032	13490032	13491032
	white struc	13492009	13490009	13491009
1-10V (500mA driver)	black struc	13492232	13490232	13491232
	white struc	13492209	13490209	13491209
DALI/PUSHDIM (500mA driver)	black struc	13492432	13490432	13491432
	white struc	13492409	13490409	13491409
CASAMBI (500mA driver)	black struc	13495032	13493032	13494032
	white struc	13495009	13493009	13494009

### MODUPOINT LED > MORE INFO SEE PAGE 404


		MODUPOINT LED DEEP RECESSED 1X	MODUPOINT LED DEEP RECESSED 2X	MODUPOINT LED DEEP RECESSED TRIMLESS 1X	MODUPOINT LED DEEP RECESSED TRIMLESS 2X	MODUPOINT LED	MODUPOINT LED TRIMLESS
GEAR EXCLUDED (driver - see product page on website)	black struc	13240532	13240732	13240632	13240832	13240332	
	white struc	13240509	13240709	13240609	13240809	13240309	
	n/a						13240400



MARBULITO JACK SUSPENSION  
MODUPOINT LED DEEP RECESSED 2X

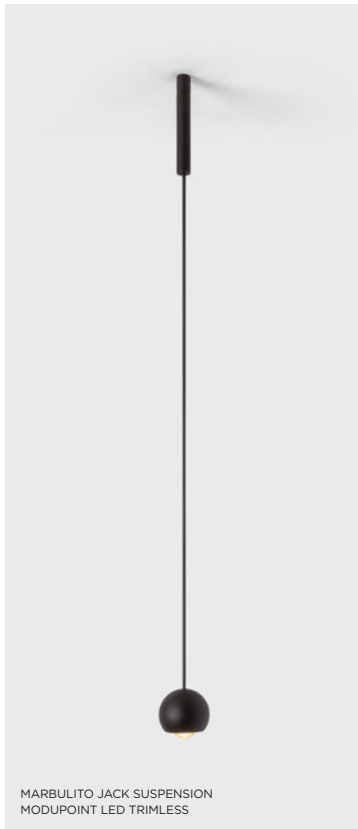

MARBULITO JACK SUSPENSION  
MODUPOINT LED TRIMLESS

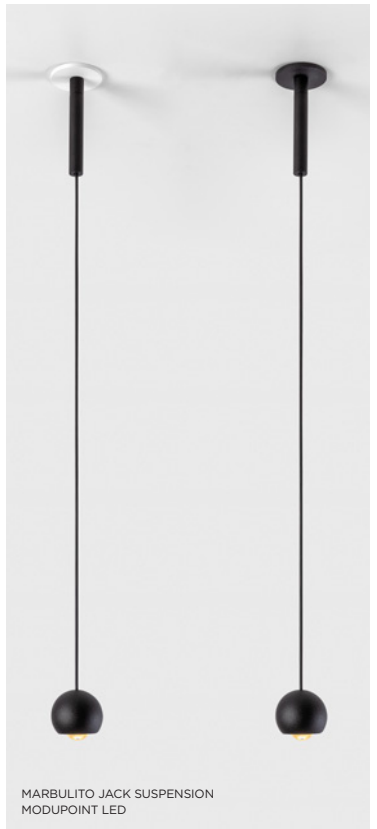

MARBULITO JACK SUSPENSION  
MODUPOINT LED





MARBULITO JACK SUSPENSION  
CEILING BASE Ø200 FOR 3X JACK



MARBULITO JACK SUSPENSION  
CEILING BASE FOR 3X JACK

## Marbulito jack suspension LED GE



1X LED ARRAY INCL. 4.4W

! MUST BE COMBINED WITH CEILING BASE JACK OR MODUPOINT LED

CONNECTED > SEE GOODIES

CEILING BASE JACK > SEE BELOW

MODUPOINT LED > SEE BELOW



	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	13424032	13424132
white struc	13424009	13424109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 28°	322lm / 4.4W
3000K / 28°	322lm / 4.4W

### CEILING BASE JACK > MORE INFO SEE PAGE 408

		CEILING BASE Ø200 GI FOR 3X JACK	CEILING BASE 320X58 GI FOR 2X JACK	CEILING BASE 420X58 GI FOR 3X JACK
TRAILING EDGE DIMMABLE (500mA driver)	black struc	13492032	13490032	13491032
	white struc	13492009	13490009	13491009
1-10V (500mA driver)	black struc	13492232	13490232	13491232
	white struc	13492209	13490209	13491209
DALI/PUSHDIM (500mA driver)	black struc	13492432	13490432	13491432
	white struc	13492409	13490409	13491409
CASAMBI (500mA driver)	black struc	13495032	13493032	13494032
	white struc	13495009	13493009	13494009

### MODUPOINT LED > MORE INFO SEE PAGE 404

		MODUPOINT LED DEEP RECESSED 1X	MODUPOINT LED DEEP RECESSED 2X	MODUPOINT LED DEEP RECESSED TRIMLESS 1X	MODUPOINT LED DEEP RECESSED TRIMLESS 2X	MODUPOINT LED	MODUPOINT LED TRIMLESS
GEAR EXCLUDED (driver - see product page on website)	black struc	13240532	13240732	13240632	13240832	13240332	
	white struc	13240509	13240709	13240609	13240809	13240309	
	n/a						13240400



MEDARD 42 JACK  
MODUPOINT LED



MEDARD 42 JACK  
MODUPOINT LED TRIMLESS  
MODUPOINT LED STICK 30CM



MEDARD 42 JACK  
MODUPOINT LED DEEP RECESSED 2X  
MODUPOINT LED STICK 30CM



MEDARD 42 JACK  
CEILING BASE Ø200 FOR 3X JACK  
MODUPOINT LED STICK 20/30CM





# MÉDARD

Design — Bleijh

more info? [supermodular.com/en/medard-jack](http://supermodular.com/en/medard-jack)

SEE ALSO



CEILING - P151



TRACK 48V - P427  
TRACK 230V - P482



*It's the stick insect that inspired the Dutch design agency Bleijh for the creation of Médard. Highly flexible thanks to its orientable head, Médard can sit still as a standalone on a desk, or on the ceiling. In its miniature form, it looks graceful on its own, on a ceiling or as part of our Pista track or with a jack, on our redesigned Modulpoint LED jack system.*

## Médard for everywhere

First, it was one sleek design. Modularity and fun ensued. From a table lamp, to more subtle surface mounted and recessed ceiling applications. Add lovely wall versions and a playful track variant, or plug it in our easy-to-install Modulpoint LED ceiling base - recessed or surface mounted - with or without extender sticks, and you've got yourself full-blown modularity.

## Matching sizes, matching rings

Médard jack is but one member of the family. There are others, gracing walls or ceilings, standalone, or sliding playfully as smaller spots for our Pista track (48V). Médard 70 is a solid eyecatcher as a track spot (230V). And of equal diameter, Médard ceiling beautifies spaces as a surface-mounted and recessed luminaire.



MEDARD 42 JACK  
MODUPOINT LED DEEP RECESSED TRIMLESS 1X  
MODUPOINT LED STICK 20CM




MEDARD 42 JACK  
MODUPOINT LED DEEP RECESSED TRIMLESS 2X  
MODUPOINT LED STICK 10/20CM



MEDARD 42 JACK  
CEILING BASE FOR 3X JACK  
MODUPOINT LED STICK 10CM

# Médard 42 jack LED GE



1X LED ARRAY INCL. 8.5W

! MUST BE COMBINED WITH CEILING BASE JACK OR MODUPOINT LED  
! COMBINATION WITH MODUPOINT DEEP RECESSED REQUIRES THE USE OF MODUPOINT STICK

CONNECTED > SEE GOODIES

CEILING BASE JACK > SEE BELOW

MODUPOINT LED > SEE BELOW

### INSTALLATION ACCESSORIES

13240009 MODUPOINT LED STICK 10CM GE WHITE STRUC

13240032 MODUPOINT LED STICK 10CM GE BLACK STRUC

13240109 MODUPOINT LED STICK 20CM GE WHITE STRUC

13240132 MODUPOINT LED STICK 20CM GE BLACK STRUC

13240209 MODUPOINT LED STICK 30CM GE WHITE STRUC

13240232 MODUPOINT LED STICK 30CM GE BLACK STRUC

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K / 25°	657lm 8.5W
3000K / 25°	671lm 8.5W



	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13434032	13434132	13434232	13434332
white struc	13434009	13434109	13434209	13434309

### CEILING BASE JACK > MORE INFO SEE PAGE 408

		CEILING BASE Ø200 GI FOR 3X JACK	CEILING BASE 320X58 GI FOR 2X JACK	CEILING BASE 420X58 GI FOR 3X JACK
TRAILING EDGE DIMMABLE (500mA driver)	black struc	13492032	13490032	13491032
	white struc	13492009	13490009	13491009
1-10V (500mA driver)	black struc	13492232	13490232	13491232
	white struc	13492209	13490209	13491209
DALI/PUSHDIM (500mA driver)	black struc	13492432	13490432	13491432
	white struc	13492409	13490409	13491409
CASAMBI (500mA driver)	black struc	13495032	13493032	13494032
	white struc	13495009	13493009	13494009

### MODUPOINT LED > MORE INFO SEE PAGE 404

		MODUPOINT LED DEEP RECESSED 1X	MODUPOINT LED DEEP RECESSED 2X	MODUPOINT LED DEEP RECESSED TRIMLESS 1X	MODUPOINT LED DEEP RECESSED TRIMLESS 2X	MODUPOINT LED	MODUPOINT LED TRIMLESS
GEAR EXCLUDED (driver - see product page on website)	black struc	13240532	13240732	13240632	13240832	13240332	
	white struc	13240509	13240709	13240609	13240809	13240309	
	n/a						13240400




MEDARD 42 JACK  
CEILING BASE FOR 3X JACK



MEDARD 42 JACK  
CEILING BASE FOR 2X JACK

WARM DIM

## Médard 42 jack LED warm dim GE



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH CEILING BASE JACK OR MODUPOINT LED  
! COMBINATION WITH MODUPOINT DEEP RECESSED REQUIRES THE USE OF MODUPOINT STICK

CONNECTED > SEE GOODIES

CEILING BASE JACK > SEE BELOW

MODUPOINT LED > SEE BELOW

### INSTALLATION ACCESSORIES

13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC



	1800K - 3000K / CRI90+	
	35°	40°
black struc	13434432	13434532
white struc	13434409	13434509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35°

367lm / 6W

### CEILING BASE JACK > MORE INFO SEE PAGE 408

		CEILING BASE Ø200 GI FOR 3X JACK		CEILING BASE 320X58 GI FOR 2X JACK		CEILING BASE 420X58 GI FOR 3X JACK	
		WARM DIM		WARM DIM		WARM DIM	
TRAILING EDGE DIMMABLE (500mA driver) (warm dim: 350mA driver)	black struc	13492032	13492132	13490032	13490132	13491032	13491132
	white struc	13492009	13492109	13490009	13490109	13491009	13491109
1-10V (500mA driver) (warm dim: 350mA driver)	black struc	13492232	13492332	13490232	13490332	13491232	13491332
	white struc	13492209	13492309	13490209	13490309	13491209	13491309
DALI/PUSHDIM (500mA driver) (warm dim: 350mA driver)	black struc	13492432	13492532	13490432	13490532	13491432	13491532
	white struc	13492409	13462509	13490409	13490509	13491409	13491509
CASAMBI (500mA driver) (warm dim: 350mA driver)	black struc	13495032	13495132	13493032	13493132	13494032	13494132
	white struc	13495009	13495109	13493009	13493109	13494009	13494109

### MODUPOINT LED > MORE INFO SEE PAGE 404

		MODUPOINT LED DEEP RECESSED 1X	MODUPOINT LED DEEP RECESSED 2X	MODUPOINT LED DEEP RECESSED TRIMLESS 1X	MODUPOINT LED DEEP RECESSED TRIMLESS 2X	MODUPOINT LED	MODUPOINT LED TRIMLESS
GEAR EXCLUDED (driver - see product page on website)	black struc	13240532	13240732	13240632	13240832	13240332	
	white struc	13240509	13240709	13240609	13240809	13240309	
	n/a						13240400




MINUDE 45 ADJUSTABLE JACK - ANO BLACK STRUC  
MODUPOINT LED TRIMLESS



MINUDE 45 ADJUSTABLE JACK - ANO BRONZE  
MODUPOINT LED  
MODUPOINT LED STICK 20CM



MINUDE 45 SUSPENSION JACK - ANO SILVER BRONZE  
CEILING BASE FOR 3X JACK

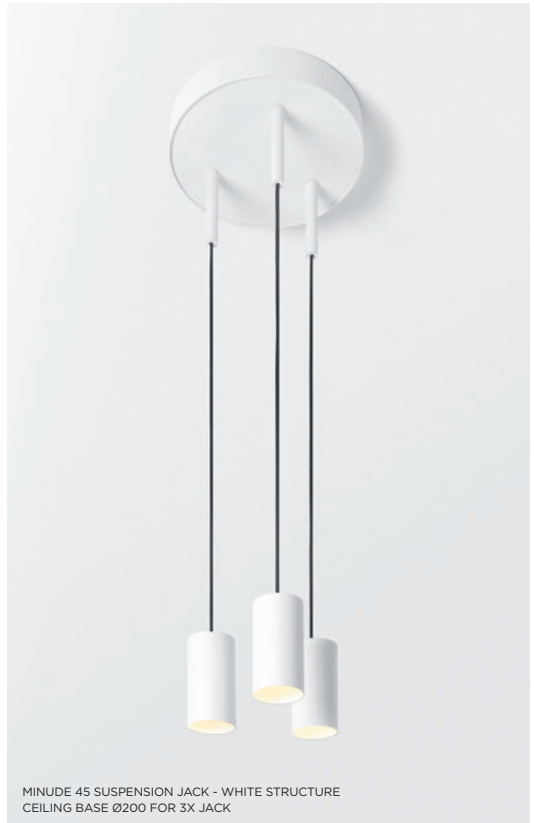


MINUDE 45 SUSPENSION JACK - WHITE STRUCTURE  
CEILING BASE Ø200 FOR 3X JACK



# MINUDE

more info? [supermodular.com/en/minude-jack](http://supermodular.com/en/minude-jack)

SEE ALSO



CEILING - P85



CEILING - P163



TRACK 48V - P433



*Our miniature spot is an extremely simple cylinder-shaped light fixture with a lot to show. Endless applications, a variety of rich colours, phenomenal yogic flexibility. A deep-recessed light source for a glare-free light effect. To express a refined and minimalistic look & feel on walls or low ceilings. On high ceiling in its stand-alone suspended variant, as part of our Modupoint LED jack system or combined with Kompas and Hoolahoop.*

## Minude, more than one

Don't be afraid to go for more than one Minude, on our Pista track or Modupoint LED system, as spot lights or suspended. With Modupoint, there's the option of having Minude hugging the ceiling base - recessed or surface mounted, hanging gracefully as a pendant light, or at different heights using extender sticks.

## Pure form, rich colours

Minude is a pure cylindrical shape with a thin, sharp edge and curved inner side. Showing off its 6 rich colours - black ano, champagne ano, bronze ano, silver bronze ano - achieved by anodization, and two additional colours, powder painted black and white structure. All variants have a matte black back side.

## Quality lens and light

Minude's light quality will not be outshined by its minimalist design, however. Its beautifully concentrated light beam projected from a deep-recessed LED light source, provides a pleasant light output. Its sophisticated lens technology is well protected by the inner edge snuggling right up to the glass lens.



MINUDE 45 ADJUSTABLE JACK - ANO CHAMPAGNE  
MODUPOINT LED DEEP RECESSED 1X  
MODUPOINT LED STICK 20CM



MINUDE 45 ADJUSTABLE JACK - WHITE STRUC  
MODUPOINT LED DEEP RECESSED 1X



MINUDE 45 ADJUSTABLE JACK - ANO BLACK  
MODUPOINT LED DEEP RECESSED TRIMLESS 2X



MINUDE 45 ADJUSTABLE JACK - ANO SILVER BRONZE  
CEILING BASE FOR 2X JACK



MINUDE 45 ADJUSTABLE JACK - WHITE STRUCTURE  
CEILING BASE Ø200 FOR 3X JACK



MINUDE 45 ADJUSTABLE JACK - WHITE STRUCTURE  
CEILING BASE FOR 3X JACK



MINUDE 45 ADJUSTABLE JACK - BLACK STRUCTURE  
CEILING BASE FOR 2X JACK  
MODUPOINT LED STICK 20CM



# Minude 45 adjustable jack LED GE



1X LED ARRAY INCL. 8.5W

! MUST BE COMBINED WITH CEILING BASE JACK OR MODUPOINT LED  
! RESTRICTED ADJUSTABILITY WHEN COMBINED WITH MODUPOINT DEEP RECESSED

CONNECTED > SEE GOODIES

CEILING BASE JACK > SEE BELOW

MODUPOINT LED > SEE BELOW

### INSTALLATION ACCESSORIES

13240009 MODUPOINT LED STICK 10CM GE WHITE STRUC

13240032 MODUPOINT LED STICK 10CM GE BLACK STRUC

13240109 MODUPOINT LED STICK 20CM GE WHITE STRUC

13240132 MODUPOINT LED STICK 20CM GE BLACK STRUC

13240209 MODUPOINT LED STICK 30CM GE WHITE STRUC

13240232 MODUPOINT LED STICK 30CM GE BLACK STRUC



	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11463081	11463181
ano bronze	11463082	11463182
ano champagne	11463041	11463141
ano silver bronze	11463084	11463184
black struc	11463032	11463132
white struc	11463009	11463109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 30°	598lm / 8.1W
3000K / 30°	610lm / 8.1W

### CEILING BASE JACK > MORE INFO SEE PAGE 408


		CEILING BASE Ø200 GI FOR 3X JACK	CEILING BASE 320X58 GI FOR 2X JACK	CEILING BASE 420X58 GI FOR 3X JACK
TRAILING EDGE DIMMABLE (500mA driver)	black struc	13492032	13490032	13491032
	white struc	13492009	13490009	13491009
1-10V (500mA driver)	black struc	13492232	13490232	13491232
	white struc	13492209	13490209	13491209
DALI/PUSHDIM (500mA driver)	black struc	13492432	13490432	13491432
	white struc	13492409	13490409	13491409
CASAMBI (500mA driver)	black struc	13495032	13493032	13494032
	white struc	13495009	13493009	13494009

### MODUPOINT LED > MORE INFO SEE PAGE 404

		MODUPOINT LED DEEP RECESSED 1X	MODUPOINT LED DEEP RECESSED 2X	MODUPOINT LED DEEP RECESSED TRIMLESS 1X	MODUPOINT LED DEEP RECESSED TRIMLESS 2X	MODUPOINT LED	MODUPOINT LED TRIMLESS
GEAR EXCLUDED (driver - see product page on website)	black struc	13240532	13240732	13240632	13240832	13240332	
	white struc	13240509	13240709	13240609	13240809	13240309	
	n/a						13240400



# Minude 45 suspension jack LED GE



1X LED ARRAY INCL. 8.5W

! MUST BE COMBINED WITH CEILING BASE JACK OR MODUPOINT LED

CONNECTED > SEE GOODIES

CEILING BASE JACK > SEE BELOW

MODUPOINT LED > SEE BELOW



	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11464081	11464181
ano bronze	11464082	11464182
ano champagne	11464041	11464141
ano silver bronze	11464084	11464184
black struc	11464032	11464132
white struc	11464009	11464109

## LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 30°	598lm / 8.1W
3000K / 30°	610lm / 8.1W

### CEILING BASE JACK > MORE INFO SEE PAGE 408

		CEILING BASE Ø200 GI FOR 3X JACK	CEILING BASE 320X58 GI FOR 2X JACK	CEILING BASE 420X58 GI FOR 3X JACK
TRAILING EDGE DIMMABLE (500mA driver)	black struc	13492032	13490032	13491032
	white struc	13492009	13490009	13491009
1-10V (500mA driver)	black struc	13492232	13490232	13491232
	white struc	13492209	13490209	13491209
DALI/PUSHDIM (500mA driver)	black struc	13492432	13490432	13491432
	white struc	13492409	13490409	13491409
CASAMBI (500mA driver)	black struc	13495032	13493032	13494032
	white struc	13495009	13493009	13494009

### MODUPOINT LED > MORE INFO SEE PAGE 404

		MODUPOINT LED DEEP RECESSED 1X	MODUPOINT LED DEEP RECESSED 2X	MODUPOINT LED DEEP RECESSED TRIMLESS 1X	MODUPOINT LED DEEP RECESSED TRIMLESS 2X	MODUPOINT LED	MODUPOINT LED TRIMLESS
GEAR EXCLUDED (driver - see product page on website)	black struc	13240532	13240732	13240632	13240832	13240332	
	white struc	13240509	13240709	13240609	13240809	13240309	
	n/a						13240400



CEILING BASE Ø200 FOR 3X JACK




CEILING BASE FOR 2X JACK



CEILING BASE FOR 2X JACK



MODUPOINT LED

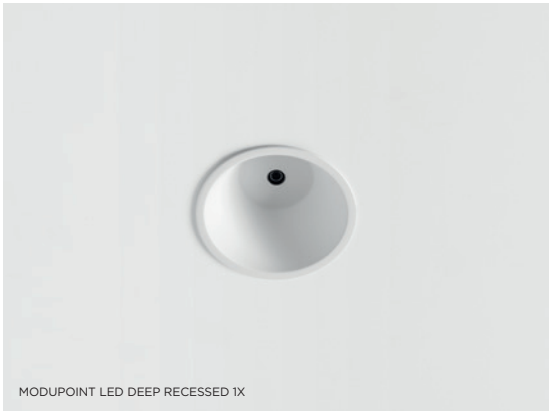

MODUPOINT LED DEEP RECESSED 1X



MODUPOINT LED TRIMLESS



MODUPOINT LED DEEP RECESSED TRIMLESS 2X



# JACK ACCESSORIES

---

MODUPOINT LED

CEILING BASE JACK

MODUPOINT LED STICK

more info? [supermodular.com/en/ceiling-base-jack](https://supermodular.com/en/ceiling-base-jack)  
[supermodular.com/en/modupoint-led](https://supermodular.com/en/modupoint-led)

*A contemporary version of our iconic Modulpoint, our new Modupoint LED is a modular lighting system with a wide range of ceiling bases, mounting options and miniature spot designs. It is an attractive solution for adding a minimalist style to both renovation and newly built projects.*

## Recessed or surface-mounted?

Modupoint's original recessed mounting option is for extreme minimalists, even more so if you go for a trimless look. A tiny jack inviting you to plug in any of our miniature designs. Now, a new, deep-recessed cove-like base, trim or trimless, offers even more fun options for adding a little mystery to your expression. For more challenging renovation projects, try one of our surface-mounted ceiling bases with 2 or 3 jacks.


## A feast of miniature lighting

Once you choose your Modupoint mounting option, it's up to you to choose from a party of miniature jack spots. Start playing and mixing to get your selection just right. Marbulito, Médard or Minude against the wall or ceiling will offer a dramatic flair, while the suspended jack variants will create a more private area. Add more layers of light by using different sized extender sticks on our miniature spots.

## Connected-ready, ready for life

Now, with so many lights, heights, colours and styles, we couldn't skip the option of adding a dimming system. Modupoint's ceiling bases can be fitted with different dimming protocols: Tre dim, 1-10V, DALI and Casambi, a powerful connected system that gives users the option to control smart lighting and transforms Modupoint LED into a true light for life.

## Modupoint LED ø90 deep recessed 1x



LUMINAIRE NOT INCL

! MUST BE USED WITH JACK LED FIXTURES:  
 MARBULITO > SEE PAGES 384-389  
 MÉDARD > SEE PAGES 390-395  
 MINUDE > SEE PAGES 396-401  
 ! DEEP RECESS RESTRICTS ADJUSTABILITY FIXTURES  
 ! COMBINATION WITH MÉDARD REQUIRES THE USE OF MODUPOINT STICK  
 ! MOUNT LED DRIVER REMOTE AND ACCESSIBLE

### INSTALLATION ACCESSORIES

13240009 MODUPOINT LED STICK 10CM GE WHITE STRUC

13240032 MODUPOINT LED STICK 10CM GE BLACK STRUC

13240109 MODUPOINT LED STICK 20CM GE WHITE STRUC

13240132 MODUPOINT LED STICK 20CM GE BLACK STRUC

13240209 MODUPOINT LED STICK 30CM GE WHITE STRUC

13240232 MODUPOINT LED STICK 30CM GE BLACK STRUC



IP20


GWT  
950°

0.23KG



black struc	13240532
white struc	13240509

## Modupoint LED ø90 deep recessed 2x



LUMINAIRE NOT INCL

! MUST BE USED WITH JACK LED FIXTURES:  
 MARBULITO > SEE PAGES 384-389  
 MÉDARD > SEE PAGES 390-395  
 MINUDE > SEE PAGES 396-401  
 ! DEEP RECESS RESTRICTS ADJUSTABILITY FIXTURES  
 ! COMBINATION WITH MÉDARD REQUIRES THE USE OF MODUPOINT STICK  
 ! MOUNT LED DRIVER REMOTE AND ACCESSIBLE

### INSTALLATION ACCESSORIES

13240009 MODUPOINT LED STICK 10CM GE WHITE STRUC

13240032 MODUPOINT LED STICK 10CM GE BLACK STRUC

13240109 MODUPOINT LED STICK 20CM GE WHITE STRUC

13240132 MODUPOINT LED STICK 20CM GE BLACK STRUC

13240209 MODUPOINT LED STICK 30CM GE WHITE STRUC

13240232 MODUPOINT LED STICK 30CM GE BLACK STRUC



IP20


GWT  
960°

0.34KG



black struc	13240732
white struc	13240709

## Modupoint LED ø82 deep recessed trimless 1x

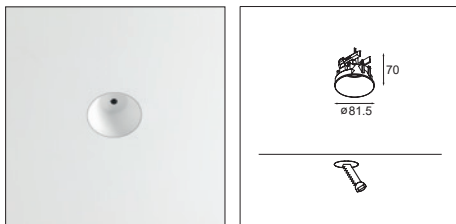

LUMINAIRE NOT INCL

! MUST BE USED WITH JACK LED FIXTURES:  
 MARBULITO > SEE PAGES 384-389  
 MÉDARD > SEE PAGES 390-395  
 MINUDE > SEE PAGES 396-401  
 ! DEEP RECESS RESTRICTS ADJUSTABILITY FIXTURES  
 ! COMBINATION WITH MÉDARD REQUIRES THE USE OF MODUPOINT STICK  
 ! MOUNT LED DRIVER REMOTE AND ACCESSIBLE

### INSTALLATION ACCESSORIES

11624030	CONBOX 140X250X100X210 <sup>(1)</sup>
12293430	GYPKIT TRIMLESS 150X150 - Ø82
13240930	CONCRETE KIT 150X150 - Ø82
13241030	RECESSED RING Ø82
13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC

<sup>(1)</sup> can be used with Gykit Trimless and Concrete Kit



black struc	13240632
white struc	13240609

## Modupoint LED ø82 deep recessed trimless 2x



LUMINAIRE NOT INCL

! MUST BE USED WITH JACK LED FIXTURES:  
 MARBULITO > SEE PAGES 384-389  
 MÉDARD > SEE PAGES 390-395  
 MINUDE > SEE PAGES 396-401  
 ! DEEP RECESS RESTRICTS ADJUSTABILITY FIXTURES  
 ! COMBINATION WITH MÉDARD REQUIRES THE USE OF MODUPOINT STICK  
 ! MOUNT LED DRIVER REMOTE AND ACCESSIBLE

### INSTALLATION ACCESSORIES



11624130	CONBOX 140X400X100X210 <sup>(1)</sup>
12293530	GYPKIT TRIMLESS 300X150 - Ø82 2X
13241230	CONCRETE KIT 300X150 - Ø82 2X
13241130	RECESSED RING Ø82 2X
13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC

<sup>(1)</sup> can be used with Gykit Trimless and Concrete Kit



black struc	13240832
white struc	13240809

## Modupoint LED



LUMINAIRE NOT INCL

! MUST BE USED WITH JACK LED FIXTURES:  
 MARBULITO > SEE PAGES 384-389  
 MÉDARD > SEE PAGES 390-395  
 MINUDE > SEE PAGES 396-401  
 ! MOUNT LED DRIVER REMOTE AND ACCESSIBLE

### INSTALLATION ACCESSORIES

13240009 MODUPOINT LED STICK 10CM GE WHITE STRUC

13240032 MODUPOINT LED STICK 10CM GE BLACK STRUC

13240109 MODUPOINT LED STICK 20CM GE WHITE STRUC

13240132 MODUPOINT LED STICK 20CM GE BLACK STRUC



13240209 MODUPOINT LED STICK 30CM GE WHITE STRUC

13240232 MODUPOINT LED STICK 30CM GE BLACK STRUC



black struc	13240332
white struc	13240309

## Modupoint LED trimless



LUMINAIRE NOT INCL

! MUST BE USED WITH JACK LED FIXTURES:  
 MARBULITO > SEE PAGES 384-389  
 MÉDARD > SEE PAGES 390-395  
 MINUDE > SEE PAGES 396-401  
 ! MOUNT LED DRIVER REMOTE AND ACCESSIBLE

### INSTALLATION ACCESSORIES

13240009 MODUPOINT LED STICK 10CM GE WHITE STRUC

13240032 MODUPOINT LED STICK 10CM GE BLACK STRUC

13240109 MODUPOINT LED STICK 20CM GE WHITE STRUC

13240132 MODUPOINT LED STICK 20CM GE BLACK STRUC

13240209 MODUPOINT LED STICK 30CM GE WHITE STRUC


13240232 MODUPOINT LED STICK 30CM GE BLACK STRUC



n/a	13240400
-----	----------



## Modupoint LED stick 10cm/20cm/30cm




! STICKS CAN BE COMBINED TO MAX. LENGTH OF 1200MM  
 ! TO BE COMBINED WITH JACK LED FIXTURES:  
 MARBULITO > SEE PAGES 384-389  
 MÉDARD > SEE PAGES 390-395  
 MINUDE > SEE PAGES 396-401



	10CM <sup>(1)</sup>	20CM <sup>(2)</sup>	30CM <sup>(3)</sup>
<b>black struc</b>	<b>13240032</b>	<b>13240132</b>	<b>13240232</b>
<b>white struc</b>	<b>13240009</b>	<b>13240109</b>	<b>13240209</b>

WARM DIM

### Ceiling base ø200 GI for 3x jack

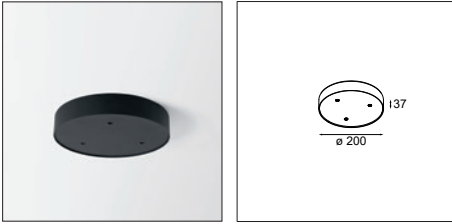

LUMINAIRE NOT INCL

! MUST BE USED WITH JACK LED FIXTURES:  
 MARBULITO > SEE PAGES 384-389  
 MÉDARD > SEE PAGES 390-395  
 MINUDE > SEE PAGES 396-401  
 ! 500mA DRIVER INCLUDED (\*WARM DIM 350mA)

#### INSTALLATION ACCESSORIES


13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC



TRAILING EDGE DIMMABLE		WARM DIM
black struc	13492032	13492132
white struc	13492009	13492109
1-10V		WARM DIM
black struc	13492232	13492332
white struc	13492209	13492309
DALI/PUSHDIM		WARM DIM
black struc	13492432	13492532
white struc	13492409	13492509
CASAMBI		WARM DIM
black struc	13495032	13495132
white struc	13495009	13495109

WARM DIM

### Ceiling base 320x58 GI for 2x jack

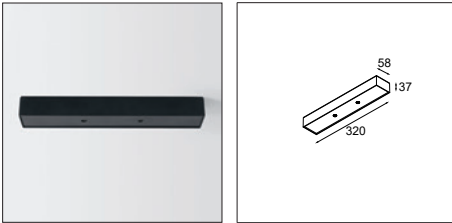

LUMINAIRE NOT INCL

! MUST BE USED WITH JACK LED FIXTURES:  
 MARBULITO > SEE PAGES 384-389  
 MÉDARD > SEE PAGES 390-395  
 MINUDE > SEE PAGES 396-401  
 ! 500mA DRIVER INCLUDED (\*WARM DIM 350mA)

#### INSTALLATION ACCESSORIES


13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC
13496009	BACKPLATE 352X90 WHITE STRUC



TRAILING EDGE DIMMABLE		WARM DIM
black struc	13490032	13490132
white struc	13490009	13490109
1-10V		WARM DIM
black struc	13490232	13490332
white struc	13490209	13490309
DALI/PUSHDIM		WARM DIM
black struc	13490432	13490532
white struc	13490409	13490509
CASAMBI		WARM DIM
black struc	13493032	13493132
white struc	13493009	13493109

WARM DIM

## Ceiling base 420x58 GI for 3x jack

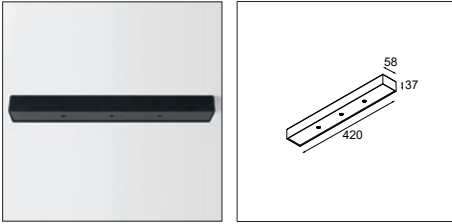

LUMINAIRE NOT INCL.

! MUST BE USED WITH JACK LED FIXTURES:  
 MARBULITO > SEE PAGES 384-389  
 MÉDARD > SEE PAGES 390-395  
 MINUDE > SEE PAGES 396-401  
 ! 500mA DRIVER INCLUDED (\*WARM DIM 350mA)

### INSTALLATION ACCESSORIES

13240009	MODUPOINT LED STICK 10CM GE WHITE STRUC
13240032	MODUPOINT LED STICK 10CM GE BLACK STRUC
13240109	MODUPOINT LED STICK 20CM GE WHITE STRUC
13240132	MODUPOINT LED STICK 20CM GE BLACK STRUC
13240209	MODUPOINT LED STICK 30CM GE WHITE STRUC
13240232	MODUPOINT LED STICK 30CM GE BLACK STRUC
13496109	BACKPLATE 452X90 WHITE STRUC



Friends of hue



230V




IP20



TRAILING EDGE DIMMABLE		WARM DIM
black struc	13491032	13491132
white struc	13491009	13491109
1-10V		WARM DIM
black struc	13491232	13491332
white struc	13491209	13491309
DALI/PUSHDIM		WARM DIM
black struc	13491432	13491532
white struc	13491409	13491509
CASAMBI		WARM DIM
black struc	13494032	13494132
white struc	13494009	13494109

## Modupoint LED stick 10cm/20cm/30cm

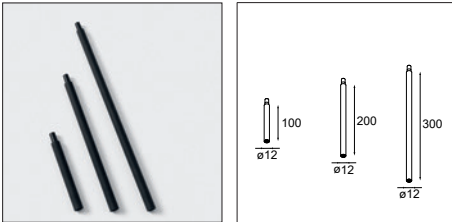

! STICKS CAN BE COMBINED TO MAX. LENGTH OF 1200MM  
 ! TO BE COMBINED WITH JACK LED FIXTURES:  
 MARBULITO > SEE PAGES 384-389  
 MÉDARD > SEE PAGES 390-395  
 MINUDE > SEE PAGES 396-401




IP20



	10CM <sup>(1)</sup>	20CM <sup>(2)</sup>	30CM <sup>(3)</sup>
black struc	13240032	13240132	13240232
white struc	13240009	13240109	13240209

### CEILING BASE BACKPLATE

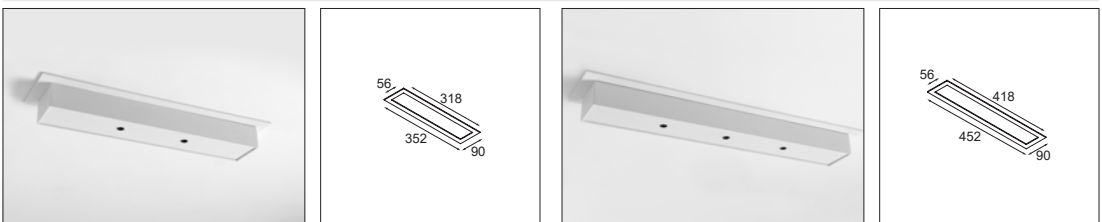




# DEFINITIF

*Over the years, Modular L.I. has developed extremely modular luminaires, and Definitif is one of them. Definitif stick connects to Supermodupoint and is actually no more than a stylish bar, which is available in three lengths.*

# Definitif MR16 GE



	12V	IP20	GWT 960°	0.07KG	
--	-----	------	----------	--------	--



1X QR-CBC 51 | GU 5.3 | MAX. 50W

! TO BE INSTALLED WITH DEFINITIF STICK AND SUPERMODUPOINT (NOT INCLUDED)

## ACCESSORIES



10040205	DEFINITIF STICK 10CM GE ALU
10040202	DEFINITIF STICK 10CM GE BLACK
10040201	DEFINITIF STICK 10CM GE WHITE STRUC
10040305	DEFINITIF STICK 20CM GE ALU
10040302	DEFINITIF STICK 20CM GE BLACK
10040301	DEFINITIF STICK 20CM GE WHITE STRUC
10040405	DEFINITIF STICK 30CM GE ALU
10040402	DEFINITIF STICK 30CM GE BLACK
10040401	DEFINITIF STICK 30CM GE WHITE STRUC
10000005	SUPERMODUPOINT EQ GE ALU
10000002	SUPERMODUPOINT EQ GE BLACK
10000001	SUPERMODUPOINT EQ GE WHITE STRUC

alu	10050105
black	10050102
white struc	10050101

01 — CEILING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR

06 — PROFILES

07 — GOODIES

REQUIRED PARTS

03





# TRACK

# 03


## 48V magnetic




**MARBUL**  
418




**MARBUL  
SUSPENSION**  
419




**MARBULITO**  
424




**MARBULITO  
SUSPENSION**  
425



**MEDARD 42**  
429



**MINUDE**  
435



**MINUDE  
SUSPENSION**  
437



**PISTA LINEAR**  
440



**PISTA LINEAR  
FLAPS**  
446



**PISTA LINEAR  
SPOTS**  
451



**PLACEBO**  
455



**SMART SURFACE  
TUBED 48<sup>(1)</sup>**  
460



**SMART TUBED  
SUSPENSION 48<sup>(1)</sup>**  
461

<sup>(1)</sup> to be combined with Smart Cake / Smart Kup / Smart Lotis




# TRACK

230V




**CHARLATAN**  
470




**KANON**  
474




**MARBUL**  
479




**MARBUL  
SUSPENSION**  
480




**MEDARD 70**  
483




**REKTOR**  
487



**SEMIH 61**  
490




**SINGLE  
ROUND**  
493



**SINGLE  
SQUARE**  
495



**SMART TUBED  
SUSPENSION 82<sup>(1)</sup>**  
498



**SPEKTRA**  
501




**STOVE**  
503



**TULIP**  
507

<sup>(1)</sup> to be combined with Smart Cake / Smart Kup / Smart Lotis

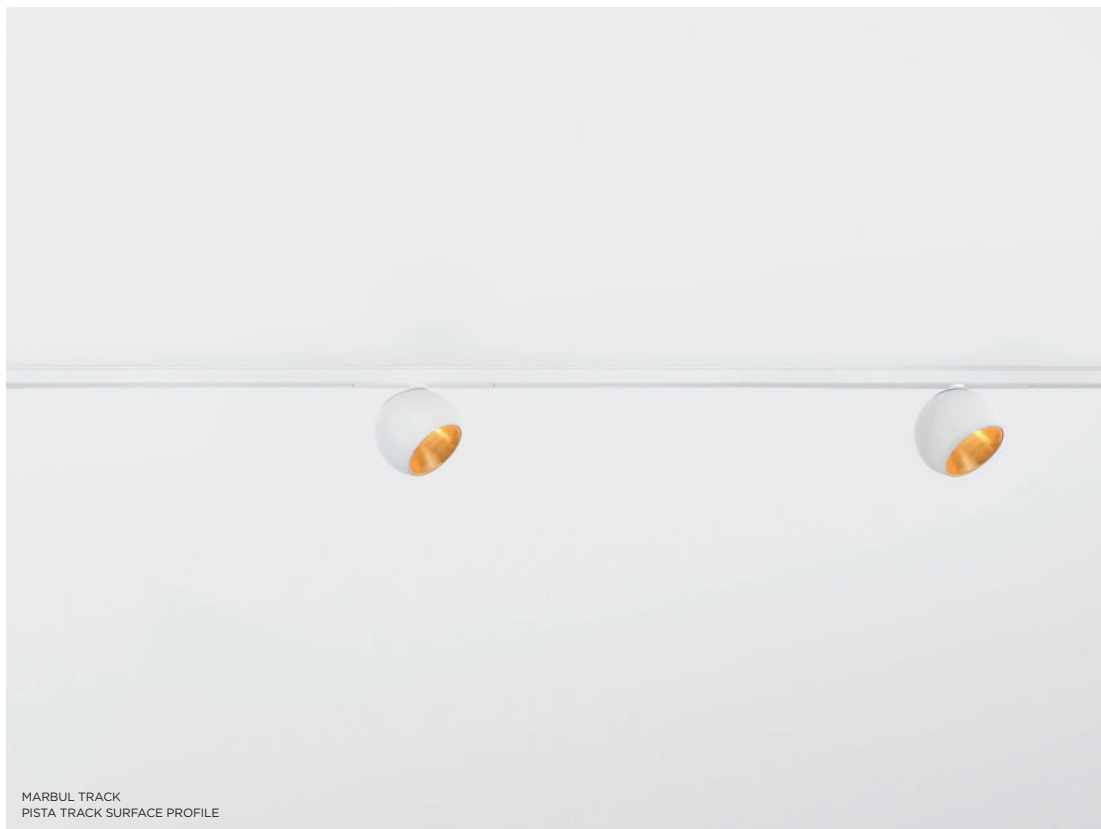

MARBUL TRACK  
PISTA TRACK SURFACE PROFILE



MARBUL TRACK  
MARBUL SUSPENSION ADJUSTABLE TRACK  
PISTA TRACK SURFACE PROFILE




# MARBUL

Design — Jeffrey Huyghe

more info? [supermodular.com/en/pista-marbul](http://supermodular.com/en/pista-marbul)

SEE ALSO



CEILING - P85



CEILING - P137



TRACK 230V - P477





HENRY VAN  
DE VELDE  
AWARDS 15  
WINNER



*We haven't lost our Marbuls. In fact, we found new ways of expressing them. Following the ceiling surface-mounted and recessed, suspended, adjustable variants - find Marbul in the ceiling section - Marbul for Pista enters the scene. With its bigger volume, Marbul enhances the presence of our slender 48V track system. And get excited. This new Pista companion comes as an adjustable spot directly on the track, and in suspended, non-adjustable and adjustable versions, all with a range of coloured reflectors. Curious about our other track systems? Try Marbul for our 230V track and extend your projects into retail and hospitality spaces*

## Marbul track 48V 1x LED GI



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	2700K / CRI90+	3000K / CRI90+
black struc	13482032	13482132
white struc	13482009	13482109



DALI	2700K / CRI90+	3000K / CRI90+
black struc	13482332	13482432
white struc	13482309	13482409

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25° alu	634lm / 8.5W
3000K / 25° alu	718lm / 8.5W

WARM DIM

## Marbul track 48V 1x LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	1800K - 3000K / CRI90+
black struc	13482232
white struc	13482209


  

DALI	1800K - 3000K / CRI90+
black struc	13482532
white struc	13482509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25° alu	955lm / 15W
------------------	-------------

## Marbul suspension track 48V LED GI



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
 ! LONGER SUSPENSION CABLE ON REQUEST  
 ! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
 BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD
TRACK 48V COMPONENTS > SEE PAGES 462-467	




1-10V	2700K / CRI90+	3000K / CRI90+
black struc	13480032	13480132
white struc	13480009	13480109
DALI	2700K / CRI90+	3000K / CRI90+
black struc	13480332	13480432
white struc	13480309	13480409

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25° alu	634lm / 8.5W
3000K / 25° alu	718lm / 8.5W

WARM DIM

## Marbul suspension track 48V LED warm dim Gi



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
 ! LONGER SUSPENSION CABLE ON REQUEST  
 ! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
 BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD
TRACK 48V COMPONENTS > SEE PAGES 462-467	



1-10V	1800K - 3000K / CRI90+
black struc	13480232
white struc	13480209
DALI	1800K - 3000K / CRI90+
black struc	13480532
white struc	13480509


### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25° alu	955lm / 15W
------------------	-------------



MARBUL SUSPENSION ADJUSTABLE TRACK  
PISTA TRACK SURFACE PROFILE

## Marbul suspension adjustable track 48V LED GI



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
 ! LONGER SUSPENSION CABLE ON REQUEST  
 ! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
 BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD
<b>TRACK 48V COMPONENTS &gt; SEE PAGES 462-467</b>	




1-10V	2700K / CRI90+	3000K / CRI90+
black struc	13481032	13481132
white struc	13481009	13481109
DALI		
2700K / CRI90+	3000K / CRI90+	
black struc	13481332	13481432
white struc	13481309	13481409

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25° alu	634lm / 8.5W
3000K / 25° alu	718lm / 8.5W

WARM DIM

## Marbul suspension adjustable track 48V warm dim LED GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR  
 ! LONGER SUSPENSION CABLE ON REQUEST  
 ! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
 BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD
<b>TRACK 48V COMPONENTS &gt; SEE PAGES 462-467</b>	



1-10V	1800K - 3000K / CRI90+
black struc	13481232
white struc	13481209
DALI	
1800K - 3000K / CRI90+	
black struc	13481532
white struc	13481509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25° alu	955lm / 15W
------------------	-------------



MARBULITO TRACK  
PISTA TRACK LINEAR LED  
PISTA TRACK RECESSED TRIMLESS PROFILE



MARBULITO SUSPENSION TRACK  
PISTA TRACK RECESSED TRIMLESS PROFILE





# MARBULITO





JACK - P385

*Designed specifically for Pista's magnetic track rails, Marbulito takes accent lighting to the next level. With a diameter of 41mm, Marbulito is a perfect match for the thin and slim look of Pista. Thanks to its 2m cable, Marbulito suspended can be used for elegant executions on high ceilings.*

## More modularity with Modupoint

Because of its popularity, Marbulito can also be spotted on our redesigned Modupoint LED system. Plug a unit directly into the ceiling base, or with extender sticks, or try out the suspended variant. Don't miss it in the jack section. In any case, keep experimenting, there's more to love about this little stunner.

## Marbulito track 48V 1x LED GI



1X LED ARRAY INCL. 4.4W

! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467





1-10V	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	13420032	13420432
white struc	13420009	13420409
DALI	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	13420132	13420532
white struc	13420109	13420509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 28°	332lm / 6.5W
3000K / 28°	332lm / 6.5W

## Marbulito track 48V 2x LED GI



2X LED ARRAY INCL. 4.4W

! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467




1-10V	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	13421032	13421432
white struc	13421009	13421409
DALI	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	13421132	13421532
white struc	13421109	13421509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - lumen output per lamp module )

2700K / 28°	332lm / 10.5W
3000K / 28°	332lm / 10.5W

# Marbulito suspension track 48V 1xLED



1X LED ARRAY INCL. 4.4W

! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
 ! BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	13422032	13422432
white struc	13422009	13422409

DALI	2700K / CRI90+	3000K / CRI90+
	28°	28°
black struc	13422132	13422532
white struc	13422109	13422509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 28°	332lm / 6.5W
3000K / 28°	332lm / 6.5W



MEDARD 42 TRACK  
PISTA TRACK LINEAR LED  
PISTA TRACK UP/DOWN PROFILE



MEDARD 42 TRACK 2X  
PISTA TRACK LINEAR LED  
PISTA TRACK SURFACE PROFILE



# MÉDARD 42

Design — Bleijh

more info? [supermodular.com/en/pista-medard-42](http://supermodular.com/en/pista-medard-42)

426 • 427

SEE ALSO



CEILING - P151



JACK - P391



TRACK 230V - P482



*First, it was one sleek design inspired by the stick insect, modularity and fun ensued. From a table lamp to more subtle surface-mounted and recessed ceiling applications. From lovely wall versions to playful track rail variants. Médard 42 is ready to slide on our 48V track rail.*

## One design, fun with track rails


Play with the designs you love. Click in our miniaturised design, Médard 42, on our magnetic Pista track and slide it where you need it. Thanks to Médard's impressive flexibility — due to its orientable head — designers can create special accents in the room, wherever they please. Add in more of the Médard family to create further accents while keeping a sophisticated, uniform expression.

## Médard for Modupoint LED

If you love Médard, and are open to something other than a track, check out Médard for Modupoint LED. A plug & play version for our redesigned Modupoint ceiling base, Médard can be clicked-in directly into the base, or extended with extender sticks.



## Médard 42 track 48V 1x LED GI



1X LED ARRAY INCL. | 8.1W

! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13430032	13430232	13430432	13430632
white struc	13430009	13430209	13430409	13430609


DALI	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13430132	13430332	13430532	13430732
white struc	13430109	13430309	13430509	13430709

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25°	702lm / 10.5W
3000K / 25°	702lm / 10.5W

WARM DIM

## Médard 42 track 48V 1x LED warm dim GI



1X LED ARRAY INCL. | 6W

! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	1800K - 3000K / CRI90+	
	35°	45°
black struc	13433032	13433132
white struc	13433009	13433109

DALI	1800K - 3000K / CRI90+	
	35°	45°
black struc	13433432	13433532
white struc	13433409	13433509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 35°	367lm / 8W
--------------	------------





MEDARD 42 TRACK 2X  
PISTA TRACK UP/DOWN PROFILE



MEDARD 42 TRACK 2X  
PISTA TRACK RECESSED FLANGE PROFILE



## Médard 42 track 48V 2x LED GI



2X LED ARRAY INCL. | 8.1W

! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13431032	13431232	13431432	13431632
white struc	13431009	13431209	13431409	13431609


DALI	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13431132	13431332	13431532	13431732
white struc	13431109	13431309	13431509	13431709

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - lumen output per lamp module)

2700K / 25°	702lm / 18.5W
3000K / 25°	702lm / 18.5W

WARM DIM

## Médard 42 track 48V 2x LED warm dim GI



2X LED ARRAY INCL. | 6W

! WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
BLACK PISTA 48V SPOTS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	1800K - 3000K / CRI90+	
	35°	45°
black struc	13433232	13433332
white struc	13433209	13433309

DALI	1800K - 3000K / CRI90+	
	35°	45°
black struc	13433632	13433732
white struc	13433609	13433709

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - lumen output per lamp module)

@3000K / 35°	367lm / 14W
--------------	-------------



MINUDE 45 ADJUSTABLE TRACK 2X  
PISTA TRACK LINEAR LED  
PISTA TRACK RECESSED TRIMLESS PROFILE



MINUDE 45 ADJUSTABLE TRACK 1X  
PISTA TRACK LINEAR LED  
PISTA TRACK SURFACE PROFILE




MINUDE 45 ADJUSTABLE TRACK 2X  
MINUDE 45 SUSPENSION TRACK  
PISTA TRACK RECESSED FLANGE PROFILE



# MINUDE

more info? [supermodular.com/en/pista-minude](http://supermodular.com/en/pista-minude)

SEE ALSO



CEILING - P85



CEILING - P163



JACK - P397



*With our miniaturized spotlight, you'll simply need our Pista track rail system for your endless choices. Minude as a 48V track spot, or Minude as an intimate 48V suspended track spot. And a trail of Minudes on single and multiple rails, anywhere along the way. Also available in a semi-recessed application for walls and ceilings, and as a stand-alone pendant or combined with our Kompas ceiling base.*

## Minude for Modupoint LED

If you love Minude, and are open to something other than a track, check out Minude for Modupoint LED. A plug & play version for our redesigned Modupoint ceiling base, Minude can be clicked-in directly into the base, or extended with extender sticks, or even as a suspended variant.





MINUDE 45 ADJUSTABLE TRACK  
PISTA TRACK LINEAR LED  
PISTA TRACK UP/DOWN PROFILE



MINUDE 45 ADJUSTABLE TRACK 2X  
PISTA TRACK RECESSED FLANGE PROFILE

## Minude 45 adjustable track 48V 1x LED GI



1X LED ARRAY INCL. 8.1W

! ALL WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
! ALL OTHER COLOURS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467





1-10V	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11460081	11460281
ano bronze	11460082	11460282
ano champagne	11460041	11460241
ano silver bronze	11460084	11460284
black struc	11460032	11460232
white struc	11460009	11460209

DALI	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11460181	11460381
ano bronze	11460182	11460382
ano champagne	11460141	11460341
ano silver bronze	11460184	11460384
black struc	11460132	11460332
white struc	11460109	11460309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 30°	686lm / 10.5W
3000K / 30°	686lm / 10.5W

## Minude 45 adjustable track 48V 2x LED GI



2X LED ARRAY INCL. 8.1W

! ALL WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
! ALL OTHER COLOURS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11460481	11460681
ano bronze	11460482	11460682
ano champagne	11460441	11460641
ano silver bronze	11460484	11460684
black struc	11460432	11460632
white struc	11460409	11460609

DALI	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11460581	11460781
ano bronze	11460582	11460782
ano champagne	11460541	11460741
ano silver bronze	11460584	11460784
black struc	11460532	11460732
white struc	11460509	11460709



### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - lumen output per lamp module)

2700K / 30°	686lm / 18.5W
3000K / 30°	686lm / 18.5W



MINUDE 45 SUSPENSION TRACK  
PISTA TRACK SURFACE PROFILE

# Minude 45 suspension track 48V 1x LED GI



1X LED ARRAY INCL. 8.1W

! ALL WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
 ALL OTHER COLOURS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11462081	11462281
ano bronze	11462082	11462282
ano champagne	11462041	11462241
ano silver bronze	11462084	11462284
black struc	11462032	11462232
white struc	11462009	11462209

DALI	2700K / CRI90+	3000K / CRI90+
	30°	30°
ano black	11462181	11462381
ano bronze	11462182	11462382
ano champagne	11462141	11462341
ano silver bronze	11462184	11462384
black struc	11462132	11462332
white struc	11462109	11462309

**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
 (white struc)

	2700K / 30°	3000K / 30°
		686lm / 10.5W
		686lm / 10.5W



PISTA TRACK LINEAR LED  
PISTA TRACK UP/DOWN PROFILE



PISTA TRACK LINEAR LED  
PISTA TRACK UP/DOWN PROFILE



PISTA TRACK LINEAR LED  
PISTA TRACK SURFACE PROFILE





# PISTA LINEAR


*Pista is the ultimate in modern aesthetics that introduces thinner and slimmer magnetic track rails, ever smaller light fixtures and ultra-thin cables. But Pista isn't just about miniaturization, it's also about personalization.*

## **Create unique configurations**

Designers can play with different modules on single or multiple track rails in different lengths and colours. The geometrical possibilities really are endless. Even after installation, you can change the lighting configuration thanks to the magnetic track rails. Two LED linear modules, two entirely different effects. The first, beautifully functional with powerful lumen packages (1000 lm/m). The second, Night Light is pure design, for more ambient and intimate lighting.

more info? [supermodular.com/en/pista](https://supermodular.com/en/pista)

### Pista track 48V LED linear (500mm) GI



1X LED-STRIP INCL. | 8.5W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13412032	13412532
white struc	13412009	13412509


1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13413032	13413532
white struc	13413009	13413509

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13414032	13414532
white struc	13414009	13414509

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K	493lm / 8.5W
3000K	517m / 8.5W

### Pista track 48V LED linear (1000mm) GI



1X LED-STRIP INCL. | 17W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13412132	13412632
white struc	13412109	13412609


1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13413132	13413632
white struc	13413109	13413609

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13414132	13414632
white struc	13414109	13414609

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K	985lm / 17W
3000K	1033lm / 17W

### Pista track 48V LED linear (1500mm) GI



1X LED-STRIP INCL. | 25.5W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13412232	13412732
white struc	13412209	13412709


1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13413232	13413732
white struc	13413209	13413709

DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13414232	13414732
white struc	13414209	13414709

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K	1478lm / 25.5W
3000K	1550m / 25.5W

### Pista track 48V LED linear (2000mm) GI



1X LED-STRIP INCL. 34W


CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13412332	13412832
white struc	13412309	13412809
1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13413332	13413832
white struc	13413309	13413809
DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13414332	13414832
white struc	13414309	13414809
<b>LUMINAIRE OUTPUT &amp; POWER CONSUMPTION</b> (white struc)		
2700K	1970lm / 34W	
3000K	2067m / 34W	

### Pista track 48V LED linear (2500mm) GI



1X LED-STRIP INCL. 42.5W


CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13412432	13412932
white struc	13412409	13412909
1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13413432	13413932
white struc	13413409	13413909
DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13414432	13414932
white struc	13414409	13414909
<b>LUMINAIRE OUTPUT &amp; POWER CONSUMPTION</b> (white struc)		
2700K	2463lm / 42.5W	
3000K	2583m / 42.5W	

**Pista track 48V LED linear night light (500mm) GI**



1X LED-STRIP INCL. 8.5W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467




NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13415032	13415532
1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13416032	13416532
DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13417032	13417532

**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
(black struc)

2700K	81lm / 8.5W
3000K	84lm / 8.5W

**Pista track 48V LED linear night light (1000mm) GI**



1X LED-STRIP INCL. 17W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467




NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13415132	13415632
1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13416132	13416632
DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13417132	13417632

**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
(black struc)

2700K	161lm / 17W
3000K	169lm / 17W

**Pista track 48V LED linear night light (1500mm) GI**



1X LED-STRIP INCL. 25.5W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467




NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13415232	13415732
1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13416232	13416732
DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13417232	13417732

**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
(black struc)

2700K	242lm / 25.5W
3000K	253lm / 25.5W

**Pista track 48V LED linear night light (2000mm) GI**



1X LED-STRIP INCL. | 34W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467




NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13415332	13415832
1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13416332	13416832
DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13417332	13417832

**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
(black struc)

2700K	322lm / 34W
3000K	338lm / 34W

**Pista track 48V LED linear night light (2500mm) GI**



1X LED-STRIP INCL. | 42.5W

CONNECTED > SEE GOODIES


TRACK 48V COMPONENTS > SEE PAGES 462-467



NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13415432	13415932
1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13416432	13416932
DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13417432	13417932

**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
(black struc)

2700K	403lm / 42.5W
3000K	422lm / 42.5W

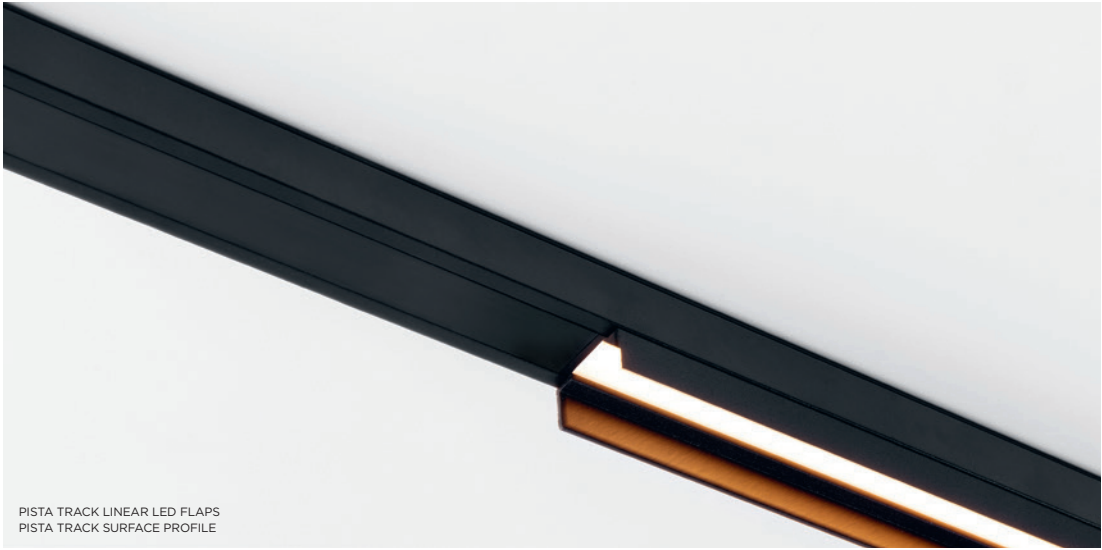

PISTA TRACK LINEAR LED FLAPS  
PISTA TRACK SURFACE PROFILE



PISTA TRACK LINEAR LED FLAPS  
PISTA TRACK UP/DOWN PROFILE



PISTA TRACK LINEAR LED FLAPS  
PISTA TRACK SURFACE PROFILE





# PISTA LINEAR FLAPS

*The two thin, elegant flaps on both sides of Pista's linear module make it obviously beneficial. The module shows off an interesting esthetical value and has the functional feature of reducing glare. Additionally, the flaps have the visual effect of extending the slim track profile.*

*This gives designers endless options to create interesting light patterns.*

*Available in 5 different sizes, in black and white structure.*

### Pista track 48V LED linear flaps GI (500mm)



X LED-STRIP INCL. 8.5W


CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13452032	13452532
white struc	13452009	13452509
1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13450032	13450532
white struc	13450009	13450509
DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13451032	13451532
white struc	13451009	13451509
<b>LUMINAIRE OUTPUT &amp; POWER CONSUMPTION</b> (white struc)		
2700K	608lm / 8.5W	
3000K	637lm / 8.5W	

### Pista track 48V LED linear flaps GI (1000mm)



X LED-STRIP INCL. 17W



CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13452132	13452632
white struc	13452109	13452609
1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13450132	13450632
white struc	13450109	13450609
DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13451132	13451632
white struc	13451109	13451609
<b>LUMINAIRE OUTPUT &amp; POWER CONSUMPTION</b> (white struc)		
2700K	1214lm / 17W	
3000K	1274lm / 17W	

### Pista track 48V LED linear flaps GI (1500mm)



X LED-STRIP INCL. 25.5W

CONNECTED > SEE GOODIES


TRACK 48V COMPONENTS > SEE PAGES 462-467



NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13452232	13452732
white struc	13452209	13452709
1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13450232	13450732
white struc	13450209	13450709
DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13451232	13451732
white struc	13451209	13451709
<b>LUMINAIRE OUTPUT &amp; POWER CONSUMPTION</b> (white struc)		
2700K	1822lm / 25.5W	
3000K	1911lm / 25.5W	



## Pista track 48V LED linear flaps GI (2000mm)



X LED-STRIP INCL. 34W



CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13452332	13452832
white struc	13452309	13452809
1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13450332	13450832
white struc	13450309	13450809
DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13451332	13451832
white struc	13451309	13451809
<b>LUMINAIRE OUTPUT &amp; POWER CONSUMPTION</b> (white struc)		
2700K	2429lm / 34W	
3000K	2548lm / 34W	

## Pista track 48V LED linear flaps GI (2500mm)



X LED-STRIP INCL. 42.5W

CONNECTED > SEE GOODIES


TRACK 48V COMPONENTS > SEE PAGES 462-467




NOT DIMMABLE (a)	2700K / CRI90+	3000K / CRI90+
black struc	13452432	13452932
white struc	13452409	13452909
1-10V (b)	2700K / CRI90+	3000K / CRI90+
black struc	13450432	13450932
white struc	13450409	13450909
DALI (b)	2700K / CRI90+	3000K / CRI90+
black struc	13451432	13451932
white struc	13451409	13451909
<b>LUMINAIRE OUTPUT &amp; POWER CONSUMPTION</b> (white struc)		
2700K	3037lm / 42.5W	
3000K	3185lm / 42.5W	



PISTA TRACK LINEAR SPOTS 8X  
PISTA TRACK SURFACE PROFILE

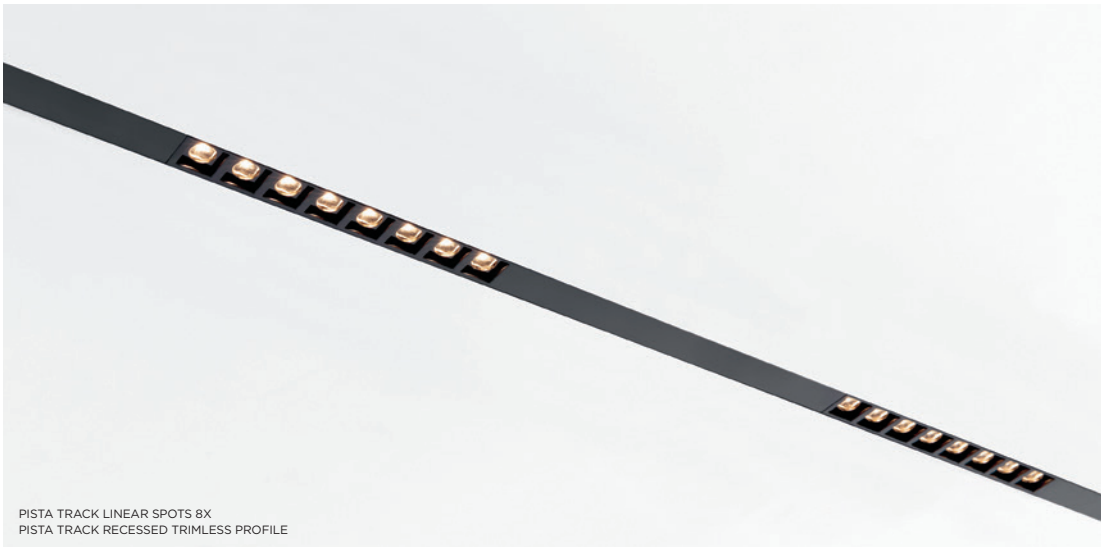

PISTA TRACK LINEAR SPOTS 8X  
PISTA TRACK RECESSED TRIMLESS PROFILE

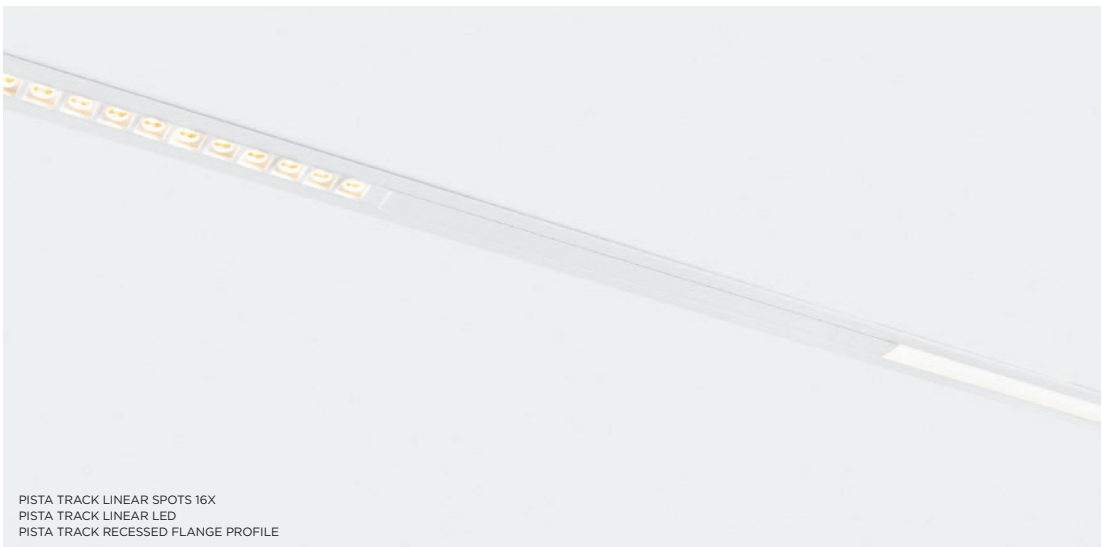

PISTA TRACK LINEAR SPOTS 16X  
PISTA TRACK LINEAR LED  
PISTA TRACK RECESSED FLANGE PROFILE



# PISTA LINEAR SPOTS

*When you look up to see what's giving small, charming light bursts underneath our slim rail, you'll see it: a trail of tiny but powerful LED spots. As they are fully integrated in the profile, nothing sticks out beneath. Available in units of 8x and 16x, in black and white structure, the spots enable designers to create accents using a linear module, and still enjoy Pista's streamlined design. Choose between 2 beam angles, medium or flood, and 1-10V or DALI dimming systems.*

## **16 linear spots**

Pista's popular linear spots just got longer - from 8x to 16x - and more powerful. With 1800 lm, and a UGR below 19, this makes Pista an original and elegant choice for office applications. Only style - and nothing else - sticks out with this charming trail of accent lights; Pista keeps its streamlined shape. A perfect luminaire for highlighting objects or the architectural features of a space.

more info? [supermodular.com/en/pista-linear-spots](https://supermodular.com/en/pista-linear-spots)





PISTA TRACK LINEAR SPOTS 8X  
PISTA TRACK LINEAR LED FLAPS  
PISTA TRACK SURFACE PROFILE



PISTA TRACK LINEAR SPOTS 16X  
PISTA TRACK RECESSED FLANGE PROFILE

## Pista track 48V LED linear spots (8x) GI



1X LED LINE INCL. 8W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13461032	13461132	13461232	13461332
white struc	13461009	13461109	13461209	13461309



DALI	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13461432	13461532	13461632	13461732
white struc	13461409	13461509	13461609	13461709

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K / 25°	744lm / 9W
3000K / 25°	796lm / 9W

## Pista track 48V LED linear spots (16x) GI



1X LED LINE INCL. 19W

CONNECTED > SEE GOODIES

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13460032	13460132	13460232	13460332
white struc	13460009	13460109	13460209	13460309

DALI	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	13460432	13460532	13460632	13460732
white struc	13460409	13460509	13460609	13460709

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K / 25°	1516lm / 19W
3000K / 25°	1623lm / 19W



PLACEBO DOWN WITH GLASS TUBE 46MM DOWN  
PLACEBO SOMBRERO - BLACK MATT  
PISTA TRACK SURFACE PROFILE



PLACEBO UP WITH GLASS BALL Ø155MM UP - ANO BRONZE  
PISTA TRACK SUSPENDED PROFILE



PLACEBO UP WITH GLASS TUBE 130MM UP - WHITE STRUC  
PISTA TRACK RECESSED FLANGE PROFILE



PLACEBO DOWN WITH GLASS BALL Ø155MM DOWN  
PLACEBO BEANIE - BLACK MATT  
PISTA TRACK RECESSED FLANGE PROFILE



# PLACEBO

Design — Jeffrey Huyghe

SEE ALSO



CEILING - P85



CEILING - P209

*Placebo joins Pista, our 48V track rail family to add lots of playful shapes with volume. Placebo is already a very large product family available with a ball and cylindrical glass bulb, different sizes, up and down lighting, and stylish shade accessories to dress it up. So many fun light effects to try out in residential, hospitality and retail spaces.*


## A track of mix & match

All of Placebo's LED units slide in wonderfully on our Pista track. In white and black structure, anodised champagne, bronze, silver bronze and black. Decide on a finish, then move on to choosing a tube or a ball shape, each in 2 sizes, with an up or down light effect. Add volume and presence to your Placebo expression with any of our 3 shades, Douli, Beanie and Sombrero. And watch the light effects they create!

## Playful Placebo effect

8 models to start from. Imagine a row or flock of changing Placebos, above a dining room table or a long counter space. Alternating between up and down lights, a tube shape or a ball shape. Go for Placebo with warm dim, tune down the intensity of your light and enjoy a change of colour temperature to a warmer, cosy light.

more info? [supermodular.com/en/pista-placebo](http://supermodular.com/en/pista-placebo)


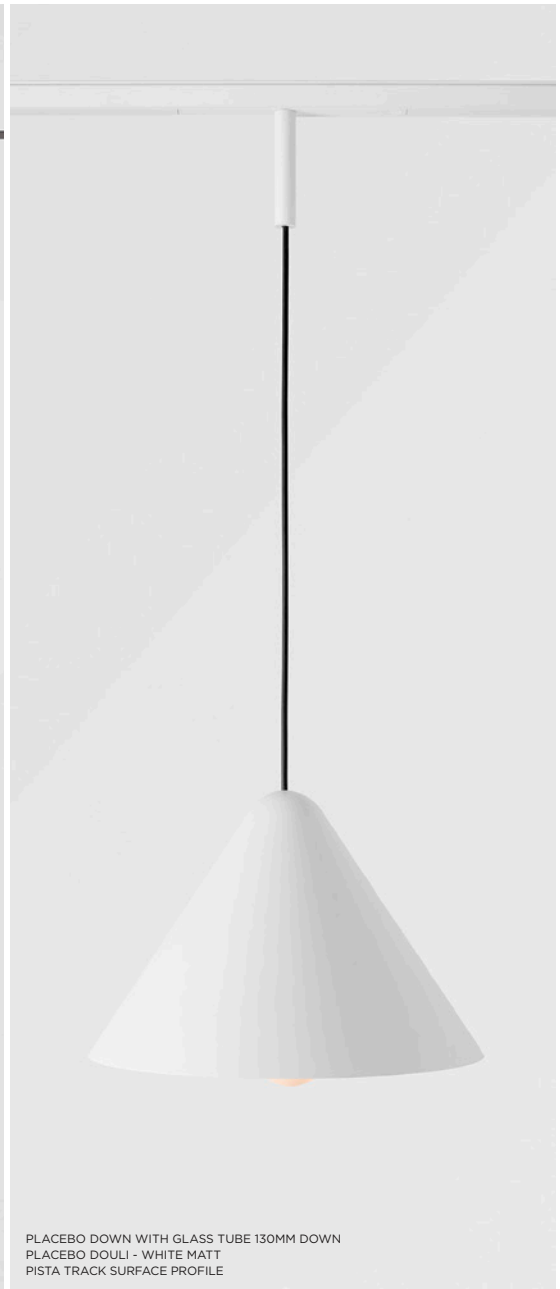


**PLACEBO SHADES**

<b>BEANIE</b>				<b>DOULI</b>				<b>SOMBRERO</b>															
white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne								
12628038	12628083	12628018	12628017	12629038	12629083	12629018	12629017	12627038	12627083	12627018	12627017												



## Placebo down track 48V LED GI



1X LED MODULE INCL. 6.3W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
! LONGER SUSPENSION CABLE ON REQUEST  
! ALL WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
! ALL OTHER COLOURS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE LEFT PAGE

### OPTICAL ACCESSORIES

12624038 PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT

12624238 PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT

12626038 PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT

12626238 PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	2700K / CRI90+	3000K / CRI90+
ano black	13540181	13540381
ano bronze	13540182	13540382
ano champagne	13540141	13540341
ano silver bronze	13540184	13540384
black struc	13540132	13540332
white struc	13540109	13540309

DALI	2700K / CRI90+	3000K / CRI90+
ano black	13540781	13540981
ano bronze	13540782	13540982
ano champagne	13540741	13540941
ano silver bronze	13540784	13540984
black struc	13540732	13540932
white struc	13540709	13540909

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(glass ball ø155)

2700K



608lm / 7.1W

3000K

625lm / 7.1W

WARM DIM

## Placebo down track 48V LED warm dim GI



1X LED MODULE INCL. 7.4W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
! LONGER SUSPENSION CABLE ON REQUEST  
! ALL WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
! ALL OTHER COLOURS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE LEFT PAGE

### OPTICAL ACCESSORIES

12624038 PLACEBO GLASS TUBE DOWN (46MM) WHITE MATT

12624238 PLACEBO GLASS TUBE DOWN (130MM) WHITE MATT

12626038 PLACEBO GLASS BALL DOWN (Ø90MM) WHITE MATT

12626238 PLACEBO GLASS BALL DOWN (Ø155MM) WHITE MATT

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	1800K - 3000K / CRI90+
ano black	13540581
ano bronze	13540582
ano champagne	13540541
ano silver bronze	13540584
black struc	13540532
white struc	13540509

DALI	1800K - 3000K / CRI90+
ano black	13541181
ano bronze	13541182
ano champagne	13541141
ano silver bronze	13541184
black struc	13541132
white struc	13541109

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(glass ball ø155)

@3000K / glass ball ø155


365lm / 8.4W



PLACEBO UP WITH GLASS BALL Ø155MM UP - ANO SILVER BRONZE  
PLACEBO BEANIE - BRONZE









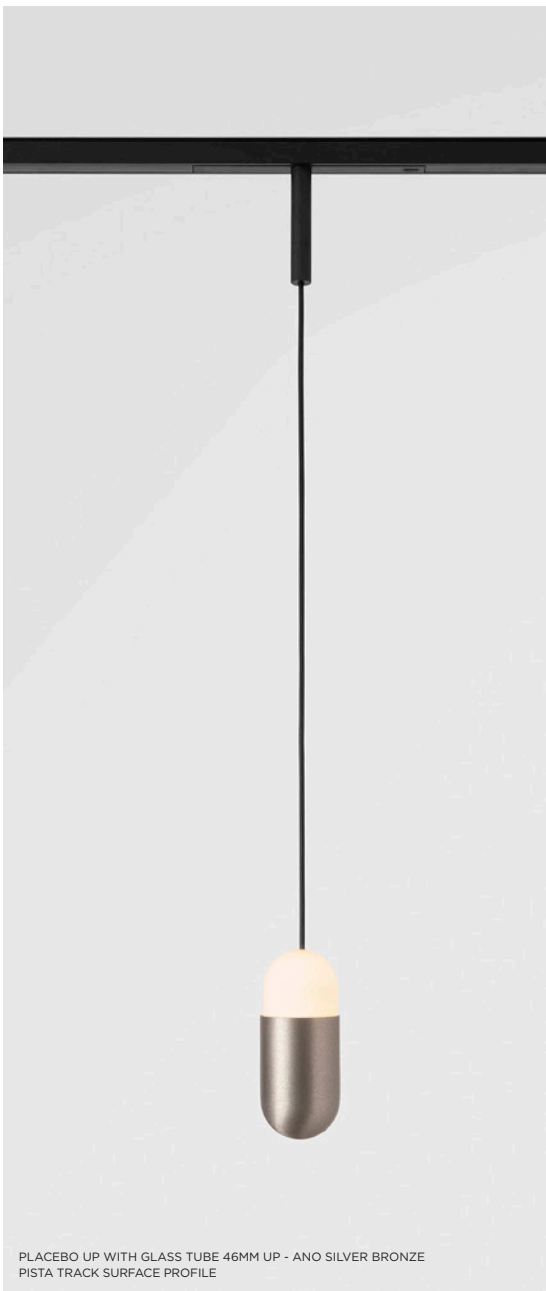PLACEBO UP WITH GLASS TUBE 130MM UP - ANO CHAMPAGNE  
PLACEBO DOULI - CHAMPAGNE




PLACEBO UP WITH GLASS TUBE 46MM UP - ANO SILVER BRONZE  
PISTA TRACK SURFACE PROFILE

PLACEBO SHADES

 				 				 			
<b>BEANIE</b>				<b>DOULI</b>				<b>SOMBRERO</b>			
white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne	white matt	black matt	bronze	champagne
12628038	12628083	12628018	12628017	12629038	12629083	12629018	12629017	12627038	12627083	12627018	12627017

## Placebo up track 48V LED GI



1X LED MODULE INCL. 6.3W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
! LONGER SUSPENSION CABLE ON REQUEST  
! ALL WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
! ALL OTHER COLOURS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE LEFT PAGE

### OPTICAL ACCESSORIES

12623038 PLACEBO GLASS TUBE UP (46MM) WHITE MATT

12623238 PLACEBO GLASS TUBE UP (130MM) WHITE MATT

12625038 PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT

12625238 PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	2700K / CRI90+	3000K / CRI90+
ano black	13540081	13540281
ano bronze	13540082	13540282
ano champagne	13540041	13540241
ano silver bronze	13540084	13540284
black struc	13540032	13540232
white struc	13540009	13540209


DALI	2700K / CRI90+	3000K / CRI90+
ano black	13540681	13540881
ano bronze	13540682	13540882
ano champagne	13540641	13540841
ano silver bronze	13540684	13540884
black struc	13540632	13540832
white struc	13540609	13540809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (glass ball ø155)

2700K	608lm / 7.1W
3000K	625lm / 7.1W

WARM DIM

## Placebo up track 48V LED warm dim GI



1X LED MODULE INCL. 7.4W

! MUST BE COMBINED WITH GLASS TUBE OR GLASS BALL (NOT INCLUDED);  
LUMEN OUTPUT DEPENDS ON CHOICE OF GLASS ACCESSORY  
! LONGER SUSPENSION CABLE ON REQUEST  
! ALL WHITE PISTA 48V SPOTS HAVE A WHITE 48V TRACK ADAPTER.  
! ALL OTHER COLOURS HAVE A BLACK ADAPTER. DEVIATION FROM THIS IS ONLY POSSIBLE ON REQUEST.

CONNECTED > SEE GOODIES

PLACEBO SHADES > SEE LEFT PAGE

### OPTICAL ACCESSORIES

12623038 PLACEBO GLASS TUBE UP (46MM) WHITE MATT

12623238 PLACEBO GLASS TUBE UP (130MM) WHITE MATT

12625038 PLACEBO GLASS BALL UP (Ø90MM) WHITE MATT

12625238 PLACEBO GLASS BALL UP (Ø155MM) WHITE MATT

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	1800K - 3000K / CRI90+
ano black	13540481
ano bronze	13540482
ano champagne	13540441
ano silver bronze	13540484
black struc	13540432
white struc	13540409


DALI	1800K - 3000K / CRI90+
ano black	13541081
ano bronze	13541082
ano champagne	13541041
ano silver bronze	13541084
black struc	13541032
white struc	13541009

### LUMINAIRE OUTPUT & POWER CONSUMPTION (glass ball ø155)

@3000K / glass ball ø155	365lm / 8.4W
--------------------------	--------------



SMART SURFACE TUBED 48 TRACK  
SMART CAKE 48

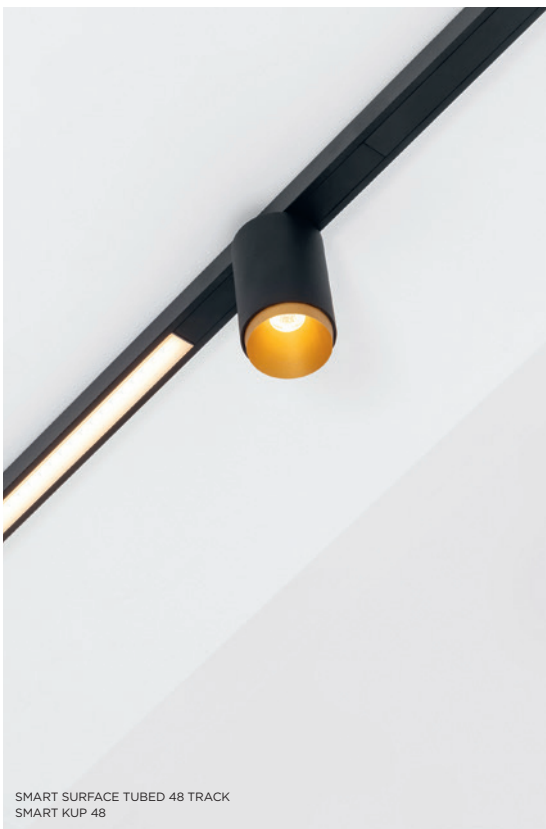

SMART SURFACE TUBED 48 TRACK  
SMART KUP 48



SMART TUBED SUSPENSION48 TRACK  
SMART LOTIS 48



# SMART ACCESSORIES

## SURFACE TUBED 48 TUBED SUSPENSION 48

more info? [supermodular.com/en/pista-smart-surface-tubed](https://supermodular.com/en/pista-smart-surface-tubed)

458 · 459



SEE ALSO



CEILING - P259

*Smart surface tubed 48 is ready to roll with a 48V track adapter on the Pista rail track. If you want to play with layers of light on the same track, or create a cosier atmosphere for an area of the track, why not add a few Smart tubed suspension 48?*

### Smart surface tubed 48 track 48V 1x LED GI



LUMINAIRE NOT INCL.


! TO BE COMBINED WITH SMART 48 (+)

[TRACK 48V COMPONENTS > SEE PAGES 462-467](#)



1-10V	
black struc	12904032
white struc	12904009
DALI	
black struc	12904132
white struc	12904109

### Smart surface tubed 48 track 48V 2x LED GI



LUMINAIRE NOT INCL.


! TO BE COMBINED WITH SMART 48 (+)

[TRACK 48V COMPONENTS > SEE PAGES 462-467](#)



1-10V	
black struc	12904232
white struc	12904209
DALI	
black struc	12904332
white struc	12904309

## Smart tubed suspension 48 track 48V 1x LED GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 48 (+)

TRACK 48V COMPONENTS > SEE PAGES 462-467



1-10V	
black struc	12903032
white struc	12903009
DALI	
black struc	12903132
white struc	12903109

## Smart combinations & accessories

### SMART 48/48+ - SURFACE TUBED TRACK 48V, TUBED SUSPENSION TRACK 48V

DESIGN	COLOR	FIX/ADJ.	IP-RATE	TECHNOLOGY	SURFACE TUBED TRACK 48V Ø48 GI 1X/2X	TUBED SUSPENSION TRACK 48V Ø48 GI
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20	LED		
				LED warm dim		
Smart asy lotis	○ ● ●	fix	IP20	LED		
				LED warm dim		



PISTA TRACK LINEAR LED  
UP/DOWN SUSPENSION CABLE



FLEXIBLE CONNECTION



TWIN SUSPENSION CABLE  
TWIN BRACKET



BRACKET INCL. SAFETY CABLE FOR CLIMATE CONTROL CEILINGS



PISTA TRACK LINEAR LED  
SURFACE MOUNTED LED GEAR



MEDARD 42 TRACK  
POWER FEED CABLE + CONNECTION BOX



# TRACK 48V COMPONENTS

---

PROFILE

SUSPENSION

POWER FEED

ENDPLATE & COVER

CONNECTION

LED GEAR

more info? [supermodular.com/en/pista-track-48v](http://supermodular.com/en/pista-track-48v)

*Our favourite 48V track is offering quite a few novelties that will open up even more options for designing your lighting concepts for office spaces, hospitality, retail and residential environments. An easy installation option, an upright family member, click-in brackets for climate control ceilings. So many options are coming your way.*

## Easy installation

It's easier and faster than ever to install Pista recessed. It now comes with a version that includes a flange. No need to have a perfect, seamless plasterwork all around, the flange will cover the edges. And no worries, it's compatible with all of Pista's existing LED modules and fixtures. We even designed new 90° and 180° connections to fit!

## Up/Down

Pista suspended includes the option of having light on the top side of its track rail. Try accent and general light upwards, down or both, general light with general light, or accents all over. All of Pista's exciting family can be used to create endless possibilities. A plus with Médard spot: click it in the upward track and make it shine downwards, thanks to its flexibility.


## Functional lighting concept

A new Pista addition that works especially well for offices. Pista bracket makes it possible for Pista track profiles to be installed on climate control ceilings. This makes our 48V sweetheart a unique and functional linear lighting concept, adding design value, distinction and playfulness to your office lighting design.

# Track components - 48V

## TRACK 48V

### PROFILE

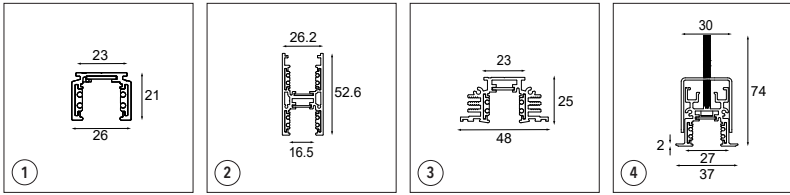

13410009 PISTA TRACK 48V SURFACE PROFILE 1M WHITE STRUC (1)

13410032 PISTA TRACK 48V SURFACE PROFILE 1M BLACK STRUC (1)

13410109 PISTA TRACK 48V SURFACE PROFILE 2M WHITE STRUC (1)

13410132 PISTA TRACK 48V SURFACE PROFILE 2M BLACK STRUC (1)

13410209 PISTA TRACK 48V SURFACE PROFILE 3M WHITE STRUC (1)

13410232 PISTA TRACK 48V SURFACE PROFILE 3M BLACK STRUC (1)

12360009 PISTA TRACK 48V UP/DOWN PROFILE 1M WHITE STRUC (2)

12360032 PISTA TRACK 48V UP/DOWN PROFILE 1M BLACK STRUC (2)

12360109 PISTA TRACK 48V UP/DOWN PROFILE 2M WHITE STRUC (2)

12360132 PISTA TRACK 48V UP/DOWN PROFILE 2M BLACK STRUC (2)

12360209 PISTA TRACK 48V UP/DOWN PROFILE 3M WHITE STRUC (2)

12360232 PISTA TRACK 48V UP/DOWN PROFILE 3M BLACK STRUC (2)

13410302 PISTA TRACK 48V RECESSED TRIMLESS PROFILE 1M BLACK (3)

13410402 PISTA TRACK 48V RECESSED TRIMLESS PROFILE 2M BLACK (3)

13410502 PISTA TRACK 48V RECESSED TRIMLESS PROFILE 3M BLACK (3)

13419109 PISTA TRACK 48V RECESSED (FLANGE) PROFILE 1M WHITE STRUC (4)

13419132 PISTA TRACK 48V RECESSED (FLANGE) PROFILE 1M BLACK STRUC (4)


13419209 PISTA TRACK 48V RECESSED (FLANGE) PROFILE 2M WHITE STRUC (4)

13419232 PISTA TRACK 48V RECESSED (FLANGE) PROFILE 2M BLACK STRUC (4)

13419309 PISTA TRACK 48V RECESSED (FLANGE) PROFILE 3M WHITE STRUC (4)

13419332 PISTA TRACK 48V RECESSED (FLANGE) PROFILE 3M BLACK STRUC (4)

### SUSPENSION

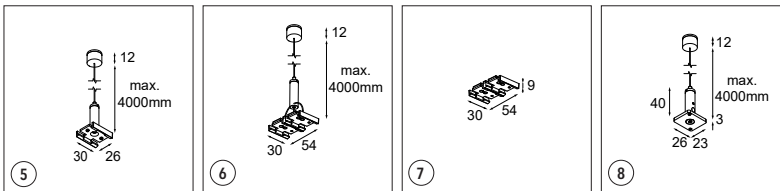

13411409 PISTA TRACK 48V SUSPENSION CABLE 4M WHITE STRUC (5)

13411432 PISTA TRACK 48V SUSPENSION CABLE 4M BLACK STRUC (5)

13411709 PISTA TRACK 48V TWIN SUSPENSION CABLE 4M WHITE STRUC (6)

13411732 PISTA TRACK 48V TWIN SUSPENSION CABLE 4M BLACK STRUC (6)

13411809 PISTA TRACK 48V TWIN BRACKET WHITE STRUC (7)


13411832 PISTA TRACK 48V TWIN BRACKET BLACK STRUC (7)

12360709 PISTA TRACK 48V UP/DOWN SUSPENSION CABLE 4M WHITE STRUC (8)

12360732 PISTA TRACK 48V UP/DOWN SUSPENSION CABLE 4M BLACK STRUC (8)

## TRACK 48V

### POWER FEED

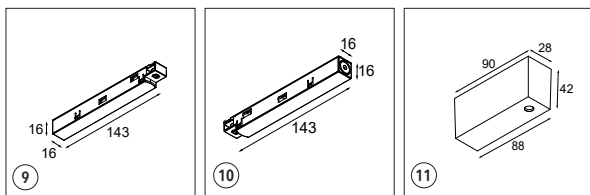

13410809 PISTA TRACK 48V POWER FEED LEFT WHITE STRUC (9)

13410832 PISTA TRACK 48V POWER FEED LEFT BLACK STRUC (9)


13410909 PISTA TRACK 48V POWER FEED RIGHT WHITE STRUC (10)

13410932 PISTA TRACK 48V POWER FEED RIGHT BLACK STRUC (10)

13411509 PISTA TRACK 48V POWER FEED CABLE 2M 4X1.5MM<sup>2</sup> + CONNECTION BOX WHITE STRUC (11)

13411532 PISTA TRACK 48V POWER FEED CABLE 2M 4X1.5MM<sup>2</sup> + CONNECTION BOX BLACK STRUC (11)

### ENDPLATE

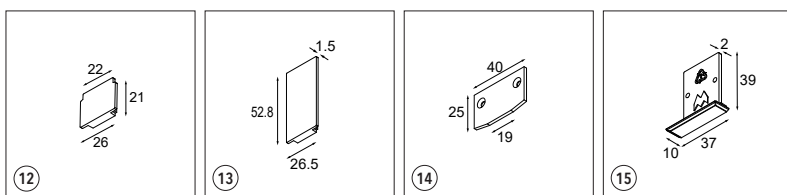

13411009 PISTA TRACK 48V SURFACE ENDPLATE WHITE STRUC (12)

13411032 PISTA TRACK 48V SURFACE ENDPLATE BLACK STRUC (12)

12360609 PISTA TRACK 48V UP/DOWN ENDPLATES (2) WHITE STRUC (13)


12360632 PISTA TRACK 48V UP/DOWN ENDPLATES (2) BLACK STRUC (13)

13411132 PISTA TRACK 48V RECESSED ENDPLATE BLACK STRUC (14)

13419409 PISTA TRACK 48V RECESSED (FLANGE) ENDPLATES (2) WHITE STRUC (15)

13419432 PISTA TRACK 48V RECESSED (FLANGE) ENDPLATES (2) BLACK STRUC (15)

### COVER



13410609 PISTA TRACK 48V COVER 1M WHITE STRUC (16)

13410632 PISTA TRACK 48V COVER 1M BLACK STRUC (16)


13410709 PISTA TRACK 48V COVER 2M WHITE STRUC (16)

13410732 PISTA TRACK 48V COVER 2M BLACK STRUC (16)

# Track components - 48V


## TRACK 48V

### CONNECTION

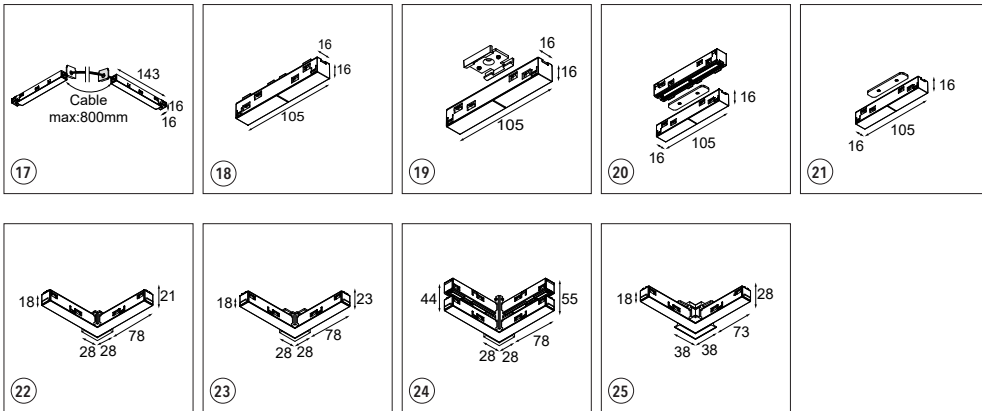

- 13418332 PISTA TRACK 48V ELECTRICAL/MECHANICAL CONNECTION FLEXIBLE BLACK STRUC (17)
- 13418309 PISTA TRACK 48V ELECTRICAL/MECHANICAL CONNECTION FLEXIBLE WHITE STRUC (17)
- 13411309 PISTA TRACK 48V ELECTRICAL (SURFACE) CONNECTION 180° WHITE STRUC (18)
- 13411332 PISTA TRACK 48V ELECTRICAL (SURFACE) CONNECTION 180° BLACK STRUC (18)
- 13419009 PISTA TRACK 48V ELECTRICAL/MECHANICAL (SUSPENSION) CONNECTION 180° WHITE STRUC (19)
- 13419032 PISTA TRACK 48V ELECTRICAL/MECHANICAL (SUSPENSION) CONNECTION 180° BLACK STRUC (19)
- 12360532 PISTA TRACK 48V ELECTRICAL/MECHANICAL (UP/DOWN) CONNECTION 180° BLACK STRUC (20)
- 12360509 PISTA TRACK 48V ELECTRICAL/MECHANICAL (UP/DOWN) CONNECTION 180° WHITE STRUC (20)
- 13419732 PISTA TRACK 48V ELECTRICAL/MECHANICAL (RECESSED) CONNECTION 180° BLACK STRUC (21)
- 13419709 PISTA TRACK 48V ELECTRICAL/MECHANICAL (RECESSED) CONNECTION 180° WHITE STRUC (21)
- 13418132 PISTA TRACK 48V ELECTRICAL/MECHANICAL (SURFACE) CONNECTION 90° INSIDE BLACK STRUC (22)
- 13418109 PISTA TRACK 48V ELECTRICAL/MECHANICAL (SURFACE) CONNECTION 90° INSIDE WHITE STRUC (22)
- 13418232 PISTA TRACK 48V ELECTRICAL/MECHANICAL (SURFACE) CONNECTION 90° OUTSIDE BLACK STRUC (22)
- 13418209 PISTA TRACK 48V ELECTRICAL/MECHANICAL (SURFACE) CONNECTION 90° OUTSIDE WHITE STRUC (22)
- 13418632 PISTA TRACK 48V ELECTRICAL/MECHANICAL (SUSPENSION) CONNECTION 90° INSIDE BLACK STRUC (23)
- 13418609 PISTA TRACK 48V ELECTRICAL/MECHANICAL (SUSPENSION) CONNECTION 90° INSIDE WHITE STRUC (23)
- 13418732 PISTA TRACK 48V ELECTRICAL/MECHANICAL (SUSPENSION) CONNECTION 90° OUTSIDE BLACK STRUC (23)
- 13418709 PISTA TRACK 48V ELECTRICAL/MECHANICAL (SUSPENSION) CONNECTION 90° OUTSIDE WHITE STRUC (23)
- 12360332 PISTA TRACK 48V ELECTRICAL/MECHANICAL (UP/DOWN) CONNECTION 90° BLACK STRUC (24)
- 12360309 PISTA TRACK 48V ELECTRICAL/MECHANICAL (UP/DOWN) CONNECTION 90° WHITE STRUC (24)
- 13419532 PISTA TRACK 48V ELECTRICAL/MECHANICAL (RECESSED FLANGE) CONNECTION 90° INSIDE BLACK STRUC (25)
- 13419509 PISTA TRACK 48V ELECTRICAL/MECHANICAL (RECESSED FLANGE) CONNECTION 90° INSIDE WHITE STRUC (25)
- 13419632 PISTA TRACK 48V ELECTRICAL/MECHANICAL (RECESSED FLANGE) CONNECTION 90° OUTSIDE BLACK STRUC (25)
- 13419609 PISTA TRACK 48V ELECTRICAL/MECHANICAL (RECESSED FLANGE) CONNECTION 90° OUTSIDE WHITE STRUC (25)


### EXTRA

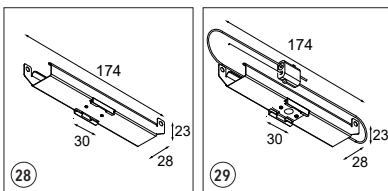

- 13410001 PISTA BRACKET FOR CLIMATE CONTROL CEILINGS (10 PIECES) (28)
- 13410003 PISTA BRACKET INCL. SAFETY CABLE FOR CLIMATE CONTROL CEILINGS (10 PIECES) (29)


## TRACK 48V

## SURFACE MOUNTED LED GEAR

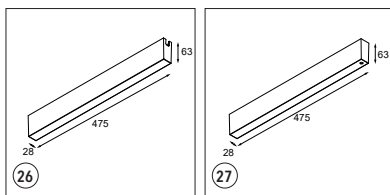


- 13418432** PISTA SURFACE MOUNTED LED GEAR 48V 75W (FOR SURFACE INSTALLATION) BLACK STRUC (26)
- 13418409** PISTA SURFACE MOUNTED LED GEAR 48V 75W (FOR SURFACE INSTALLATION) WHITE STRUC (26)
- 13418532** PISTA SURFACE MOUNTED LED GEAR 48V 75W (FOR SUSPENDED INSTALLATION) BLACK STRUC (27)
- 13418509** PISTA SURFACE MOUNTED LED GEAR 48V 75W (FOR SUSPENDED INSTALLATION) WHITE STRUC (27)
- 13418832** PISTA SURFACE MOUNTED LED GEAR 48V 150W (FOR SURFACE INSTALLATION) BLACK STRUC (26)
- 13418809** PISTA SURFACE MOUNTED LED GEAR 48V 150W (FOR SURFACE INSTALLATION) WHITE STRUC (26)
- 13418932** PISTA SURFACE MOUNTED LED GEAR 48V 150W (FOR SUSPENDED INSTALLATION) BLACK STRUC (27)
- 13418909** PISTA SURFACE MOUNTED LED GEAR 48V 150W (FOR SUSPENDED INSTALLATION) WHITE STRUC (27)

## REMOTE LED GEAR (MORE INFO SEE PAGE 651)

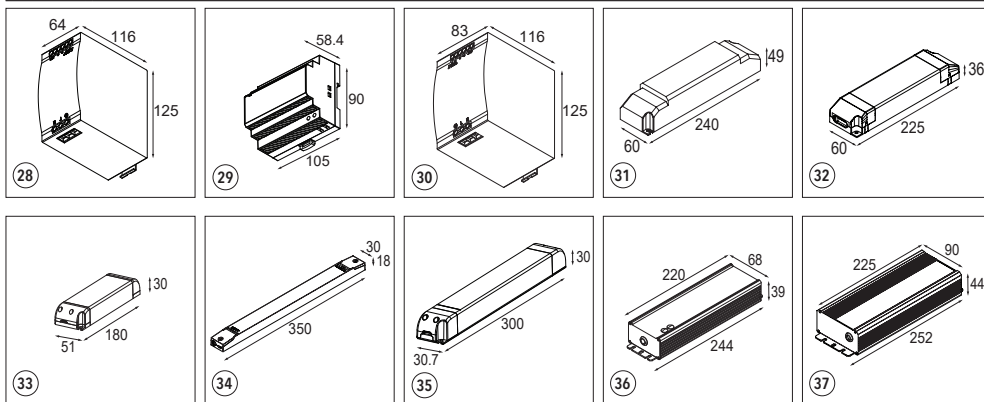

- 12407530** LED gear 48V 120W - DIN RAIL (28)
- 13551530** LED gear 48V 150W - DIN RAIL (29)
- 12408430** LED gear 48V 240W - DIN RAIL (30)
- 13550730** LED gear 48V 50-150W (31)
- 13550630** LED gear 48V 70W (32)
- 12408730** LED gear 48V 75W (33)
- 13550230** LED gear 48V 100W (34)
- 12408630** LED gear 48V 120W (35)
- 13550330** LED gear 48V 150W (34)
- 12408930** LED gear 48V 240W (36)
- 12409030** LED gear 48V 320W (37)

## CASAMBI DIM MODULE (MORE INFO SEE PAGE 635)

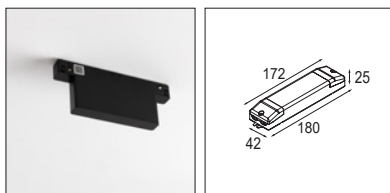

- 13470232** CASAMBI TRACK 48V DIM MODULE BLACK STRUC
- 13470209** CASAMBI TRACK 48V DIM MODULE WHITE STRUC
- 13470302** CASAMBI TRACK 48V REMOTE DIM MODULE



CHARLATAN TRACK 100  
CHARLATAN TRACK 85  
CHARLATAN TRACK 65



CHARLATAN TRACK 100




# CHARLATAN

*A trackspot for our 230V track rail, Charlatan is a light to keep close. Its pure, unpretentious and timeless design makes Charlatan an easy choice for several kinds of spaces. Thin, adjustable bracket, flexibility of 360° horizontal and 90° vertical, deeper recessed positioning of reflector for visual comfort, there's no compromise on quality or technology. Choose between 3 diameter sizes, 3 beam angles, 4 colour temperatures, 3 lumen packages and 2 dimming systems, and let the show begin.*

more info? [supermodular.com/en/charlatan](https://supermodular.com/en/charlatan)

## Charlatan track 65 LED GI



1X LED ARRAY INCL. | 13.8W

! MUST BE COMBINED WITH REFLECTOR

TRACK COMPONENTS > SEE PAGES 508-511

### OPTICAL ACCESSORIES

10210001	REFLECTOR Ø65 15°
10210002	REFLECTOR Ø65 25°
10210003	REFLECTOR Ø65 40°



TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+	3500K / CRI90+	4000K / CRI90+
black struc	13110032	13110132	13110232	13110332
white struc	13110009	13110109	13110209	13110309

DALI	2700K / CRI90+	3000K / CRI90+	3500K / CRI90+	4000K / CRI90+
black struc	13110432	13110532	13110632	13110732
white struc	13110409	13110509	13110609	13110709

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)


2700K / 25° alu	1246lm / 17W
3000K / 25° alu	1329lm / 17W
3500K / 25° alu	1384lm / 17W
4000K / 25° alu	1433lm / 17W



REFLECTOR Ø65  
REFLECTOR Ø85  
REFLECTOR Ø100



## Charlatan track 85 LED GI



1X LED ARRAY INCL. 23.8W


! MUST BE COMBINED WITH REFLECTOR

TRACK COMPONENTS > SEE PAGES 508-511

### OPTICAL ACCESSORIES

10210004	REFLECTOR Ø85 15°
10210005	REFLECTOR Ø85 25°
10210006	REFLECTOR Ø85 40°

## Charlatan track 100 LED GI



1X LED ARRAY INCL. 30.5W

! MUST BE COMBINED WITH REFLECTOR

TRACK COMPONENTS > SEE PAGES 508-511

### OPTICAL ACCESSORIES

10210007	REFLECTOR Ø100 15°
10210008	REFLECTOR Ø100 25°
10210009	REFLECTOR Ø100 40°



TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+	3500K / CRI90+	4000K / CRI90+
black strut	13111032	13111132	13111232	13111332
white strut	13111009	13111109	13111209	13111309

DALI	2700K / CRI90+	3000K / CRI90+	3500K / CRI90+	4000K / CRI90+
black strut	13111432	13111532	13111632	13111732
white strut	13111409	13111509	13111609	13111709

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white strut)

2700K / 25° alu	2306lm / 27.5W
3000K / 25° alu	2543lm / 27.5W
3500K / 25° alu	2687lm / 27.5W
4000K / 25° alu	2652lm / 27.5W



TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+	3500K / CRI90+	4000K / CRI90+
black strut	13112032	13112132	13112232	13112332
white strut	13112009	13112109	13112209	13112309

DALI	2700K / CRI90+	3000K / CRI90+	3500K / CRI90+	4000K / CRI90+
black strut	13112432	13112532	13112632	13112732
white strut	13112409	13112509	13112609	13112709

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white strut)

2700K / 25° alu	3111lm / 34.5W
3000K / 25° alu	3409lm / 34.5W
3500K / 25° alu	3512lm / 34.5W
4000K / 25° alu	3666lm / 34.5W



KANON T10 TRACK



KANON 138 TRACK



# KANON

**Design** — Couvreur-Devos

more info? [supermodular.com/en/kanon](http://supermodular.com/en/kanon)

472 • 473

*Interior designers in search of spotlight track lighting that combines exceptional brightness with great design are now armed with Modular L.I.'s Kanon. The most powerful spotlight in our portfolio (up to 5000 lumens), Kanon fires light, while looking sleek and elegant, with all wiring and cables hidden. Designed for retail environments, it is a surefire guarantee that your merchandise will be illuminated in style..*

## Refined and stylish

Kanon is a simple, versatile spotlight with a refined fixture hardly ever found in track lighting. While all the wiring and gear – even screws – are smartly hidden, the outer bracket is neatly shaped to follow the lines of the housing.


## Striking performance

Kanon is an energy-efficient LED fixture, available in two levels of luminous efficacy: Kanon 110 delivers up to 3500 lumens, while its bigger brother Kanon 138 reaches up to 5000 lumen, which makes it the most powerful spotlight in our family. Thanks to this brightness, Kanon 138 is an ideal choice for showrooms or shops with a high ceiling.

## Smartly lockable

Versatile as it is, Kanon easily rotates 365° and has an inclination of 90°. Rather maintain it in a fixed position? The Kanon spotlight is lockable, with invisible screws, as befits its sleek, neat design.

# Kanon track 110 LED GI



1X LED ARRAY INCL. 40W



TRAILING EDGE DIMMABLE	2700K / CRI90+			
	15°	25°	40°	60°
black struc	13150032	13150132	13150232	13150332
white struc	13150009	13150109	13150209	13150309
TRAILING EDGE DIMMABLE	3000K / CRI90+			
	15°	25°	40°	60°
black struc	13150432	13150532	13150632	13150732
white struc	13150409	13150509	13150609	13150709
TRAILING EDGE DIMMABLE	4000K / CRI90+			
	15°	25°	40°	60°
black struc	13150832	13150932	13151032	13151132
white struc	13150809	13150909	13151009	13151109

DALI	2700K / CRI90+			
	15°	25°	40°	60°
black struc	13152032	13152132	13152232	13152332
white struc	13152009	13152109	13152209	13152309
DALI	3000K / CRI90+			
	15°	25°	40°	60°
black struc	13152432	13152532	13152632	13152732
white struc	13152409	13152509	13152609	13152709
DALI	4000K / CRI90+			
	15°	25°	40°	60°
black struc	13152832	13152932	13153032	13153132
white struc	13152809	13152909	13153009	13153109

TRACK COMPONENTS > SEE PAGES 508-511

## OPTICAL ACCESSORIES

10216700 TRANSPARENT GLASS Ø77

10216703 SPREADLENS Ø77

10217002 CROSS BLADE Ø80 BLACK

10216430 REFLECTOR Ø80 H39 LED SPOT

10216530 REFLECTOR Ø80 H39 LED MEDIUM

10216630 REFLECTOR Ø80 H39 LED FLOOD

10216730 REFLECTOR LED Ø80 WIDE FLOOD H39

## LUMINAIRE OUTPUT & POWER CONSUMPTION


(white struc)

<sup>(1)</sup> DALI

<sup>(2)</sup> TRAILING EDGE

2700K / 25°	3107lm / <sup>(1)</sup> 42.3W / <sup>(2)</sup> 45.5W
3000K / 25°	3222lm / <sup>(1)</sup> 42.3W / <sup>(2)</sup> 45.5W
4000K / 25°	3483lm / <sup>(1)</sup> 42.3W / <sup>(2)</sup> 45.5W

# Kanon track 138 LED GI



1X LED ARRAY INCL. 49.7W

TRACK COMPONENTS > SEE PAGES 508-511

## OPTICAL ACCESSORIES

10216800	TRANSPARENT GLASS Ø107
10216803	SPREADLENS Ø107
10216030	REFLECTOR Ø111 LED SPOT
10216130	REFLECTOR Ø111 LED MEDIUM
10216230	REFLECTOR Ø111 LED FLOOD
10216330	REFLECTOR Ø111 LED WIDE FLOOD



TRAILING EDGE DIMMABLE	2700K / CRI90+			
	15°	25°	40°	60°
black struc	13160032	13160132	13160232	13160332
white struc	13160009	13160109	13160209	13160309
TRAILING EDGE DIMMABLE	3000K / CRI90+			
	15°	25°	40°	60°
black struc	13160432	13160532	13160632	13160732
white struc	13160409	13160509	13160609	13160709
TRAILING EDGE DIMMABLE	4000K / CRI90+			
	15°	25°	40°	60°
black struc	13160832	13160932	13161032	13161132
white struc	13160809	13160909	13161009	13161109

DALI	2700K / CRI90+			
	15°	25°	40°	60°
black struc	13162032	13162132	13162232	13162332
white struc	13162009	13162109	13162209	13162309
DALI	3000K / CRI90+			
	15°	25°	40°	60°
black struc	13162432	13162532	13162632	13162732
white struc	13162409	13162509	13162609	13162709
DALI	4000K / CRI90+			
	15°	25°	40°	60°
black struc	13162832	13162932	13163032	13163132
white struc	13162809	13162909	13163009	13163109

## LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

<sup>(1)</sup>DALI

<sup>(2)</sup>TRAILING EDGE

2700K / 25°	4786lm / <sup>(1)</sup> 53.6W / <sup>(2)</sup> 56W
3000K / 25°	4963lm / <sup>(1)</sup> 53.6W / <sup>(2)</sup> 56W
4000K / 25°	5365lm / <sup>(1)</sup> 53.6W / <sup>(2)</sup> 56W



MARBUL TRACK



MARBUL SUSPENSION ADJUSTABLE TRACK



MARBUL SUSPENSION TRACK



# MARBUL

Design — Jeffrey Huyghe

SEE ALSO



CEILING - P85



CEILING - P137



TRACK 48V - P417

*Marbul is an ideal choice for both residential and hospitality projects. A round, organic design, direct light with a simple twist of the lamp units, each with its own dedicated LED module. The elegant wall and ceiling luminaire – find Marbul in the ceiling and 48V track sections – presents a new family member. With Marbul now also available for our 230V track, the family is getting happier and bubblier.*

## More choices for retail and hospitality

230V tracks are a top pick for retail and hospitality spaces because of their flexibility and versatility. Adding Marbul's soft, organic shape to your track will give a different style and feel to your expression. A welcome feature will also be Marbul's compatibility with DALI and Casambi systems, bringing smart lighting to your project.





MARBUL TRACK



MARBUL TRACK



## Marbul track LED GI



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

TRACK COMPONENTS > SEE PAGES 508-511



DALI	2700K / CRI90+	3000K / CRI90+
black struc	13500032	13500132
white struc	13500009	13500109


CASAMBI	2700K / CRI90+	3000K / CRI90+
black struc	13500632	13500732
white struc	13500609	13500709

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25° alu	634lm / 8.5W
3000K / 25° alu	718lm / 8.5W

WARM DIM

## Marbul track LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

TRACK COMPONENTS > SEE PAGES 508-511




DALI	1800K - 3000K / CRI90+
black struc	13500232
white struc	13500209

CASAMBI	1800K - 3000K / CRI90+
black struc	13500832
white struc	13500809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@ 3000K / 25° alu	955lm / 14.5W
-------------------	---------------

## Marbul suspension track LED GI



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

TRACK COMPONENTS > SEE PAGES 508-511



DALI	2700K / CRI90+	3000K / CRI90+
black struc	13501032	13501132
white struc	13501009	13501109


CASAMBI	2700K / CRI90+	3000K / CRI90+
black struc	13501732	13501632
white struc	13501709	13501609

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25° alu	634lm / 8.5W
3000K / 25° alu	718lm / 8.5W

WARM DIM

## Marbul suspension track LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

TRACK COMPONENTS > SEE PAGES 508-511



DALI	1800K - 3000K / CRI90+
black struc	13501232
white struc	13501209


  

CASAMBI	1800K - 3000K / CRI90+
black struc	13501832
white struc	13501809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@ 3000K / 25° alu	955lm / 14.5W
-------------------	---------------

## Marbul suspension adjustable track LED GI



1X LED ARRAY INCL. 6W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10216830	MAGNETIC REFLECTOR Ø82 LED 10° ALU
10216930	MAGNETIC REFLECTOR Ø82 LED 10° CHAMPAGNE
10217030	MAGNETIC REFLECTOR Ø82 LED 10° GOLD
10217130	MAGNETIC REFLECTOR Ø82 LED 25° ALU
10217230	MAGNETIC REFLECTOR Ø82 LED 25° CHAMPAGNE
10217330	MAGNETIC REFLECTOR Ø82 LED 25° GOLD
10217430	MAGNETIC REFLECTOR Ø82 LED 40° ALU
10217530	MAGNETIC REFLECTOR Ø82 LED 40° CHAMPAGNE
10217630	MAGNETIC REFLECTOR Ø82 LED 40° GOLD

TRACK COMPONENTS > SEE PAGES 508-511



DALI	2700K / CRI90+	3000K / CRI90+
black struc	13502032	13502132
white struc	13502009	13502109



CASAMBI	2700K / CRI90+	3000K / CRI90+
black struc	13502732	13502632
white struc	13502709	13502609

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25° alu	634lm / 8.5W
3000K / 25° alu	718lm / 8.5W

WARM DIM

## Marbul suspension adjustable track LED warm dim GI



1X LED ARRAY INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

CONNECTED > SEE GOODIES

### OPTICAL ACCESSORIES

10219330	MAGNETIC REFLECTOR Ø82 LED WARM DIM 25° ALU
10219430	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° ALU
10219830	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° CHAMPAGNE
10219630	MAGNETIC REFLECTOR Ø82 LED WARM DIM 40° GOLD

TRACK COMPONENTS > SEE PAGES 508-511



DALI	1800K - 3000K / CRI90+
black struc	13502232
white struc	13502209

CASAMBI	1800K - 3000K / CRI90+
black struc	13502832
white struc	13502809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@ 3000K / 25° alu	955lm / 14.5W
-------------------	---------------

SEE ALSO



CEILING - P151



JACK - P391



TRACK 48V - P427



# MÉDARD 70

Design — Bleijh


*First, it was one sleek design inspired by the stick insect, modularity and fun ensued. From a table lamp to more subtle recessed ceiling applications. From lovely surface-mounted versions to playful track rail variants. Get ready to slide on our 230V track rail with Médard 70.*

## One design, fun with track rails

Play with the designs you love. Position our original eyecatcher, Médard 70 on our 230V track, and slide in as many as you need, where you need them. Thanks to Médard's impressive flexibility — due to its orientable head — designers can create special accents in the room, wherever they please. Add in more of the Médard family to create further accents while keeping a sophisticated, uniform expression.

more info? [supermodular.com/en/medard-track](https://supermodular.com/en/medard-track)

## Médard 70 track LED GI



1X LED ARRAY INCL. 11W

TRACK COMPONENTS > SEE PAGES 508-511



TRAILING EDGE DIMMABLE	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	12733632	12733832	12735132	12735332
white struc	12733609	12733809	12735109	12735309


DALI	2700K / CRI90+		3000K / CRI90+	
	25°	40°	25°	40°
black struc	12737032	12737132	12737232	12737432
white struc	12737009	12737109	12737209	12737409

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25°	936lm / 13W
3000K / 25°	920lm / 13W

WARM DIM

## Médard 70 track LED warm dim GI



1X LED ARRAY INCL. 12W

TRACK COMPONENTS > SEE PAGES 508-511



TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+	
	25°	40°
black struc	12733332	12733432
white struc	12733309	12733409

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°	802lm / 13.5W
--------------	---------------



REKTOR TRACK



REKTOR TRACK



# REKTOR

Design — Couvreur-Devos

SEE ALSO



CEILING - P237



*With a name derived from the Latin word for “ruler”, the Rektor family has every quality of a leader. Winner of the 2014 Henry Van de Velde design award, Rektor showcases the distinguished effects of right angles and accented light direction.*

## Right on track, and ceiling

Rektor’s refined industrial, rectangular design works wonders on our 230V track system, making it an attractive and relevant choice for retail and hospitality spaces. Rektor can also be mounted directly on the ceiling surface-mounted, or recessed, hiding the driver box completely – find Rektor in the ceiling section.

more info? [supermodular.com/en/rektor-track](http://supermodular.com/en/rektor-track)

484 · 485

01 — CEILING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR

06 — PROFILES

07 — GOODIES



REKTOR TRACK




REKTOR TRACK



## Rektor track 1x LED GI



1X LED ARRAY INCL. 11W



TRACK COMPONENTS > SEE PAGES 508-511



DALI	2700K / CRI90+		3000K / CRI90+	
	MEDIUM	FLOOD	MEDIUM	FLOOD
black struc	14270032	14270132	14270232	14270332
white struc	14270009	14270109	14270209	14270309

CASAMBI	2700K / CRI90+		3000K / CRI90+	
	MEDIUM	FLOOD	MEDIUM	FLOOD
black struc	14270632	14270732	14270832	14270932
white struc	14270609	14270709	14270809	14270909

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)


2700K / 25°	916lm / 14W
3000K / 25°	900lm / 14W

## WARM DIM

## Rektor track 1x LED warm dim GI



1X LED ARRAY INCL. 12W



TRACK COMPONENTS > SEE PAGES 508-511



DALI	1800K - 3000K / CRI90+	
	MEDIUM	FLOOD
black struc	14270432	14270532
white struc	14270409	14270509

CASAMBI	1800K - 3000K / CRI90+	
	MEDIUM	FLOOD
black struc	14271032	14271132
white struc	14271009	14271109

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

@3000K / 25°	881lm / 14.5W
--------------	---------------



SEMIH 61 TRACK WITH CHAMPAGNE REFLECTOR



SEMIH 61 TRACK WITH LENS



# SEMIH 61

Design — Jeffrey Huyghe

more info? [supermodular.com/en/semih-61](http://supermodular.com/en/semih-61)

488 · 489

SEE ALSO



CEILING - P245

*Semih 61's application on our 230V track rail is ideal for residential and hospitality settings and small boutiques, where flexible and subtle lighting is suitable. Play with the small but powerful luminaires to create accents on special items or corners, and adapt the light's position as you please. Ceiling versions can easily complete the overall expression with clean and easy execution, thanks to powerful magnetic plates in the ceiling.*



01 — CEILING

02 — JACK

03 — TRACK


04 — WALL

05 — EXTERIOR

06 — PROFILES

07 — GOODIES

## Semih 61 track LED GI



1X LED MODULE INCL. 8.1W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR OR LENS

TRACK COMPONENTS > SEE PAGES 508-511

### OPTICAL ACCESSORIES

10218030	MAGNETIC REFLECTOR Ø57 LED 15° ALU
10218130	MAGNETIC REFLECTOR Ø57 LED 25° ALU
10218230	MAGNETIC REFLECTOR Ø57 LED 40° ALU
10218630	MAGNETIC REFLECTOR Ø57 LED 40° CHAMPAGNE
10218430	MAGNETIC REFLECTOR Ø57 LED 40° GOLD
10217003	LENS Ø57 LED 30°
10213802	SNOOT Ø57 BLACK (ONLY IN COMBINATION WITH LENS)



TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	13441032	13441132
white struc	13441009	13441109


DALI	2700K / CRI90+	3000K / CRI90+
black struc	13441432	13441532
white struc	13441409	13441509

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25° alu	704lm / 11W
3000K / 25° alu	704lm / 11W
3000K / 25° lens	658lm / 11W

WARM DIM

### Semih 61 track LED warm dim GI



1X LED MODULE INCL. 12W

! MUST BE COMBINED WITH MAGNETIC REFLECTOR

TRACK COMPONENTS > SEE PAGES 508-511

#### OPTICAL ACCESSORIES

10218730	MAGNETIC REFLECTOR Ø57 LED WARM DIM 25° ALU
10218830	MAGNETIC REFLECTOR Ø57 LED WARM DIM 40° ALU
10219230	MAGNETIC REFLECTOR Ø57 LED WARM DIM 50° CHAMPAGNE
10219030	MAGNETIC REFLECTOR Ø57 LED WARM DIM 50° GOLD



TRAILING EDGE DIMMABLE	1800K - 3000K / CRI90+
black struc	13441632
white struc	13441609

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25° alu

928lm / 15W

01 — CEILING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR

06 — PROFILES

07 — GOODIES




## SINGLE ROUND

*Playing with square-angled and round shapes, Single round combines the best of both worlds. The M-LED 111 module fits well in an aluminium cylinder. The single connection with the hinge contributes to a highly directional fixture. A great solution for use in specific retail projects thanks to the high performance and energy-efficient LED engine.*

## Single round LED GI



1X LED ARRAY INCL. 25W



TRAILING EDGE DIMMABLE	2700K / CRI90+		
	15°	25°	40°
black struc	13031032	13031332	13031632
white struc	13031009	13031309	13031609
TRAILING EDGE DIMMABLE	3000K / CRI90+		
	15°	25°	40°
black struc	13031132	13031432	13031732
white struc	13031109	13031409	13031709
TRAILING EDGE DIMMABLE	4000K / CRI90+		
	15°	25°	40°
black struc	13031232	13031532	13031832
white struc	13031209	13031509	13031809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25°	1913lm / 28.5W
3000K / 25°	1982lm / 28.5W
4000K / 25°	2143lm / 28.5W

TRACK COMPONENTS > SEE PAGES 508-511



# SINGLE SQUARE


*Single square likes to show off with its discreet hinge points and square corners. The built-in hinging mechanism makes this fixture a versatile and highly directional spotlight. A perfect fit for our 230V track rail system.*



## Single square LED GI



1X LED ARRAY INCL. 25W



TRAILING EDGE DIMMABLE	2700K / CRI90+		
	15°	25°	40°
black struc	11402032	11402332	11402632
white struc	11402009	11402309	11402609
TRAILING EDGE DIMMABLE	3000K / CRI90+		
	15°	25°	40°
black struc	11402132	11402432	11402732
white struc	11402109	11402409	11402709
TRAILING EDGE DIMMABLE	4000K / CRI90+		
	15°	25°	40°
black struc	11402232	11402532	11402832
white struc	11402209	11402509	11402809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25°	1913lm / 28.5W
3000K / 25°	1982lm / 28.5W
4000K / 25°	2143lm / 28.5W

TRACK COMPONENTS > SEE PAGES 508-511



SMART LOTIS  
SMART TUBED SUSPENSION TRACK 82 L



SMART LOTIS  
SMART TUBED SUSPENSION TRACK 82 XL



# SMART ACCESSORIES



## TUBED SUSPENSION 82

SEE ALSO




CEILING - P259

*Smart tubed suspension 82 is ready to roll with a track adaptor for our 230V track rail system. Try it out in large spaces, or on high ceilings and light up the night. And go further, combine it with other Smart family members for ceiling and wall applications.*

more info? [supermodular.com/en/smart-surface-tubed](https://supermodular.com/en/smart-surface-tubed)

## Smart tubed suspension track 82 L LED GI



LUMINAIRE NOT INCL.

SMART COMBINATIONS > SEE RIGHT PAGE

TRACK COMPONENTS > SEE PAGES 508-511



230V



IP20


GWT  
960°

1.01KG



TRAILING EDGE DIMMABLE	
black struc	12842532
brushed alu	12842524
white struc	12842509

## Smart tubed suspension track 82 XL LED GI



LUMINAIRE NOT INCL.

SMART COMBINATIONS > SEE RIGHT PAGE

TRACK COMPONENTS > SEE PAGES 508-511



230V



IP20

GWT  
960°





1.68KG



TRAILING EDGE DIMMABLE	
black struc	12842632
brushed alu	12842624
white struc	12842609

DALI	
black struc	12842732
brushed alu	12842724
white struc	12842709

# Smart combinations & accessories

SMART 82 - TUBED SUSPENSION TRACK						
DESIGN	COLOR	FIX/ADJ.	IP-RATE	TECHNOLOGY	TUBED SUSPENSION TRACK Ø82 L GI	TUBED SUSPENSION TRACK Ø82 XL GI
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20	LED		
				LED warm dim		
				GU10		
		adj.	IP20	GU10 for tube/box		
				LED		
				LED warm dim		




# SPEKTRA

**Design** — Florent Coirier

*“We believe in objects with meaning, so that they give meaning to everyday lives,” says French designer Florent Coirier. Inspired by this belief, Coirier designed Spektra: a very precise Modular L.I. trackspot for retail environments. Spektra has an adjustable zoom lens. Users can easily adjust the beam angle and change the inclination of the luminaire, ensuring that it only highlights targeted areas. The light quality is excellent (CRI 90+), mimicking natural light; just what retailers need to put their products in the spotlight.*

more info? [supermodular.com/en/spektra](https://supermodular.com/en/spektra)

# Spektra track LED 15° - 55° GI



1X LED ARRAY INCL. 26.8W

TRACK COMPONENTS > SEE PAGES 508-511

	230V		IP20	GWT 960°	2.67KG	
--	------	--	------	----------	--------	--


TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
	15°-55°	15°-55°
black struc	13261032	13261132
white struc	13261009	13261109

DALI	2700K / CRI90+	3000K / CRI90+
	15°-55°	15°-55°
black struc	13262032	13262132
white struc	13262009	13262109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 20°	1928lm / 30W
3000K / 20°	2043lm / 30W

SEE ALSO



CEILING - P330



# STOVE


**Design** — Couvreur-Devos

*A 230V track luminaire that is both sleek and playful. The unusual thing about Stove is the two pivot points, which make this spotlight a particularly versatile and highly directional light source. Slide it along where you need it, to create those special accents. And why not combine with Stove ceiling for a uniform look?*

more info? [supermodular.com/en/stove](http://supermodular.com/en/stove)



## Stove track LED GI



1X LED ARRAY INCL. | 11W

TRACK COMPONENTS > SEE PAGES 508-511

### OPTICAL ACCESSORIES

11949730 REFLECTOR LED Ø80 FLOOD

11949930 REFLECTOR LED Ø80 SPOT



230V



IP20

GWT

960°



1.36KG



TRAILING EDGE DIMMABLE	2700K / CRI90+	
	25°	
black struc	11877132	
white struc	11877109	

DALI	2700K / CRI90+	4000K / CRI90+
		25°
black struc	11878132	11878432
white struc	11878109	11878409

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K / 25°	940lm / 13.5W
4000K / 25°	1076lm / 13.5W



TULIP BLOSSOM TRACK  
TRACK SURFACE PROFILE



TULIP BLOSSOM TRACK  
TRACK RECESSED PROFILE



TULIP BLOOM TRACK  
TRACK SURFACE PROFILE



TULIP BLOOM TRACK  
TRACK RECESSED PROFILE



# TULIP

Design — Studio Kees

SEE ALSO



CEILING - P85



CEILING - P359

*An architectural pendant light that comes in two complementary shapes, Blossom and Bloom. Available with a track adapter to combine with a 230V track rail, and designed to fit E27 light bulbs, Tulip is truly accessible. Tulip boasts a complementary design, and displays both cosy mood light and general light. Full of grace and elegance, Tulip is the couple no one can miss.*

## Tracking Tulip

This track 230V feature of Tulip's makes it very interesting for hospitality, retail and even residential projects, where changing the position of lights occurs more often. No need to change or add an electrical connection. This addition is a simple, easy and budget-friendly solution for spaces with limited electrical points.

more info? [supermodular.com/en/tulip](http://supermodular.com/en/tulip)




TULIP BLOOM TRACK  
TRACK SUSPENDED PROFILE

## Tulip blossom track E27



LAMP EXCL. E27 MAX. 35W



black struc	12662132
black struc - gold	12662191
white struc	12662109
white struc - gold	12662189


CONNECTED > SEE GOODIES

TRACK COMPONENTS > SEE PAGES 508-511

## Tulip bloom track E27



LAMP EXCL. E27 MAX. 35W

























black struc	12662032
black struc - gold	12662091
white struc	12662009
white struc - gold	12662089

CONNECTED > SEE GOODIES

TRACK COMPONENTS > SEE PAGES 508-511

# Track components - 230V



**TRACK 230V - SURFACE**

11242201	PROFILE 1M WHITE SHINY (1)
11242202	PROFILE 1M BLACK (1)
11240101	PROFILE 2M WHITE SHINY (2)
11240102	PROFILE 2M BLACK (2)
11240501	POWER FEED RIGHT WHITE SHINY (3)
11240502	POWER FEED RIGHT BLACK (3)
11240601	POWER FEED LEFT WHITE SHINY (4)
11240602	POWER FEED LEFT BLACK (4)
11240701	CONNECTOR 180° WHITE SHINY (5)
11240702	CONNECTOR 180° BLACK (5)
11240801	CONNECTOR 90° INSIDE WHITE SHINY (6)
11240802	CONNECTOR 90° INSIDE BLACK (6)
11240901	CONNECTOR 90° OUTSIDE WHITE SHINY (7)
11240902	CONNECTOR 90° OUTSIDE BLACK (7)




















11241001	CONNECTOR T RIGHT WHITE SHINY (8)
11241002	CONNECTOR T RIGHT BLACK (8)
11241101	CONNECTOR T LEFT WHITE SHINY (9)
11241102	CONNECTOR T LEFT BLACK (9)
11241201	CONNECTOR X WHITE SHINY (10)
11241202	CONNECTOR X BLACK (10)
11241301	CONNECTOR FLEXIBLE WHITE SHINY (11)
11241302	CONNECTOR FLEXIBLE BLACK (11)
11241401	ENDPLATE WHITE SHINY (12)
11241402	ENDPLATE BLACK (12)
11241501	CONNECTOR INTERNAL WHITE SHINY (13)
11241502	CONNECTOR INTERNAL BLACK (13)
11241801	SUSPENSION KIT 3M WHITE SHINY (14)
11241802	SUSPENSION KIT 3M BLACK (14)

**TRACK 230V - RECESSED**

11242401	PROFILE 1M WHITE SHINY (1)
11242402	PROFILE 1M BLACK (1)
11240301	PROFILE 2M WHITE SHINY (2)
11240302	PROFILE 2M BLACK (2)
11241601	POWER FEED RIGHT WHITE SHINY (3)
11241602	POWER FEED RIGHT BLACK (3)
11241701	POWER FEED LEFT WHITE SHINY (3)
11241702	POWER FEED LEFT BLACK (3)
11242001	CONNECTOR 90° INSIDE WHITE SHINY (4)
11242002	CONNECTOR 90° INSIDE BLACK (4)

11242101	CONNECTOR 90° OUTSIDE WHITE SHINY (5)
11242102	CONNECTOR 90° OUTSIDE BLACK (5)
11241401	ENDPLATE WHITE SHINY (6)
11241402	ENDPLATE BLACK (6)
11241501	CONNECTOR INTERNAL WHITE SHINY (7)
11241502	CONNECTOR INTERNAL BLACK (7)
11241930	MOUNTING BRACKET (8)

# Dali track components - 230V





**DALI TRACK 230V - SURFACE**

14212201	PROFILE 1M DALI WHITE SHINY (1)	14210701	CONNECTOR 180° DALI WHITE (5)
14212202	PROFILE 1M DALI BLACK (1)	14210702	CONNECTOR 180° DALI BLACK (5)
14210101	PROFILE 2M DALI WHITE SHINY (1)	14210801	CONNECTOR 90° INSIDE DALI WHITE (6)
14210102	PROFILE 2M DALI BLACK (1)	14210802	CONNECTOR 90° INSIDE DALI BLACK (6)
14210501	POWER FEED RIGHT DALI WHITE (2)	14210901	CONNECTOR 90° OUTSIDE DALI WHITE (7)
14210502	POWER FEED RIGHT DALI BLACK (2)	14210902	CONNECTOR 90° OUTSIDE DALI BLACK (7)
14210601	POWER FEED LEFT DALI WHITE (3)	14211401	ENDPLATE DALI WHITE SHINY (8)
14210602	POWER FEED LEFT DALI BLACK (3)	14211402	ENDPLATE DALI BLACK (8)
14211501	CONNECTOR INTERNAL DALI WHITE (4)	14211809	SUSPENSION KIT 4M DALI WHITE STRUC (9)
14211502	CONNECTOR INTERNAL DALI BLACK (4)	14211832	SUSPENSION KIT 4M DALI BLACK STRUC (9)

**DALI TRACK 230V - RECESSED**

14212401	PROFILE 1M DALI WHITE SHINY (1)	14210201	COVERPLATE 180° DALI WHITE (6)
14212402	PROFILE 1M DALI BLACK (1)	14210202	COVERPLATE 180° DALI BLACK (6)
14210301	PROFILE 2M DALI WHITE SHINY (1)	14210801	CONNECTOR 90° INSIDE DALI WHITE (7)
14210302	PROFILE 2M DALI BLACK (1)	14210802	CONNECTOR 90° INSIDE DALI BLACK (7)
14210501	POWER FEED RIGHT DALI WHITE (2)	14210901	CONNECTOR 90° OUTSIDE DALI WHITE (8)
14210502	POWER FEED RIGHT DALI BLACK (2)	14210902	CONNECTOR 90° OUTSIDE DALI BLACK (8)
14210601	POWER FEED LEFT DALI WHITE (3)	14211401	ENDPLATE DALI WHITE (9)
14210602	POWER FEED LEFT DALI BLACK (3)	14211402	ENDPLATE DALI BLACK (9)
14211501	CONNECTOR INTERNAL DALI WHITE (4)	11241930	MOUNTING BRACKET (10)
14211502	CONNECTOR INTERNAL DALI BLACK (4)		
14210401	COVERPLATE 90° DALI WHITE (5)		
14210402	COVERPLATE 90° DALI BLACK (5)		

04





# WALL

04

---

# WALL




**BOLD**

519



**DENT**

522




**DOZE**

526




**DUELL**

531




**HOLLOW**

536




**LOTIS  
TUBED**

540



**NOMAD  
LINESTRA**

543




**NOMAD  
MINIMAL**

546



**NUDE**

550




**NUKAV**

553




**SMART  
TUBED WALL\***

556



**SPLIT**

564



**SULFER**

568



**SULFER  
UPLIGHT**


573



**TRAPZ**

577

\*to be combined with Smart Cake / Smart Kup / Smart Lotis

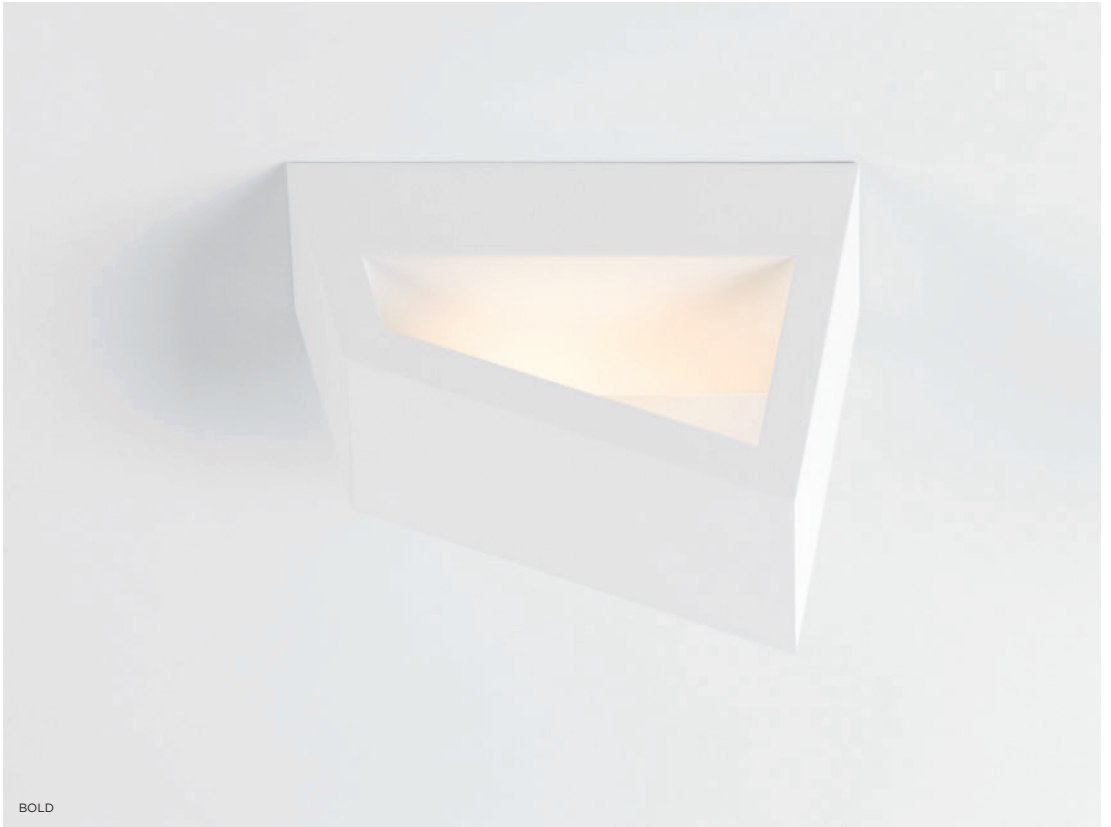

BOLD



BOLD



# BOLD

Design — Studio Kees

*It doesn't take gaudy or pretentious to attract attention. Strong lines, oblique angles, an element of motion and a hidden source of light make Bold a true statement. Bold was designed in close collaboration with the Rotterdam-based design Studio Kees.*

## A paradox in luminaires

Inspired by the works of Escher as well as some of the most fearless architectural feats of modern times, Bold manipulates perspective to blend in and stand out at the same time. A Bold fixture is the epitome of daring while playing in harmony with the other stylistic elements of your residential or hospitality space.


## Audacious from every angle

Bold can be mounted to a wall in a vertical or horizontal position and flipped around 180°, even after installing the wall plate. The shape and light effect also change, depending on perspective. The single light source is artistically hidden, and points to the wall on which the frame is installed.

## No visible screws

Installation is a simple process. Thanks to a flush-fitted magnetic cover plate, fixation of the screws can be done inside the fixture. No screws will be visible. Thin design gap visible along one side.

more info? [supermodular.com/en/bold](https://supermodular.com/en/bold)

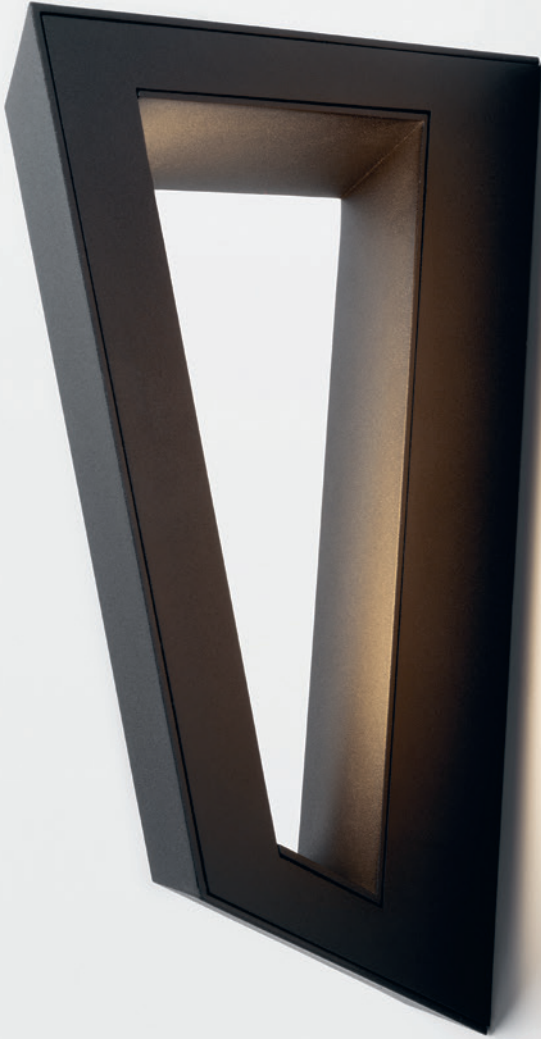




# Bold LED GI



1X LED ARRAY INCL. 9.5W



TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black strut	14251032	14251232
white strut	14251009	14251209
1-10V*/PUSHDIM	2700K / CRI90+	3000K / CRI90+
black strut	14251132	14251332
white strut	14251109	14251309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white strut)

2700K	745lm / 11W
3000K	818lm / 11W

CONNECTED > SEE GOODIES



DENT MEDIUM



DENT SMALL  
DENT MEDIUM  
DENT LARGE



# DENT

Design — Jeffrey Huyghe

*This is the luminaire with a playful personality. Looking one way, and then another. Its design is enigmatic, as is the light it provides. And then there's what can be done with it, and where. Alone on a residential wall, it's minimalistic and beautiful. Together in a large public space, they become an artful lightscape with puzzling lines and angular paths.*

## A twofold design, one art installation

Dent is an excellent candidate for an art installation that demands minimalist beauty, originality and function. One, two, or even several units of different shapes and colours can be combined in wildly fun patterns and landscapes that enhance the mathematical cleverness and playfulness of the design.

## Endless applications, endless play


Dent is an ultra-thin (25mm) wall fixture that fits in a number of residential and hospitality environments. Narrow hallways, large spaces, cozy spaces, walls of any dimension. Our minimalist fixture with an edge is ready to for a game.

## Playful modularity for more than light

Dent comes in three sizes. Small is a square, medium and large are rectangular. Create mind-boggling artistic landscapes with this geometrical design. Squares, rectangles, bigger rectangles, lines. As the name suggests, Dent's body is slightly indented, adding depth to any configuration

more info? [supermodular.com/en/dent](http://supermodular.com/en/dent)

## Dent small LED GE



2X LED LINE INCL. 3.9W

! CAN BE INSTALLED ON SINGLE ELECTRICAL CONNECTION BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES





	2700K / CRI90+	3000K / CRI90+
black struc	11610032	11610132
white struc	11610009	11610109

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K	373lm / 7.8W
3000K	413lm / 7.8W

## Dent medium LED GE



2X LED LINE INCL. 8.8W

! CAN BE INSTALLED ON SINGLE AND DOUBLE ELECTRICAL CONNECTION BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES




	2700K / CRI90+	3000K / CRI90+
black struc	11611032	11611132
white struc	11611009	11611109

### LUMINAIRE OUTPUT & POWER CONSUMPTION

(white struc)

2700K	666lm / 17.6W
3000K	729lm / 17.6W

# Dent large LED GE




4X LED LINE INCL. 4.4W

! CAN BE INSTALLED ON SINGLE AND DOUBLE ELECTRICAL CONNECTION BOX

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES



Friends of hue

350mA

IP20

GWT 650°


1.60KG

◀ ▶

	2700K / CRI90+	3000K / CRI90+
<b>black struc</b>	<b>11612032</b>	<b>11612132</b>
<b>white struc</b>	<b>11612009</b>	<b>11612109</b>

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K	764lm / 17.6W
3000K	833lm / 17.6W

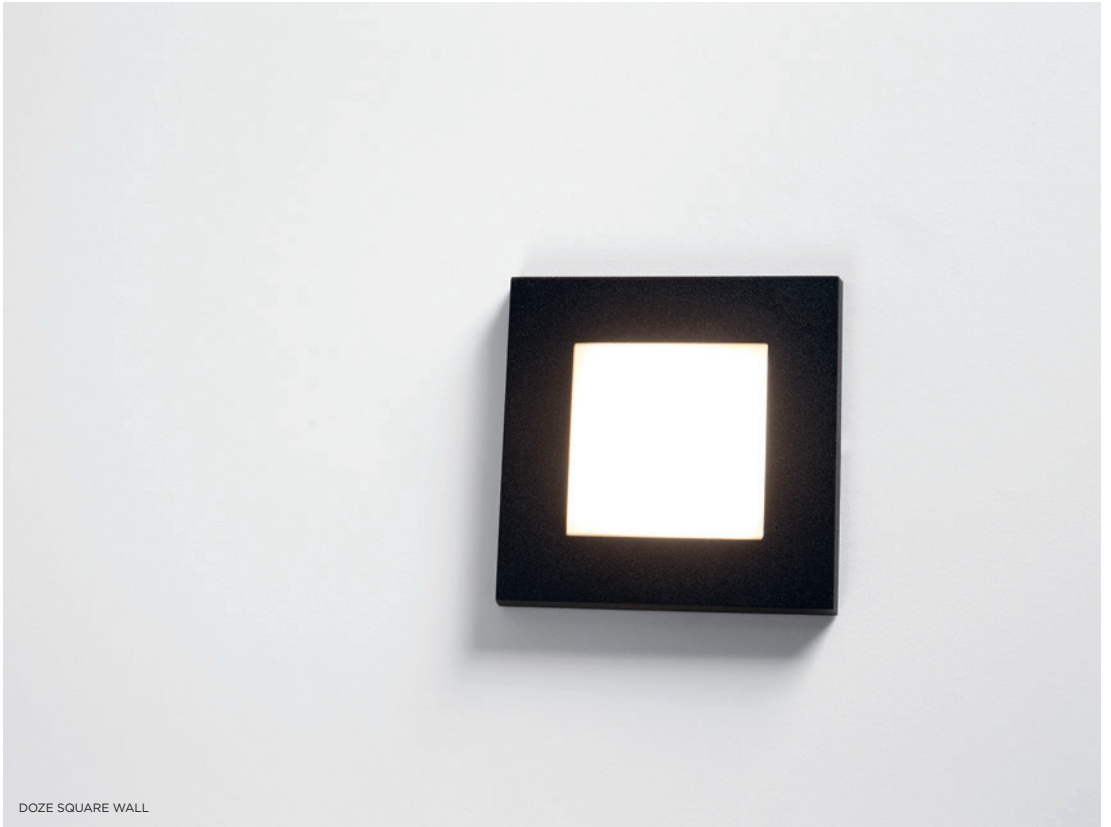

DOZE SQUARE WALL



DOZE ROUND WALL





# DOZE

*Doze, a box of light. Our luminaire is available in a round or square version and has a sturdy rim in white or black with a polycarbonate diffuser. The nice thing is that Doze fits perfectly into a standard electrical junction box (supplied with the luminaire), which is found in every (new) building. A performant alternative for a standard recessed spot. Perfect for illuminating a hallway or staircase.*

more info? [supermodular.com/en/doze](https://supermodular.com/en/doze)

## Doze 80 wall LED



1X HIGH POWER LED INCL. 4.5W

! FIXTURE FITS IN STANDARD Ø68 JUNCTION BOX (INCLUDED)

### INSTALLATION ACCESSORIES

12339930 CONBOX Ø130 H135



TRAILING EDGE DIMMABLE	2700K / CRI90+
black struc	12330032
white struc	12330009



### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K

194lm / 4.5W



## Doze square wall LED



1X HIGH POWER LED INCL. 4.5W

! FIXTURE FITS IN STANDARD Ø68 JUNCTION BOX (INCLUDED)

### INSTALLATION ACCESSORIES

12339930 CONBOX Ø130 H135



TRAILING EDGE DIMMABLE	2700K / CRI90+
black struc	12330132
white struc	12330109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K

194lm / 4.5W



DUELL WALL - ANO CHAMPAGNE - CHAMPAGNE



DUELL WALL - ANO SILVER BRONZE - CHAMPAGNE



DUELL WALL - ANO BLACK - ALU



DUELL WALL - ANO BRONZE - BLACK



# DUELL

more info? [supermodular.com/en/duell](https://supermodular.com/en/duell)

528 • 529

SEE ALSO



CEILING - P33



EXTERIOR - P584

*With its gentle curves, Duell gives every room a softer touch. As a wall luminaire, Duell creates a wide fan of light on the wall, both upwards and downwards. The double-walled housing allows you to play with colour, bringing a more authentic feel into the room.*

## Anodised colours and splendid light effect

Duell will never go unnoticed, in fact, make it more visible with a flavourful range of anodised colours. On the outside, you'll enjoy extra choices of anodised black, bronze, silver bronze and champagne, while the inside is available in black, champagne and aluminium. In any of its colour choices, Duell will effortlessly give an architectural, high-end touch to your expression.

## Party between families

Duell's colours and style is also a breeze to match with other like-colours families such as Trapz, Nude on the wall, and Minude, Thimble, Shellby and Placebo everywhere.




DUELL WALL - ANO BRONZE - ALU



DUELL WALL - ANO CHAMPAGNE - CHAMPAGNE

# Duell wall LED 900lm GI



2X LED ARRAY INCL. 6.2W



NOT DIMMABLE	2700K / CRI90+
cacao bronze - black	11074568
metallic blue - alu	11074569
silky grey - champagne	11074559

TRAILING EDGE DIMMABLE	2700K / CRI90+
ano black - alu	11074998
ano black - black	11074903
ano black - champagne	11074908
ano bronze - alu	11074999
ano bronze - black	11074910
ano bronze - champagne	11074911
ano champagne - black	11074996
ano champagne - champagne	11074997
ano silver bronze - black	11074912
ano silver bronze - champagne	11074995
black struc - gold	11074991
white struc - champagne	11074939

1-10V/PUSHDIM	2700K / CRI90+
ano black - alu	11074698
ano black - black	11074603
ano black - champagne	11074608
ano bronze - alu	11074699
ano bronze - black	11074610
ano bronze - champagne	11074611
ano champagne - black	11074696
ano champagne - champagne	11074697
ano silver bronze - black	11074612
ano silver bronze - champagne	11074695
black struc - gold	11074632
cacao bronze - black	11074668
metallic blue - alu	11074669
silky grey - champagne	11074659
white struc - champagne	11074609

DALI	2700K / CRI90+
ano black - alu	11074898
ano black - black	11074803
ano black - champagne	11074808
ano bronze - alu	11074899
ano bronze - black	11074810
ano bronze - champagne	11074811
ano champagne - black	11074896
ano champagne - champagne	11074897
ano silver bronze - black	11074812
ano silver bronze - champagne	11074895
black struc - gold	11074832
metallic blue - alu	11074869
silky grey - champagne	11074859
white struc - champagne	11074809

## LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - champagne)

2700K

763lm / 14W





DUELL WALL - BLACK STRUC - GOLD



DUELL WALL - WHITE STRUC - CHAMPAGNE

## Duell wall IP55 LED



2X LED MODULE INCL. | 6W

! OUTDOOR USE: NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST





	2700K / CRI90+	3000K / CRI90+
black struc - gold	11075091	11075191
white struc - champagne	11075039	11075139

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc (champagne interior))

2700K	646lm / 12W
3000K	646lm / 12W

## Duell wall LED 500lm



2X LED ARRAY 230V INCL. | 4.5W



TRAILING EDGE DIMMABLE	2700K / CRI90+
metallic blue - alu	11074769
silky grey - champagne	11074759

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - champagne interior)

2700K	574lm / 9W
-------	------------



HOLLOW 115 TRIMLESS



HOLLOW 125



HOLLOW 115 TRIMLESS





# HOLLOW

**Design** — James van Vossel

more info? [supermodular.com/en/hollow](https://supermodular.com/en/hollow)

♣ 534 • 535



*For designer James van Vossel, it was time to rethink pure, simple forms. That's when the tube came in. Lit or dark, open or closed. Hollow is the luminaire that works with you. Adjustable and versatile. For spaces that welcome intrigue and personality. It's the light companion you were waiting for.*

## Design that pops

One design, invisible and visible. It can hide, be one with the environment, showing nothing but glowing cavities. It can stick out playfully, casting light in an ocean of space. Hollow is a surprise and won't be revealed until you touch.


## Present, not present

Rediscover light with Hollow's marvellous, unusual adjustability. Hollow's smooth rotation system slides open to let you choose a 90°, 60° or 45° angle, or anything else in between. Powerful beam, soft glow, discreet light.

## Colours to caress

Experiment with colours and use the cup's inner glow as an additional light source. Gold for a warm, cosy mood maker. White, for a decisive indirect light effect. Black, for a stronger presence, but with softer, indirect light.

## Hollow 125 LED GE



1X LED ARRAY INCL. 8.5W

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE RIGHT PAGE

10889830 CONBOX 192X190X130X256

12292830 GYPSUM FIBREBOARD 190X190





	2700K / CRI90+	3000K / CRI90+
	30°	30°
black struc - black struc	12171056	12171156
black struc - gold	12171032	12171132
black struc - white struc	12171047	12171147
gold - gold	12171087	12171187
white struc - white struc	12171009	12171109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - white struc)

	350mA	500mA
2700K / 30°	346lm / 5.7W	467lm / 8.5W
3000K / 30°	353lm / 5.7W	476lm / 8.5W

## Hollow 115 trimless LED GE



1X LED ARRAY INCL. 8.5W

! MUST BE USED WITH RECESSED RING

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES > SEE BELOW

10889830 CONBOX 192X190X130X256

14204030 RECESSED RING Ø146

12292830 GYPSUM FIBREBOARD 190X190



	2700K / CRI90+	3000K / CRI90+
	30°	30°
black struc - black struc	12170056	12170156
black struc - gold	12170032	12170132
black struc - white struc	12170047	12170147
gold - gold	12170087	12170187
white struc - white struc	12170009	12170109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - white struc)

	350mA	500mA
2700K / 30°	346lm / 5.7W	467lm / 8.5W
3000K / 30°	353lm / 5.7W	476lm / 8.5W

### INSTALLATION ACCESSORIES FOR PLASTERED FALSE CEILINGS

HOLLOW 115	PLASTERED FINISH
	HOLLOW 115 TRIMLESS
	14204030 - RECESSED RING Ø146  ø 142 48 ø 146 h 100

### INSTALLATION ACCESSORIES FOR STRUCTURAL CEILINGS (CONCRETE, STALTON, ...)

HOLLOW 115 / 125	10889830 CONBOX 190X192X130X256  256 130 192 190	+	PLASTERED FINISH	
			HOLLOW 115 TRIMLESS	HOLLOW 125
			12292830 GYPSUM FIBREBOARD 190X190  190 190 12	12292830 GYPSUM FIBREBOARD 190X190  190 190 12
14204030 - RECESSED RING Ø146  ø 142 48				



LOTIS TUBED WALL



# LOTIS TUBED

SEE ALSO



CEILING - P133





EXTERIOR - P604

*Lotis tubed wall is the wall-mounted version of the standard Lotis recessed spot, covered in a coloured cylinder. Lotis tubed wall is available in 2 different heights: 190mm and 275mm. Combining both versions creates depth in your rooms and spices up your interior. Lotis tubed wall also allows you to play with colour: go for contrast between black, white and gold or choose a more uniform look instead.*

more info? [supermodular.com/en/lotis-tubed](https://supermodular.com/en/lotis-tubed)

## Lotis tubed wall 1x LED retrofit



1X LED GU10 INCL. | GU10 | 5.5W





LEADING EDGE DIMMABLE	2700K / CR190+
	25°
black struc - gold	11458832
black struc - white struc	11458837
white struc - black	11458829
white struc - gold	11458889
white struc - white struc	11458809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25°

346lm / 5.5W

## Lotis tubed wall 1x GU10



1X QPAR 16 | GU10 | MAX. 35W





RESISTIVE DIMMABLE	
black struc - gold	10883832
black struc - white struc	10883837
white struc - black	10883829
white struc - gold	10883889
white struc - white struc	10883809

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES

## Lotis tubed wall 2x LED retrofit



2X LED GU10 INCL. | GU10 | 5.5W





LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black struc - gold	11458932
black struc - white struc	11458937
white struc - black	11458929
white struc - gold	11458989
white struc - white struc	11458909

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25°

692lm / 5.5W

## Lotis tubed wall 2x GU10



2X QPAR 16 | GU10 | MAX. 35W



RESISTIVE DIMMABLE	
black struc - gold	10883732
black struc - white struc	10883737
white struc - black	10883729
white struc - gold	10883789
white struc - white struc	10883709

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN GU10 LAMP

CONNECTED > SEE GOODIES





# NOMAD LINESTRA

*Nomad linestra is yet another classic. The symmetrical luminaire, with its visible wiring and bare strip light, reduces lighting to its essence. It is ideal for use above a mirror, where the diffuse light will showcase you at your best.*



## Nomad linestra short S14d



1X LS14D | MAX. 60W

\* ONLY WHEN COMBINED WITH INCANDESCENT BULB

! CAN BE USED WITH 70008058 - LINESTRA LED TUBE 300MM 2700K (NOT DIMMABLE)



230V



IP20

GWT  
960°

0.50KG



RESISTIVE DIMMABLE	
alu	10203105
white struc	10203109



NOMAD MINIMAL ULTRA SHORT



NOMAD MINIMAL SHORT



# NOMAD MINIMAL





CEILING - P206

*Our classic Nomad is an example of lighting at its most refined and versatile. If you wish to make the industrial look a little more homely, simply choose Nomad minimal and enhance the luminaire with a shade. Available in two sizes, four colours and one animal print.*

more info? [supermodular.com/en/nomad-minimal](https://supermodular.com/en/nomad-minimal)

## Nomad minimal short E27



1X A 60 | E27 | MAX. 70W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN E27 LAMP

! NOMAD MINIMAL/ANIMAL SHADE OPTIONAL  
! DISK OPTIONAL

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10203801 MINIMAL SHADE - MEDIUM (Ø200) - WHITE

10203802 MINIMAL SHADE - MEDIUM (Ø200) - BLACK

10203813 MINIMAL SHADE - MEDIUM (Ø200) - RED

10203837 MINIMAL SHADE - MEDIUM (Ø200) - BLACK/GOLD

10203901 MINIMAL SHADE - LARGE (Ø250) - WHITE

10203902 MINIMAL SHADE - LARGE (Ø250) - BLACK


10203913 MINIMAL SHADE - LARGE (Ø250) - RED

10203937 MINIMAL SHADE - LARGE (Ø250) - BLACK/GOLD



10203924 ANIMAL SHADE - LARGE (Ø250) - ZEBRAWHITE



RESISTIVE DIMMABLE	
alu	10203305



## Nomad minimal ultra short E27



1X A 60 | E27 | MAX. 70W

\* RESISTIVE DIMMABLE ONLY WHEN USED WITH HALOGEN E27 LAMP

! NOMAD MINIMAL/ANIMAL SHADE OPTIONAL  
! SHADE ONLY POSSIBLE WHEN MOUNTED ON CEILING  
! DISK OPTIONAL

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

10203801	MINIMAL SHADE - MEDIUM (Ø200) - WHITE
10203802	MINIMAL SHADE - MEDIUM (Ø200) - BLACK
10203813	MINIMAL SHADE - MEDIUM (Ø200) - RED
10203837	MINIMAL SHADE - MEDIUM (Ø200) - BLACK/GOLD
10203901	MINIMAL SHADE - LARGE (Ø250) - WHITE
10203902	MINIMAL SHADE - LARGE (Ø250) - BLACK
10203913	MINIMAL SHADE - LARGE (Ø250) - RED
10203937	MINIMAL SHADE - LARGE (Ø250) - BLACK/GOLD
10203924	ANIMAL SHADE - LARGE (Ø250) - ZEBRAWHITE



RESISTIVE DIMMABLE	
alu	10203405



NUDE 2X - ANO BRONZE



NUDE 2X - ANO BLACK



NUDE 2X - ANO SILVER BRONZE



NUDE 1X - ANO CHAMPAGNE



NUDE 1X - ANO BRONZE



# NUDE

Design — Joël Claisse

SEE ALSO



EXTERIOR - P613

*Nude's pure geometrical lines are ideal for highlighting architectural features. Nude is stripped down to the essence of a luminaire. Its light source is recessed in the slender cylinder so much that it is practically invisible. This wall luminaire is available as downlight, or with both up and downlight.*


## Dress up Nude with colours

With an extended range of brushed aluminium colours, Nude will be a lovely colourful-yet-minimalist companion to any of our families with matching colours, like Shellby, Thimble, Minude or Placebo. Enjoy our extra choices of anodised black, bronze, silver bronze and champagne.


more info? [supermodular.com/en/nude](http://supermodular.com/en/nude)

♣ 548 · 549

## Nude wall 1x LED retrofit



1X LED PAR20 INCL. 5.5W




LEADING EDGE DIMMABLE	2700K / CRI80
	25°
ano black	10922181
ano bronze	10922182
ano silver bronze	10922184
ano champagne	10922141
brushed alu	10922124
white struc	10922109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)


2700K / 25°

430m / 5.5W

## Nude wall 1x PAR20




1X QPAR 20 E27 MAX. 50W



RESISTIVE DIMMABLE	
ano black	10920781
ano bronze	10920782
ano silver bronze	10920784
ano champagne	10920741
brushed alu	10920724
white struc	10920709



## Nude wall 2x LED retrofit



2X LED PAR20 INCL. 5.5W




LEADING EDGE DIMMABLE	2700K / CRI80
	25°
ano black	10922281
ano bronze	10922282
ano silver bronze	10922284
ano champagne	10922241
brushed alu	10922224
white struc	10922209

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25°

860m / 5.5W

## Nude wall 2x PAR20



2X QPAR 20 E27 MAX. 50W



RESISTIVE DIMMABLE	
ano black	10920881
ano bronze	10920882
ano silver bronze	10920884
ano champagne	10920841
brushed alu	10920824
white struc	10920809





# NUKAV

**Design** — Couvreur-Devos

*Nukav, which means edge, is an orientation lighting fixture. In the literal sense, edge is also the characteristic feature of this sleek square missing a corner. The light is recessed a little deeper in the corner, making the oblique polycarbonate panel illuminate. The luminaire can be positioned in any direction for a playful effect.*

more info? [supermodular.com/en/nukav](https://supermodular.com/en/nukav)

# Nukav LED



1X HIGH POWER LED 230V INCL. 4.5W

	230V		IP20	GWT 650°	0.20KG	
--	------	--	------	----------	--------	--

TRAILING EDGE DIMMABLE	2700K / CRI90+
black struc	12300032
white struc	12300009

## LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K

69lm / 4.5W

01 — CEILING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR

06 — PROFILES

07 — GOODIES



SMART TUBED WALL 82



SMART TUBED WALL 48



SMART TUBED WALL 82 LARGE



# SMART ACCESSORIES



## TUBED WALL

SEE ALSO



CEILING - P259



*Beautifully designed and customisable to any smaller venue, there is a Smart luminaire for anybody interested in adding an element of elegance to their space. With Smart tubed wall, illumination can now come from above and/or below, for truly beautiful and unique effects.*

### Endless combinations

Compatible with 48 and 82mm round spots, Smart tubed units direct light up and down or simply down parallel to a wall, depending on the tube size. The units come in black or white structures and can be fitted with Smart Cake, Smart Kup and Smart Lotis spots in white, black or gold. Both the adjustable and the fixed versions can be combined in the Smart tubed. Gear can be included or excluded.

more info? [supermodular.com/en/smart-tubed-wall](http://supermodular.com/en/smart-tubed-wall)

### Smart tubed wall 48 1x LED GE



LUMINAIRE NOT INCL.

\* ONLY WHEN COMBINED WITH SMART 48 LED IP55



DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGE 512



black struc	12901032
white struc	12901009

### Smart tubed wall 48 2x LED GE



LUMINAIRE NOT INCL.

\* ONLY WHEN COMBINED WITH SMART 48 LED IP55



DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGE 512



black struc	12901132
white struc	12901109

### Smart tubed wall 82 small 1x LED GE



LUMINAIRE NOT INCL.



DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGE 513



black struc	12846632
white struc	12846609

### Smart tubed wall 82 large 1x LED GE



LUMINAIRE NOT INCL.


DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGE 513



black struc	12846432
white struc	12846409

### Smart tubed wall 82 X-large 1x LED GE



LUMINAIRE NOT INCL.


DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGE 513



black struc	12846032
white struc	12846009

### Smart tubed wall 82 X-large 2x LED GE



LUMINAIRE NOT INCL.



DRIVER > SEE PRODUCT PAGE ON WEBSITE

SMART COMBINATIONS > SEE PAGE 513



black struc	12846732
white struc	12846709

### Smart tubed wall 82 large 1x LED GI



LUMINAIRE NOT INCL.

! 500MA DRIVER INCLUDED



SMART COMBINATIONS > SEE PAGE 513



black struc	12846532
white struc	12846509

WARM DIM

### Smart tubed wall 82 large 1x LED warm dim GI



LUMINAIRE NOT INCL.



! TO BE COMBINED WITH SMART 82 WARM DIM  
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGE 513



TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	12846832
white struc	12846809

### Smart tubed wall 82 X-large 1x LED GI



LUMINAIRE NOT INCL.

! 500MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGE 513



TRAILING EDGE DIMMABLE	
black struc	12846132
white struc	12846109


DALI	
black struc	12846332
white struc	12846309

1-10V/PUSHDIM	
black struc	12846232
white struc	12846209



WARM DIM

### Smart tubed wall 82 X-large 1x LED warm dim GI



LUMINAIRE NOT INCL.

! TO BE COMBINED WITH SMART 82 WARM DIM  
! 350MA DRIVER INCLUDED

SMART COMBINATIONS > SEE PAGE 513



TRAILING EDGE DIMMABLE	1800K - 3000K
black struc	12846932
white struc	12846909

01 — CEILING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR

06 — PROFILES

07 — GOODIES

## Smart combinations & accessories

### SMART 48/48+ - TUBED WALL

DESIGN	COLOR	FIX/ADJ.	IP-RATE	TECHNOLOGY	TUBED WALL Ø48 GE 1X/2X
Smart cake Smart kup Smart lotis	○ ● ●	fix	IP20 IP55	LED	
				LED warm dim	
Smart asy lotis	○ ● ●	fix	IP20 IP55	LED	
				LED warm dim	

### SMART TUBED WALL 48

1x LED	black struc	12901032
	white struc	12901009
2x LED	black struc	12901132
	white struc	12901109

## SMART 82 - TUBED WALL


DESIGN	COLOUR	FIX/ ADJ.	IP-RATE	TECHNOLOGY	TUBED WALL Ø82 S GE	TUBED WALL Ø82 L GE	TUBED WALL Ø82 XL GE	TUBED WALL Ø82 L GI	TUBED WALL Ø82 XL GI	
Smart cake Smart kup Smart lotis		fix	IP20	LED						
				LED warm dim						
				GU10						
				GU10 for tube/box <sup>(1)</sup>						
		adj.	IP20	LED						
				LED warm dim						

### SMART TUBED WALL 82

		GE			GI (500MA)				GI (350MA)	
		SMALL	LARGE	X-LARGE	LARGE NOT DIMMABLE	X-LARGE		DALI	LARGE	X-LARGE
						TRAILING EDGE DIMMABLE	1-10V/ PUSHDIM			
1x LED	black struc	12846632	12846432	12846032	12846532	12846132	12846232	12846332	12846832	12846932
	white struc	12846609	12846409	12846009	12846509	12846109	12846209	12846309	12846809	12846909
2x LED	black struc			12846732						
	white struc			12846709						

<sup>(1)</sup> When retrofitting Smart with Hue technology, note that only Hue Ambiance GU10 lamps (70000621) fit in Smart tubes



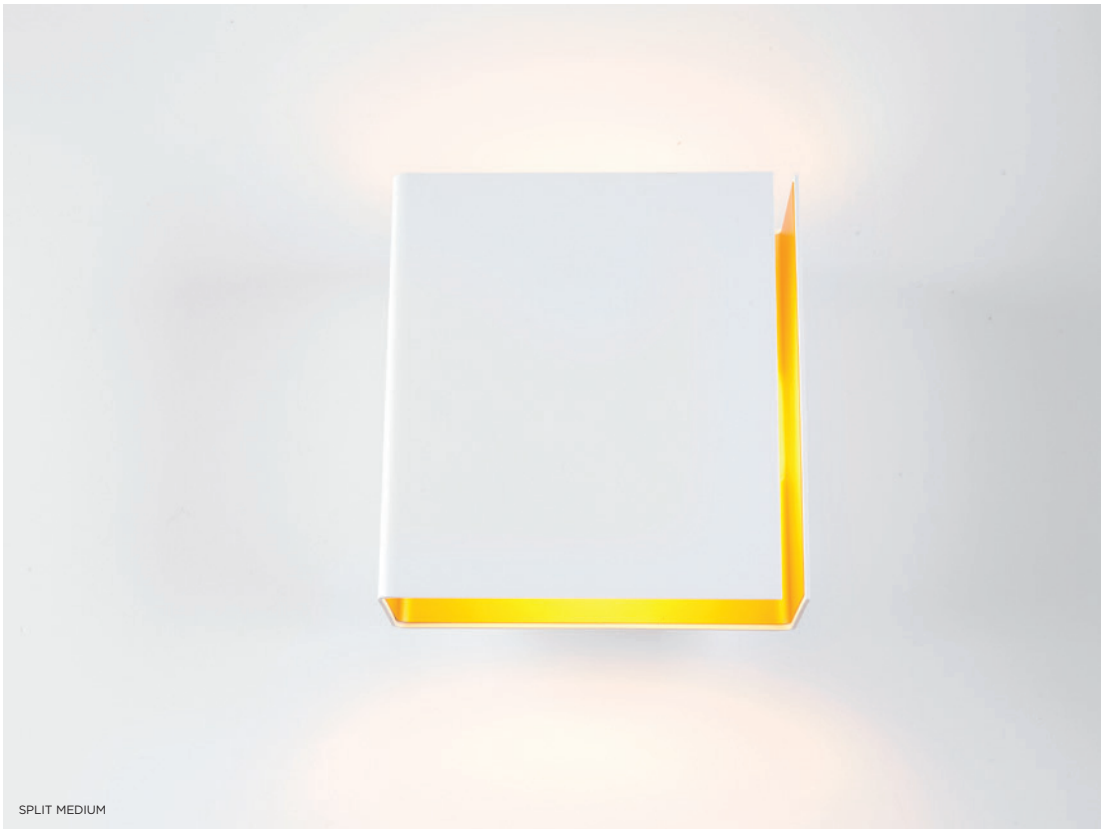

SPLIT MEDIUM



SPLIT LARGE



# SPLIT



**Design** — Couvreur-Devos

*Split is the result of improved folding techniques. It is a wall-mounted up- and downlight, which consists of a single folded plate with a thin slit from which the light radiates. Split's asymmetrical design makes it ideal for areas that can benefit from mood lighting, such as living rooms, bedrooms or hallways. Available in a white or black structure, and a white, black or gold interior, ideal for a warm, glowing light.*

more info? [supermodular.com/en/split](https://supermodular.com/en/split)

▲ 562 • 563

## Split small LED



1X LED ARRAY 230V INCL. 4.5W




TRAILING EDGE DIMMABLE	2700K / CRI90+
black struc - gold	12600032
black struc - white struc	12600037
white struc - black	12600029
white struc - gold	12600089

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - gold)

2700K

58lm /4.5W

## Split medium LED



2X LED ARRAY 230V INCL. 4.5W




TRAILING EDGE DIMMABLE	2700K / CRI90+
black struc - gold	12602132
black struc - white struc	12602137
white struc - black	12602129
white struc - gold	12602189

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - gold)

2700K

312lm /9W

# Split large LED



2X LED ARRAY 230V INCL 4.5W

	230V		IP20	GWT 960°	2.50KG	
--	------	--	------	----------	--------	--

TRAILING EDGE DIMMABLE	2700K / CRI90+
black struc - gold	12604132
black struc - white struc	12604137
white struc - black	12604129
white struc - gold	12604189

## LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - gold)

2700K

288lm / 9W



SULFER



SULFER






# SULFER

**Design** — Jeffrey Huyghe

more info? [supermodular.com/en/sulfer](https://supermodular.com/en/sulfer)

♣ 566 · 567



SEE ALSO



EXTERIOR - P616

*Sulfer is a minimalist square-shaped fixture. The cast aluminium luminaire brings a modern accent to walls, whether in or outside (IP54) homes, hotels, restaurants, etc. By default, Sulfer diffuses a wide beam (flood), yet the fixture comes with optional, additional beam angle plates (medium and small) to let you customize the beam. Since the diffuser is recessed into the casing, Sulfer shines indirect light, ensuring you will never be blinded by its beam.*

## Sulfer LED GI



2X LED ARRAY INCL. 3W

### OPTICAL ACCESSORIES

13271009	SMALL BEAM APERTURE PLATES WHITE STRUC
13271032	SMALL BEAM APERTURE PLATES BLACK STRUC
13271109	MEDIUM BEAM APERTURE PLATES WHITE STRUC
13271132	MEDIUM BEAM APERTURE PLATES BLACK STRUC




TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+
black struc	13270032	13270132
white struc	13270009	13270109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	2700K	3000K
	400lm / 8W	413lm / 8W

**Sulfer LED IP54 GI**

	230V		IP54	GWT 960°		
--	------	--	------	----------	--	--



2X LED MODULE INCL. 3W

! OUTDOOR USE: NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

**OPTICAL ACCESSORIES**

13271209	SMAL BEAM APERTURE PLATES IP WHITE STRUCT
13271232	SMAL BEAM APERTURE PLATES IP BLACK STRUCT
13271309	MEDIUM BEAM APERTURE PLATES IP WHITE STRUCT
13271332	MEDIUM BEAM APERTURE PLATES IP BLACK STRUCT

	3000K / CRI90+
black struc	13270232
white struc	13270209

**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
(white struc)

3000K	290lm / 8W
-------	------------

01 — CEILING  
02 — JACK  
03 — TRACK  
04 — WALL  
05 — EXTERIOR  
06 — PROFILES  
07 — GOODIES



SULFER UPLIGHT



SULFER UPLIGHT



# SULFER UPLIGHT

*A member of our minimalist Sulfer family, Sulfer uplight brings you the indirect uplight you've been waiting for. A wall-mounted luminaire, Sulfer uplight is installed perpendicular to the wall. Its powerful LED provides a generous, indirect flood beam upward and reflects off the wall, as well as off the ceiling, offering a secondary, softer and wider light beam.*


## **Minimalist & sophisticated**

Choose Sulfer uplight for an expression requiring a minimalist wall-mounted uplight that also provides choices in lumen packages, dimming or smart lighting solutions with Casambi-ready gear. A pure geometrical shape, Sulfer uplight, like its other family member Sulfer, encompasses the accessibility of a passe-partout luminaire.

## **Uniform, ambient light**

In large spaces Sulfer uplight brings the benefits of a powerful but indirect LED light, without the discomfort of glare. Try it in offices, in combination with a profile, and create uniform light levels for more visual comfort. Alternatively, experiment in hospitality or wellness spaces, where you'd like a soft ambient light around you, by dimming down Sulfer uplight.


more info? [supermodular.com/en/sulfer-uplight](https://supermodular.com/en/sulfer-uplight)

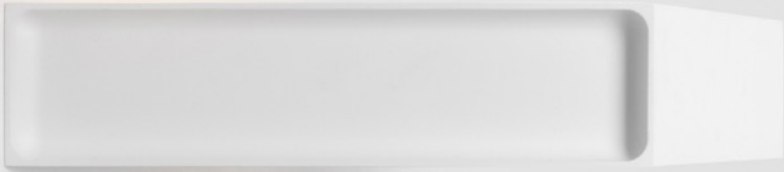

# Sulfer uplight LED GI



1X LED INCL 41.8W



TRAILING EDGE DIMMABLE	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	110°	110°	110°
black struc	13272332	13272432	13272532
white struc	13272309	13272409	13272509
1-10V/DALI/PUSHDIM	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	110°	110°	110°
black struc	13272032	13272132	13272232
white struc	13272009	13272109	13272209
CASAMBI	2700K / CRI90+	3000K / CRI90+	4000K / CRI90+
	110°	110°	110°
black struc	13272632	13272732	13272832
white struc	13272609	13272709	13272809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K	4270lm / 47W
3000K	4679lm / 47W
4000K	5032lm / 47W



TRAPZ - ANO BLACK - ALU



TRAPZ - ANO CHAMPAGNE - BLACK



TRAPZ - ANO BRONZE - ALU



TRAPZ - ANO SILVER BRONZE - CHAMPAGNE





# TRAPZ

*With their indirect lighting and subtle shadow effects, wall fixtures are undoubtedly atmosphere creators. Trapz, our organic interpretation inspired by a trapezium, is no different. The flattened cylinder has been finished with two oblique openings, which allow you to see the contrasting interior of the luminaire, and at the same time, create an unusual chiaroscuro effect.*

## **Rich colours in many places**

A list of high-end spaces can benefit from our Trapz, thanks to a refined, angular design and the warm mood that its anodised colours can create. On the outside, you'll enjoy extra choices of anodised black, bronze, silver bronze and champagne, while the inside is available in black, champagne and aluminium. Try matching Trapz with Duell and Nude on the wall, and Minude, Thimble, Shellby and Placebo.





TRAPZ - ANO BLACK - BLACK



TRAPZ - ANO CHAMPAGNE - CHAMPAGNE - ALU

# Trapz LED 900lm GI



2X LED ARRAY INCL. 5W



TRAILING EDGE DIMMABLE	2700K / CRI90+
ano black - alu	12590298
ano black - black	12590203
ano black - champagne	12590208
ano bronze - alu	12590299
ano bronze - black	12590210
ano bronze - champagne	12590211
ano champagne - black	12590296
ano champagne - champagne	12590297
ano silver bronze - black	12590212
ano silver bronze - champagne	12590295
black struc - gold	12590291
white struc - champagne	12590239

DALI	2700K / CRI90+
ano black - alu	12592098
ano black - black	12592003
ano black - champagne	12592008
ano bronze - alu	12592099
ano bronze - black	12592010
ano bronze - champagne	12592011
ano champagne - black	12592096
ano champagne - champagne	12592097
ano silver bronze - black	12592012
ano silver bronze - champagne	12592095
black struc - gold	12592091
white struc - champagne	12592039

1-10V/PUSHDIM	2700K / CRI90+
ano black - alu	12591098
ano black - black	12591003
ano black - champagne	12591008
ano bronze - alu	12591099
ano bronze - black	12591010
ano bronze - champagne	12591011
ano champagne - black	12591096
ano champagne - champagne	12591097
ano silver bronze - black	12591012
ano silver bronze - champagne	12591095
black struc - gold	12591091
white struc - champagne	12591039

## LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - champagne)

2700K

746lm/12W

CONNECTED > SEE GOODIES

01 — CEILING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR

06 — PROFILES


07 — GOODIES



TRAPZ - BLACK STRUC - GOLD





TRAPZ - SILKY GREY - CHAMPAGNE

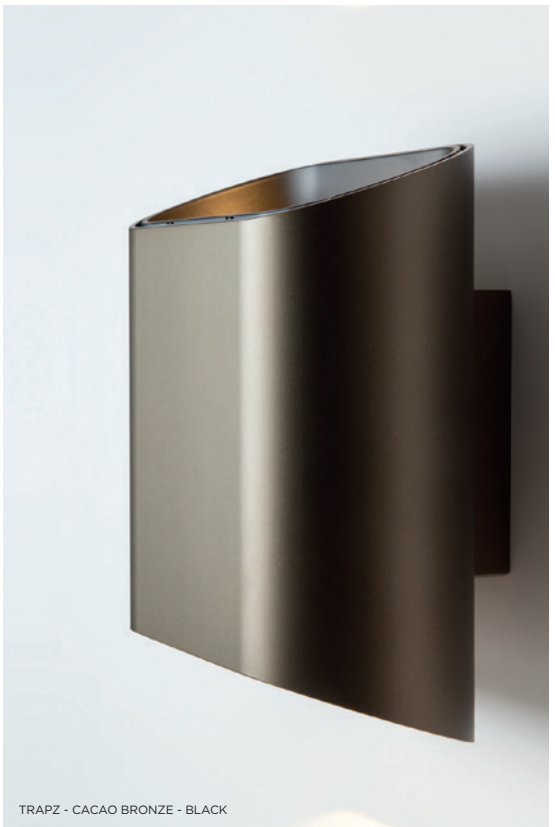

TRAPZ - CACAO BRONZE - BLACK

# Trapz LED 500lm GI



2X LED ARRAY INCL. 4.5W

	230V		IP20	GWT 960°	1.20KG	
--	------	--	------	----------	--------	--

TRAILING EDGE DIMMABLE	2700K / CRI90+
metallic blue - alu	12590169

## LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc - champagne)

2700K

587lm / 9W

01 — CEILING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR

06 — PROFILES

07 — GOODIES

05






# EXTERIOR

# 05


## *floor*




**FALL**  
587



**HIPY**  
590




**JULIEN ROUND**  
597



**JULIEN SQUARE**  
599



**KABAZ**  
603




**LOWIEZE**  
610




# EXTERIOR

## *wall*



**DUELL**  
585



**JULIEN ROUND**  
597




**JULIEN SQUARE**  
599



**LOTIS TUBED**  
605




**KABAZ**  
602



**LOWIE**  
607



**NUDE**  
614



**SULFER**  
617

## *surface*

SEE ALSO



CEILING - P33



WALL - P529





# DUELL

*With its perfectly fitted glazing on top and bottom this version of Duell is fitted to be used in moisty rooms such as bathrooms or even terraces. Connect indoor with your outdoor. The IP version allows you to achieve complete continuity in your home, right through to the bathroom or terrace.*

more info? [supermodular.com/en/duell](http://supermodular.com/en/duell)

## Duell wall IP55 LED



2X LED MODULE INCL. 6W

! NOT SUITABLE FOR INSTALLATION  $\leq 5$ KM FROM THE COAST



	2700K / CRI90+	3000K / CRI90+
black struc - gold	11075091	11075191
white struc - champagne	11075039	11075139

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc (champagne interior))

2700K	646lm / 12W
3000K	646lm / 12W




# FALL


*In Belgium, Modular L.I.'s birthplace, the prevailing wind forces trees to grow at odd angles alongside canals.*

*A powerful image, which inspired the design of Fall, although with more minimalist lines. This exterior fixture stands at a 10° incline and therefore seems to be bending slightly in the wind. The semi-transparent polycarbonat ensures diffused light. A ground stake is available for installation in soft ground.*

Fall 1.1 IP54 LED GI



OUTLET



1X LED-STRIP 24V INCL | 16.8W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

INSTALLATION ACCESSORIES

11189102 EARTH PIN H350 WITH SQUARE PLATE 100X100

	230V		IP54	GWT 960°	3.60KG	▼
--	------	--	------	----------	--------	---

	3000K / CRI90+
black struc	11180832

LUMINAIRE OUTPUT & POWER CONSUMPTION  
(white struc)


3000K

335lm / 20.6W

01 — CEILING  
02 — JACK  
03 — TRACK  
04 — WALL  
05 — EXTERIOR  
06 — PROFILES  
07 — GOODIES



HIPY 70 ANTI GLARE ROUND

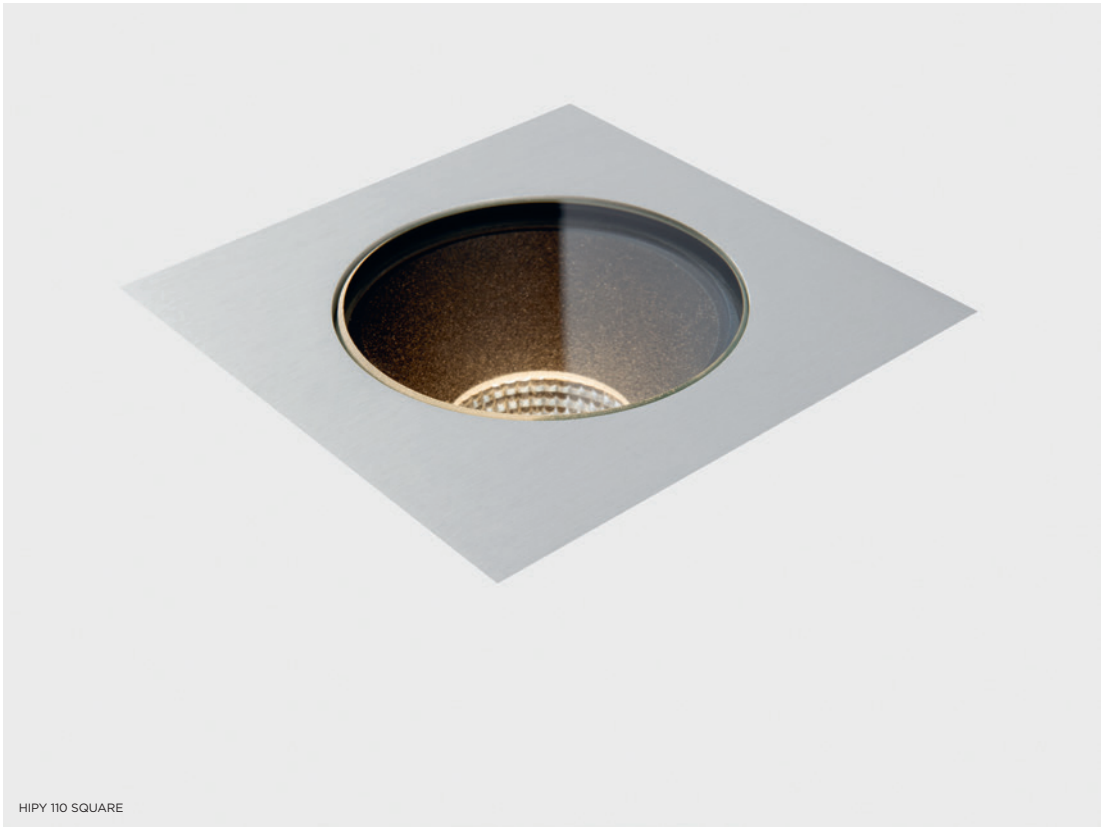

HIPY 110 SQUARE





# HIPY

*Our popular floor spot Hipy continues to shine with its trailblazing personality. In two sizes, 70 and 110, and in round and square shapes. We've added a warmer colour temperature (2700K) to the range. Designers can create a welcoming path from the outside to the inside – or vice versa – and keep a consistent light effect. Thanks to the CCT, Hipy is also accessible to designers for an indoor floor expression.*

more info? [supermodular.com/en/hipy](https://supermodular.com/en/hipy)

## Hipy 70 IP67 LED GE



1X LED ARRAY INCL. 3W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

12379630 RENOVATION CONBOX Ø73 H151

12379830 CONBOX 145X75X123





	2700K / CRI90+	3000K / CRI90+
	40°	40°
alu	12374705	12374305

### LUMINAIRE OUTPUT & POWER CONSUMPTION (alu)

2700K / 40°	272lm / 3W
3000K / 40°	262lm / 3W

## Hipy 70 anti glare IP67 LED GE



1X LED ARRAY INCL. 3W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

12379630 RENOVATION CONBOX Ø73 H151

12379830 CONBOX 145X75X123





	2700K / CRI90+	3000K / CRI90+
	25°	25°
alu	12374605	12374205

### LUMINAIRE OUTPUT & POWER CONSUMPTION (alu)

2700K / 25°	128lm / 3W
3000K / 25°	130lm / 3W



## Hipy square 70x70 IP67 LED GE



1X LED ARRAY INCL. 3.1W

! SUITABLE FOR INSTALLATION  $\leq 5$ KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12379730 RENOVATION CONBOX 75X73X151

12379930 CONBOX 145X75X95





	2700K / CRI90+	3000K / CRI90+
	40°	40°
alu	12374505	12374105

### LUMINAIRE OUTPUT & POWER CONSUMPTION (alu)

2700K / 40°	272lm / 3W
3000K / 40°	262lm / 3W

## Hipy square 70x70 anti glare IP67 LED GE



1X LED ARRAY INCL. 3.1W

! SUITABLE FOR INSTALLATION  $\leq 5$ KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12379730 RENOVATION CONBOX 75X73X151

12379930 CONBOX 145X75X95





	2700K / CRI90+	3000K / CRI90+
	25°	25°
alu	12374405	12374005

### LUMINAIRE OUTPUT & POWER CONSUMPTION (alu)

2700K / 25°	128lm / 3W
3000K / 25°	130lm / 3W

## Hipy 110 IP67 LED GE



1X LED ARRAY INCL. 9.2W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12349830 CONBOX Ø114 H165





	2700K / CRI90+	3000K / CRI90+
	40°	40°
alu	12345505	12345405

### LUMINAIRE OUTPUT & POWER CONSUMPTION (alu)

	350mA	500mA	700mA
2700K / 40°	392lm / 6.2W	526lm / 9.2W	676lm / 13.4W
3000K / 40°	408lm / 6.2W	547lm / 9.2W	703lm / 13.4W

## Hipy 110 anti glare IP67 LED GE



1X LED ARRAY INCL. 9.2W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12349830 CONBOX Ø114 H165





	2700K / CRI90+	3000K / CRI90+
	25°	25°
alu	12345105	12345005

### LUMINAIRE OUTPUT & POWER CONSUMPTION (alu)

	350mA	500mA	700mA
2700K / 25°	218lm / 6.2W	293lm / 9.2W	376lm / 13.4W
3000K / 25°	227lm / 6.2W	304lm / 9.2W	391lm / 13.4W

# Hipy 110 asy IP67 LED GE



1X LED ARRAY INCL. 9.2W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12349830 CONBOX Ø114 H165





	2700K / CRI90+	3000K / CRI90+
	40°	40°
alu	12345305	12345205

## LUMINAIRE OUTPUT & POWER CONSUMPTION (alu)

	350mA	500mA	700mA
2700K / 40°	248lm / 6.2W	333lm / 9.2W	428lm / 13.4W
3000K / 40°	258lm / 6.2W	346lm / 9.2W	445lm / 13.4W

## Hipy square 110x110 IP67 LED GE



1X LED ARRAY INCL. 9.2W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12349930 CONBOX 115X115X150X251





	2700K / CRI90+	3000K / CRI90+
	40°	40°
alu	12346505	12346405

### LUMINAIRE OUTPUT & POWER CONSUMPTION (alu)

	350mA	500mA	700mA
2700K / 40°	392lm / 6.2W	526lm / 9.2W	676lm / 13.4W
3000K / 40°	408lm / 6.2W	547lm / 9.2W	703lm / 13.4W

## Hipy square 110x110 anti glare IP67 LED GE



1X LED ARRAY INCL. 9.2W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

INSTALLATION ACCESSORIES

12349930 CONBOX 115X115X150X251





	2700K / CRI90+	3000K / CRI90+
	25°	25°
alu	12346105	12346005

### LUMINAIRE OUTPUT & POWER CONSUMPTION (alu)

	350mA	500mA	700mA
2700K / 25°	218lm / 6.2W	293lm / 9.2W	376lm / 13.4W
3000K / 25°	227lm / 6.2W	304lm / 9.2W	391lm / 13.4W

# Hipy square 110x110 asy IP67 LED GE



1X LED ARRAY INCL. 9.2W

! SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE

CONNECTED > SEE GOODIES

### INSTALLATION ACCESSORIES

12349930 CONBOX 115X115X150X251



	2700K / CRI90+	3000K / CRI90+
	40°	40°
alu	12346305	12346205

### LUMINAIRE OUTPUT & POWER CONSUMPTION (alu)



	350mA	500mA	700mA
2700K / 40°	248lm / 6.2W	333lm / 9.2W	428lm / 13.4W
3000K / 40°	258lm / 6.2W	346lm / 9.2W	445lm / 13.4W



# JULIEN ROUND

*Julien round highlights garden features and is perfect for the task at hand. The round version is less prominent than its square counterpart. Julien's ground stake is suitable for soft ground and Julien round foot, with its fixed mounting plate, is ideal as a wall fixture.*

## Julien round foot IP54 LED GI



1X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION  $\leq$ 5KM FROM THE COAST




	3000K / CRI90+
	25°
black struc	10731208

### LUMINAIRE OUTPUT & POWER CONSUMPTION (black struc)

3000K / 25° 159lm / 6W


## Julien round IP54 LED GE



1X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION  $\leq$ 5KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE



	3000K / CRI90+
	25°
black struc	10731308

### LUMINAIRE OUTPUT & POWER CONSUMPTION (black struc)

3000K / 25° 159lm / 4W





# JULIEN SQUARE

*Every garden has a feature that deserves to be in the spotlight. So why not rely on glamorous lighting to do so? Julien is perfect for the task at hand with an IP rate of 54, its adjustable length and tilting head. Julien's ground stake is suited for softer ground and Julien foot, with its fixed mounting plate, can be mounted on walls or hard surfaces.*





## Julien square foot IP54 LED GI



1X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION  $\leq 5$ KM FROM THE COAST

## Julien square IP54 LED GE



1X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION  $\leq 5$ KM FROM THE COAST

DRIVER > SEE PRODUCT PAGE ON WEBSITE



	3000K / CRI90+
	25°
black struc	10732208

### LUMINAIRE OUTPUT & POWER CONSUMPTION (black struc)

3000K / 25° 143lm / 6W



	3000K / CRI90+
	25°
black struc	10732308

### LUMINAIRE OUTPUT & POWER CONSUMPTION (black struc)

3000K / 25° 143lm / 4W






# KABAZ

*Kabaz has one sole purpose: to make your garden a wonderful place to hang out. Available as standard in white matte polycarbonate for a sleek lounge look. Add a Maroc plate for an oriental look or a Louvre for a sexy touch. The useful handle and 5m cable allow you to place Kabaz — ‘handbag’ in West-Flemish — wherever you like. Also available for wall mounting.*

more info? [supermodular.com/en/kabaz](http://supermodular.com/en/kabaz)

## Kabaz wall IP44 E27



1X TC-TSE E27 MAX. 23W

! NOT SUITABLE FOR INSTALLATION  $\leq$ 5KM FROM THE COAST

### INSTALLATION ACCESSORIES

11130409 KABAZ MAROC PLATE WHSTR

11130422 KABAZ MAROC PLATE KHAKI

11130432 KABAZ MAROC PLATE BLSTR

11130433 KABAZ MAROC PLATE DESERT

11130509 KABAZ LOUVRE PLATE WHSTR

11130522 KABAZ LOUVRE PLATE KHAKI


11130532 KABAZ LOUVRE PLATE BLSTR

11130533 KABAZ LOUVRE PLATE DESERT



black struc	11130132
desert	11130133
khaki	11130122
white struc	11130109

## Kabaz wall IP44 LED



1X LED E27 INCL. E27 12W

! NOT SUITABLE FOR INSTALLATION  $\leq$ 5KM FROM THE COAST

### INSTALLATION ACCESSORIES

11130409 KABAZ MAROC PLATE WHSTR

11130422 KABAZ MAROC PLATE KHAKI

11130432 KABAZ MAROC PLATE BLSTR

11130433 KABAZ MAROC PLATE DESERT

11130509 KABAZ LOUVRE PLATE WHSTR

11130522 KABAZ LOUVRE PLATE KHAKI

11130532 KABAZ LOUVRE PLATE BLSTR

11130533 KABAZ LOUVRE PLATE DESERT




LEADING EDGE DIMMABLE	2700K / CRI80
black struc	11130732
desert	11130733
khaki	11130722
white struc	11130709

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K

504lm / 12W

## Kabaz floor IP44 E27




1X TC-TSE E27 MAX. 23W

! CABLE (5M) INCLUDED  
! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

### INSTALLATION ACCESSORIES

11130409	KABAZ MAROC PLATE WHSTR
11130422	KABAZ MAROC PLATE KHAKI
11130432	KABAZ MAROC PLATE BLSTR
11130433	KABAZ MAROC PLATE DESERT
11130509	KABAZ LOUVRE PLATE WHSTR
11130522	KABAZ LOUVRE PLATE KHAKI
11130532	KABAZ LOUVRE PLATE BLSTR
11130533	KABAZ LOUVRE PLATE DESERT

## Kabaz floor IP44 LED



1X LED E27 INCL. E27 12W

! CABLE (5M) INCLUDED  
! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

### INSTALLATION ACCESSORIES

11130409	KABAZ MAROC PLATE WHSTR
11130422	KABAZ MAROC PLATE KHAKI
11130432	KABAZ MAROC PLATE BLSTR
11130433	KABAZ MAROC PLATE DESERT
11130509	KABAZ LOUVRE PLATE WHSTR
11130522	KABAZ LOUVRE PLATE KHAKI
11130532	KABAZ LOUVRE PLATE BLSTR
11130533	KABAZ LOUVRE PLATE DESERT



black struc	11130232
desert	11130233
khaki	11130222
white struc	11130209



LEADING EDGE DIMMABLE	2700K / CR180
black struc	11130832
desert	11130833
khaki	11130822
white struc	11130809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K

504lm / 12W

SEE ALSO



CEILING - P133



WALL - P539





# LOTIS TUBED

*Lotis tubed (IP44) is designated for use in bathrooms and outdoor spaces. The ceiling-mounted version contains an extra protection glass to prevent moisture from entering the fixture. The spotlight allows you to play with colour: go for contrast between black, white and gold or choose a more uniform look instead.*

more info? [supermodular.com/en/lotis-tubed](https://supermodular.com/en/lotis-tubed)

## Lotis tubed surface IP44 LED retrofit



1X LED GU10 INCL. 5.5W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST



230V



IP44

GWT  
960°

0.60KG



LEADING EDGE DIMMABLE	2700K / CRI90+
	25°
black struc - gold	11450332
black struc - white struc	11450337
white struc - black	11450329
white struc - gold	11450389
white struc - white struc	11450309

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

2700K / 25°

346lm / 5.5W





# LOWIE

*Lowie is the noble member of a highly versatile outdoor family (IP54). Together with Lowieze, they will turn your garden into a theatre performance, putting specific areas under the spotlight. Lowie, for wall mounting, is a perfect example of form blending with function. The cylindrical light units can rotate fully around the body, which is also a cylinder, and can therefore be used as uplights or downlights independent of each other. Available with one or two light units.*



### Lowie IP54 1x LED GI



1X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST



	230V		IP54	GWT 960°	1.20KG	
--	------	--	------	----------	--------	--

	3000K / CRI90+
	40°
black struc	12670308

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (lumen value per lamp unit)

3000K / 40° 208lm / 5W

### Lowie IP54 2x LED GI



2X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

	230V		IP54	GWT 960°	1.60KG	
--	------	--	------	----------	--------	--

	3000K / CRI90+
	40°
black struc	12670408

#### LUMINAIRE OUTPUT & POWER CONSUMPTION (lumen value per lamp unit)

3000K / 40° 208lm / 9W







# LOWIEZE

*Lowieze is a highly versatile outdoor luminaire and comes in two sizes. The smaller size is perfect for lighting a pathway. The bigger version is more suitable for highlighting garden features. Form blends in perfectly with function. The cylindrical light units can rotate fully around the body, also a cylinder, and can therefore be used as uplights or downlights independent of each other. Available with one or two light units.*

more info? [supermodular.com/en/lowieze](https://supermodular.com/en/lowieze)

## Lowieze low IP54 1x LED GI



1X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION  $\leq 5$ KM FROM THE COAST

### INSTALLATION ACCESSORIES

11189802 EARTHIPIN H350





	3000K / CRI90+
	40°
black struc	12671308

### LUMINAIRE OUTPUT & POWER CONSUMPTION (lumen value per lamp unit)

3000K / 40°

208lm / 5W

## Lowieze low IP54 2x LED GI



2X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION  $\leq 5$ KM FROM THE COAST

### INSTALLATION ACCESSORIES

11189802 EARTHIPIN H350





	3000K / CRI90+
	40°
black struc	12671408

### LUMINAIRE OUTPUT & POWER CONSUMPTION (lumen value per lamp unit)

3000K / 40°

208lm / 9W

## Lowieze high IP54 1x LED GI



1X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION  $\leq 5$ KM FROM THE COAST

### INSTALLATION ACCESSORIES

11189802 EARTH PIN H350





	3000K / CRI90+
	40°
black struc	12672308

### LUMINAIRE OUTPUT & POWER CONSUMPTION (lumen value per lamp unit)

3000K / 40°

208lm / 5W

## Lowieze high IP54 2x LED GI



2X HIGH POWER LED INCL. 4W

! NOT SUITABLE FOR INSTALLATION  $\leq 5$ KM FROM THE COAST

### INSTALLATION ACCESSORIES

11189802 EARTH PIN H350




	3000K / CRI90+
	40°
black struc	12672408

### LUMINAIRE OUTPUT & POWER CONSUMPTION (lumen value per lamp unit)

3000K / 40°

208lm / 9W

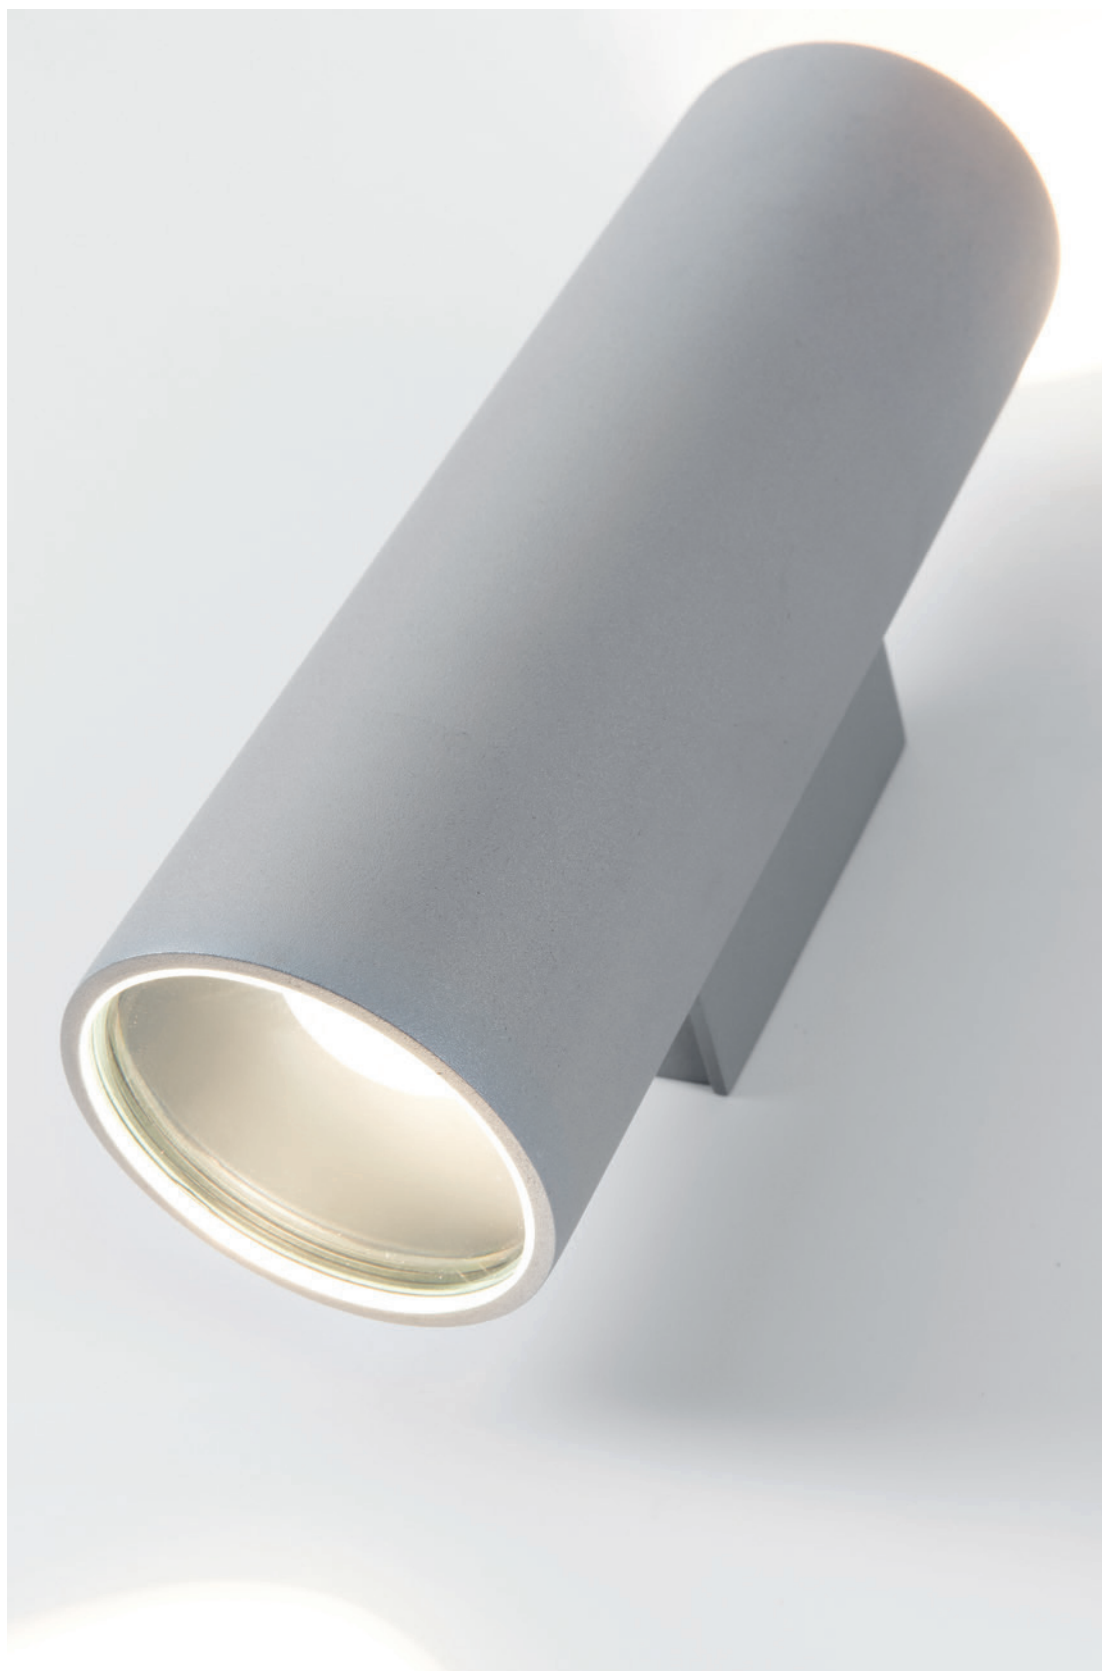



# NUDE

more info? [supermodular.com/en/nude](http://supermodular.com/en/nude)


SEE ALSO



WALL - P549

*Nude's IP55 version can be wall mounted at the entrance of a residence, highlighting the wall, at the entrance to a shop or on the terrace of your favourite bar. Both downlight and up- and downlight versions are available. A choice of colours: black, white or alu structure.*

# Nude wall IP55 1x LED GI



1X LED ARRAY INCL. 6.2W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST



	3000K / CRI90+
	40°
alu struc	10923024
black struc	10923032
white struc	10923009



## LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

3000K / 40°

321lm / 8W



**Nude wall IP55 2x LED GI**



2X LED ARRAY INCL. 6.2W

! NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

	230V		IP55	GWT 960°	1.77KG	
--	------	--	------	----------	--------	--

	3000K / CRI90+
	40°
alu struc	10923124
black struc	10923132
white struc	10923109

**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
(white struc)

3000K / 40°

642lm / 13W

SEE ALSO



WALL - P567




# SULFER

**Design** — Jeffrey Huyghe

*Sulfer (IP54) is a minimalist square-shaped fixture. The cast aluminium luminaire brings a modern accent to walls, whether in or outside homes, hotels, restaurants, or other exterior hospitality spaces.*

more info? [supermodular.com/en/sulfer](https://supermodular.com/en/sulfer)

**Sulfer LED IP54 GI**



2X LED MODULE INCL. 3W

! OUTDOOR USE: NOT SUITABLE FOR INSTALLATION ≤5KM FROM THE COAST

**OPTICAL ACCESSORIES**

13271209 SMALL BEAM APERTURE PLATES IP WHITE STRUC

13271232 SMALL BEAM APERTURE PLATES IP BLACK STRUC

13271309 MEDIUM BEAM APERTURE PLATES IP WHITE STRUC

13271332 MEDIUM BEAM APERTURE PLATES IP BLACK STRUC

	230V		IP54	GWT 960°	
--	------	--	------	----------	--

	3000K / CRI90+
black struc	13270232
white struc	13270209

**LUMINAIRE OUTPUT & POWER CONSUMPTION**  
(white struc)

3000K	290lm / 8W
-------	------------

01 — CEILING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR

06 — PROFILES

07 — GOODIES

# 06






# PROFILES


06

---


# PROFILES




**COMO CORNER**  
623



**DRUPL**  
629



**MP78**  
635



**SLD25**  
639




**SLD35**  
643




**SLD50**  
647



**SLD75**  
657

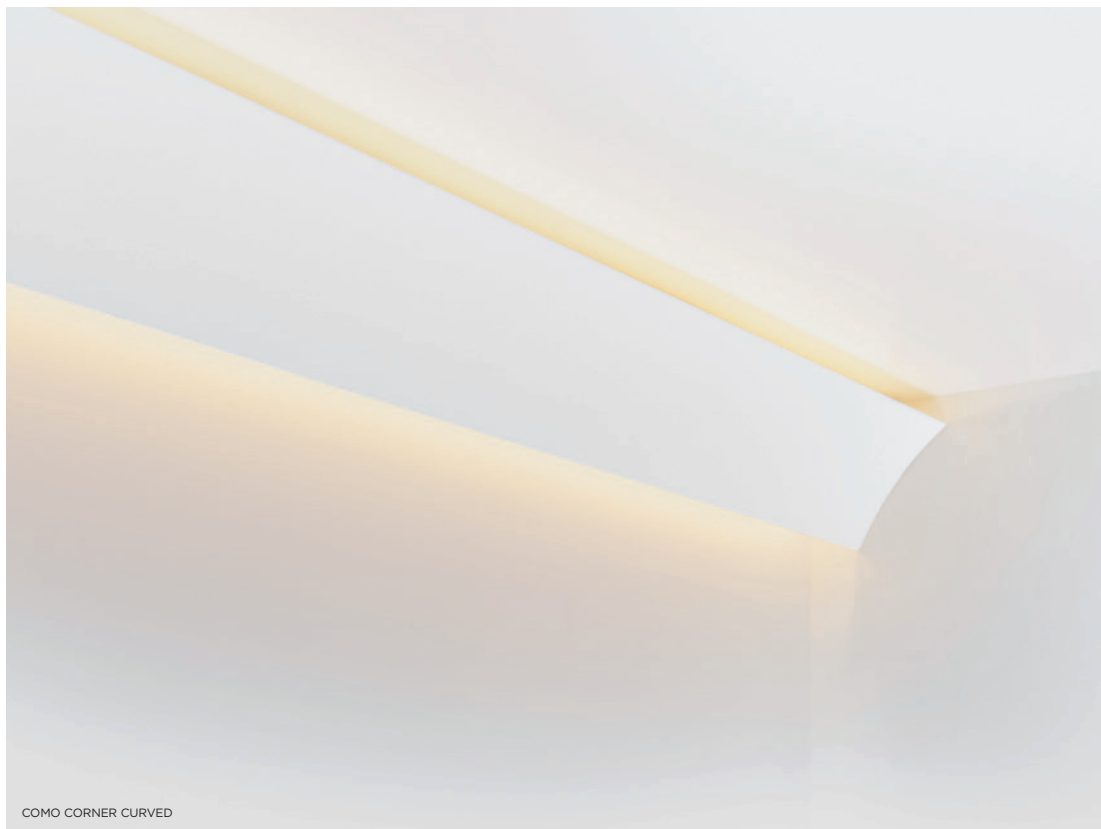

COMO CORNER CURVED

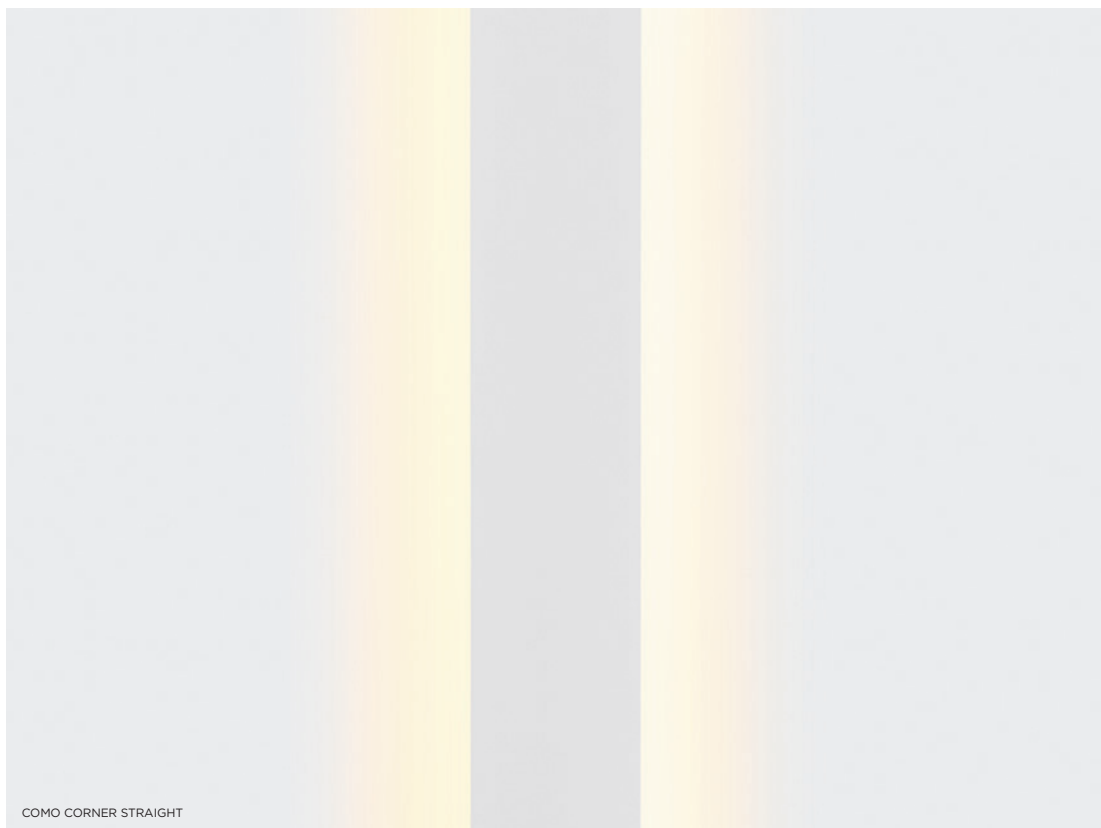


COMO CORNER STRAIGHT





# COMO CORNER

Design — Dirk Wynants

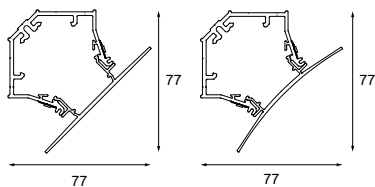

more info? [supermodular.com/en/como-corner](https://supermodular.com/en/como-corner)

*Especially conceived for renovation projects and a vibrant desire to keep installation simple, Como Corner bears no resemblance to anything in our profile families. Designer Dirk Wynants created this linear lighting solution with soft, indirect light, and an extremely subtle expression, with the purpose of confirming that challenging spaces can have beautiful light too.*

## So simple, so easy

This surface-mounted linear lighting solution poses no challenge to install on the wall or ceiling, where electrical outlets are limited, and where ceiling height is within easy reach. A simple aluminium extrusion fixed to the surface, 1 or 2 quality LED strips and a cover, custom-cut up to a maximum length of 4 meters.

## Corners of light

Como Corner can emit light from 1 or 2 sides. Place it horizontally between the ceiling and wall, and it offers the options of indirect light on the ceiling, a wall-wash effect, or both. Or try it again horizontally, but at any level, to show up and/or down light. Position Como Corner vertically in the corner, where two walls meet, for a lighted corner space.

## Welcome visual comfort

Our connected-ready profile is a new development in visual comfort. Its integrated Casambi module makes Como Corner's light a contributor to a person's well-being. Light levels to match time of day, light uniformity and indirect light (thus no glare), all contribute to Como Corner's inevitable popularity.



COMO CORNER  
PRIVATE RESIDENCE, AMSTERDAM (NL)



COMO CORNER  
PRIVATE RESIDENCE, NICE (FR)

07 — GOODIES

06 — PROFILES

05 — EXTERIOR

04 — WALL

03 — TRACK

02 — JACK

01 — CEILING



COMO CORNER  
PRIVATE RESIDENCE, VIENNA (A1)



COMO CORNER  
PRIVATE RESIDENCE NINJE (FR)

07 — GOODIES

06 — PROFILES

05 — EXTERIOR

04 — WALL

03 — TRACK

02 — JACK

01 — CEILING



DRUPL 70 SHARP COVER



DRUPL 70 FLANGE STRAIGHT COVER




DRUPL 70 UPLIGHT




# DRUPL


CURVED COVER

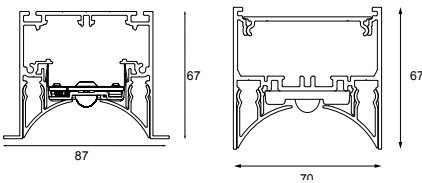

SHARP COVER

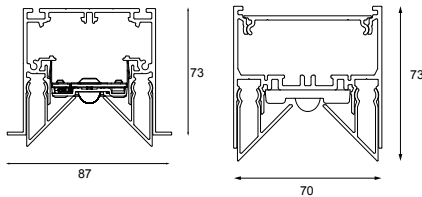

STRAIGHT COVER

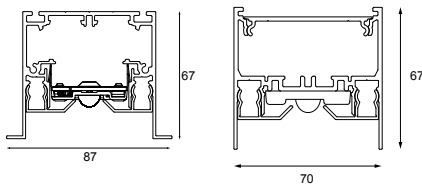

more info? [supermodular.com/en/drupl-70-curved](https://supermodular.com/en/drupl-70-curved)  
[supermodular.com/en/drupl-70-sharp](https://supermodular.com/en/drupl-70-sharp)  
[supermodular.com/en/drupl-70-straight](https://supermodular.com/en/drupl-70-straight)  
[configurator.supermodular.com](https://configurator.supermodular.com)

*Inspired by the effects of sunlight through droplets of water, Drupl is the perfect solution for office-compliant continuous lighting. This luminaire's high-quality light and anti-glare features are key to comfort and productivity in professional settings. Create a uniform light expression in your space with general light down and soft light up.*

## Cutting-edge optical lighting

Drupl combines the benefits of unique optical lenses that cover highly-performant LEDs. Our luminaire produces light at a quality of CRI90 or greater, with elegant design that will transform any professional space. Available in a wide range of colours and shapes.

## Colour your temp

So that you can bring the most beautiful, natural and highest quality light into your space, Drupl features Fortimo LED Lines that come in 3 colour temperatures: 2700K, 3000K and 4000K. Add ambient light to your design with Drupl's uplight.

## Light that thinks

Using a DALI-based lighting control system, Drupl offers smart profile lighting solutions that incorporate 3 types of miniature sensors: motion, daylight and infrared. For maximum comfort, and energy savings of up to 75%.



DRUPL  
URBAN INDUSTRIAL, AMSTERDAM (NL)  
HEYLIGERS DESIGN + PROJECTS  
(IMAGE WOUTER VAN DER SAR)



DRUPL, UNITED  
GBL, KORTRIJK (BE)  
GBL STUDIO  
(IMAGE BEELDCOLLECTIEF)





DRUPL  
PRIVATE RESIDENCE, ANTWERPEN (BE)



DRUPL  
PRIVATE RESIDENCE, ZOTTEGEM (BE)



01 — CEILING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR


06 — PROFILES

07 — GOODIES

DRUPL, MEDARD  
BINST ARCHITECTS, ANTWERPEN (BE)  
BINST ARCHITECTS  
(IMAGE JIM VAN LOO)



MP78 LED & LEDLINE

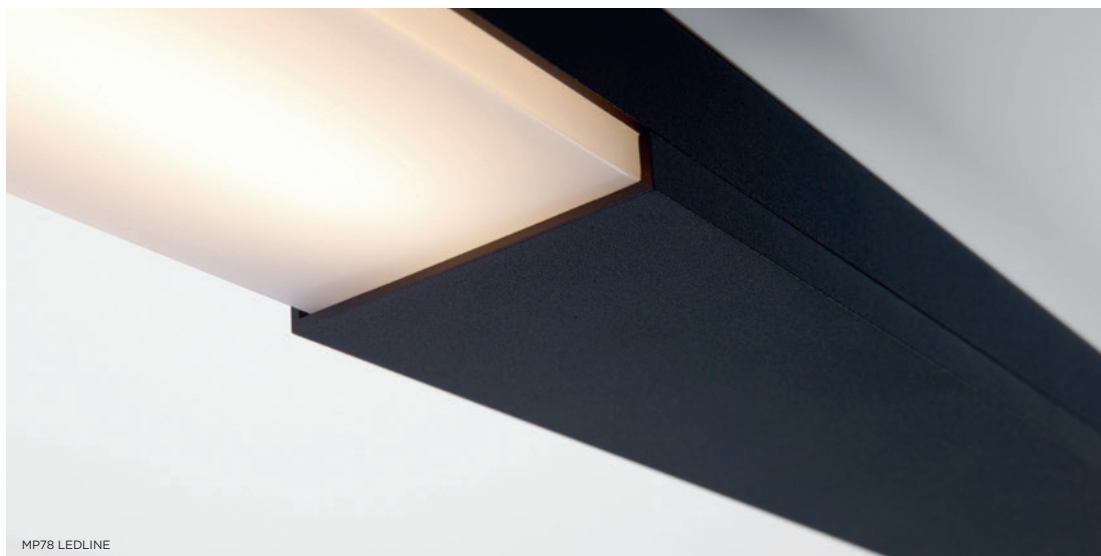


MP78 LEDLINE



MP78 REKTOR LED & LEDLINE



# MP78



*MP78 is one of the thinnest profiles on the market. In combination with LED lines, LED spotlights or the directional spotlight Rektor, MP78 is your ideal ally for any project in which you wish to provide both basic and accent lighting with a single fixture.*

## Versatile lighting

MP78 is a LED designated profile. For general lighting, use LED lines. For accent lighting, LED spotlights are available in warm or neutral white, in single or double lamp modules. With its sleek looks, the Rektor directional surface-mounted spotlight is a perfect match for MP78 and makes the profile particularly versatile.

## Ingenious and sleek

Its 78mm width and 36mm height make MP78 a very slim fixture. An ingenious detail is that the heat is automatically conducted away by the aluminium housing. The standard finishes are white or black structure. You can also create your own colour combinations by choosing a base plate and top plate in different colours. MP78 can be either surface mounted or suspended.

more info? [supermodular.com/en/mp78](https://supermodular.com/en/mp78)  
[configurator.supermodular.com](https://configurator.supermodular.com)



MP78  
OFFICES, BRECHT (BB)  
BHOOM  
(IMAGE LENZER)



MP78  
P&N BANK (AU)  
WOODS BAGOT  
(IMAGE © DION ROBESON)




MP78  
PRIVATE RESIDENCE, CHAAM (NL)  
DOEN  
(IMAGE JORIS LUIJN)



SLD25 - ANO SILVER BRONZE



SLD25 - ANO BRONZE

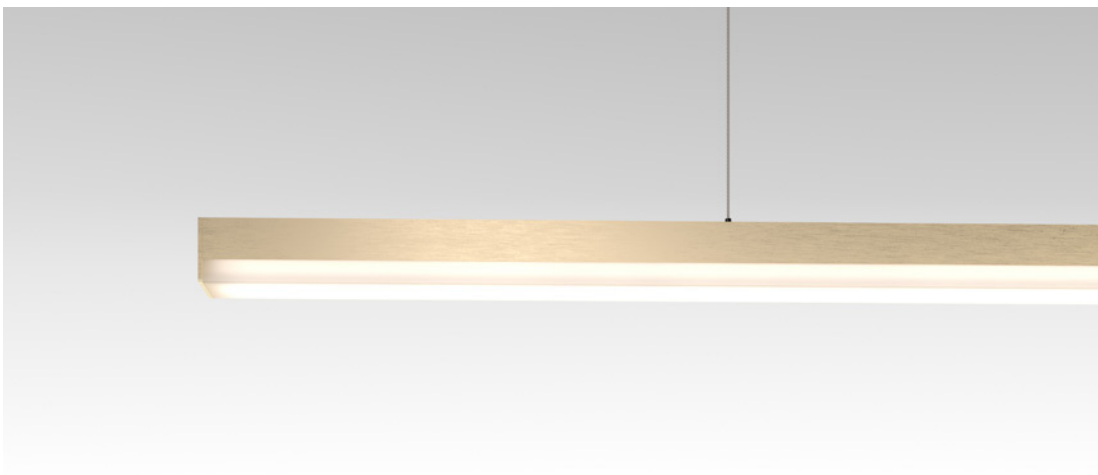


SLD25 - ANO CHAMPAGE





# SLD25



*Light lines make fantastic architectural features. At just 26,5 mm wide, SLD25, formerly SL nano, is our narrowest U-profile. SLD25 poly out, available with a PMMA diffuser on the outside, guarantees a light-filling effect in any room. Available with LEDs. Suitable for surface mounting on the wall or ceiling, also works wonders as a suspended luminaire.*

## Dress up with colours

SLD25's slender frame can make quite an impression with its anodised colour finishes. Champagne, bronze and silver bronze will make hospitality and residential spaces look absolutely ravishing.

more info? [supermodular.com/en/sld25](https://supermodular.com/en/sld25)  
[configurator.supermodular.com](https://configurator.supermodular.com)



SLD25  
PRIVATE RESIDENCE, LILLE (FR)



SLD25  
PRIVATE RESIDENCE, BERGEN (NO)

07 — GOODIES

06 — PROFILES

05 — EXTERIOR

04 — WALL

03 — TRACK

02 — JACK

01 — CEILING



SLD35 - ANO SILVER BRONZE




SLD35 - ANO CHAMPAGNE



SLD35 - ANO BRONZE



# SLD35

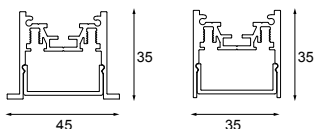

*Light lines are a beautiful way to highlight the architectural elements of a space. SLD35, formerly SL micro, can easily be your luminaire of choice for this effect. In fact, so can our entire SLD family. Available in ceiling mounted, suspended and recessed versions. SLD35's IP44 version enables you to extend your light lines into an outdoor space or the bathroom.*


## Colours to impress

SLD35's frame is the second thinnest of the family. Let it make an impression with its anodised colour finishes. Champagne, bronze and silver bronze will make hospitality and residential spaces look absolutely stunning.

more info? [supermodular.com/en/sld35](https://supermodular.com/en/sld35)  
[configurator.supermodular.com](https://configurator.supermodular.com)



SLD35  
HOTEL, BRUSSELS (BE)

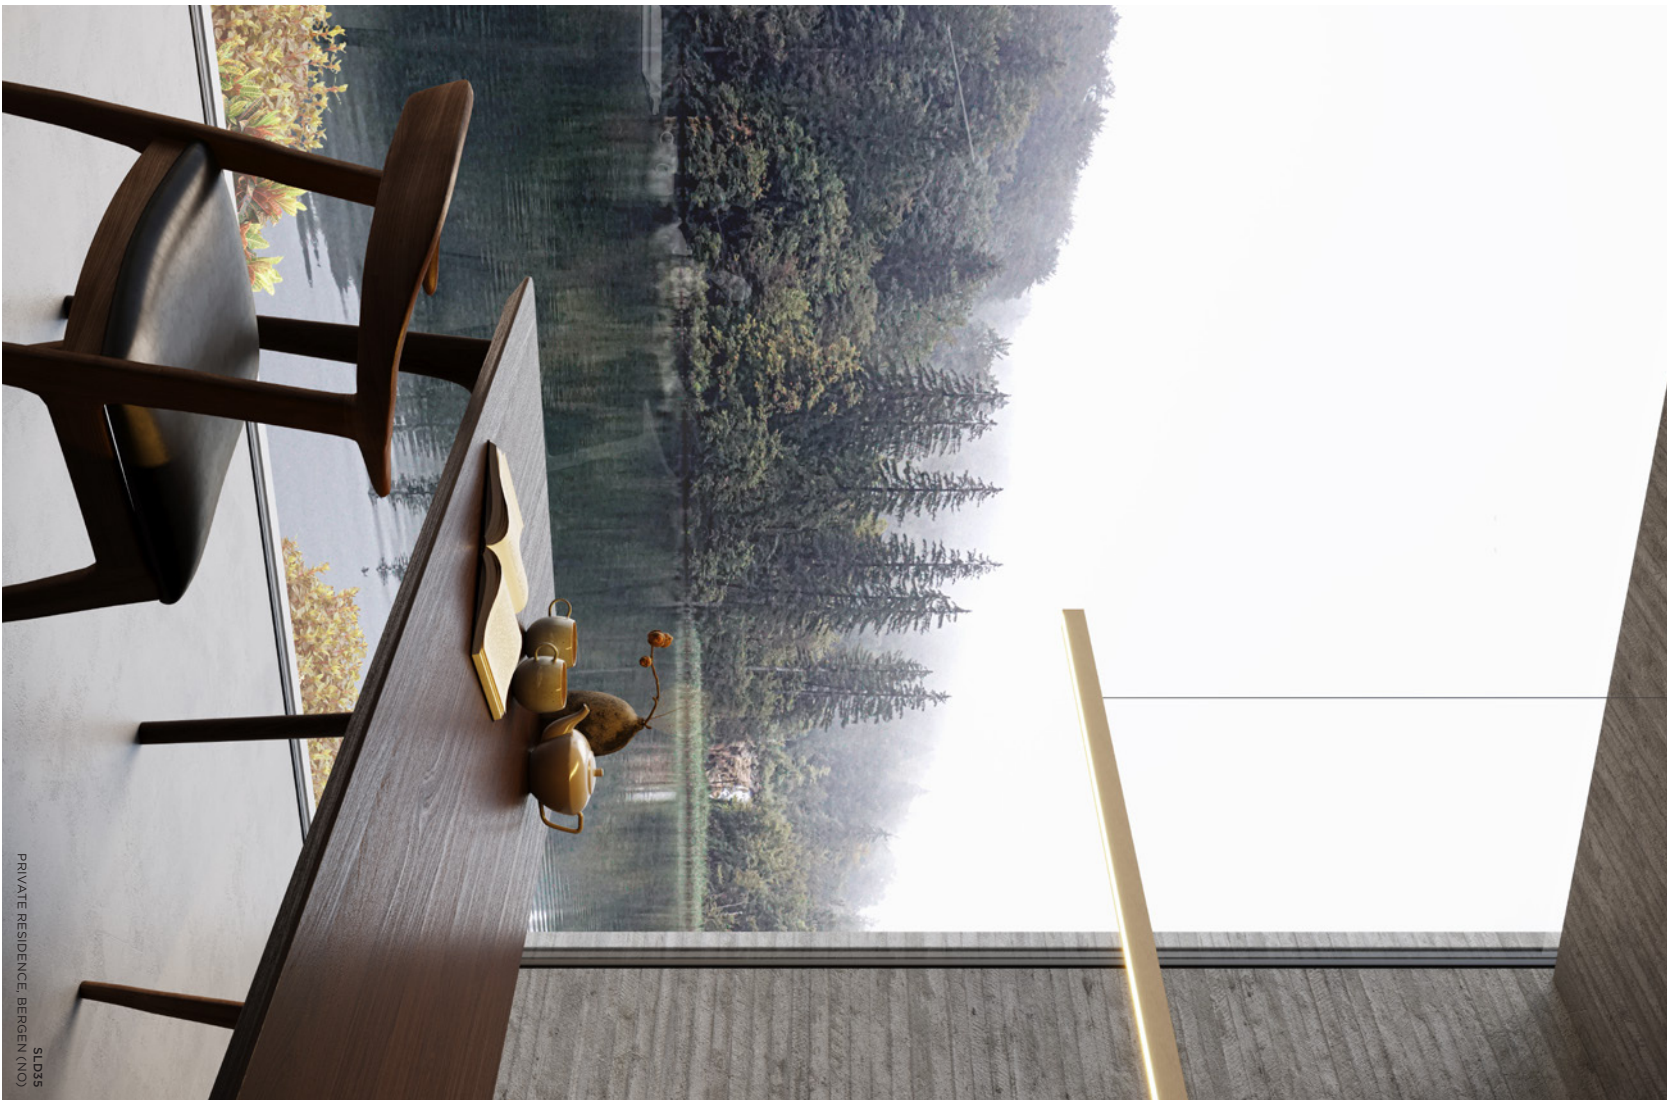

SL035  
PRIVATE RESIDENCE, BERGEN (NO)

07 — GOODIES

06 — PROFILES


05 — EXTERIOR

04 — WALL


03 — TRACK

02 — JACK

01 — CEILING

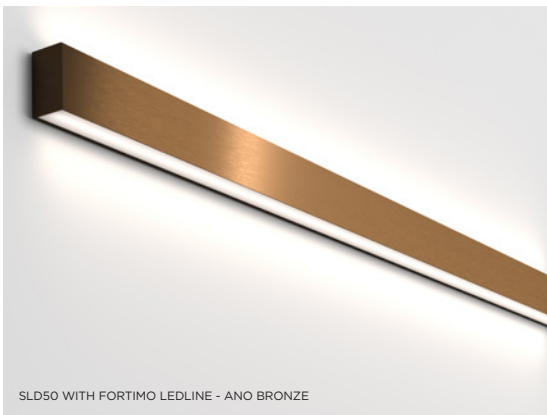

SLD50 WITH FORTIMO LEDLINE - ANO BRONZE

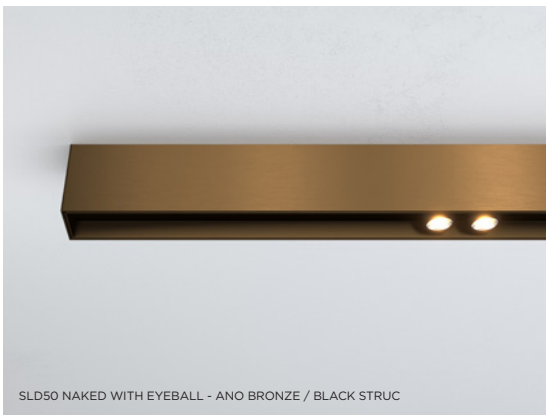


SLD50 NAKED WITH EYEBALL - ANO BRONZE / BLACK STRUC



SLD50 NAKED WITH EYEBALL - BLACK STRUC / BRONZE



SLD50 HIGH WITH EYEBALL - ANO BRONZE / BLACK STRUC

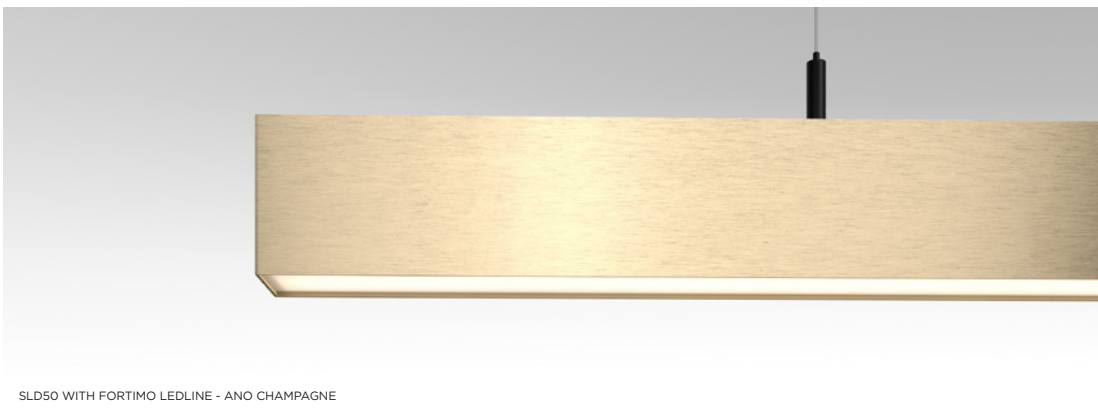

SLD50 WITH FORTIMO LEDLINE - ANO CHAMPAGNE



SLD50 WITH FORTIMO LEDLINE - ANO SILVER BRONZE




SLD50 HIGH WITH FORTIMO LEDLINE - ANO SILVER BRONZE






# SLD50


POLY OUT

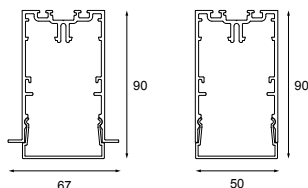


POLY IN

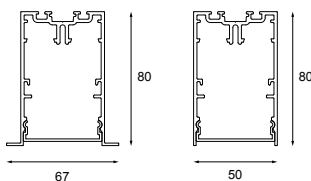

NAKED

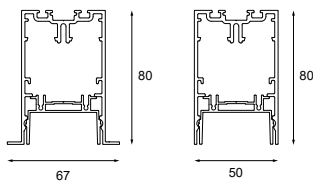

HIGH

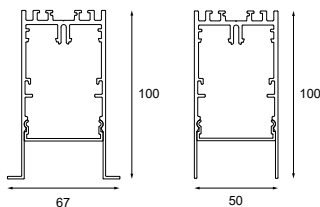

more info? [supermodular.com/en/sld50-naked](http://supermodular.com/en/sld50-naked)  
[supermodular.com/en/sld50-office-compliant](http://supermodular.com/en/sld50-office-compliant)  
[supermodular.com/en/sld50-poly-in](http://supermodular.com/en/sld50-poly-in)  
[supermodular.com/en/sld50-poly-out](http://supermodular.com/en/sld50-poly-out)  
[supermodular.com/en/sld50-high](http://supermodular.com/en/sld50-high)  
[configurator.supermodular.com](http://configurator.supermodular.com)

*A member of our popular SLD family, SLD50 is a thin, attractive (50 mm wide) variant. To complement its linear light, designers can incorporate Modular L.I.'s Eyeball, a small yet highly powerful, adjustable spot that can be rotated 360° and adjusted 30° in both directions. Its sleek design makes SLD50 a perfect solution for offices. Its luscious colours, champagne, gold, bronze and silver bronze will not go unnoticed in residential and hospitality environments.*

## The sexiest member of our gang

With SLD50 naked you can think up your own configuration: different outer and inner profiles in different colour combinations, 4 possible mountings, the naked linear LED tubes that come in 3 different lengths and the option to add 1 or 2 accent lights, in the form of our naked Eyeball luminaires. Office, residential and hospitality settings won't get enough of our warm colour options for the inner profiles (champagne, gold, bronze and silver bronze).

## Always aim high

If more powerful light combined with the same brilliant esthetics of SLD50 naked is your desire, SLD50 high fulfills it. Perfect for a space in which users require an extra degree of visual comfort. Its deep recessed light units provide powerful luminance, the perfect fit for an office looking to add architectural feel to its ambiance. Available in SLD50 colours, trimless, in a surface mounted, suspended and recessed version, and with flange, for the recessed version only.



SLD50 @5000K



SLD50 @3500K



SLD50 @2700K



SLD50 @2400K



SLD50 HIGH  
PRIVATE RESIDENCE, MUNICH (DE)





SLD&O NAKED  
OFFICE, AMSTERDAM (NL)

07 — GOODIES

06 — PROFILES

05 — EXTERIOR

04 — WALL

03 — TRACK

02 — JACK

01 — CEILING



SLD50 HIGH  
PRIVATE RESIDENCE, VIENNA (AT)



PRIVATE RESIDENCE BUDAPEST (HU)  
SLD50 HIGH

07 — GOODIES

06 — PROFILES

05 — EXTERIOR

04 — WALL

03 — TRACK

02 — JACK

01 — CEILING





SLD50 HIGH  
SHOWROOM, AMSTERDAM (NL)



SLD50 NAKED  
SHOWROOM, AMSTERDAM (NL)




SLD50 HIGH  
MELBOURNE (AU)






**SLSO NAKED**  
PRIVATE RESIDENCE, ROTTERDAM (NL)  
DOEN  
(IMAGE NICOLINE RODENBURG)

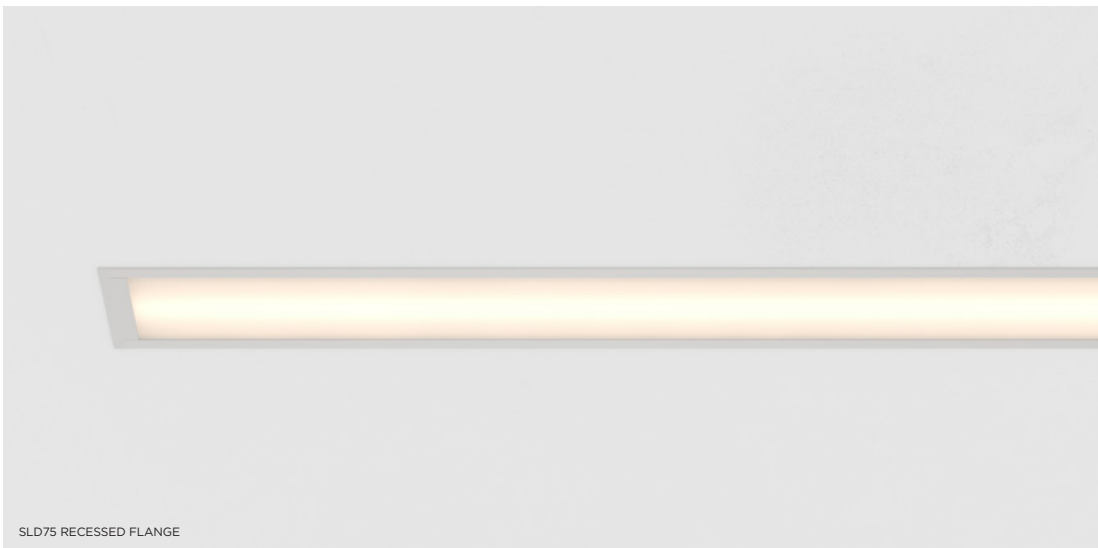

SLD75 RECESSED FLANGE

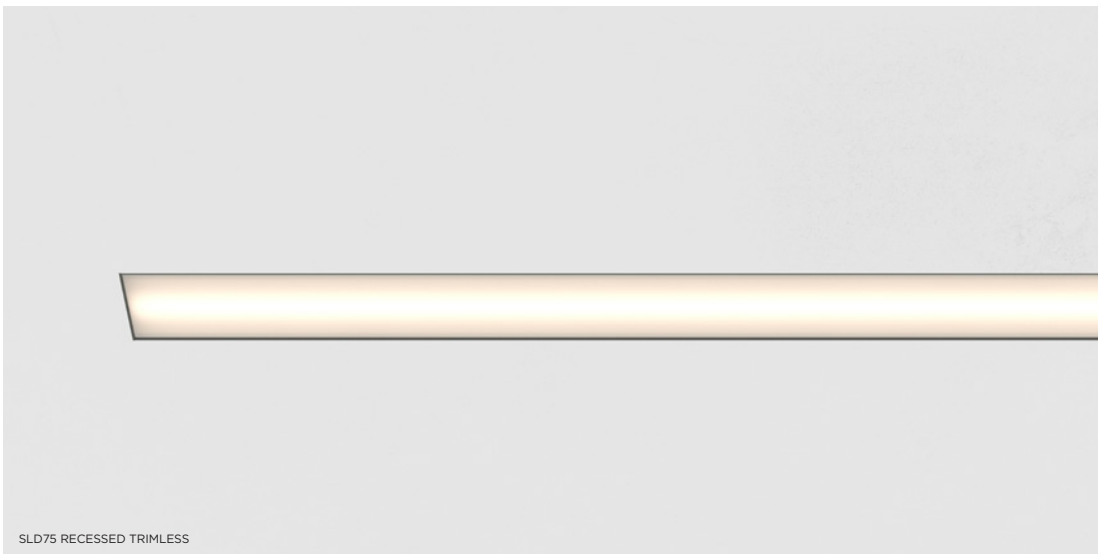



SLD75 RECESSED TRIMLESS



SLD75 SURFACE



# SLD75



*A LED dedicated version of our famous SL75 lighting cove, SLD75 is a completely customisable solution, guaranteeing the perfect size for your setting. With a low UGR, our LED module, combined with different lenses – prismatic polycarbonate diffuser or PMMA diffuser – brings you the ideal solution for office lighting.*

*SLD75 fitted with standard poly lenses is perfect for general lighting and even comes standard with pre-set dimming.*

more info? [supermodular.com/en/sld75](https://supermodular.com/en/sld75)  
[configurator.supermodular.com](https://configurator.supermodular.com)





ELIOTS  
ZOL, GENK (E)  
ART-TE STAB  
(IMAGE JIM VAN LOO)



# GOODIES

**663** — CONNECTED LIGHTING

**674** — M-LED

**678** — LED SPOTS & TUBES

**679** — LED-STRIP 24V

**680** — DRIVER SPECS. - CONSTANT CURRENT

**688** — DRIVER SPECS. - CONSTANT CURRENT DEEP DIM

**689** — DRIVER SPECS. - CONSTANT VOLTAGE 48V

**690** — DRIVER SPECS. - CONSTANT VOLTAGE 24V

**692** — BACK-UP UNITS

**694** — WIRING DIAGRAMS

**698** — WIRING DIAGRAMS - PISTA TRACK 48V



SHELLBY  
PRIVATE RESIDENCE, LISBON (PT)



# CONNECTED LIGHTING

Powered by — Hue & Casambi



CASAMBI

*A simple click, touch, swipe, sound, or even physical presence, is all it takes to control light in a space and adapt it to an activity or to create mood. With the use of smart devices, bring safety and comfort to a space, and let there be light. Turning lights on/off, or dimming them. Adjusting intensity, setting up light routines and in/out modes with an easy setup and features. Using remote control from anywhere, anytime. Yes to all.*

*No need to look further for who can help you with which. Modular Lighting Instruments is your lighting partner in projects that incorporate Hue and Casambi combined, or separately.*

## Turn light into an experience with Hue

Designed with consumers and smart home devices in mind, Hue will give touch of a finger a whole new meaning. One touch or voice command is all it takes to bring interactivity into your lighting plan with the Friends of Hue ecosystem.

## Control light as you wish with Casambi

Casambi fits in commercial applications, residential spaces, hospitality, office and retail environments. With a portfolio dedicated to smart lighting, Casambi is designed for ultimate control of your entire lighting network.


# Choosing a connected technology

What do you have in mind?

Here are a few tips to help you decide what you need.



CASAMBI

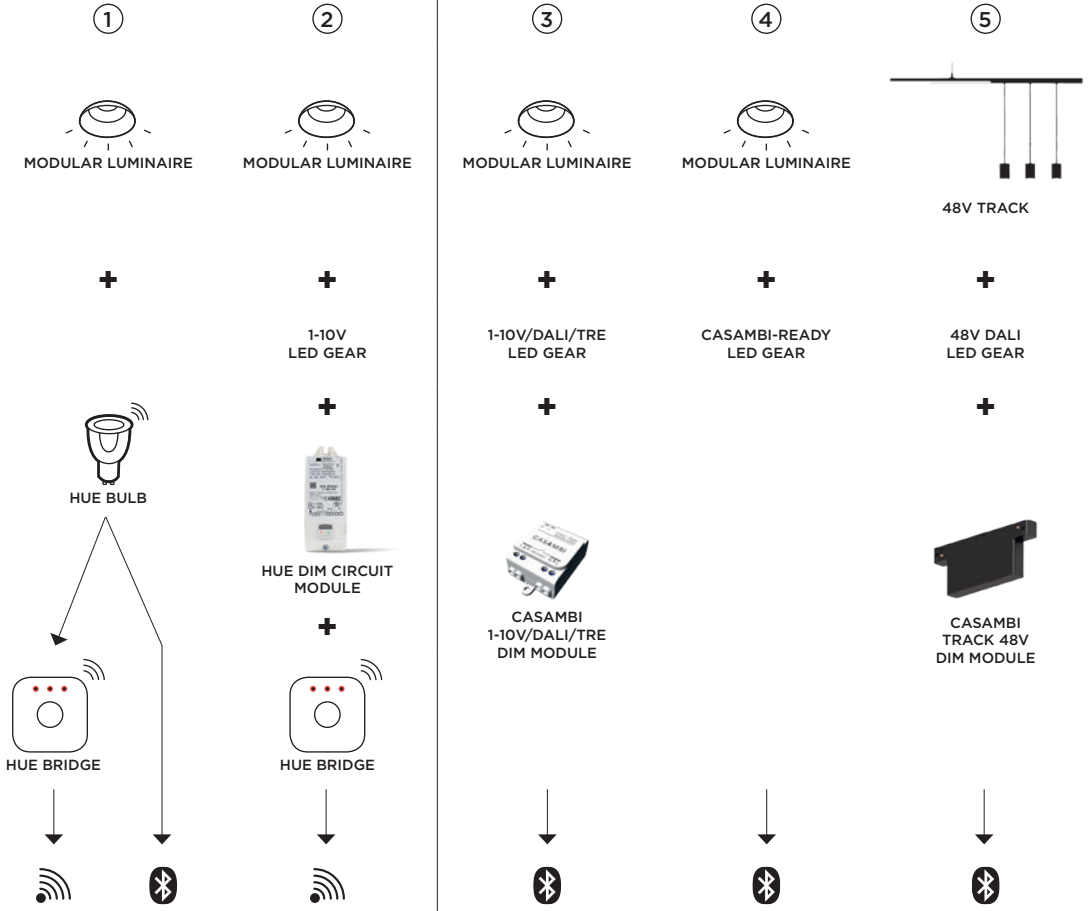

### **Creating a smart room (1)**

Your project is a room with installed luminaires (with GU10 or E27 sockets) without the possibility to change wiring in order to dim your lights. Hue offers connected-ready bulbs, compatible with Bluetooth and Wifi, which you can simply screw in existing luminaires. Just install the app - and create a connection with Hue Bridge if you want to connect via Wifi - and voila. Many of our loved residential luminaires such as Smart, Lotis, Nomad, Duell, and our latest, Tulip, can be retrofitted to incorporate smart lighting.

### **Wanting more than just light (2)**

You're looking to integrate wireless control of lighting in a space, but also want to include more in your wireless system. Hue offers an entire ecosystem. In addition to wireless lighting control, voice, thermostats, blinds and sound control will make your Hue experience even more complete.

### **Working with LED luminaires already connected to LED drivers (2 & 3)**

You want to upgrade a home with the power of connected lighting. Install a Tre, 1-10V or Dali dim module, between the 230V power network and the LED driver and control connected lights with the Casambi app. In case a 1-10V driver is already being used, you can also opt to add a Hue Bridge and a Hue 1-10V dim circuit module to control all lights with the Hue app.

### **Working on a larger, multi-brand project (3)**

Renovation work is already completed, LED luminaires and 1-10V/Dali/Tre LED gears of different brands have already been installed. Now you want to add smart lighting. Thanks to its compatibility with other brands, all you need to do is choose the suitable Casambi dim module (1-10V/Dali/Tre dim), and download the Casambi app. Connected!

### **Building from scratch (4)**

As construction work on an office space or residential project is being done, you get to choose everything. Casambi-compatible LED luminaires or profiles, Casambi-ready gears and that's all. There's no need for extra Casambi modules and the solution is cost effective. Download the app and control as many as 250 luminaires from anywhere in the building.

### **Looking to add a 48V track (5)**


Our 48V Pista system is ready for Casambi. Linear lighting and spots all in one. Just 3 wires per track system and the Casambi 48V track dim module. In combination with Dali fixtures, this allows you to dim all fixtures together or separately. Choose accent lights such as Minude, Marbulito, Médard and Smart tubed, or linear modules to provide your clients with ultimate control of lighting. Lights can easily be adjusted to only use Pista's upright by night, making a warm, cozy ambience even in large spaces.

# Connected lighting - components



## CONNECTED LIGHTING

### HUE

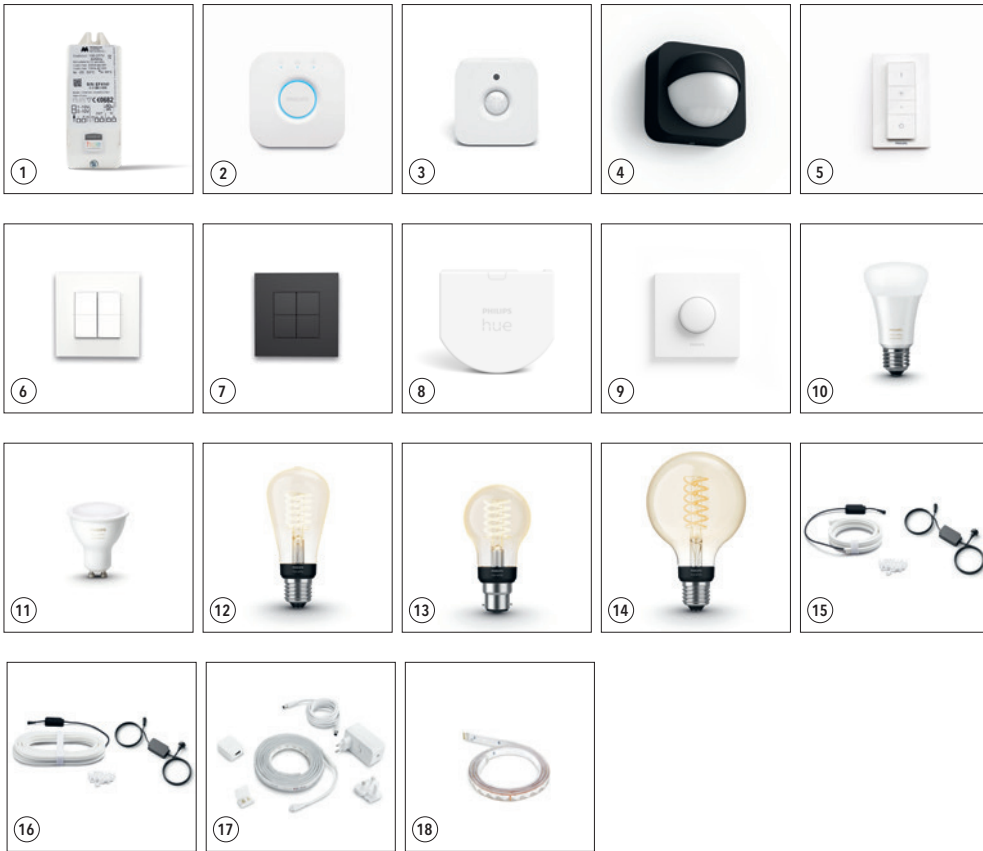

13190130	HUE DIM CIRCUIT MODULE 150-300W 0/1-10V (1)	
70000616	HUE BRIDGE EU (2)	
70000617	HUE BRIDGE UK (2)	
70008054	HUE MOTION SENSOR (3)	
70000191	HUE OUTDOOR MOTION SENSOR (4)	
70000152	HUE DIMMER SWITCH EU (5)	
70000154	NIKO PURE SWITCH FOR HUE - WHITE STEEL (6)	
70000155	NIKO PURE SWITCH FOR HUE - BLACK STEEL (7)	
70000213	HUE SMART BUTTON (8)	
70000214	HUE WALL SWITCH MODULE (9)	
70000184	HUE WHITE AMBIANCE 8.5W A60 E27 (10)	
70000185	HUE WHITE 9W A60 E27 (10)	
70000169	HUE WHITE AND COLOR AMBIANCE 9W A60 E27 (10)	
70000611	HUE WARM WHITE 9.5W A60 E27 EU (10)	
70000188	HUE WHITE FILAMENT 7W ST64 E27 (12)	
70000189	HUE WHITE FILAMENT 7W A60 E27 (13)	
70000190	HUE WHITE FILAMENT 7W G93 E27 (14)	
70000186	HUE WHITE 5.2W GU10 (11)	
70000168	HUE WHITE AMBIANCE 5W GU10 (11)	
70000187	HUE WHITE AND COLOR AMBIANCE 5.7W GU10 (11)	
70000196	HUE WHITE AND COLOR AMBIANCE OUTDOOR LEDSTRIP - 2M (15)	
70000193	HUE WHITE AND COLOR AMBIANCE OUTDOOR LEDSTRIP - 5M (16)	
70000194	HUE LIGHTSTRIP PLUS WHITE AND COLOR AMBIANCE - 2M (17)	
70000195	HUE LIGHTSTRIP PLUS WHITE AND COLOR AMBIANCE - 1M EXTENT (18)	



HUE APP



HUE TAP SWITCH



HUE DIMMER SWITCH



HUE MOTION SENSOR


230V




PLUG 230V



HUE BRIDGE



WIFI ROUTER WITH LAN CONNECTION


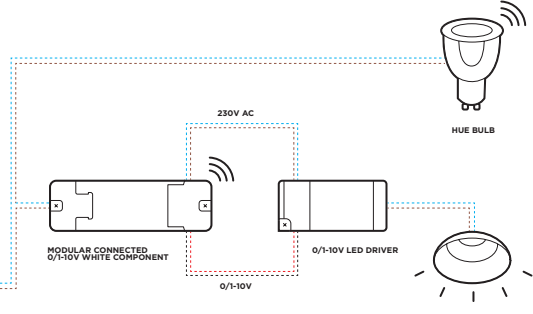


MAX. 8 LED DRIVERS OR 300W ON A MODULAR CONNECTED 0/1-10V WHITE COMPONENT



## CONNECTED LIGHTING

### CASAMBI

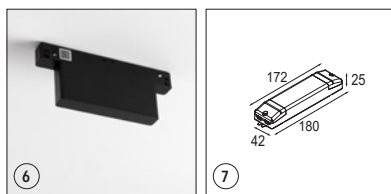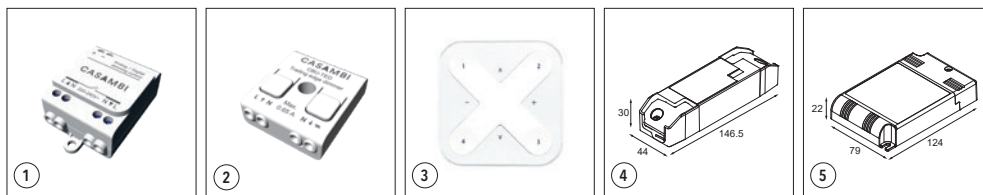

13470100	CASAMBI DIM MODULE 1-10V (1)	
13470101	CASAMBI DIM MODULE TRE DIM (2)	
13470102	CASAMBI DIM MODULE DALI (1)	
13470109	CASAMBI SWITCH WHITE (3)	
13470030	CASAMBI LED GEAR 300-1050MA 16-38W (4)	
13470130	CASAMBI LED GEAR 350-1050MA 25-60W (5)	
13470209	CASAMBI TRACK 48V DIM MODULE WHITE STRUC (6)	
13470232	CASAMBI TRACK 48V DIM MODULE BLACK STRUC (6)	
13470302	CASAMBI TRACK 48V REMOTE DIM MODULE (7)	




CASAMBI APP




CASAMBI SWITCH

TRAILING EDGE DIMMABLE (GI FIXTURES)

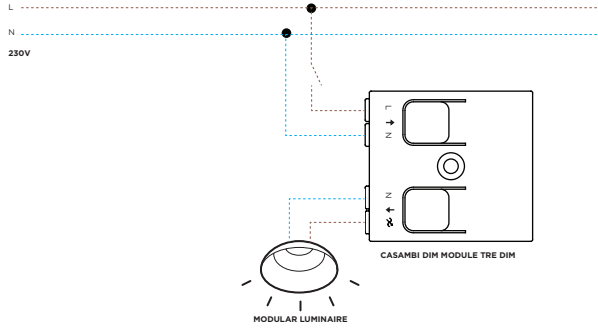


TRAILING EDGE DIMMABLE (GE FIXTURES)

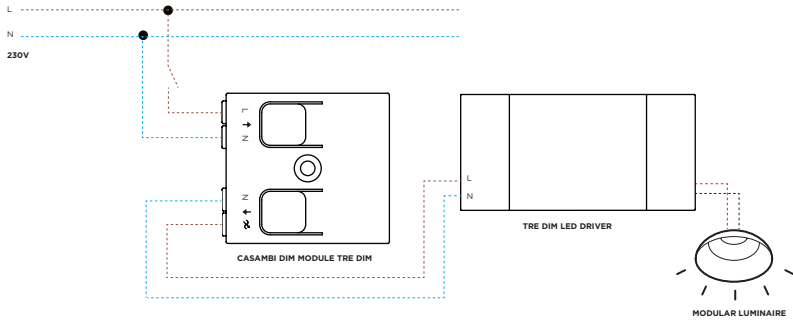


CONNECT ONLY 1 LED DRIVER TO THE CASAMBI MODULE

0/1-10V DIMMABLE

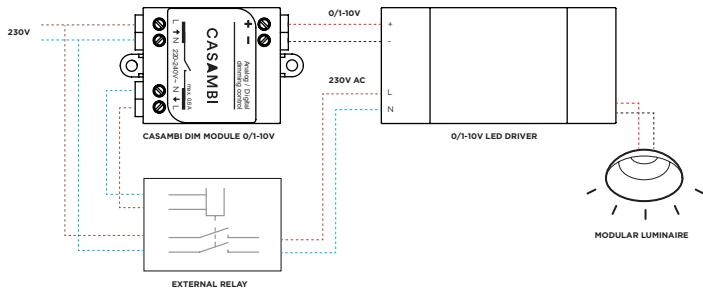

CONNECT ONLY 1 LED DRIVER TO THE CASAMBI MODULE

DALI DIMMABLE

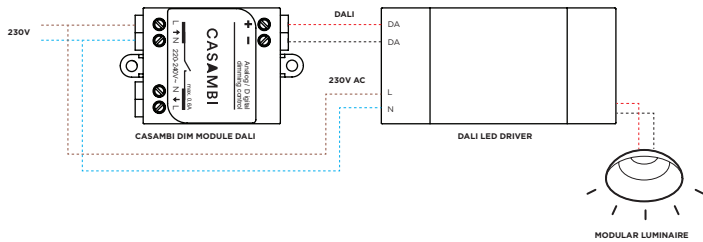

CONNECT ONLY 1 LED DRIVER TO THE CASAMBI MODULE

# Connected lighting - product specifications



## HUE DEVICES

Description	HUE DIM CIRCUIT MODULE 150-300W 0/1-10V	HUE BRIDGE - EU	HUE BRIDGE - UK
Article number	13190130	70000616	70000617
Power supply	198-253V AC / 50-60Hz	100-240 V AC / 50-60Hz	100-240 V AC / 50-60Hz
Power consumption	0.3W (stand-by)	3W	3W
Protection level	IP20	IP20	IP20
Lifetime	50000 hours	30000 hours	30000 hours
Dimensions	127mm x 46mm x 32mm	88 mm x 88 mm x 26 mm	88 mm x 88 mm x 26 mm
Weight	0,09kg		
Range	12m		
Features	<ul style="list-style-type: none"> <li>connect up to 8 1-10V drivers (max. 300W)</li> </ul>	<ul style="list-style-type: none"> <li>connect up to 50 Modular connected 1-10V white components or bulbs and strips, and max. 12 controls</li> </ul>	<ul style="list-style-type: none"> <li>connect up to 50 Modular connected 1-10V white components or bulbs and strips, and max. 12 controls</li> </ul>

## HUE OPTIONAL CONTROLS

Description	HUE DIMMER SWITCH	HUE MOTION SENSOR	HUE OUTDOOR MOTION SENSOR
Article number	70000152	70008054	70000191
Power supply	battery powered	battery powered	battery powered (2x AA)
Protection level	IP20	IP42	IP54
Lifetime	50000 clicks		
Dimensions	115mm x 70mm x 14mm (wall plate) 92mm x 35mm x 11mm (remote)	55mm x 55mm x 29mm	76mm x 76mm x 56mm
Range	12m (depending on local circumstances)	5m (100-degree detection angle)	5m (100-degree detection angle)
Features	<ul style="list-style-type: none"> <li>connect up to 12 dimmer switches to the bridge</li> </ul>	<ul style="list-style-type: none"> <li>connect up to 12 motion sensors to the bridge</li> </ul>	<ul style="list-style-type: none"> <li>connect up to 12 motion sensors to the bridge</li> </ul>

Description	HUE SMART BUTTON	HUE WALL SWITCH MODULE	NIKO PURE SWITCH FOR HUE
Article number	70000213	70000214	70000154 - white steel 70000155 - black steel
Power supply	battery powered	battery powered	kinetic energy provided by your button touch
Protection level	IP44	IP20	IP20
Lifetime	50000 clicks		50000 clicks
Dimensions	76mm x 76mm	43mm x 38mm	85mm x 85mm
Range	12m (depending on local circumstances)	12m (depending on local circumstances)	15-30m (depending on local circumstances)
Features	<ul style="list-style-type: none"> <li>connect up to 12 dimmer switches to the bridge</li> </ul>	<ul style="list-style-type: none"> <li>connect up to 12 dimmer switches to the bridge</li> </ul>	<ul style="list-style-type: none"> <li>connect up to 25 switches to the bridge</li> <li>4 configurable buttons</li> <li>wall mountable</li> </ul>



# Connected lighting - product specifications



01 — CEILING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR

06 — PROFILES

07 — GOODIES

## HUE BULBS

Description	HUE WARM WHITE A60 E27	HUE WHITE A60 E27	HUE WHITE AMBIANCE A60 E27	HUE WHITE AND COLOR AMBIANCE A60 E27
Article number	70000611	70000185	70000184	70000169
Socket	E27	E27	E27	E27
CCT (min - max.)	2700K	2700K	2200K-6500K	2000-6500K
CRI	CRI 80+	CRI 80+	CRI 80+	CRI 80+
Power supply	100-240 V AC / 50-60Hz	220V-240V	220V-240V	220-240V
Power consumption	9.5W	9W	8.5W	9W
Output (min - max.)	806lm	806lm	806lm @ 4000K	806lm @4000K
Dimmable / not dimmable	dimnable	dimnable	dimnable	dimnable
Communication protocol	Wifi	Wifi/Bluetooth	Wifi/Bluetooth	Wifi/Bluetooth
Protection level	IP20	IP20	IP20	IP20
Lifetime	25000 hours	25000 hours	25000 hours	25000 hours

Description	HUE WHITE FILAMENT 7W ST64 E27	HUE WHITE FILAMENT 7W A60 E27	HUE WHITE FILAMENT 7W G93 E27
Article number	70000188	70000189	70000190
Socket	E27	E27	E27
CCT (min - max.)	2100K	2100K	2100K
CRI	CRI 80+	CRI 80+	CRI 80+
Power supply	220V-240V	220V-240V	220V-240V
Power consumption	7W	7W	7W
Output (min - max.)	550lm	550lm	550lm
Dimmable / not dimmable	dimnable	dimnable	dimnable
Communication protocol	Wifi/Bluetooth	Wifi/Bluetooth	Wifi/Bluetooth
Protection level	IP20	IP20	IP20
Lifetime	15000 hours	15000 hours	15000 hours

Description	HUE WHITE GU10	HUE WHITE AMBIANCE GU10	HUE WHITE AND COLOR AMBIANCE GU10
Article number	70000186	70000168	70000187
Socket	GU10	GU10	GU10
CCT (min - max.)	2700K	2200-6500K	2000K-6500K
CRI	CRI 80+	CRI 80+	CRI 80+
Power supply	220V-240V	220V-240V	220V-240V
Power consumption	5.2W	5W	5.7W
Output (min - max.)	400lm	129-292lm	350lm @ 4000K
Dimmable / not dimmable	dimnable	dimnable	dimnable
Communication protocol	Wifi/Bluetooth	Wifi/Bluetooth	Wifi/Bluetooth
Protection level	IP20	IP20	IP20
Lifetime	15000 hours	15000 hours	15000 hours

# Connected lighting - product specifications



HUE LED STRIPS				
Description	HUE WHITE AND COLOR AMBIANCE OUTDOOR LED STRIP - 2M	HUE WHITE AND COLOR AMBIANCE OUTDOOR LED STRIP - 5M	HUE LIGHTSTRIP PLUS WHITE AND COLOR AMBIANCE - 2M	HUE LIGHTSTRIP PLUS WHITE AND COLOR AMBIANCE - 1M EXTENT
Article number	70000196	70000193	70000194	70000195
CCT (min - max.)	2000K-6500K	2000K-6500K	2000K-6500K	2000K-6500K
CRI	CRI 80+	CRI 80+	CRI 80+	CRI 80+
Power supply	100-240 VAC 50-60 Hz	100-240 VAC 50-60 Hz	100-240 VAC 50-60 Hz	100-240 VAC 50-60 Hz
Power consumption	19W	37,5W	20W	11,5W
Output (min - max.)	850lm	1650lm	1600lm	950lm
Dimmable / not dimmable	dimmable	dimmable	dimmable	dimmable
Communication protocol	Wifi	Wifi	Wifi/Bluetooth	Wifi/Bluetooth
Protection level	IP67	IP67	IP20	IP20
Lifetime	25000 hours	25000 hours	25000 hours	25000 hours
Features			including power adapter	

# Connected lighting - product specifications



01 — GELLING

02 — JACK

03 — TRACK

04 — WALL

05 — EXTERIOR

06 — PROFILES

07 — GOODIES

## CASAMBI DEVICES

Description	CASAMBI DIM MODULE 1-10V	CASAMBI DIM MODULE DALI	CASAMBI DIM MODULE TRE DIM	CASAMBI TRACK 48V DIM MODULE
Article number	13470100	13470102	13470101	13470232 - black struc 13470209 - white struc
Power supply	220-240 VAC 50 Hz	220-240 VAC 50 Hz	85-240 VAC 50-60 Hz	24-50 Vdc
Power consumption	1.2W	1.2W	0.3W	5W
Protection level	IP20	IP20	IP20	IP20
Lifetime	50000 hours	50000 hours	50000 hours	
Weight	0,05kg	0,05kg	0,01kg	0.058kg
Dimensions	56.5mm x 35.8mm x 22.3mm	56.5mm x 35.8mm x 22.3mm	40.4mm x 36.3mm x 14mm	142.6mm x 58.1mm
Features	connect max. 1 driver	connect max. 1 driver	connect max. 1 driver	connect up to 64 dali 48V track fixtures
Communication protocol	Bluetooth	Bluetooth	Bluetooth	Bluetooth

## CASAMBI OPTIONAL CONTROLS

Description	CASAMBI SWITCH WHITE
Article number	713470109
Power supply	battery powered (1x CR2430)
Protection level	IP20
Dimensions	90mm x 90mm x 12 mm
Range	up to 50m in open air
Features	battery lifetime 2-5 years (depending on usage)


## CASAMBI LED GEAR

Description	CASAMBI LED GEAR 300-1050MA 16-38W	CASAMBI LED GEAR 350-1050MA 25-60W
Article number	13470030	13470130
Power supply	220-240 VAC 50-60 Hz	220-240 VAC 50-60 Hz
Power consumption	16-38W	25-60W
Protection level	IP20	IP20
Weight	0.139kg	0.215kg
Dimensions	146.5mm x 44mm x 30mm	124mm x 79mm x 22mm
Communication protocol	Bluetooth	Bluetooth

# M-LED



## M-LED 111 GE



1X LED ARRAY INCL. 16.25W

! CAN BE COMBINED WITH BOLSTER RECESSED, HALOSCAN 179, LOTIS AND MULTIPLE (TRIMLESS)




2700K / CRI90+			
	15°	25°	40°
black matt	11298002	11298102	11298202
brushed alu	11298024	11298124	11298224
white struc	11298009	11298109	11298209
3000K / CRI90+			
	15°	25°	40°
black matt	11298302	11298402	11298502
brushed alu	11298324	11298424	11298524
white struc	11298309	11298409	11298509
4000K / CRI90+			
	15°	25°	40°
black matt	11298602	11298702	11298802
brushed alu	11298624	11298724	11298824
white struc	11298609	11298709	11298809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA	700mA
2700K / 25°	920lm 11W	<b>1256lm 16.25W</b>	1625lm 23.6W
3000K / 25°	904lm 11W	<b>1233lm 16.25W</b>	1596lm 23.6W
4000K / 25°	1053lm 11W	<b>1437lm 16.25W</b>	1860lm 23.6W

## M-LED 70 GE



1X LED ARRAY INCL. 9.2W

! CAN BE COMBINED WITH MINI MULTIPLE (TRIMLESS)




2700K / CRI90+			
	15°	25°	40°
<b>black</b>	14070002	14070102	14070202
<b>white struc</b>	14070009	14070109	14070209
3000K / CRI90+			
	15°	25°	40°
<b>black</b>	14070302	14070402	14070502
<b>white struc</b>	14070309	14070409	14070509
4000K / CRI90+			
	15°	25°	40°
<b>black</b>	14070602	14070702	14070802
<b>white struc</b>	14070609	14070709	14070809

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

	350mA	500mA
2700K / 25°	519lm 6.2W	667lm 9.2W
3000K / 25°	550lm 6.2W	739lm 9.2W
4000K / 25°	590lm 6.2W	792lm 9.2W

WARM DIM

## M-LED 70 warm dim GE



1X LED ARRAY INCL. 6W

! CAN BE COMBINED WITH MINI MULTIPLE (TRIMLESS)




1800K - 3000K / CRI90+			
	20°	25°	40°
<b>black</b>	14070902	14071002	14071102
<b>white struc</b>	14070909	14071009	14071109

### LUMINAIRE OUTPUT & POWER CONSUMPTION (white struc)

@3000K / 25°	456lm / 6W
--------------	------------

## M-LED 50 GE



1X LED ARRAY INCL. 9.2W

! CAN BE COMBINED WITH LOTIS, ASY LOTIS AND LOTIS SQUARE




		2700K / CRI90+					
		15°		25°		40°	
alu		14060005		14060105		14060205	
		3000K / CRI90+					
		15°		25°		40°	
alu		14060305		14060405		14060505	
		3500K / CRI90+			4000K / CRI90+		
		15°	25°	40°	15°	25°	40°
alu		14060605	14060705	14060805	14060905	14061005	14061105

### LUMINAIRE OUTPUT & POWER CONSUMPTION (alu)

	350mA	500mA
2700K / 25°	519lm 6.2W	667lm 9.2W
3000K / 25°	550lm 6.2W	739lm 9.2W
3500K / 25°	571lm 6.2W	768lm 9.2W
4000K / 25°	590lm 6.2W	792lm 9.2W

WARM DIM

## M-LED 50 warm dim GE



1 X LED ARRAY INCL. 6W

! CAN BE COMBINED WITH LOTIS, ASY LOTIS AND LOTIS SQUARE



		1800K - 3000K / CRI90+		
		15°	25°	40°
alu		14061205	14061305	14061405

### LUMINAIRE OUTPUT & POWER CONSUMPTION (alu)

@3000K / 25°	461lm / 6W
--------------	------------

# LED SPOTS & TUBES

## LED SPOTS & TUBES



Description	PH MAS LEDSP EXPERTCOLOR MV 3.9-35W GU10 927 25° (1)	PH MAS LEDSP EXPERTCOLOR MV 3.9-35W GU10 927 36° (1)	PH MAS LEDSP EXPERTCOLOR MV 3.9-35W GU10 930 25° (1)
Article number	70008052	70008059	70008063
Socket	GU10	GU10	GU10
Lumen output	265lm	265lm	280lm
Beam angle	25°	36°	25°
CCT	2700K	2700K	3000K
CRI	97	97	97
Dimmable	Only with specific dimmers	Only with specific dimmers	Only with specific dimmers
Power	3.9W (35W)	3.9W (35W)	3.9W (35W)
Power supply	220V-240V	220V-240V	220V-240V
Lifetime	40000 hours	40000 hours	40000 hours


Description	PH MAS LEDSP EXPERTCOLOR MV 5.5-50W GU10 927 25° (1)	PH MAS LEDSP EXPERTCOLOR MV 5.5-50W GU10 927 36° (1)	PH MAS LEDSP EXPERTCOLOR MV 5.5-50W GU10 930 25° (1)	PH MAS LEDSP EXPERTCOLOR MV 5.5-50W GU10 930 36° (1)
Article number	70008048	70008049	70008050	70008053
Socket	GU10	GU10	GU10	GU10
Lumen output	355lm	355lm	375lm	375lm
Beam angle	25°	36°	25°	36°
CCT	2700K	2700K	3000K	3000K
CRI	97	97	97	97
Dimmable	Only with specific dimmers	Only with specific dimmers	Only with specific dimmers	Only with specific dimmers
Power	5.5W (50W)	5.5W (50W)	5.5W (50W)	5.5W (50W)
Power supply	220V-240V	220V-240V	220V-240V	220V-240V
Lifetime	40000 hours	40000 hours	40000 hours	40000 hours

Description	VL LED AR111 12V 12W 2700K MEDIUM (2)	VL LED AR111 12V 12W 2000-3000K MEDIUM (2)	PH LEDTUBE 3W 300MM S14D 2700K NOT DIMMABLE (3)	OS LEDINESTRA 7W/827 FR S14D 500MM (4)
Article number	70008066	70008067	70008058	70005798
Socket	QR-LP 111	QR-LP 111	S14d	S14d
Lumen output	900lm	628lm	250lm	470lm
Beam angle	24°	24°	140°	200°
CCT	2700K	2000-3000K	2700K	2700K
CRI	92	95	82	80+
Dimmable	yes	yes	not dimmable	yes
Power	12W (75W)	12W (75W)	3W (35W)	7W (40W)
Power supply	12V AC	12V AC	220V-240V	220V-240V
Lifetime	30000 hours	30000 hours	15000 hours	25000 hours




# LED-STRIP 24V

## LED-STRIP 5M 24V GE




	1000LM/M			2000LM/M		
	2700K / CRI90	3000K / CRI90	4000K / CRI90	2700K / CRI90	3000K / CRI90	4000K / CRI90
not mounted (roll 5m)	93000515	93000516	93000517	93000007	93000008	93000009

## LED-STRIP IP44 5M 24V GE





	1000LM/M			2000LM/M		
	2700K / CRI90	3000K / CRI90	4000K / CRI90	2700K / CRI90	3000K / CRI90	4000K / CRI90
not mounted (roll 5m)	93000016	93000017	93000018	93000026	93000027	93000028



## LED-STRIP IP44 3M 24V GE













	1000LM/M			2000LM/M		
	2700K / CRI90	3000K / CRI90	4000K / CRI90	2700K / CRI90	3000K / CRI90	4000K / CRI90
not mounted (roll 5m)	93000032	93000033	93000034	93000035	93000036	93000037

# Driver specs. - constant current

			
Reference	<b>13550130</b>	<b>13550030</b>	
Dimensions (LxWxH)	115x34x19	115x34x19	
Input	220-240V 50/60Hz	220-240V 50/60Hz	
Ambient temperature	-25°C to +45°C	-25°C to +50°C	
Power factor (max)	0.8	0.88	
Dimming	-	-	
Max drivers on MCB 16A type B*	27	27	
Output	<b>350mA / 15W</b> 2-41.5V DC	<b>500mA / 12W</b> 2-24V DC	




			
Reference	<b>12408830</b>		
Dimensions (LxWxH)	ø42x20		
Input	220-240V 50/60Hz		
Ambient temperature	-20°C to +60°C		
Power factor (max)	>0.92		
Dimming	-		
Max drivers on MCB 16A type B*	75		
Output	<b>350mA / 14W</b> 21-40V DC		








						
Reference	<b>12403430</b>					
Dimensions (LxWxH)	124x79x22					
Input	220-240V 50/60Hz					
Ambient temperature	-25°C to +45°C					
Power factor (max)	0.95					
Dimming	-					
Max drivers on MCB 16A type B*	15					
Output	<b>350mA / 25W</b> 1-74V DC	<b>500mA / 35W</b> 1-72V DC	<b>700mA / 50W</b> 1-71V DC	<b>900mA / 50W</b> 1-55V DC	<b>1050mA / 50W</b> 1-48V DC	
DIP-switch setting (check on driver)						








				 
Reference	<b>12407230</b>	<b>12404830</b>	<b>12404930</b>	
Dimensions (LxWxH)	102x38x21	102x38x21	102x38x21	
Input	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	
Ambient temperature	-25°C to +45°C	-25°C to +45°C	-25°C to +45°C	
Power factor (max)	0.96	0.96	0.96	
Dimming	TRAILING EDGE/LEADING EDGE (AM)	TRAILING EDGE/LEADING EDGE (AM)	TRAILING EDGE/LEADING EDGE (AM)	
Max drivers on MCB 16A type B*	50	50	50	
Output	<b>250mA / 3-7W</b> 14-28V DC	<b>350mA / 4-10W</b> 12-28V DC	<b>500mA / 5-10W</b> 10-20V DC	







\* FOR OTHER TYPES OF MCB, SEE TABLE PAGE 687

# Driver specs. - constant current



































	  		
Reference	<b>12404230</b>	<b>12404330</b>	<b>12408530</b>
Dimensions (LxWxH)	111x52x22	111x52x22	111x52x22
Input	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-25°C to +50°C	-25°C to +45°C	-25°C to +45°C
Power factor (max)	0.95	0.95	0.95
Dimming	TRAILING EDGE/LEADING EDGE (AM)	TRAILING EDGE/LEADING EDGE (AM)	TRAILING EDGE/LEADING EDGE (AM)
Max drivers on MCB 16A type B*	50	50	50
Output	<b>350mA</b> / 8-18W 25-51V DC	<b>500mA</b> / 8-20W 16-40V DC	<b>700mA</b> / 8-20W 16-28V DC

























	   		
Reference	<b>12400330</b>		
Dimensions (LxWxH)	166x46x34		
Input	220-240V 50/60Hz		
Ambient temperature	-25°C to +45°C		
Power factor (max)	0.97		
Dimming	TRAILING EDGE/LEADING EDGE/PUSH DIM (PWM)		
Max drivers on MCB 16A type B*	50		
Output	<b>350mA</b> / 17W 1-47V DC	<b>500mA</b> / 24W 1-47V DC	<b>700mA</b> / 32W 1-46V DC
DIP-switch setting (check on driver)			

























	   		
Reference	<b>12405730</b>		
Dimensions (LxWxH)	163x83x35		
Input	220-240V 50/60Hz		
Ambient temperature	-25°C to +50°C		
Power factor (max)	0.88		
Dimming	MAINS/PUSH (PWM)		
Max drivers on MCB 16A type B*	30		
Output	<b>1050mA</b> / 1-455W 2-43V DC	<b>1200mA</b> / 1-50W 2-42V DC	<b>1400mA</b> / 1-50W 2-36V DC
DIP-switch setting (check on driver)			



































	  		
Reference	<b>12409130</b>		
Dimensions (LxWxH)	135x30x20		
Input	100-240V 50/60Hz		
Ambient temperature	-30°C to +50°C		
Power factor (max)	0.85		
Dimming	1-10V (PWM)		
Max drivers on MCB 16A type B*	100		
Output	<b>350mA</b> / 8.4W 10-24V DC	<b>500mA</b> / 12W 10-24V DC	<b>700mA</b> / 12W 10-17V DC
DIP-switch setting (check on driver)			

# Driver specs. - constant current

	   				
Reference	<b>12407730</b>				
Dimensions (LxWxH)	111x52x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +50°C				
Power factor (max)	0.95				
Dimming	0/1-10V/PUSH (AM+PWM)				
Max drivers on MCB 16A type B*	50				
Output	<b>250mA / 13W</b> 20-53V DC	<b>350mA / 18W</b> 15-50V DC	<b>500mA / 20W</b> 5-40V DC	<b>700mA / 20W</b> 3-29V DC	<b>900mA / 20W</b> 3-23V DC
DIP-switch setting (check on driver)	     	     	     	     	     










	   				
Reference	<b>12408030</b>				
Dimensions (LxWxH)	111x52x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +50°C				
Power factor (max)	0.95				
Dimming	0/1-10V/PUSH (AM)				
Max drivers on MCB 16A type B*	50				
Output	<b>250mA / 13W</b> 20-53V DC	<b>350mA / 18W</b> 15-50V DC	<b>500mA / 20W</b> 5-40V DC	<b>700mA / 20W</b> 3-29V DC	<b>900mA / 20W</b> 3-23V DC
DIP-switch setting (check on driver)	   	   	   	   	   












	   				
Reference	<b>12408230</b>				
Dimensions (LxWxH)	103x67x21				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.95				
Dimming	0/1-10V/PUSH (push dim: optional sync cable 12400100) (AM)				
Max drivers on MCB 16A type B*	15				
Output	<b>250mA / 13W</b> 15-53V DC	<b>350mA / 18W</b> 10-53V DC	<b>500mA / 25W</b> 2-50V DC	<b>700mA / 32W</b> 2-46V DC	<b>900mA / 20W</b> 2-22V DC
DIP-switch setting (check on driver)	   	   	   	   	   












	   				
Reference	<b>12405430</b>				
Dimensions (LxWxH)	103x67x21				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.95				
Dimming	1-10V/PUSH (PWM)				
Max drivers on MCB 16A type B*	50				
Output	<b>250mA / 13W</b> 15-53V DC	<b>350mA / 18W</b> 10-53V DC	<b>500mA / 25W</b> 2-50V DC	<b>700mA / 32W</b> 2-46V DC	<b>900mA / 20W</b> 2-22V DC
DIP-switch setting (check on driver)	     	     	     	     	     













\* FOR OTHER TYPES OF MCB, SEE TABLE PAGE 687

# Driver specs. - constant current











	   				
Reference	<b>12407130</b>				
Dimensions (LxWxH)	146.5x44x30				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +40°C				
Power factor (max)	0.95				
Dimming	1-10V (AM)				
Max drivers on MCB 16A type B*	50				
Output	<b>350mA / 1-18W</b> 10-54V DC	<b>500mA / 1-27W</b> 10-54V DC	<b>700mA / 1-36W</b> 10-51V DC	<b>900mA / 1-36W</b> 10-40V DC	<b>1050mA / 1-36W</b> 10-35V DC
DIP-switch setting (check on driver)					




	     				
Reference	<b>12406630</b>				
Dimensions (LxWxH)	124x79x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +50°C				
Power factor (max)	0.95				
Dimming	1-10V/PUSH (AM)				
Max drivers on MCB 16A type B*	15				
Output	<b>350mA / 25W</b> 2-74V DC	<b>500mA / 35W</b> 2-72V DC	<b>700mA / 50W</b> 2-72V DC	<b>900mA / 60W</b> 2-66V DC	<b>1050mA / 60W</b> 2-57V DC
DIP-switch setting (check on driver)					











	     				
Reference	<b>12406730</b>				
Dimensions (LxWxH)	124x79x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +50°C				
Power factor (max)	0.95				
Dimming	1-10V/PUSH (AM+PWM)				
Max drivers on MCB 16A type B*	15				
Output	<b>350mA / 25W</b> 2-74V DC	<b>500mA / 35W</b> 2-72V DC	<b>700mA / 50W</b> 2-72V DC	<b>900mA / 60W</b> 2-66V DC	<b>1050mA / 60W</b> 2-57V DC
DIP-switch setting (check on driver)					

	      				
Reference	<b>12406830</b>				
Dimensions (LxWxH)	124x79x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +50°C				
Power factor (max)	0.95				
Dimming	1-10V/DALI/PUSH (AM+PWM)				
Max drivers on MCB 16A type B*	30				
Output	<b>350mA / 25W</b> 2-74V DC	<b>500mA / 35W</b> 2-72V DC	<b>700mA / 50W</b> 2-72V DC	<b>900mA / 60W</b> 2-66V DC	<b>1050mA / 60W</b> 2-57V DC
DIP-switch setting (check on driver)					











# Driver specs. - constant current











	     			
Reference	<b>12407830</b>			
Dimensions (LxWxH)	124x79x22			
Input	220-240V 50/60Hz			
Ambient temperature	-25°C to +50°C			
Power factor (max)	0.95			
Dimming	0/1-10V/PUSH/DALI (AM+PWM)			
Max drivers on MCB 16A type B*	30			
Output	<b>250mA / 28W</b> 20-112V DC	<b>350mA / 39W</b> 20-112V DC	<b>500mA / 56W</b> 2-112V DC	<b>700mA / 60W</b> 2-86V DC
DIP-switch setting (check on driver)				









	  			
Reference	<b>12409230</b>	<b>12409330</b>	<b>12409430</b>	<b>12409530</b>
Dimensions (LxWxH)	145x31x21	145x31x21	145x31x21	145x31x21
Input	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-20°C to +50°C	-20°C to +50°C	-20°C to +50°C	-20°C to +50°C
Power factor (max)	0.94	0.94	0.94	0.94
Dimming	DALI2 (AM)	DALI2 (AM)	DALI2 (AM)	DALI2 (AM)
Max drivers on MCB 16A type B*	130	130	130	130
Output	<b>250mA / 10W</b> 5-42V DC	<b>350mA / 10W</b> 4-30V DC	<b>500mA / 10W</b> 10-20V DC	<b>700mA / 10W</b> 2.5-14V DC









	    				
Reference	<b>12406530</b>				
Dimensions (LxWxH)	124x79x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +50°C				
Power factor (max)	0.95				
Dimming	DALI/1-10V/PUSH (AM)				
Max drivers on MCB 16A type B*	30				
Output	<b>350mA / 25W</b> 2-74V DC	<b>500mA / 35W</b> 2-72V DC	<b>700mA / 50W</b> 2-72V DC	<b>900mA / 60W</b> 2-66V DC	<b>1050mA / 60W</b> 2-57V DC
DIP-switch setting (check on driver)					

# Driver specs. - constant current








	     			
Reference	<b>12404030</b>			
Dimensions (LxWxH)	129x76x30			
Input	220-240V 50/60Hz			
Ambient temperature	-25°C to +50°C			
Power factor (max)	0.95			
Dimming	DALI/1-10V/PUSH DIM (push dim: optional sync cable 12400100) (PWM)			
Max drivers on MCB 16A type B*	15			
Output	<b>1050mA / 45W</b> 1-44V DC	<b>1200mA / 52W</b> 1-44V DC	<b>1400mA / 55W</b> 1-39V DC	<b>1600mA / 55W</b> 1-35V DC
DIP-switch setting (check on driver)				







	     			
Reference	<b>12408330</b>			
Dimensions (LxWxH)	124x79x22			
Input	220-240V 50/60Hz			
Ambient temperature	-25°C to +50°C			
Power factor (max)	0.95			
Dimming	0/1-10V/DALI2/PUSH (push dim: optional sync cable 12400100) (AM)			
Max drivers on MCB 16A type B*	15			
Output	<b>250mA / 28W</b> 20-112V DC	<b>350mA / 39W</b> 20-112V DC	<b>500mA / 56W</b> 2-112V DC	<b>700mA / 60W</b> 2-86V DC
DIP-switch setting (check on driver)				









	   			
Reference	<b>12407630</b>			
Dimensions (LxWxH)	111x52x22			
Input	220-240V 50/60Hz			
Ambient temperature	-25°C to +45°C			
Power factor (max)	0.92			
Dimming	DALI (AM+PWM)			
Max drivers on MCB 16A type B*	50			
Output	<b>250mA / 20W</b> 15-49V DC	<b>350mA / 17W</b> 2-49V DC	<b>500mA / 20W</b> 2-40V DC	<b>700mA / 20W</b> 2-28V DC
DIP-switch setting (check on driver)				

	   			
Reference	<b>12407930</b>			
Dimensions (LxWxH)	111x52x22			
Input	220-240V 50/60Hz			
Ambient temperature	-25°C to +45°C			
Power factor (max)	0.92			
Dimming	DALI2 (AM)			
Max drivers on MCB 16A type B*	50			
Output	<b>250mA / 20W</b> 15-49V DC	<b>350mA / 17W</b> 2-49V DC	<b>500mA / 20W</b> 2-40V DC	<b>700mA / 20W</b> 2-28V DC
DIP-switch setting (check on driver)				

# Driver specs. - constant current






	  			
Reference	<b>12408130</b>			
Dimensions (LxWxH)	103x67x21			
Input	220-240V 50/60Hz			
Ambient temperature	-25°C to +50°C			
Power factor (max)	0.95			
Dimming	DALI2 (AM)			
Max drivers on MCB 16A type B*	50			
Output	<b>250mA / 12W</b> 10-48V DC	<b>350mA / 17W</b> 5-48V DC	<b>500mA / 24W</b> 5-48V DC	<b>700mA / 32W</b> 3-46V DC
DIP-switch setting (check on driver)				





	  		
Reference	<b>13551430</b>		
Dimensions (LxWxH)	135x30x20		
Input	100-240V 50/60Hz		
Ambient temperature	-30°C to +50°C		
Power factor (max)	0.95		
Dimming	DALI (PWM)		
Max drivers on MCB 16A type B*	16		
Output	<b>350mA / 8.4W</b> 10-24V DC	<b>500mA / 12W</b> 10-24V DC	<b>700mA / 12W</b> 10-17V DC
DIP-switch setting (check on driver)			





	  				
Reference	<b>12405630</b>				
Dimensions (LxWxH)	146.5x44x30				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.9				
Dimming	DALI2 (AM)				
Max drivers on MCB 16A type B*	50				
Output	<b>350mA / 1-18.5W</b> 10-54V DC	<b>500mA / 1-27W</b> 10-54V DC	<b>700mA / 1-38W</b> 10-54V DC	<b>900mA / 1-38W</b> 10-43V DC	<b>1050mA / 1-38W</b> 10-36V DC
DIP-switch setting (check on driver)					



# Driver specs. - constant current

	    				
Reference	<b>12404730</b>				
Dimensions (LxWxH)	169x83x35				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.98				
Dimming	DALI/1-10V/PUSH (PWM) (push dim: optional sync cable 12400100)				
Max drivers on MCB 16A type B*	30				
Output	<b>350mA / 25W</b> 1-71V DC	<b>500mA / 35W</b> 1-70V DC	<b>700mA / 50W</b> 1-70V DC	<b>900mA / 50W</b> 1-55V DC	<b>1050mA / 50W</b> 1-48V DC
DIP-switch setting (check on driver)	ON OFF 1 2 3 4 5 6	ON OFF 1 2 3 4 5 6	ON OFF 1 2 3 4 5 6	ON OFF 1 2 3 4 5 6	ON OFF 1 2 3 4 5 6




	   				
Reference	<b>13470030</b>				
Dimensions (LxWxH)	147x44x30				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +45°C				
Power factor (max)	0.9				
Dimming	Casambi (AM)				
Max drivers on MCB 16A type B*	50				
Output	<b>350mA / 18W</b> 10-54V DC	<b>500mA / 27W</b> 10-54V DC	<b>700mA / 38W</b> 10-51V DC	<b>900mA / 38W</b> 10-42V DC	<b>1050mA / 38W</b> 10-36V DC
DIP-switch setting (check on driver)	OFF ON 1 2 3 4	OFF ON 1 2 3 4	OFF ON 1 2 3 4	OFF ON 1 2 3 4	OFF ON 1 2 3 4




	   				
Reference	<b>13470130</b>				
Dimensions (LxWxH)	124x79x22				
Input	220-240V 50/60Hz				
Ambient temperature	-25°C to +50°C				
Power factor (max)	0.92				
Dimming	Casambi (AM)				
Max drivers on MCB 16A type B*	30				
Output	<b>350mA / 25W</b> 2-74V DC	<b>500mA / 35W</b> 2-72V DC	<b>700mA / 50W</b> 2-72V DC	<b>900mA / 60W</b> 2-66V DC	<b>1050mA / 60W</b> 2-57V DC
DIP-switch setting (check on driver)	OFF ON 6 5 4 3 2 1	OFF ON 6 5 4 3 2 1	OFF ON 6 5 4 3 2 1	OFF ON 6 5 4 3 2 1	OFF ON 6 5 4 3 2 1







## CONVERSION TABLE FOR MAX. QUANTITIES OF DRIVERS ON OTHER TYPES OF MINIATURE CIRCUIT BREAKER

MCB type	MAX. CURRENT	RELATIVE NUMBER OF DRIVERS
B	25A	156%
B	20A	125%
B	16A	100%
B	10A	63%
C	25A	260%
C	20A	208%
C	16A	170%
C	10A	104%




# Driver specs. - constant current | deep dim





	  							
	<b>20W</b>							
Reference	<b>11631230</b>	<b>11630030</b>	<b>11630130</b>	<b>11630230</b>	<b>11631330</b>	<b>11630330</b>	<b>11630430</b>	<b>11630530</b>
Dimensions (LxWxH)	160.5x42x31							
Input	198-264V 50/60Hz							
Ambient temperature	-20°C to +50°C							
Power factor (max)	>0.95							
Dim	DALI2 (AM+PWM)	DALI2 (AM+PWM)	DALI2 (AM+PWM)	DALI2 (AM+PWM)	O/1-10V (AM+PWM)	O/1-10V (AM+PWM)	O/1-10V (AM+PWM)	O/1-10V (AM+PWM)
Max drivers on MCB 16A type B*	106	106	106	106	106	106	106	106
Output voltage / Power range	250mA/20W 2-40V DC	350mA/20W 2-40V DC	500mA/20W 2-40V DC	700mA/20W 2-40V DC	250mA/20W 2-40V DC	350mA/20W 2-40V DC	500mA/20W 2-40V DC	700mA/20W 2-40V DC





	  					
<b>1 DRIVER WITH 2X LED OUTPUT</b>	<b>50W</b>					
Reference	<b>11630630</b>	<b>11630730</b>	<b>11630830</b>	<b>11630930</b>	<b>11631030</b>	<b>11631130</b>
Dimensions (LxWxH)	153x76.2x30.1					
Input	120-255V 50/60Hz					
Ambient temperature	-20°C to +50°C					
Power factor (max)	>0.9					
Dim	DALI2 (AM+PWM)	DALI2 (AM+PWM)	DALI2 (AM+PWM)	O/1-10V (AM+PWM)	O/1-10V (AM+PWM)	O/1-10V (AM+PWM)
Max drivers on MCB 16A type B*	22	22	22	22	22	22
Output voltage / Power range	350mA/50W 1.5-55V DC	500mA/50W 1.5-55V DC	700mA/50W 1.5-55V DC	350mA/50W 1.5-55V DC	500mA/50W 1.5-55V DC	700mA/50W 1.5-55V DC

	  		
	<b>11631430</b>		
Reference			
Dimensions (LxWxH)	111x35x20		
Input	220-240V 50/60Hz		
Ambient temperature	-20°C to +45°C		
Power factor (max)	0.97		
Dimming	TRAILING EDGE (PWM)		
Max drivers on MCB 16A type B*	8		
Output	<b>350mA / 15W</b> 9-42V DC	<b>500mA / 15W</b> 9-30V DC	<b>700mA / 15W</b> 9-21.5V DC
DIP-switch setting (check on driver)			







# Driver specs. - constant voltage 48V









			
Reference	<b>12407530</b>	<b>13551530</b>	<b>12408430</b>
Dimensions (LxWxH)	125x63.5x123.6	105x90x58.4	125x83x126
Input	90-264V 50/60Hz	85-264V 50/60Hz	90-264V 50/60Hz
Ambient temperature	-40°C to +70°C	-30°C to +45°C	-40°C to +70°C
Power factor (max)	0.70	0.70	0.70
Dim	NOT DIMMABLE	NOT DIMMABLE	NOT DIMMABLE
Max drivers on MCB 16A type B*	8	1	8
Output voltage / Power range	48V / 0-120W (DIN RAIL)	48V / 0-150W (DIN RAIL)	48V / 0-240W (DIN RAIL)




				
Reference	<b>13550730</b>	<b>13550630</b>	<b>12408730</b>	<b>13550230</b>
Dimensions (LxWxH)	240x60x49	225x60x36	180x52x30	350x30x18
Input	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-40°C to +45°C	-40°C to +45°C	-15°C to +45°C	-25°C to +45°C
Power factor (max)	0.98	0.97	0.95	0.95
Dim	NOT DIMMABLE	NOT DIMMABLE	NOT DIMMABLE	NOT DIMMABLE
Max drivers on MCB 16A type B*	8	15	15	10
Output voltage / Power range	48V / 50-150W	48V / 0-70W	48V / 0-75W	48V / 0-100W








				
Reference	<b>12408630</b>	<b>13550330</b>	<b>12408930</b>	<b>12409030</b>
Dimensions (LxWxH)	300x40x30	350x30x18	244x68x39	252x90x44
Input	220-240V 50/60Hz	220-240V 50/60Hz	90-305V 50/60Hz	90-305V 50/60Hz
Ambient temperature	-15°C to +45°C	-25°C to +45°C	-40°C to +90°C	-40°C to +90°C
Power factor (max)	0.95	0.95	0.95	0.95
Dim	NOT DIMMABLE	NOT DIMMABLE	NOT DIMMABLE	NOT DIMMABLE
Max drivers on MCB 16A type B*	15	8	2	1
Output voltage / Power range	48V / 0-120W	48V / 0-150W	48V / 0-240W	48V / 0-320W

# Driver specs. - constant voltage 24V

	 	 	 
Reference	<b>12405830</b>	<b>12401830</b>	<b>12405930</b>
Dimensions (LxWxH)	146x55x19	241x43x30	300x40x30
Input	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-25°C to +50°C	-30°C to +60°C	-25°C to +45°C
Power factor (max)	0.55	0.97	0.95
Dim	NOT DIMMABLE	NOT DIMMABLE	NOT DIMMABLE
Max drivers on MCB 16A type B*	27	6	11
Output voltage / Power range	24V / 0-20W	24V / 0-100W	24V / 0-120W

	 	  	  
Reference	<b>12405030</b>	<b>12402030</b>	<b>12402130</b>
Dimensions (LxWxH)	240x60x49	146x55x19	250x50x34
Input	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-40°C to +45°C	-25°C to +50°C	-25°C to +55°C
Power factor (max)	0.97	0.95	0.9
Dim	NOT DIMMABLE	1-10V	1-10V
Max drivers on MCB 16A type B*	8	27	10
Output voltage / Power range	24V / 0-150W	24V / 0-25W	24V / 28-80W

	  
Reference	<b>12402230</b>
Dimensions (LxWxH)	250x60x39
Input	220-240V 50/60Hz
Ambient temperature	-25°C to +55°C
Power factor (max)	0.9
Dim	1-10V
Max drivers on MCB 16A type B*	10
Output voltage / Power range	24V / 60-120W

	  	   
Reference	<b>12406030</b>	<b>12406130</b>
Dimensions (LxWxH)	166x46x34	240x60x49
Input	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-25°C to +50°C	-25°C to +50°C
Power factor (max)	0.6	0.98
Dim	PUSHDIM	1-10V / PUSHDIM
Max drivers on MCB 16A type B*	27	8
Output voltage / Power range	24V / 0-22W	24V / 0-120W

Reference	<b>12403930</b>	<b>12405230</b>
Dimensions (LxWxH)	110x52x20	295x43x30
Input	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	-25°C to +45°C	-25°C to +45°C
Power factor (max)	0.92	0.93
Dim	DALI	PUSHDIM / DALI / DSI
Max drivers on MCB 16A type B*	50	9
Output voltage / Power range	24V / 0-16W	24V / 0-100W
DIP-switch setting (check on driver)		


Reference	<b>12406430</b>
Dimensions (LxWxH)	325x43x30
Input	220-240V 50/60Hz
Ambient temperature	-25°C to +50°C
Power factor (max)	0.94
Dim	PUSHDIM / DALI / DSI
Max drivers on MCB 16A type B*	6
Output voltage / Power range	24V / 0-150W

# Back-up unit (1 hour - 3 hours)


Reference	<b>12400010</b>	<b>12400110</b>
Dimensions (LxWxH)	unit 166x46x34 / battery pack 135x45x23	unit 166x46x34 / 2x battery pack 212x40x33
Input	220-240V 50/60Hz	220-240V 50/60Hz
Ambient temperature	0°C to 50°C	0°C to 50°C
Emergency operating time	1 hour	3 hours
Charge time	24 hours	24 hours
Output	100-400mA 9-58V	100-400mA 9-58V
DIP-switch setting		

## Wiring diagrams

Non-maintained (emergency only)

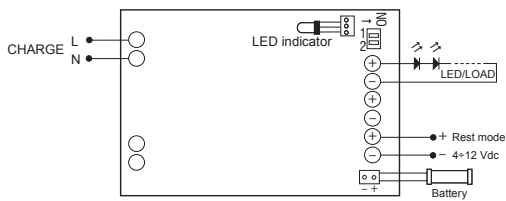

Maintained with external electronic driver

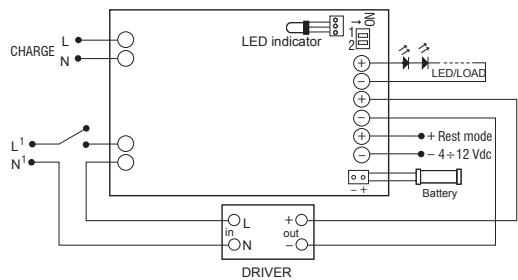

## Remarks

- Respect polarity for installation of battery and LED luminaire.
- Keep batteries away from heat source.
- Do not connect any external battery charger!
- In order to check the correct functionality, we recommend a charging time of about 30 hours.
- It is advisable to effect every 3 months at least one discharge and charge cycle in order to assure the maximum efficiency.
- Replace the batteries every 4 years or after 500 charge/discharge cycles.
- Please check wire diagrams before installing.

	Typical drive current	Emergency light output compared to light output at typical current
Chapeau 206 LED GE	350mA	50%
Dent large LED GE	350mA	30%
Dent medium LED GE	350mA	30%
Dent small LED GE	350mA	75%
Duell recessed 1x LED GE	500mA	72%
Duell recessed 2x LED GE	500mA	72%
Extruded suspended LED GE	500mA	75%
Extruded suspended warm dim LED GE	350mA	100%
Hipy 110 IP67 LED GE	500mA	72%
Hipy 70 IP67 LED GE	350mA	100%
Hollow 115 Trimless LED GE	500mA	72%
Hollow 125 LED GE	500mA	72%
Julien IP54 LED GE	500mA	100%
K120 adjustable LED GE	500mA	36%
K72 IP54 LED GE	500mA	72%
K77 adjustable LED GE	500mA	72%
Lotis 82 (concrete) LED GE	500mA	72%
Lotis 86 IP55 LED GE	500mA	72%
Lotis 97 (concrete) adjustable LED GE	500mA	72%
Lotis Square (IP55) LED GE	500mA	72%
Marbul recessed 1x LED GE	500mA	72%
Marbul recessed warm dim 1x LED GE	350mA	51%
Marbul recessed 2x LED GE	500mA	72%
Marbul recessed warm dim 2x LED GE	350mA	51%
Marbul suspension (adjustable) LED GE	500mA	72%
Marbul suspension (adjustable) warm dim LED GE	350mA	51%
Marbulito jack LED GE	500mA	75%
Marbulito suspension jack LED GE	500mA	75%
Marcel 1x LED GE	500mA	36%
Marcel 2x LED GE	500mA	36%
Marcel 3x LED GE	500mA	36%
Médard 42 jack LED GE	700mA	50%
Médard 42 jack warm dim LED GE	350mA	100%
Médard 42 recessed LED GE	500mA	75%
Médard 42 recessed warm dim LED GE	350mA	100%
Médard 42 semi-recessed LED GE	700mA	50%
Médard 42 semi-recessed warm dim LED GE	350mA	100%
Médard 70 recessed LED GE	500mA	72%
Médard 70 recessed WarmDim LED GE	350mA	51%
Médard 70 semi-recessed LED GE	500mA	38%
Médard 70 semi-recessed warm dim LED GE	350mA	51%
Médard 70 stretched semi-recessed 1X LED GE	500mA	38%
Médard 70 stretched semi-recessed warm dim 1X LED GE	350mA	51%
Médard 70 stretched semi-recessed 2X LED GE	500mA	38%
Médard 70 stretched semi-recessed warm dim 2X LED GE	350mA	51%
Mini-multiple 1x LED GE	500mA	72%
Mini-multiple 2x LED GE	500mA	72%
Mini-multiple 3x LED GE	500mA	72%
Mini-multiple 4x LED GE	500mA	72%

UNIT DOES NOT FIT THROUGH CUTOUT HOLE OF FIXTURE

DEPENDING MOUNTING ACCESSORY UNIT MAY NOT FIT THROUGH CUTOUT HOLE


\* WHEN USING ONLY ONE LAMP UNIT PER EMERGENCY UNIT

\*\* MINIMUM 4 LUMINAIRES IN SERIES

	Typical drive current	Emergency light output compared to light output at typical current
Minude 45 adjustable jack LED GE	500mA	72%
Minude 45 adjustable semi-recessed LED GE	500mA	72%
Minude 45 suspension LED GE	500mA	72%
Minude 45 suspension jack LED GE	500mA	72%
M-LED 50 GE	500mA	72%
M-LED 50 warm dim GE	350mA	100%
M-LED 70 GE	500mA	72%
M-LED 70 warm dim GE	350mA	100%
M-LED 111 GE	500mA	38%
Nomad 111 2x LED GE	500mA	38%
Nomad 111 4x LED GE	500mA	38%
Nomad 2x LED AR 111	500mA	33%
Nomad 4x LED AR 111	1000mA	17%
Placebo up/down LED GE	350mA	100%
Placebo up/down LED warm dim GE	350mA	100%
Pupil LED GE	700mA	54%
Pupil warm dim LED GE	350mA	100%
Qbini fix/adjustable/asy 1x LED GE	500mA	75%
Qbini fix/adjustable/asy 2x LED GE	500mA	75%
Qbini fix/adjustable/asy 3x LED GE	500mA	50%
Qbini fix/adjustable/asy 4x LED GE	500mA	35%
Qbini fix/adjustable/asy trimless 1x LED GE	500mA	75%
Qbini fix/adjustable/asy trimless 2x LED GE	500mA	75%
Qbini fix/adjustable/asy trimless 3x LED GE	500mA	50%
Qbini fix/adjustable/asy trimless 4x LED GE	500mA	35%
Qbini general 2X LED GE	500mA	100%
Qbini general 4X LED GE	500mA	55%
Rektor recessed LED GE	500mA	35%
Rektor recessed warm dim LED GE	350mA	51%
Scotty 270 LED GE	500mA	29%
Shellby 176 trimless LED GE	500mA	72%
Shellby 176 trimless warm dim GE	350mA	51%
Shellby 184 trimless LED GE	500mA	72%
Shellby 184 trimless warm dim GE	350mA	51%
Slide IP54 LED GE	500mA	72%
Smart Cake / Kup / Lotis / (asy) 48 (IP54) LED GE	500mA	75%
Smart Cake / Kup / Lotis /+ (asy) 48 (IP54) LED GE	500mA	75%
Smart Cake / Kup / Lotis 082 (IP54) LED GE	500mA	72%
Smart Cake / Kup / Lotis 082 adjustable LED GE	500mA	72%
Smart Cake / Kup / Lotis 082 (IP54) (adjustable) WarmDim LED GE	350mA	100%
Smart Cake / Kup / Lotis 115 (diffuse) (IP54) LED GE	500mA	35%
Smart Cake / Kup / Lotis 115 adjustable LED GE	500mA	72%
Smart Cake / Kup / Lotis 115 adjustable warm dim LED GE	350mA	51%
Smart Cake/ Kup / Lotis 160 (diffuse) (IP54) LED GE	900mA	25%
Stove LED GE	350mA	50%
Triex LED GE frame round	500mA	75%
Triex LED GE trimless	500mA	75%
Thimble 70 trimless (adjustable) LED GE	500mA	72%
Thimble 74 (adjustable) LED GE	500mA	72%
Wink 82 LED GE	500mA	72%
Wink 115 LED GE	500mA	35%


# Wiring diagrams

## MAINS

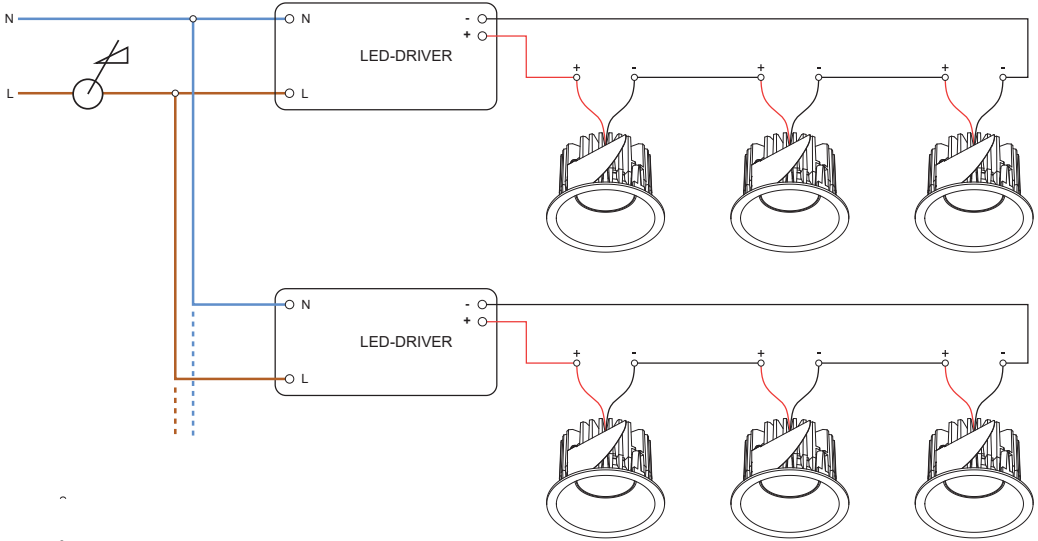

- CHECK DIMMER AND DRIVER COMPATIBILITY
- USE A TRAILING EDGE DIMMER FOR OPTIMAL DIMMING PERFORMANCE


## 1-10V

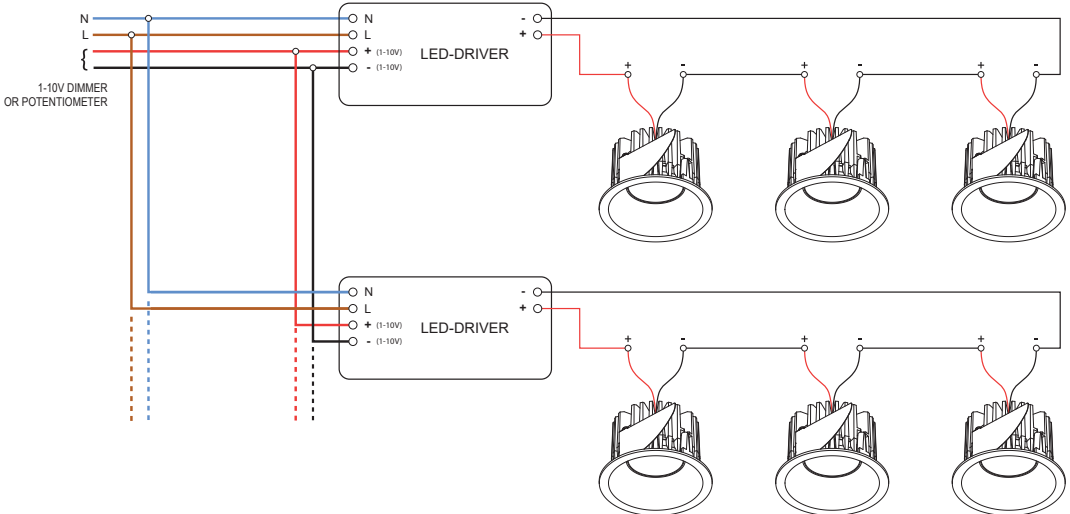


ALWAYS RESPECT POLARITY OF 1-10V SIGNAL



**DALI**

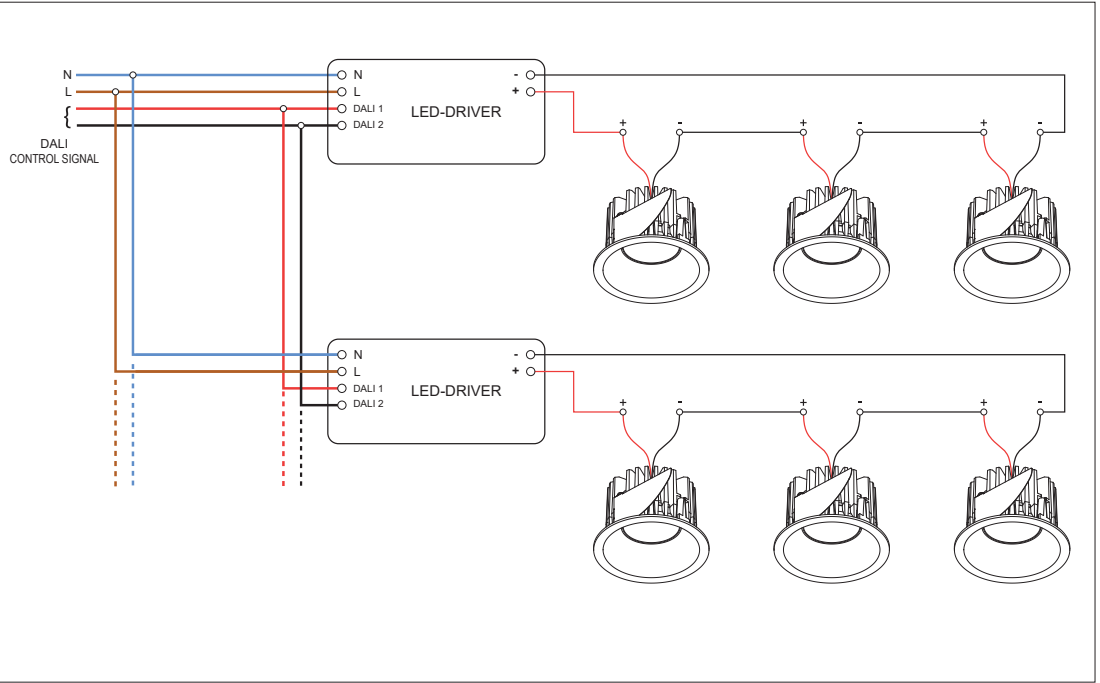


**LED DRIVER WITH 1X LED OUTPUT / 2X LED OUTPUT**

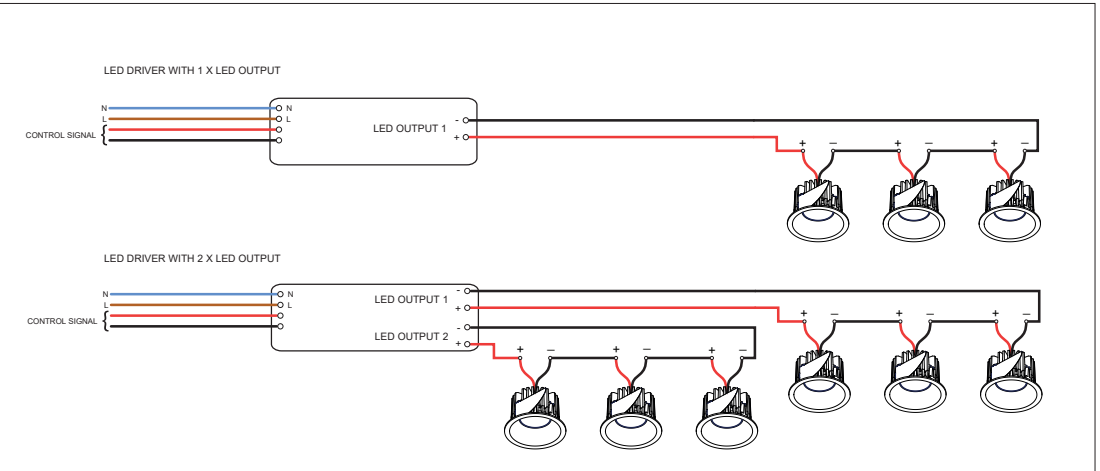


# Wiring diagrams

## PUSHDIM - SINGLE DIM CHANNEL

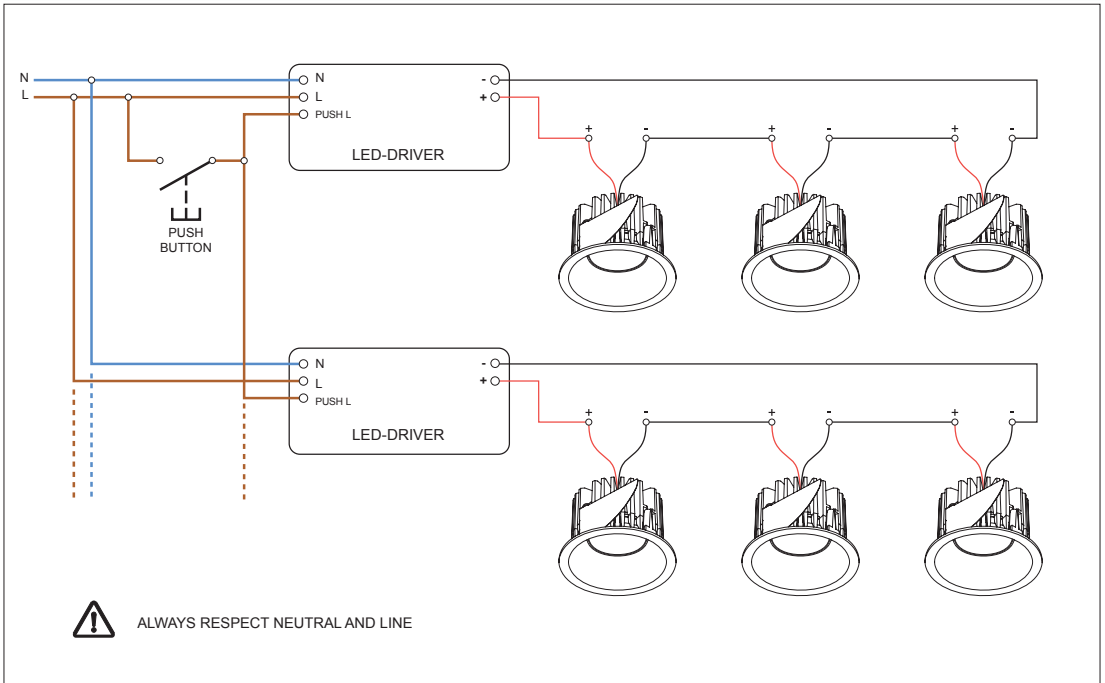


## PUSHDIM - DOUBLE DIM CHANNEL

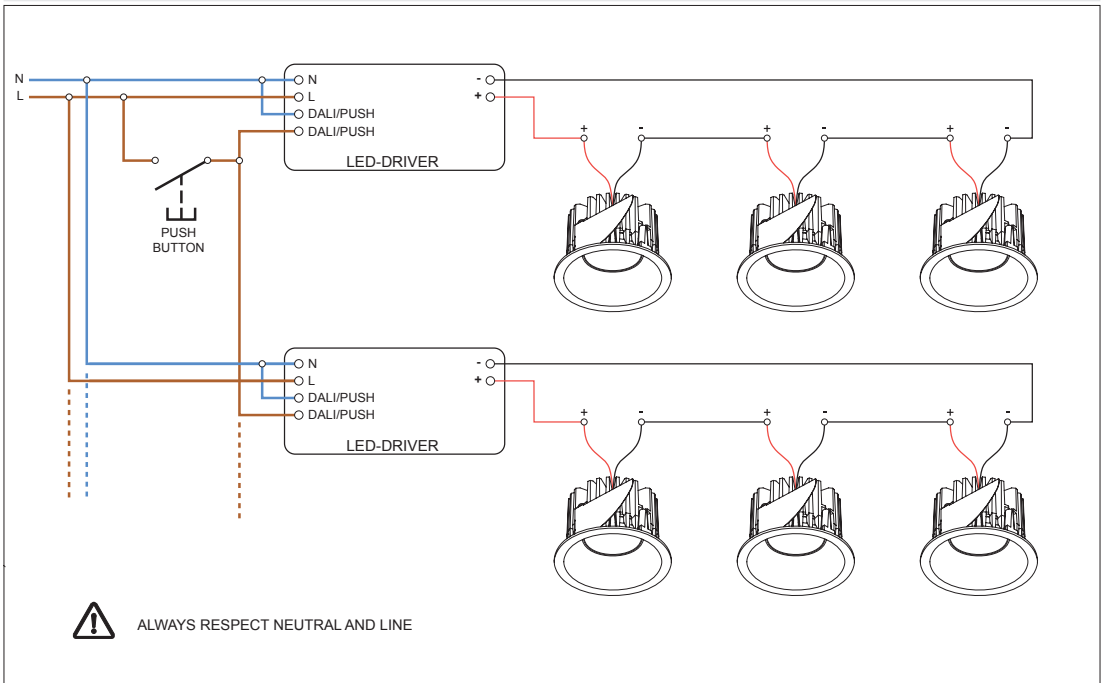




# Wiring diagrams - Pista track 48V


## HUE 1-10V

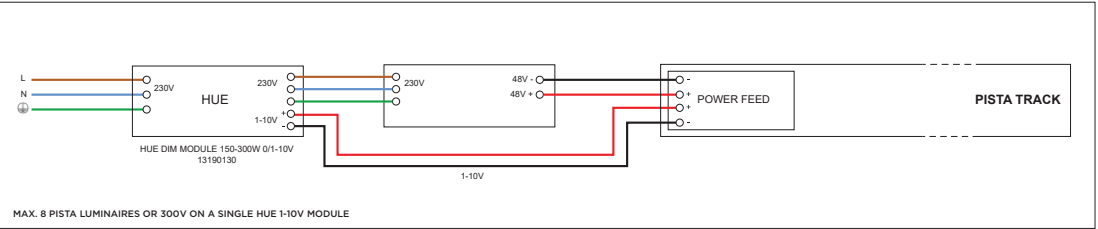


## 1-10V

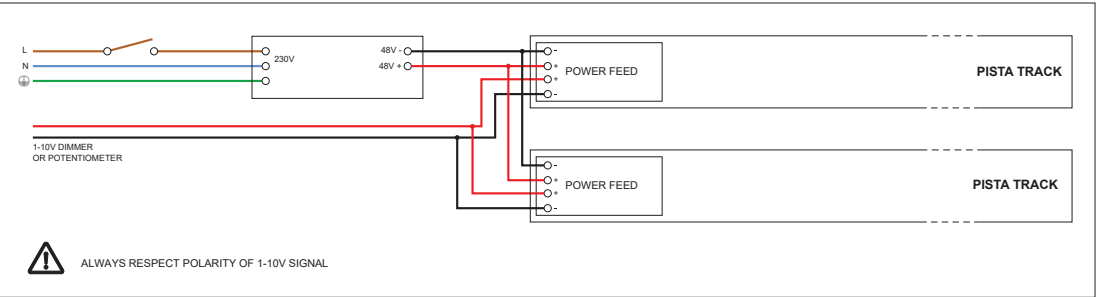


## DALI

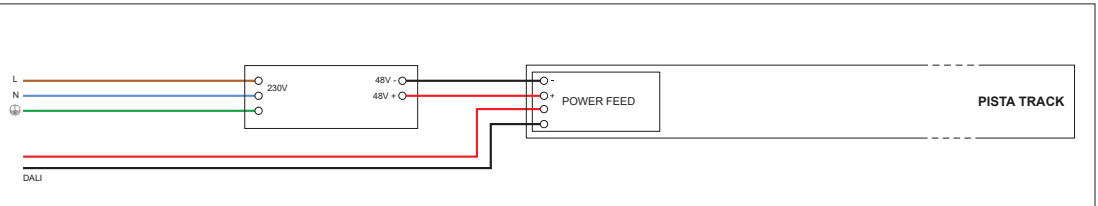

### CASAMBI TRACK 48V DIM MODULE

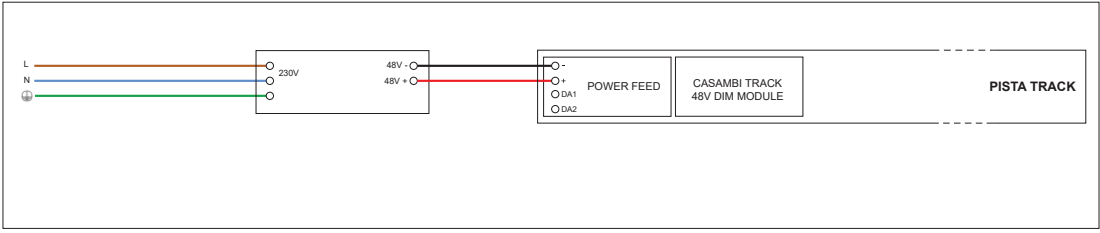

### CASAMBI TRACK 48V REMOTE DIM MODULE

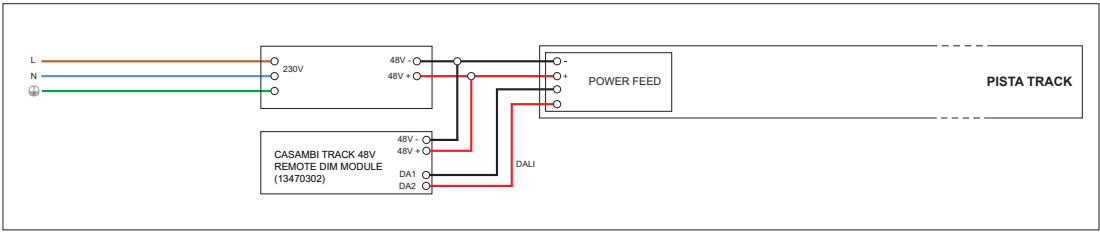

## Photo credits

Studio photography by

BOA

Campaign photography by

Jan Opdekamp


Campaign 'reportage' photography by

Thomas Sweertvaegher

# My Modular - my.supermodular.com

My Modular is a single sign-on digital platform, offering easy access to Modular’s image library, profile configurator and to a large variety of product information.

To enjoy the benefits of My Modular, go to my.supermodular.com and complete your registration.

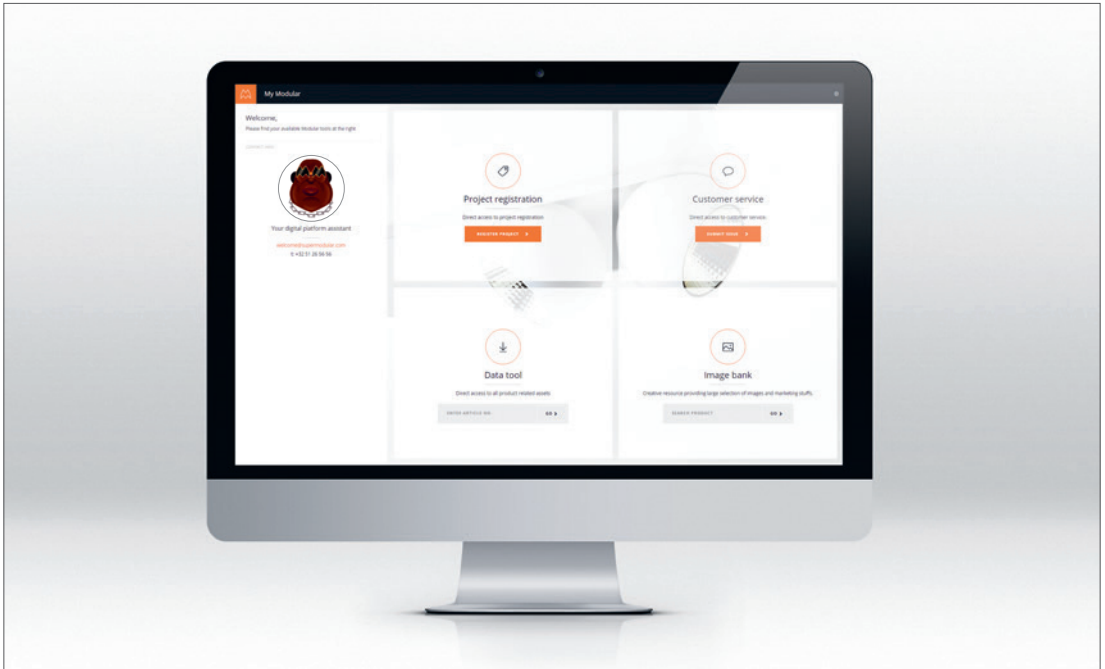

# MODULAR LIGHTING INSTRUMENTS — HEADQUARTERS

Armoedestraat 71  
8800 Roeselare  
Belgium  
t +32 51 26 56 56  
welcome@supermodular.com – www.supermodular.com

## SALES NETWORK

For an updated list please visit [www.supermodular.com/en/company/dealers](http://www.supermodular.com/en/company/dealers)

## LEGEND

	ceiling application surface / suspended / recessed		wall mounting
	wall application surface / recessed		ceiling mounting
	floor application surface / recessed		floor mounting
	weight in kg		ceiling + wall mounting
	cutout size round / square		floor + wall mounting
	adjustability	IP67	protection level
	dimmable / not dimmable	GWT	glow wire test
	universally dimmable	GE	gear excluded
	trailing edge dimmable	GI	gear included
	leading edge dimmable	RG	remote gear included
	resistive load dimmable		connected lighting compatible <a href="http://info.supermodular.com/en/connected-lighting">info.supermodular.com/en/connected-lighting</a>
	fixture class 1		connected lighting compatible <a href="http://info.supermodular.com/en/connected-lighting">info.supermodular.com/en/connected-lighting</a>
	fixture class 2	<b>OUTLET</b>	contact our customer service for discounted pricing and stock availability
	fixture class 3		

© 2022 Modular Lighting Instruments - all rights reserved (edition 06/2022)

Modular L.I. reserves the right to alter material, dimensions and characteristics without prior notice.  
Read installation instructions carefully. Technical information on the installation instruction has precedence over the information in the workbook and the legend.  
Our general terms and conditions shall apply notwithstanding any stipulation to the contrary to all the orders and agreements with Modular L.I.  
You can obtain a copy of these conditions on demand.

For latest information and specifications of the full Modular L.I. range visit [www.supermodular.com](http://www.supermodular.com)



## NOTES

Get inspired. Follow us.

**@SUPERMODULAR**

*We love to share our love for light and beauty.  
Join us on Instagram or Pinterest and stay inspired.*







*[www.supermodular.com](http://www.supermodular.com)*